



Evaluating mesoscale model predictions of diurnal speedup events in the Altamont Pass Wind Resource Area of California

Robert S. Arthur¹, Alex Rybchuk², Timothy W. Juliano³, Gabriel Rios⁴, Sonia Wharton¹,
Julie K. Lundquist^{5,2}, and Jerome D. Fast⁶

¹Lawrence Livermore National Laboratory, Livermore, CA, USA

²National Renewable Energy Laboratory, Golden, CO, USA

³National Science Foundation, National Center for Atmospheric Research, Boulder, CO, USA

⁴Program in Atmospheric and Oceanic Sciences, Princeton University, Princeton, NJ, USA

⁵Department of Mechanical Engineering, Johns Hopkins University, Baltimore, MD, USA

⁶Pacific Northwest National Laboratory, Richland, WA, USA

Correspondence: Robert S. Arthur (arthur7@llnl.gov)

Received: 25 October 2024 – Discussion started: 20 November 2024

Revised: 10 March 2025 – Accepted: 24 March 2025 – Published: 2 July 2025

Abstract. Mesoscale model predictions of wind, turbulence, and wind energy capacity factors are evaluated in the Altamont Pass Wind Resource Area of California (APWRA), where the diurnal regional sea breeze and associated terrain-driven speedup flows drive wind energy production during the summer months. Results from the Weather Research and Forecasting model version 4.4 using a novel three-dimensional planetary boundary layer (3D PBL) scheme, which treats both vertical and horizontal turbulent mixing, are compared to those using a well-established one-dimensional (1D) scheme that treats only vertical turbulent mixing. Each configuration is evaluated over a nearly 3-month-long period during the Hill Flow Study, and due to the recurring nature of the observed speedup flows, diurnal composite averaging is used to capture robust trends in model performance. Both model configurations showed similar overall skill. The general timing and direction of the speedup flows is captured, but their magnitude is overestimated within a typical wind turbine rotor layer. Both also fail to capture a persistent observed near-surface jet-like flow, likely due to the limited grid resolution that is typical of mesoscale models. However, the 3D PBL configuration shows several minor improvements over the 1D PBL configuration, including improved wind speed and turbulence kinetic energy profiles during the accelerating phase of the speedup events, as well as reduced positive wind speed bias at surface stations across the APWRA region. Using a mesoscale wind farm parameterization, modeled capacity factors are also compared to monthly data reported to the US Energy Information Administration (EIA) during the study period. Although the monthly trend in the data is captured, both model configurations overestimate capacity factors by roughly 7 %–11 %. Through model evaluation, this study provides confidence in the 3D PBL scheme for wind energy applications in complex terrain and provides guidance for future testing.

1 Introduction

Accurate mesoscale simulations of winds in the atmospheric boundary layer are essential for wind energy resource assessment and forecasting of wind power production. However, while wind turbines are often sited in regions of complex terrain to take advantage of local wind accelerations, mesoscale models are likely to experience larger errors in these regions (Jiménez and Dudhia, 2013; Olson et al., 2019; Chow et al., 2019; Radünz et al., 2021). Errors may result from a variety of interrelated effects, including underresolved terrain, model numerics, and the treatment of atmospheric turbulence and its interplay with atmospheric stability and diurnal cycles.

First and foremost, complex terrain is usually underresolved in mesoscale models, a subset of numerical weather prediction (NWP) models. Historically, NWP models were run with horizontal grid spacing on the order of 10–100 km. However, with ongoing advances in computing power, operational NWP models may now be run at higher resolution. For example, the High-Resolution Rapid Refresh model (HRRR; Benjamin et al., 2016; Dowell et al., 2022), maintained by the National Oceanographic and Atmospheric Administration (NOAA), covers the continental United States with a 3 km horizontal grid spacing. Recently, NWP models have been tested with 1 km or sub-kilometer grids (e.g., Olson et al., 2019), but their ability to capture local terrain-driven flow variability at the grid scale or smaller is inherently limited.

Complex-terrain errors can also result from model numerics. NWP models generally use a terrain-following coordinate system (e.g., Gal-Chen and Somerville, 1975) because it provides a straightforward implementation of surface boundary conditions. However in regions with steep terrain, the grid becomes skewed, leading to model errors that often manifest as numerical diffusion (see, e.g., Arthur et al., 2021). A variety of approaches have been taken in the literature to address these grid-related errors, including hybrid vertical coordinate systems, improved finite-difference stencils, and immersed boundary methods (see discussion in Arthur et al., 2022), but these are not a focus of the present study.

All atmospheric models require a parameterization for the effects of subgrid-scale (SGS) turbulence, and this study focuses on the treatment of atmospheric turbulence as an important source of model variability. In a mesoscale model, vertical turbulent mixing is typically parameterized using a one-dimensional (1D) planetary boundary layer (PBL) scheme. Horizontal turbulent mixing is assumed to be small and is therefore neglected in the governing equations. This assumption is valid in coarse-grid simulations but may be violated in higher-resolution simulations (Honnert and Masson, 2014; Mazzaro et al., 2017; Muñoz-Esparza et al., 2017; Doubrawa and Muñoz-Esparza, 2020), especially in regions with complex terrain or other sources of horizontal heterogeneity.

To address this issue, Kosović et al. (2020) and Juliano et al. (2022) implemented a three-dimensional (3D) PBL scheme within the widely used Weather Research and Forecasting model (WRF; Skamarock et al., 2019). The scheme is intended for use within the turbulence “gray zone” (Wyngaard, 2004), within which neither traditional 1D PBL schemes nor large-eddy simulation (LES) schemes are necessarily appropriate (see further discussion in Chow et al., 2019). Gray-zone resolution is a function of atmospheric stability, with PBL depth being a proxy (e.g., Rai et al., 2019), but is typically considered to span a horizontal grid spacing of 100 m to 1 km.

The 3D PBL scheme parameterizes both vertical and horizontal turbulence shear stresses and turbulent fluxes, as well as their divergences, using the framework of Mellor and Yamada (1974, 1982), which is based on a prognostic equation for the SGS turbulence kinetic energy (TKE). In this way, the scheme is similar to the 1D Mellor–Yamada–Nakanishi–Niino (MYNN) level 2.5 model (Nakanishi and Niino, 2006) available in WRF but with full 3D treatment of turbulent mixing. It should be noted that with MYNN or other 1D PBL schemes, a two-dimensional (2D) form of the Smagorinsky model (Smagorinsky, 1963) is often used to add additional horizontal diffusion and can thus be considered a form of smoothing to improve numerical stability (e.g., Smagorinsky, 1993).

In an effort to further develop the WRF 3D PBL scheme for wind energy applications, Rybchuk et al. (2022) coupled it to the mesoscale wind farm parameterization of Fitch et al. (2012). Hereafter denoted WFP, the Fitch et al. (2012) parameterization accounts for the presence of wind turbines by adding drag and TKE to the flow within the turbine rotor region. These effects are aggregated over each horizontal grid cell based on the number of turbines located within the cell. The Fitch et al. (2012) WFP is coupled to the MYNN PBL scheme in the standard WRF release (including the bug fix of Archer et al., 2020), allowing for direct comparisons with the 3D PBL implementation.

The initial work of Juliano et al. (2022) and Rybchuk et al. (2022) focused on developing and testing the 3D PBL scheme in idealized model configurations, mostly with flat terrain or over open water. Juliano et al. (2022) considered idealized convective boundary layer and sea breeze tests, as well as a mountain–valley test with simple terrain, while Rybchuk et al. (2022) considered the offshore environment. Arthur et al. (2022) and Wiersema et al. (2023) subsequently evaluated 3D PBL performance relative to standard WRF options in real complex-terrain scenarios. However, further testing of the model is necessary to ensure its robustness.

With this in mind, the present work has two main goals. The first is to evaluate the 3D PBL scheme in a complex-terrain region that is relevant to wind energy. The second is to build on the work of Rybchuk et al. (2022) by testing the WFP coupled to the 3D PBL scheme in a realistic configuration with terrain. Ultimately, this work aims to better

establish the utility of the 3D PBL scheme for wind energy applications.

2 Data and methods

2.1 Case study and observational data

The Altamont Pass Wind Resource Area (APWRA) is a collection of wind plants located in a gap within the Diablo Range of north–central California. The gap is just east of San Francisco Bay and south of the San Francisco Bay delta and is roughly bounded by Mount Diablo to the northwest and the greater Diablo Range to the southeast (see Fig. 1).

With nearly 200 turbines and roughly 326 MW of installed capacity spread over six plants (excluding very small, old 65 kW turbines), the APWRA is the fifth-largest wind energy installation in California and one of the oldest commercial wind farms in the United States, with the first turbines installed in 1981 (see Hoen et al., 2018). The typical annual cycle of wind energy production in the APWRA is shown in Fig. 2 in terms of monthly capacity factors, defined as the ratio of actual production to the maximum possible production (i.e., if all turbines operated at full capacity) during each month.

The turbines in the APWRA are especially productive over the summer months when a synoptic pressure difference between the ocean and the land drives westerly/southwesterly winds that are channeled through the Altamont Pass (see, e.g., Zaremba and Carroll, 1999). These winds are modulated by diurnal temperature variability, which enhances the land–sea pressure difference, leading to peak wind speeds in the late afternoon to early evening, local time (see, e.g., Wharton et al., 2015). The regularity of the summertime speedup events combined with the importance of terrain-induced wind acceleration makes them a useful case study for evaluating mesoscale models (see, e.g., Banta et al., 2020, 2023).

The Hill Flow Study (HilFlowS; Wharton and Foster, 2022) consisted of two vertically profiling ZephIR300 lidars and a 52 m meteorological tower deployed at Lawrence Livermore National Laboratory Site 300, roughly 10 km southeast of the APWRA wind plants, during the mid-to-late summer of 2019. HilFlowS was conducted along three parallel ridgelines that run northwesterly to southeasterly in the Diablo Range, making them perpendicular to the predominant summertime southwesterly (onshore) wind direction. Lidars were deployed on the first two (upwind) parallel ridgelines at the Western Observation Point (WOP; Atmosphere to Electrons, 2019c) and Eastern Observation Point (EOP; Atmosphere to Electrons, 2019b), which are separated by a line-of-sight distance of 860 m. The WOP ridgeline has a higher peak (527 m a.m.s.l., meters above mean sea level), while the EOP peak is slightly lower (448 m a.m.s.l.). The ridgeline slopes are 22 and 13°, respectively, along the predominant wind direction of 240°. The meteorological tower (Atmo-

sphere to Electrons, 2019a) is found on the third ridgeline and is at an elevation of 395 m a.m.s.l. The study area and surrounding region are largely covered by grassland. All instrument and turbine locations are included in Fig. 1.

Wind speed data from the two lidars are used here to evaluate model performance between the surface and 150 m a.g.l. (meters above ground level), spanning the vertical range of the turbines in the APWRA. Both lidars gathered horizontal wind speed, wind direction, and vertical velocity data at 10, 20, 30, 38, 50, 60, 70, 80, 90, 120, and 150 m a.g.l. (note that 38 m is a fixed calibration height) between 9 July and 23 September 2019. Horizontal wind speed, direction, air temperature, and air pressure data are also available at 1 m a.g.l. from an onboard meteorological station, although only the wind speed and direction data are used here.

While the lidars completed their scan strategy roughly once every 15 s, the data have been averaged in 10 min intervals, as in Wharton and Foster (2022). Over the study period, the WOP lidar had greater than 98 % data availability for horizontal wind speed and direction and roughly 90 % data availability for vertical velocity. The EOP lidar ran on solar and battery power, which resulted in slightly lower data availability of roughly 84 % and 77 %, respectively. Lower data availability for the vertical velocity relative to the horizontal is a result of the standard quality control filtering applied by the lidars when calculating 10 min averages, which removes the vertical velocity when rain or fog is detected. Diurnal composite averages over the nearly 3-month-long data record were analyzed by Wharton and Foster (2022) and were shown to be robust; a similar composite-averaging approach is used in the present study for model evaluation.

Horizontal wind speed, wind direction, and vertical velocity are calculated from lidar observations using the velocity-azimuth display (VAD) technique for each measurement height. Note that the ZephIR300 does not have a vertically pointing beam; thus, vertical velocities are not measured directly. TKE is calculated using high-frequency variance measurements during postprocessing (see Sect. 3.1.2). Reported accuracy for the ZephIR300 in ideal site conditions (e.g., flat, homogeneous terrain) is ± 0.25 % for wind speed and direction. However, the HilFlowS experiment was not conducted under these ideal conditions. In hilly terrain, assumptions about the horizontal homogeneity of the flow across the lidar's observation volume may be invalid, leading to errors in the measured horizontal wind speed as large as ± 10 % (Bingöl et al., 2009). Although Bingöl et al. (2009) did not quantify errors in vertical velocities, these are also expected to be present in complex terrain due to the ZephIR300 lidar's lack of a vertically pointing beam.

An earlier experiment in the APWRA (Wharton et al., 2015) that used identical ZephIR300 lidars to measure hill speedup flows and their effects on power production assessed terrain-induced measurement errors with the Dynamics software package provided by ZephIR Ltd. As discussed therein, the software converts raw lidar line-of-sight velocity data

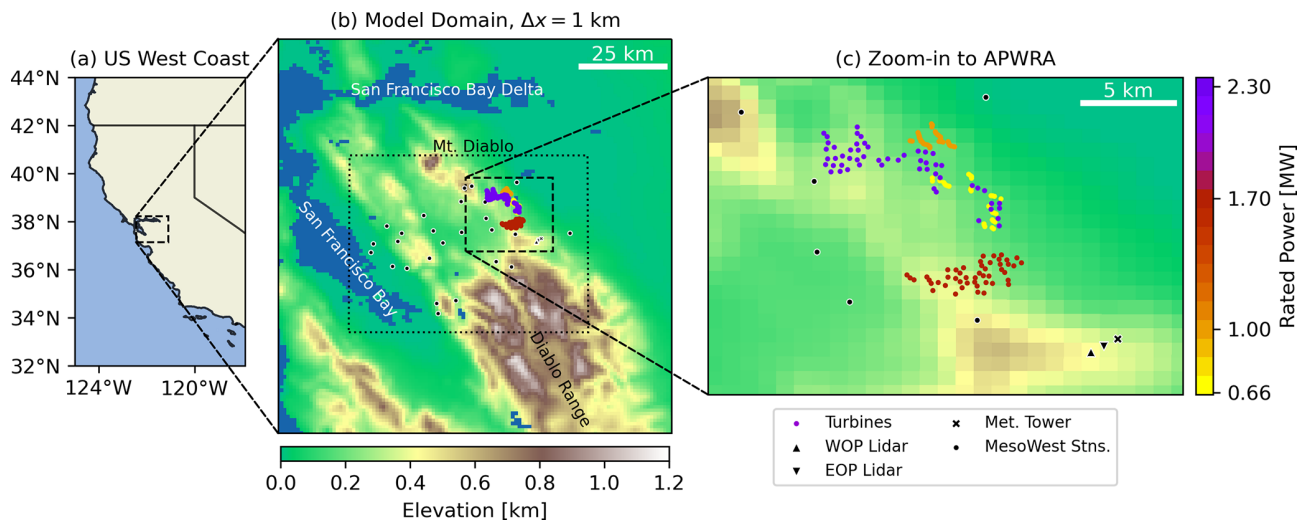


Figure 1. A map of the study region, zooming in from (a) the US west coast to (b) the WRF model domain to (c) the APWRA. Included in panels (b) and (c) are the locations of observation stations (black symbols) used for model evaluation; the locations of APWRA wind turbines at the time of the HilFlowS study (colored by their rated power); and terrain elevation as represented in the model, with water shown in blue. Dashed-line boxes indicate zoomed-in regions in the next panel to the right, while the dotted-line box in (b) indicates the region shown in Fig. 7.

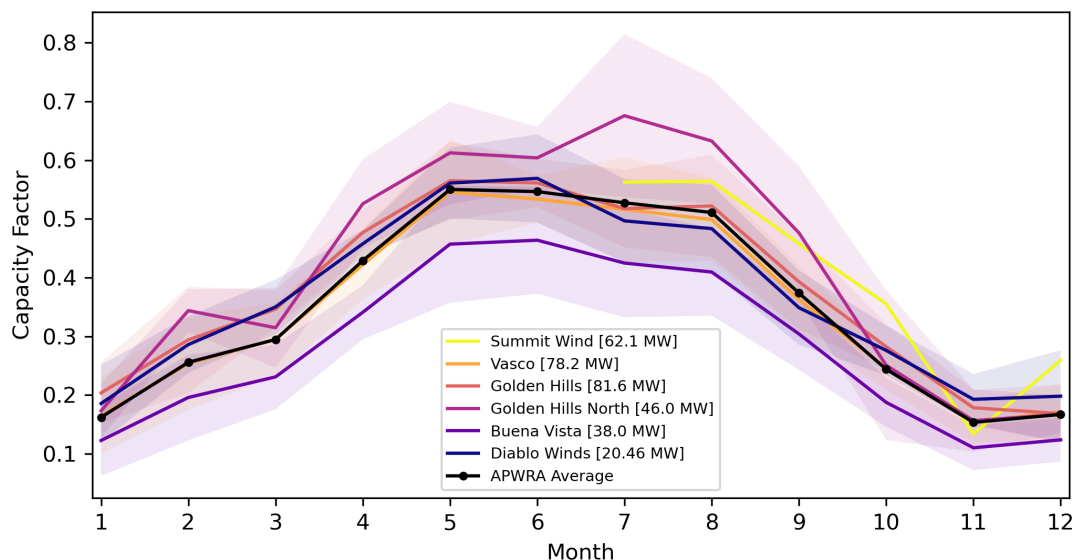


Figure 2. Monthly capacity factors for the six wind plants in the APWRA based on Energy Information Administration (EIA)-reported data (EIA, 2023a, b) averaged over 2014–2021. The shaded area represents ± 1 standard deviation. The average over all plants is weighted by plant capacity as noted in the legend. Note that Summit Wind became operational in 2021.

into unbiased measurements of wind speed and wind direction for hilly sites, based on the work of Bingöl et al. (2009). In Wharton et al. (2015), conversion factors for all wind directions and measurement heights ranged from +1 % to +8 % for the hill lidar, within the range of the Bingöl et al. (2009) study. Moreover, the correction factors associated with the predominant wind direction were closer to zero: +3 % for the hill lidar and −2 % for the base lidar near the bottom of the hill.

The conversion factors in Wharton et al. (2015) were calculated for a hill that is similar to those at the HilFlowS site and are presented here for additional context. However, conversion factors are not recalculated for the present study. Rather, the potential ± 10 % calculated by Bingöl et al. (2009) is used to conservatively bound the potential mean error in the measured horizontal wind speed. It should be noted that prior to the HilFlowS experiment, the lidars were cross-compared and showed high agreement (see Wharton and

Foster, 2022), providing confidence in their use for model evaluation.

To supplement lidar observations, wind speed and temperature data are available from the meteorological tower at 10, 23, and 52 m a.g.l. Wharton and Foster (2022) used these data to assess atmospheric stability via the bulk Richardson number; here, the temperature data are used for model evaluation. Furthermore, before the start of HilFlowS, the lidars were deployed at the base of the meteorological tower to assess instrument agreement. That dataset showed strong agreement between the lidars and the tower, with r^2 values of 0.97–0.99 for all measurement levels.

To further examine the spatial variability in model performance, 10 m wind speed data from nearby surface meteorological stations in the MesoWest network (MesoWest, 2023) are used. Although proprietary turbine data from the APWRA wind plants are not generally available, public power production data reported to the United States Energy Information Administration (EIA) on a monthly basis (EIA, 2023a, b) are used to evaluate estimates of wind power production from the WFP. Note that site-specific wind power studies have been performed previously in the APWRA, as presented in Wharton et al. (2015) and Bulaevskaya et al. (2015).

Rios et al. (2025) used HilFlowS lidar data to evaluate the aforementioned HRRR model, which is used frequently for forecasting within the wind energy industry (Shaw et al., 2019). Rios et al. (2025) found that while HRRR captured the general diurnal trend of the observed speedup events, it overestimated hub-height wind speeds (by as much as 3 m s^{-1}) during nighttime hours and underestimated hub-height wind speeds by as much as 2 m s^{-1} during daytime hours. Wind speed errors also varied spatially and as a function of the predominant wind direction associated with different synoptic conditions. These results serve as a baseline for the present study, which explores the effects of increased grid resolution (relative to HRRR) and PBL treatment on model performance.

2.2 Model configuration

2.2.1 Domain and model options

A fork of the WRF model version 4.4 (Juliano and Arthur, 2025) is employed with a horizontal grid spacing of 1 km over the $120 \times 120 \text{ km}$ domain depicted in Fig. 1b. The model is initialized on 6 July 2019, 00:00 UTC, allowing for roughly 2 d of spinup time prior to observational comparisons, and run through 24 September 2019, 00:00 UTC. Initial and boundary conditions are derived from hourly HRRR analysis fields (at the zeroth forecast hour), but interior nudging is not employed due to the relatively small domain. The WRF name list and wind turbine specification files used in this study are archived under Arthur (2024).

Simulations are completed with two model configurations, varying only the treatment of SGS turbulent mixing. The first configuration is treated as a control and roughly corresponds to the standard HRRR setup, while the second configuration employs the 3D PBL scheme. Recall that HRRR uses a horizontal grid spacing of 3 km; the present value of 1 km was chosen to increase the resolution relative to HRRR while also approaching both the upper limit of traditional mesoscale models and the lower limit of the turbulence gray zone.

In the control configuration, vertical turbulent mixing is treated using the MYNN level 2.5 PBL scheme (`bl_pbl_opt` = 5), while horizontal mixing is not treated explicitly; rather, horizontal smoothing is employed using WRF's 2D Smagorinsky scheme (`km_opt` = 4). In the second configuration, both vertical and horizontal turbulent mixing are treated using the 3D PBL scheme. In both configurations, local curvilinear-grid metric terms are used in the calculation of horizontal gradients (as with WRF's `diff_opt` = 2), although `diff_opt` is set to 0 when the 3D PBL scheme is used. All other model options are identical between the two configurations.

Note that following Rybchuk et al. (2022), Arthur et al. (2022), and Wiersema et al. (2023), the PBL approximation (Mellor, 1973; Mellor and Yamada, 1982) is used within the 3D PBL scheme (`pbl3d_opt` = 1) to improve computational efficiency and numerical stability (see discussions therein and in Juliano et al., 2022). Indeed, the full 3D PBL scheme was found to be computationally unstable in the present domain, likely due to the turbulence-length-scale calculation. This was also the case in the complex-terrain studies of Arthur et al. (2022) and Wiersema et al. (2023). With the PBL approximation, the divergences of horizontal turbulence shear stresses and turbulent fluxes are retained in the prognostic equations for momentum and scalars, respectively. However, horizontal gradients are neglected in the system of equations used to calculate the stresses and fluxes, allowing them to be determined analytically. Horizontal gradients are also neglected in the prognostic equation for TKE. Thus, TKE production due to horizontal shear, which has been found by previous studies to be important in complex terrain (Zhong and Chow, 2012; Muñoz-Esparza et al., 2016; Goger et al., 2018), is not considered here. Potential ramifications of using the PBL approximation in this study are discussed further below.

For consistency with the HRRR forcing, the present model runs use the HRRR atmospheric physics suite following Benjamin et al. (2016). This includes the Rapid Update Cycle (RUC) land–surface model (`sf_surface_physics` = 3), the Thompson aerosol-aware microphysics scheme (`mp_physics` = 28; Thompson and Eidhammer, 2014), and the RRTMG radiation schemes (`ra_sw_physics` = 4 and `ra_lw_physics` = 4; Iacono et al., 2008). However, for compatibility with the 3D PBL scheme, the revised MM5 surface layer scheme (`sf_sfclay_physics` = 1) is used instead of the MYNN scheme (`sf_sfclay_physics` = 5). Additionally,

following Arthur et al. (2022), WRF's option to add positive definite sixth-order horizontal diffusion (`diff_6th_opt = 2`) is used in both configurations, with a factor of 0.25. The added diffusion is purely numerical and is used to damp grid-scale noise. However, to prevent over-diffusion in regions of sloping terrain, where numerical diffusion is already expected to be relatively large, the added sixth-order diffusion is linearly damped between slopes of 0 and 0.05 (2.86°) and is turned off for larger slopes (using the name list options `diff_6th_slopeopt = 1` and `diff_6th_thresh = 0.05`).

The vertical grid spacing is modified from HRRR in the present study to increase the vertical grid resolution within the turbine layer. HRRR uses 50 vertical levels, with a vertical grid spacing of $\Delta z \approx 16$ m at the surface such that the first half level (the lowest level at which temperature and velocities are calculated) is located at roughly 8 m a.g.l. The vertical grid spacing is stretched above the surface, as detailed in Benjamin et al. (2016), with a domain top of roughly 25 km. Here, Δz is held constant at 16 m between the surface and roughly 300 m a.g.l. (19 levels) and is stretched by a factor of 1.1 above, with a total of 69 levels. Although Tomaszewski and Lundquist (2020) and Rybchuk et al. (2022) recommend setting Δz to 10 m or less with the WFP, this was found to be computationally unstable for the 3D PBL run; ongoing improvements to the 3D PBL scheme may alleviate this issue in the future. Note also that the present model runs use WRF's standard terrain-following vertical coordinate system (`hybrid_opt = 0`), as in Arthur et al. (2022). Although WRF's hybrid vertical coordinate (`hybrid_opt = 1`) is used in HRRR version 3 (used here for model forcing; see Dowell et al., 2022), the hybrid coordinate system primarily affects predictions above the boundary layer and is therefore not considered here.

2.2.2 Wind turbine representation

The Fitch et al. (2012) WFP, including the bug fix of Archer et al. (2020), is used in both model runs to predict the power output by APWRA turbines during the study period. Turbines are represented in the WFP by their location, hub height, rotor diameter, and power and thrust curves. The necessary WRF-WFP input files used in this study are archived under Arthur (2024). For consistency with Rybchuk et al. (2022), the wind farm TKE factor (WRF namelist variable `windfarm_tke_factor`), which controls the amount of TKE added to the flow, is set to 1. This differs from the value of 0.25 used by Archer et al. (2020). As of the time of this writing, there is no clear consensus in the literature on the optimal choice for this parameter (Larsén and Fischereit, 2021; Ali et al., 2023). Note that although wind farm wake dynamics are predicted by the WFP, they are not a focus of the present study. Moreover, wakes are not expected to reach the HilFlowS observation sites, given the complex terrain and predominant wind direction of 240° .

At the time of the study period, the APWRA consisted of 171 total turbines spread across 5 wind plants, summarized in Table 1.

Turbine locations (as shown in Figs. 1 and 7) and specifications are extracted from the United States Wind Turbine Database (Hoen et al., 2018). However, the present analysis excludes very small (65 kW), old turbines that are still listed in Hoen et al. (2018).

Because the power and thrust curves for the actual APWRA turbines are generally proprietary, comparable publicly available curves are used here (see Table 1). The General Electric (GE) 2.3, Siemens 2.3, and GE 1.7 MW APWRA turbines are matched as closely as possible to the generic dataset of NREL (2022), which is based on the OpenFAST model (<https://github.com/OpenFAST>, last access: 23 January 2023) and includes both power and thrust curves. However, since lower-power turbines are not included in the NREL (2022) dataset, additional curves are gathered from the dataset of wind-turbine-models.com (2024b, a). Within this dataset, a power curve for the Vestas 0.66 MW turbine is available (wind-turbine-models.com, 2024b); however, the thrust curve must be interpolated from the generic NREL-1.7 model. For the Mitsubishi 1.0 MW turbine, a comparable power curve from a Bonus 1.0 MW turbine (wind-turbine-models.com, 2024a) is used, again with a thrust curve interpolated from the generic NREL-1.7 model.

The modeled APWRA turbines have the same total rated capacity of 264.24 MW as the installed turbines at the time of the study period (Table 1). Furthermore, Siedersleben et al. (2020) demonstrated that the exact details of the power and thrust curves are not critical to WFP performance. Ultimately, modeled capacity factors rather than raw power production estimates are presented below. Thus, the effect of differences between the actual and modeled turbine specifications is expected to be small.

3 Model evaluation

3.1 Vertical variability

3.1.1 Wind speed, wind direction, and temperature

Model performance is first evaluated through comparison to lidar observations from the HilFlowS experiment (Wharton and Foster, 2022). The instantaneous model error E_{VAR} is defined as

$$E_{\text{VAR}} = \text{VAR}_{\text{WRF}} - \text{VAR}_{\text{OBS}}, \quad (1)$$

where VAR is the meteorological variable: horizontal wind speed V , wind direction ϕ , or vertical velocity w . The error is calculated at 10 min intervals, corresponding to the frequency of the processed lidar data as well as the model output. This calculation requires spatial interpolation of the model data to the lidar measurement locations. Model data are first interpolated horizontally to the latitude and longitude

Table 1. A summary of wind plants in the APWRA during the summer 2019 study period. Actual turbine specifications are based on Hoen et al. (2018), while modeled specifications are based on the best-available public data, as described in the text. Turbines are listed in terms of the manufacturer (Mfr), the rated power P_R (see colors in Fig. 1), the hub height H , and the rotor diameter D . The manufacturer is listed as “NREL” when the generic dataset of NREL (2022) is used. Note that the 62 MW Summit Wind plant shown in Fig. 2 was installed after the study period and is therefore not included here. The Patterson Pass and Patterson Wind plants (included in Hoen et al., 2018), which consist of very small (65 kW), old turbines, are also not considered in the analysis.

Wind plant	No. of turbines	Actual		Modeled	
		Mfr- P_R [MW]	H, D [m]	Mfr- P_R [MW]	H, D [m]
Golden Hills North	20	GE-2.3	80, 116	NREL-2.3	80, 116
Vasco	34	Siemens-2.3	80, 101	NREL-2.3	80, 107
Golden Hills	48	GE-1.7	80, 100	NREL-1.7	80, 103
Buena Vista	38	Mitsubishi-1.0	55, 61	Bonus-1.0	55, 54
Diablo Winds	31	Vestas-0.66	60, 47	Vestas-0.66	60, 47
Total	171	264.26 MW		264.26 MW	

of the lidar using nearest-neighbor interpolation and are then linearly interpolated to the lidar vertical levels. Although several figures herein present observed wind speed and direction from the lidar’s onboard meteorological station at 1 m a.g.l., model errors are not evaluated at this height because extrapolation below the first half level (at roughly 8 m a.g.l.) would be required. Additionally, note that E_ϕ is adjusted to account for the cyclical nature of the wind direction: if the raw E_ϕ value is less than -180° (greater than 180°), it is adjusted by $+360^\circ$ (-360°).

Due to the day-to-day consistency of the observed speedup events, diurnal composite averages are used to summarize model performance over the nearly 3-month-long study period (see Fig. 3).

The diurnal composite bias is therefore defined as

$$B_{\text{VAR}} = \langle \text{VAR}_{\text{WRF}} - \text{VAR}_{\text{OBS}} \rangle_C = \langle E_{\text{VAR}} \rangle_C, \quad (2)$$

where the angle brackets denote a time average, in this case a diurnal composite denoted by the subscript C . A positive bias indicates an overestimate by the model, while a negative bias indicates an underestimate. Composite averages are performed between 9 July 2019, 00:00 PST and 23 September 2019, 00:00 PST such that only complete days in local time (PST = UTC−8) are included in the analysis. Model results in Fig. 3 are shown for the 3D PBL configuration, although those for the MYNN configuration are visually similar; more detailed comparisons between the two are discussed below. Note that while the figures in this section are shown at the WOP site for brevity, the discussion generally applies to both sites unless otherwise noted. A selection of time–height-averaged error metrics are shown for both sites in Table 2.

As presented in Wharton and Foster (2022), observed winds at the study site begin to accelerate around midday, reaching a peak between 15:00 and 21:00 PST. Winds then decelerate over the course of the night, reaching a minimum between 06:00 and 09:00 PST (Fig. 3a). The speedup flows,

which are channeled through the Altamont Pass, are predominantly southwesterly (230 – 250°), while daytime flows are more variable (Fig. 3c). The speedup flows at the study site are associated with subsidence, a negative vertical velocity (blue colors in Fig. 3e), and increased horizontal wind speeds near the surface (yellow colors in Fig. 3a). This suggests that vertical convergence leads to horizontal divergence and an acceleration of the flow near the surface.

While the model captures the timing and direction of the speedup flows well (Fig. 3b, d), wind speeds are generally overestimated above 30 m a.g.l., especially between 00:00 and 03:00 PST (red colors in Fig. 3b). Conversely, wind speeds are underestimated near the surface, indicating that the model fails to capture near-surface accelerations. This highlights an inherent limitation of the vertical grid setup, which, although finer than HRRR, has only one to two model levels ($\Delta z \approx 16$ m) within the observed jet-like flow layer below roughly 30 m a.g.l. While the model captures some negative vertical velocities at the study site during the speedup events (see contours in Fig. 3f), its vertical velocities are too weak and thus do not translate to near-surface accelerations of the magnitude seen in the observations.

Several time–height average error metrics (following e.g., Chang and Hanna, 2004; Smith et al., 2018; Wiersema et al., 2020; Arthur et al., 2022) are used to compare the performance of the two model configurations over the course of the study period. The fractional bias is defined as

$$\text{FB}_{\text{VAR}} = \frac{\langle E_{\text{VAR}} \rangle}{0.5 (\langle |\text{VAR}_{\text{WRF}}| \rangle + \langle |\text{VAR}_{\text{OBS}}| \rangle)}, \quad (3)$$

and the normalized mean absolute error is defined as

$$\text{NMAE}_{\text{VAR}} = \frac{\langle |E_{\text{VAR}}| \rangle}{0.5 (\langle |\text{VAR}_{\text{WRF}}| \rangle + \langle |\text{VAR}_{\text{OBS}}| \rangle)}, \quad (4)$$

where angle brackets denote a time average over 9 July 2019, 00:00 PST–3 September 2019, 00:00 PST, and the overbar

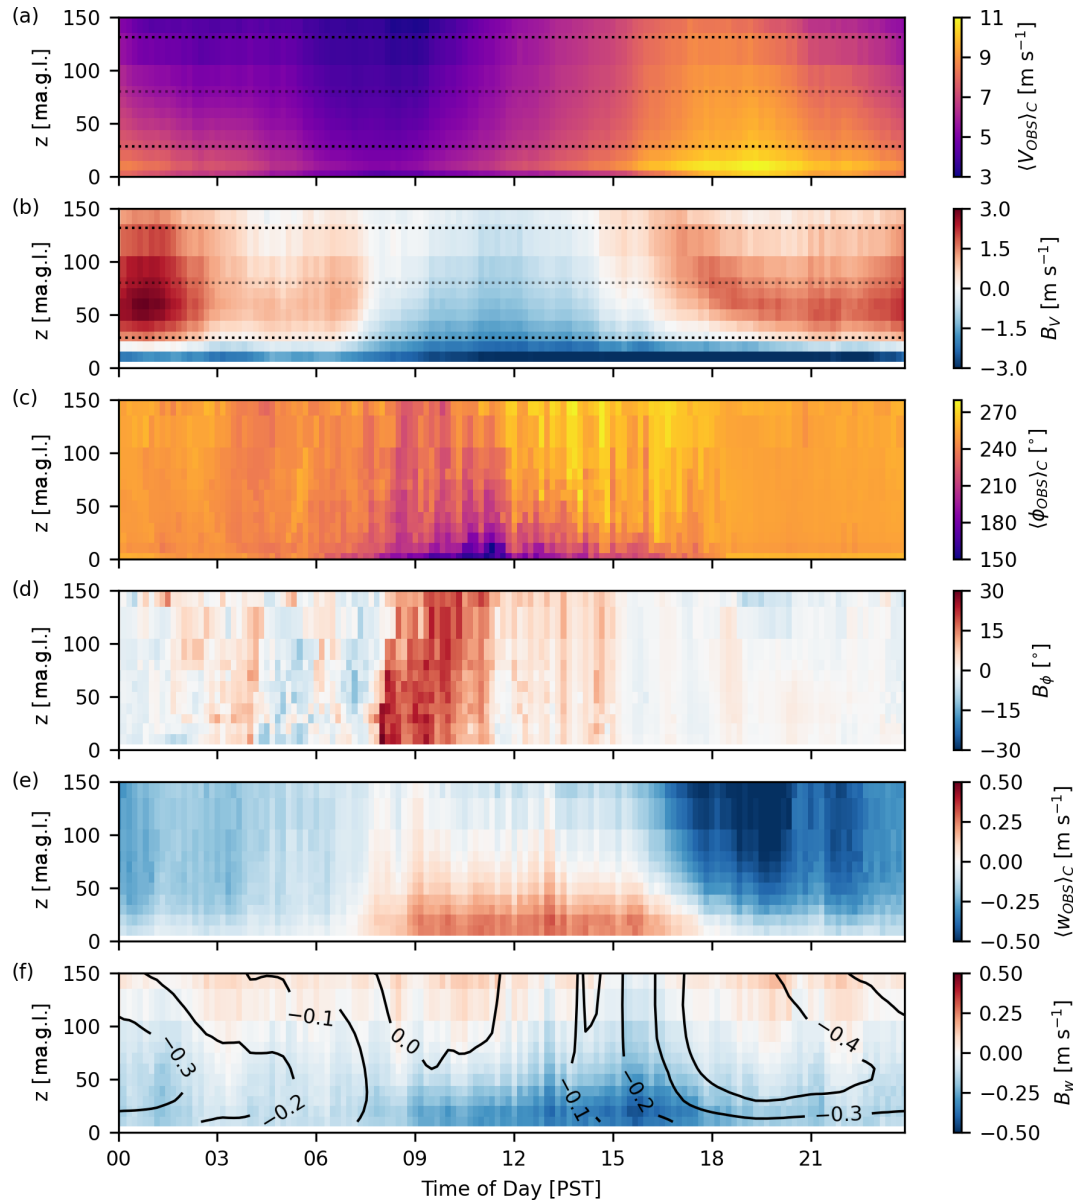


Figure 3. Diurnal composite-average WOP lidar observations and 3D PBL model bias: positive bias indicates an overestimate by the model, while negative bias indicates an underestimate. Shown are wind speed V (**a**, **b**), wind direction ϕ (**c**, **d**), and vertical velocity w (**e**, **f**). Note that panels (**a**) and (**c**) include data from the lidar’s onboard meteorological station at 1 m a.g.l., but model errors are not evaluated at this height. To contextualize the vertical velocity bias in (**f**), contour lines are shown for the modeled vertical velocity $\langle w_{WRF} \rangle_C$ in 0.1 m s^{-1} increments. Dotted lines in panels (**a**) and (**b**) indicate the rotor-swept area of the most prevalent generic turbine model in the simulations, with hub height $H = 80 \text{ m}$ and rotor diameter $D = 103 \text{ m}$ (NREL-1.7; see Table 1).

denotes a vertical average over available lidar measurement heights. Note that the absolute value operation in the denominator is only relevant for the vertical velocity, which has both positive and negative values; the horizontal wind speed is positive by definition.

For the wind direction, the scaled average angle is defined as

$$\text{SAA} = \frac{1}{N \langle V_{WRF} \rangle} \sum_{i=1}^N V_{WRF,i} |E_{\phi,i}|, \quad (5)$$

where N is the total number of observations (in both time and height) for the given lidar. SAA weighs wind direction errors based on the modeled wind speed at the given obser-

vation location and time, assuming that directional errors at low wind speeds are less impactful.

Error metrics are summarized in Table 2 for both model configurations and lidar sites.

The metrics shown in the table are time averaged over the full study period and vertically averaged over two separate layers: the rotor layer (lidar measurement heights of 30, 38, 50, 60, 70, 80, 90, and 120 m a.g.l.) and a near-surface layer below the rotor layer (lidar measurement heights of 10 and 20 m a.g.l.). The rotor layer is based on the most prevalent generic turbine model in the simulations, with hub-height $H = 80$ m and rotor diameter $D = 103$ m (NREL-1.7; see Table 1). Overall, error metrics are nearly equal for the MYNN and 3D PBL configurations, with a slight overestimate of the wind speed in the rotor layer and a larger underestimate near the surface.

Model performance is examined in more detail using composite-average wind speed profiles, presented in Fig. 4.

During the onset of the speedup events, the 3D PBL configuration predicts faster wind speeds than the MYNN configuration throughout the lidar range, showing reduced negative bias compared to the observations, especially below hub height (assumed to be 80 m; Fig. 4, 12:00–15:00 PST). This may be due to slightly improved predictions of vertical mixing of higher momentum from aloft; during this time, prior to jet development, the winds follow a standard quasi-logarithmic profile. The 3D PBL scheme has been shown previously, in idealized tests, to improve model performance during daytime convective conditions (Juliano et al., 2022).

During the peak of the speedup flow, however, the 3D PBL configuration begins to overestimate wind speeds below hub height, showing a slightly more pronounced jet near the surface relative to the MYNN configuration (Fig. 4, 18:00–21:00 PST). This pronounced jet persists into the night for both model configurations until roughly 00:00 PST. Then, as the flow decelerates in the early morning, both model configurations tend to overestimate wind speeds throughout the rotor layer (Fig. 4, 03:00–06:00 PST). Finally, when the flow reaches a minimum around 09:00 PST, both models underestimate wind speeds throughout the rotor layer, with a slightly larger underestimate in the 3D PBL configuration.

To expand upon the composite-average wind speed analysis in Fig. 4, results from a sample day during the study period, 21 July 2019, are presented in Appendix A. This day was chosen to highlight differences between the 3D PBL and MYNN configurations, while also showing consistency with the composite-average results. The same day was highlighted in the original HilFlowS study (Wharton et al., 2015, see Fig. 5 therein). The reader is referred to Appendix A for additional discussion.

Taken together, wind speed error metrics (Table 2), composite-average profiles (Figs. 3 and 4), and results from the sample day (Fig. A1) suggest that for both model configurations, the predicted amount of vertical mixing is inadequate to transport higher momentum downward from aloft. This re-

sults in a persistent negative wind speed bias below roughly 30 m a.g.l. throughout the day. During speedup events, too much momentum remains within the rotor layer. Although both model configurations produce a pronounced jet below hub height and reduced wind speeds above (Fig. 4, 21:00–06:00 PST), wind speeds are generally overestimated in the rotor layer and underestimated near the surface.

Further development and testing of the 3D PBL scheme could lead to more accurate wind speed predictions, especially if the near-surface vertical resolution is increased. Notably, the 3D PBL scheme allows more runtime flexibility in turbulence treatment (via, e.g., the closure constants) relative to MYNN and other 1D PBL schemes, which could facilitate improved predictions of vertical mixing. However, as mentioned previously, the 1 km horizontal grid spacing of the present simulations inherently limits the ability of the model to capture the observed flows. In particular, the hilly topography of the HilFlowS site, including the individual ridgelines on which the lidars were deployed, is not fully captured (see Fig. 1).

To further contextualize model wind speed biases, it is important to recall (see Sect. 2.1) that conically scanning lidars such as the ZephIR300 deployed during HilFlowS are known to experience errors in complex terrain. These errors result from violating the assumption of homogeneity that the lidars use to deduce the horizontal and vertical wind speeds. In particular, Bingöl et al. (2009) found horizontal wind speed errors as large as 10 %, while Wharton et al. (2015) found comparable or smaller values for a similar site in the AP-WRA. As a conservative estimate, the findings of Bingöl et al. (2009) imply mean horizontal wind speed errors as large as roughly 1.5 m s^{-1} in the HilFlowS lidar observations (see gray bounding lines in Fig. 4). In general, the expected maximum lidar error is smaller than the model bias, especially near the surface. Thus, the potential lidar error is not expected to affect the present conclusions related to model evaluation.

To complement wind profile comparisons at the lidar sites, temperature profiles at the meteorological tower site are shown in Fig. 5.

Note that the meteorological tower is on a similar hill to that found at WOP and EOP and is separated by a line-of-sight distance of 950 m from EOP. The 3D PBL configuration shows slightly better agreement with the observed temperature profile for most hours of the day, especially during daytime conditions when the vertical temperature gradient is negative (09:00–15:00 PST). This time corresponds to reduced wind speed bias at both lidar sites. Small improvements in the temperature prediction are also seen during the evening transition, as the vertical temperature gradient becomes positive (18:00–21:00 PST). At this time, the 3D PBL scheme produces a more pronounced near-surface jet but shows larger wind speed bias relative to MYNN, as discussed above.

Table 2. Error metrics, as defined in Eqs. (3), (4), and (5), for each model configuration at each lidar site. Metrics are time averaged over the full study period and vertically averaged over two separate layers: the rotor layer (lidar measurement heights of 30, 38, 50, 60, 70, 80, 90, and 120 m a.g.l.) and a near-surface layer below the rotor layer (lidar measurement heights of 10 and 20 m a.g.l.). The rotor layer is based on the most prevalent generic turbine model in the simulations, with hub height $H = 80$ m and rotor diameter $D = 103$ m (NREL-1.7; see Table 1).

Site	WOP	WOP	WOP	WOP	EOP	EOP	EOP	EOP
vertical layer	near-surface	near-surface	rotor	rotor	near-surface	near-surface	rotor	rotor
model	3D PBL	MYNN	3D PBL	MYNN	3D PBL	MYNN	3D PBL	MYNN
FB _v	−0.29	−0.28	0.069	0.059	−0.34	−0.33	0.034	0.024
NMAE _v	0.35	0.34	0.25	0.25	0.40	0.39	0.26	0.25
SAA [°]	12	12	12	12	13	13	12	12
FB _w	−0.98	−0.96	−0.32	−0.30	−0.15	−0.14	0.24	0.25
NMAE _w	1.2	1.2	0.94	0.94	0.69	0.68	0.73	0.73

3.1.2 Turbulence kinetic energy

Both the 3D PBL and MYNN schemes parameterize SGS turbulence shear stresses and turbulent fluxes using a prognostic equation for the SGS TKE. Thus, TKE predictions can provide insights into model performance. TKE estimates are also available from the HiFlowS lidars and are calculated as

$$\text{TKE} = \frac{1}{2} (\langle u'^2 \rangle + \langle v'^2 \rangle + \langle w'^2 \rangle), \quad (6)$$

where u , v , and w denote velocities in the zonal, meridional, and vertical directions, respectively, and brackets denote 10 min averages. Perturbation quantities, denoted by the prime symbol, are calculated as the difference between the high-frequency (15 s) time series and a detrended time series based on 2 min averages.

Note that both the observed and modeled TKE values have inherent limitations. The lidar TKE estimates are spatially averaged over the lidar's conical scanning volume and are time averaged in 10 min windows. Furthermore, the estimated TKE is limited by the 15 s sampling frequency (see additional discussion in Sathe et al., 2011). Lidar TKE estimates are also influenced by complex terrain, as discussed above for wind speeds. The modeled TKE is fully parameterized (i.e., it is assumed that there is no resolved TKE) in each model grid cell and is output as an instantaneous value every 10 min. Ultimately, these limitations preclude direct comparison of observed and modeled TKE values (i.e., bias calculations). In what follows, the time–height structure of the TKE is compared qualitatively between the observations and the model, while only the modeled TKE values are compared quantitatively.

Observed and modeled TKE profiles are shown in Fig. 6 for the WOP site.

At midday, observed TKE is elevated throughout the lidar's vertical range due to surface heating and associated atmospheric instability. The speedup flows are also accelerating during this time, leading to peak TKE values below 50 m a.g.l. due to shear associated with the jet-like velocity profile (Fig. 6a, 12:00–18:00 PST). Both model configurations

capture elevated TKE during this time (Fig. 6b, c). However, the MYNN configuration generally predicts larger TKE values relative to the 3D PBL configuration. This is likely because the 3D PBL scheme with the PBL approximation introduces additional horizontal mixing relative to MYNN without added TKE production due to horizontal shear. Reduced TKE in the 3D PBL configuration is associated with improved velocity profile predictions at midday (see Fig. 4, 12:00–15:00 PST), although the near-surface jet-like flow is not captured accurately by the model. During and after the peak of the speedup flow (18:00–09:00 PST), the observations and both model configurations show increased TKE near the surface, with reduced values aloft.

In their cold-air-pool case study, Arthur et al. (2022) also found that the 3D PBL scheme with the PBL approximation predicts lower TKE values compared to MYNN and that times of reduced TKE values in the 3D PBL configuration were associated with improved velocity profile predictions. It is important to note that modeled TKE predictions depend on parameters such as the turbulence length scale and closure constants, which differ in the between the MYNN and 3D PBL schemes as configured here (and in Rybchuk et al., 2022; Arthur et al., 2022; Wiersema et al., 2023). These parameters were not varied in the present study, although the reader is referred to Arthur et al. (2022) for a discussion of model sensitivity.

3.2 Horizontal variability

MesoWest stations are used to examine horizontal variability in model performance around the APWRA turbines. MesoWest wind data are generally available at 10 m a.g.l. (MesoWest, 2023). Here, wind speed data are used from select stations shown in Figs. 1 and 7.

For clarity in the analysis, only stations along the primary wind direction (230–250°; see Fig. 3c) are considered. Furthermore, overlapping stations and those reporting predominantly 0 m s^{−1} velocity readings are excluded.

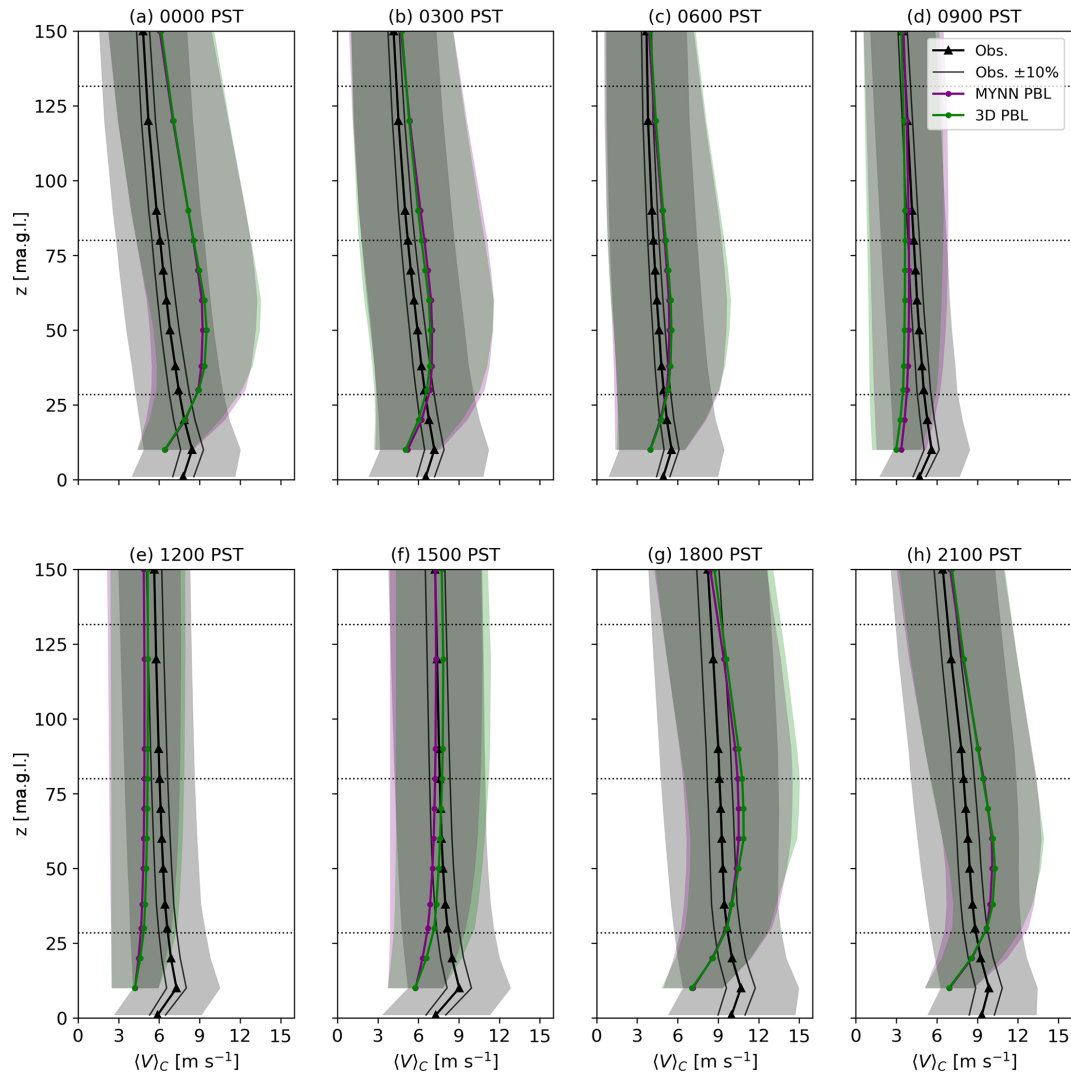


Figure 4. Diurnal composite-average wind speed profiles, shown for WOP lidar observations and both model configurations. Potential mean error bounds of $\pm 10\%$ are also shown for the lidar observations following Bingöl et al. (2009). Profiles are averaged over the hour indicated at the top of each panel, and model data have been interpolated to the vertical levels of the lidar, as in Fig. 3. Note that data are included from the lidar's onboard meteorological station at 1 m a.g.l., but model errors are not evaluated at this height. The shaded regions show ± 1 standard deviation over the given hour of the diurnal composite. Dotted lines indicate the rotor-swept area of the most prevalent generic turbine model in the simulations, with hub height $H = 80$ m and rotor diameter $D = 103$ m (NREL-1.7; see Table 1).

The fractional bias, defined in Eq. (3), is used to evaluate the spatial variability in model wind speed errors. FB_V is similar to the $NMAE_V$ metric defined in Eq. (4), but it includes the sign of the error. While this value tends to be small over the full profile due to averaging over both positive and negative bias values at different measurement heights (see Table 2 and Fig. 4), at a single height it more reliably quantifies model over- vs. underestimates.

Spatial evaluation of model performance shows that the 3D PBL scheme tends to reduce model overestimates of the 10 m wind speed relative to MYNN. As summarized in the inset of Fig. 7, the 3D PBL configuration has a lower 10 m FB_V value at all but 1 of the 20 stations with positive bias.

At the eight locations with negative bias, the value for the 3D PBL configuration tends to be more negative, as is true at both lidar sites and the meteorological tower. This suggests that model underestimates are related to near-surface jet-like flows (as shown in Fig. 4). However, additional vertical profile data would be necessary for confirmation.

4 Wind energy predictions

4.1 Hub-height and rotor-equivalent wind speeds

To better establish the utility of the 3D PBL scheme for wind energy applications, model evaluation is extended to wind-

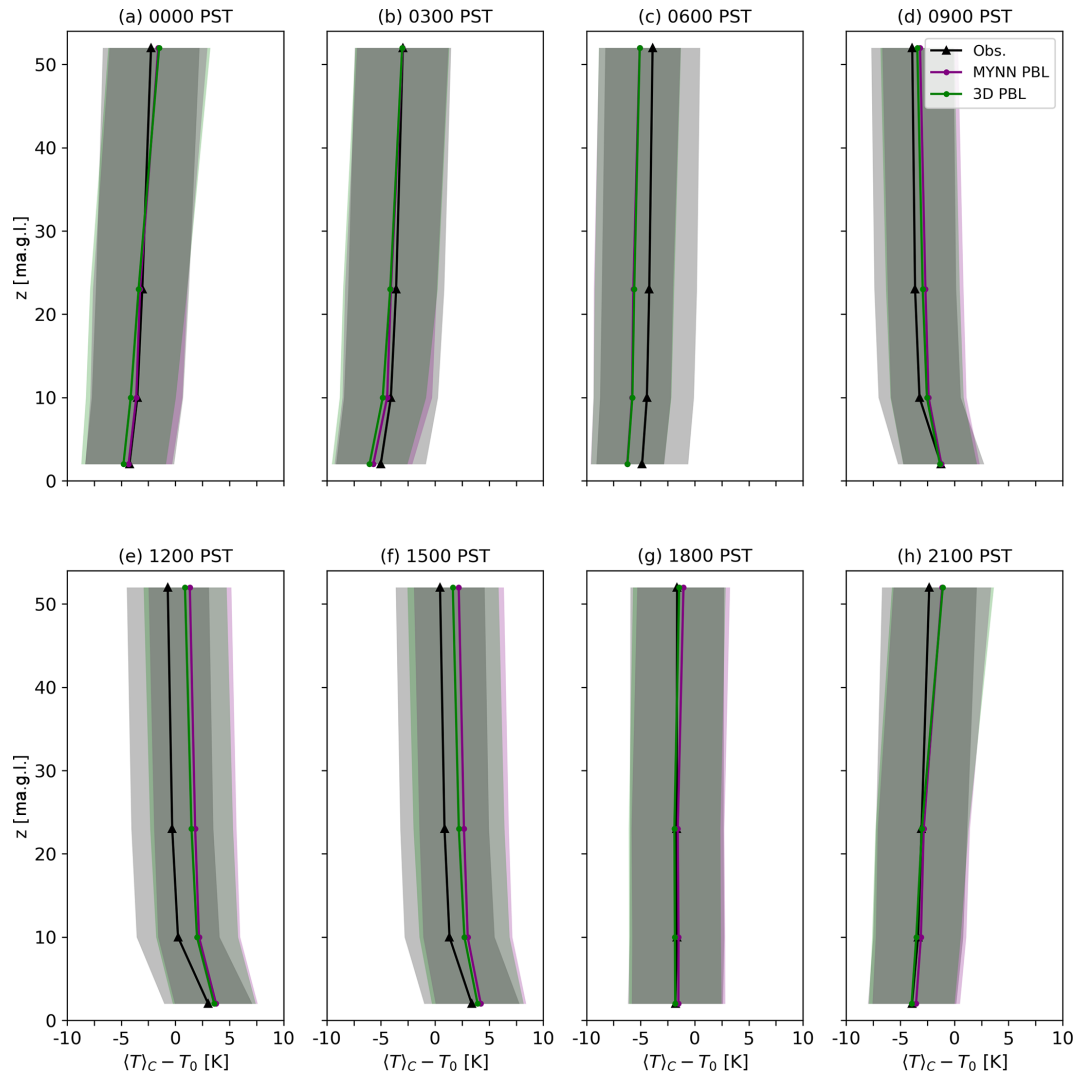


Figure 5. Diurnal composite-average temperature profiles ($T_0 = 300$ K), shown for the HiFlowS 52 m meteorological tower and both model configurations. Profiles are averaged over the hour indicated at the top of each panel, and model data have been interpolated to the vertical levels of the tower observations. The shaded regions show ± 1 standard deviation over the given hour of the diurnal composite. Note that the vertical-axis range is limited to the tower height.

energy-specific quantities, including hub-height and rotor-equivalent wind speeds. The rotor-equivalent wind speed V_{EQ} is often used in wind energy resource and turbine performance assessment (Wagner et al., 2014) and is recommended by the International Electrotechnical Commission (IEC) for determining power curves and annual energy production (see Van Sark et al., 2019). V_{EQ} more accurately captures the kinetic energy flux through the rotor-swept area, compared to a single hub-height wind speed measurement V_{HH} . However, substantial differences between V_{EQ} and V_{HH} are generally only seen at times of high shear (e.g., Van Sark et al., 2019; Redfern et al., 2019).

Following Wagner et al. (2014), the rotor-equivalent wind speed is defined as

$$V_{EQ} = \left(\sum_{i=1}^{N_h} V_i^3 \frac{A_i}{A} \right)^{1/3}, \quad (7)$$

where N_h is the number of observation heights, A is the total rotor-swept area, and

$$A_i = \int_{z_i}^{z_{i+1}} 2\sqrt{R^2 - (z - H)^2} dz \quad (8)$$

is the area of the rotor disk segment corresponding to the i th observation height, with rotor radius R and hub height H .

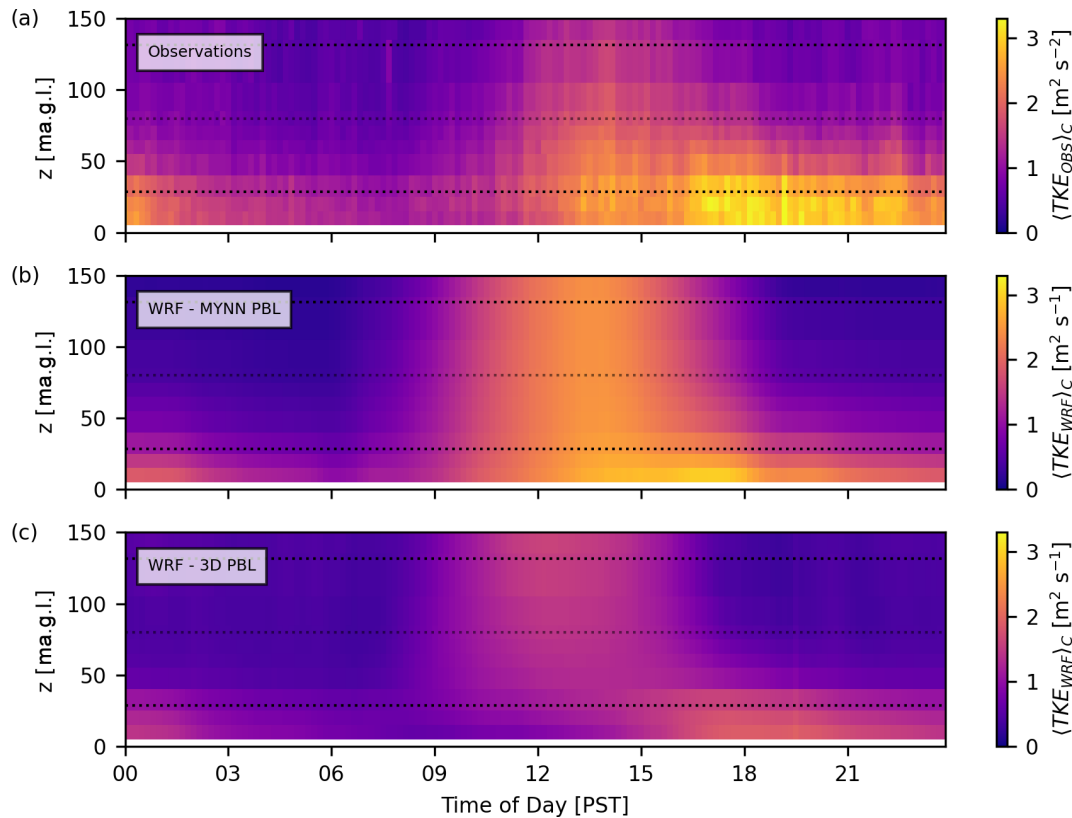


Figure 6. Diurnal composite-average TKE at the WOP lidar site, shown for the observations (a), the 3D PBL model configuration (b), and the MYNN model configuration (c). Dotted lines indicate the rotor-swept area of the most prevalent generic turbine model in the simulations, with hub height $H = 80$ m and rotor diameter $D = 103$ m (NREL-1.7; see Table 1).

The integral in Eq. (8) is evaluated analytically, with z_i and z_{i+1} representing the lower and upper bounds of the i th rotor disk segment, which are by definition located halfway between available observation points. Here, V_{EQ} is calculated using both HilFlowS lidar data and model predictions. The modeled wind speed profiles are interpolated to the lidar observation locations as in the bias calculations in Sect. 3.

As in Figs. 3 and 4, a diurnal composite average captures the trend of the hub-height and rotor-equivalent wind speeds during the study period (see Fig. 8 for WOP and Fig. 9 for EOP).

The observed hub-height wind speed gradually increases over the course of the day, reaching a peak around 18:00 PST. It then decreases gradually, reaching a minimum around 09:00 PST. The observed rotor-equivalent wind speed follows a similar trend. Note that here, V_{EQ} is calculated with a hub height $H = 80$ m and a rotor diameter $D = 103$ m, which correspond to the most prevalent generic turbine model in the simulations (NREL-1.7; see Table 1) and is also representative of most APWRA turbines (see discussion in Sect. 2.2.2 and Table 1).

The hub-height and rotor-equivalent wind speeds are generally underestimated at both sites during the ramp-up portion of the speedup event (09:00–15:00 UTC). The 3D PBL

configuration shows improved predictions during this time, reducing the negative bias by as much as 50 %. Then, during the peak and decreasing portion of the speedup event, the modeled hub-height and rotor-equivalent wind speeds are generally overestimated (15:00–09:00 UTC) by as much as a factor of roughly 2. While the 3D PBL configuration shows larger overpredictions than the MYNN configuration at the peak of the speedup event, its performance is similar to or slightly better than MYNN for the rest of the night. Hub-height and rotor-equivalent wind speeds for the sample day shown in Appendix A reinforce these composite-average trends.

The difference between the observed hub-height and rotor-equivalent wind speeds is larger at EOP than at WOP, highlighting differences in vertical shear between the sites despite similar wind climatology overall. As shown in Wharton and Foster (2022), the EOP site has lower wind speeds in the bottom half of the rotor layer for an 80 m turbine, causing V_{EQ} to be lower than V_{HH} (see Fig. 7b therein). This variability is not captured in the model, which predicts similar hub-height and rotor-equivalent wind speed values at both sites. Thus, at the EOP site, model bias values are larger for V_{EQ} by as much as 2 m s^{-1} compared to V_{HH} . At the WOP site, bias values for both quantities are similar. This analysis demonstrates

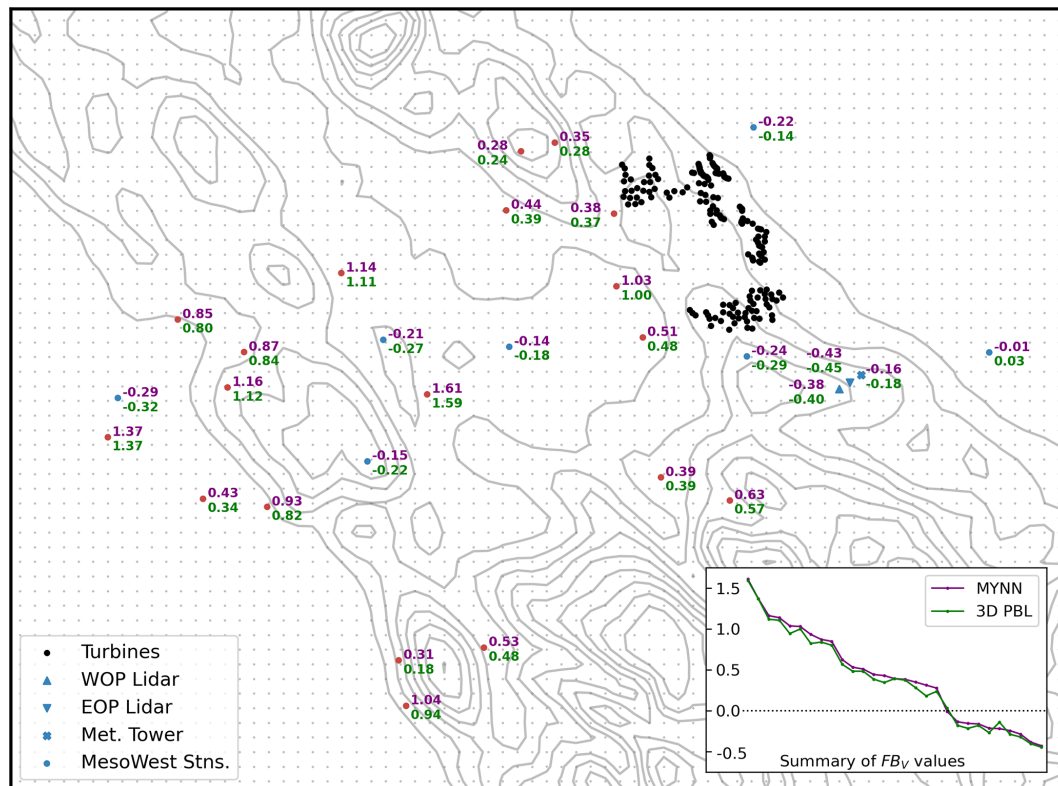


Figure 7. Fractional wind speed bias FB_V at 10 m a.g.l. for the MYNN (purple) and 3D PBL (green) configurations at meteorological observation stations in the APWRA. Station markers are colored by the sign of the bias in the MYNN configuration: blue for negative and red for positive. Gray contour lines are shown at 100 m intervals between 100 and 1000 m a.g.l., and gray dots represent cell centers on the $\Delta x = 1$ km model grid. The portion of the domain shown here is highlighted by the dotted-line box in Fig. 1b. Inset is a summary of 10 m FB_V at all stations, sorted in descending order based on the value for the MYNN configuration.

the potential effect of using V_{EQ} when evaluating model performance for wind energy applications in regions with highly sheared wind speed profiles.

4.2 Monthly capacity factors

Although the flows at the HilFlowS lidar locations are expected to be representative of those experienced by the APWRA turbines, more localized effects may contribute to turbine performance (see, e.g., Wharton et al., 2015; Bulaevskaya et al., 2015). For this reason, the Fitch et al. (2012) WFP is used in both model runs to represent the interaction between the APWRA turbines and the diurnal speedup events. Because Rybchuk et al. (2022) considered only an ocean environment with no terrain in their testing of the 3D PBL-WFP implementation, the present case study presents an opportunity to further evaluate the implementation in a realistic complex-terrain scenario.

Diurnal composite-average capacity factors for the WFP-modeled APWRA turbines are shown by month in Fig. 10 to illustrate changes in production over the roughly 3-month-long study period.

The overall trend is similar to that shown in Fig. 2, with the highest capacity factors in July, a slight decrease in August, and a more substantial decrease in September. However, the same diurnal trend remains, indicating the prominence of the speedup flows throughout the mid-to-late summer.

The capacity factors in Fig. 10 follow the trend of the hub-height and rotor-equivalent wind speeds at both lidar sites (shown in Figs. 8 and 9). Notably, however, there is a roughly 3 h delay in the timing of the peak and minimum capacity factors relative to the modeled wind speeds at the HilFlowS lidar sites. This suggests differences in the timing of the speedup flows between the HilFlowS site and the APWRA, despite their relative proximity, and highlights the influence of terrain on power production.

To further evaluate the performance of the 3D PBL-WFP configuration during the HilFlowS study period, modeled monthly capacity factors are compared to those calculated using publicly available data (Fig. 11).

The EIA collects monthly plant-level-generation data within the United States (EIA, 2023a, b, as shown in Fig. 2). These data are depicted in Fig. 11 (black bars) as an average over the five wind plants shown in Table 1, weighted by

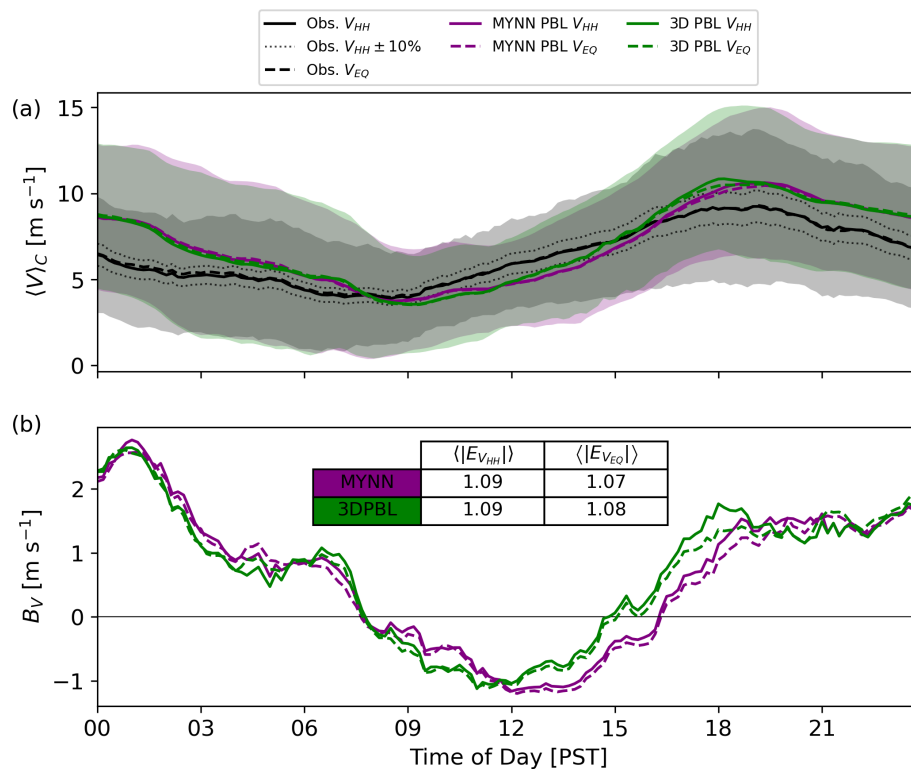


Figure 8. Diurnal composite-average hub-height wind speed V_{HH} and rotor-equivalent wind speed V_{EQ} . **(a)** Results for WOP lidar observations, including potential mean error bounds of $\pm 10\%$ following Bingöl et al. (2009), and both model configurations. **(b)** Model bias, including a summary of time-averaged absolute error values in m s^{-1} . In **(a)**, the shaded regions show ± 1 standard deviation over the diurnal composite for V_{HH} . V_{EQ} is calculated with hub height $H = 80$ m and rotor diameter $D = 103$ m, corresponding to the most prevalent generic turbine model in the simulations (NREL-1.7; see Table 1).

rated plant capacity. Because plant-level information is not available in WRF output, modeled monthly capacity factors in Fig. 11 (colored bars) are shown as an average over the APWRA as a whole.

Overall, the modeled monthly capacity factors follow the decreasing trend evident in the EIA data. However, the model generally overestimates the reported values by roughly 7 %–11 %. Several factors likely contribute to this overestimate. Most notably for this study, overestimated wind speeds in the model, especially during the night (see Figs. 3, 4, 8, and 9), likely lead to overestimated power production. Additionally, the model does not account for turbine downtime, for example, due to curtailment or maintenance, which reduces the reported monthly production; this likely also contributes to model overestimates.

Keeping these caveats in mind, the 3D PBL configuration predicts slightly lower monthly capacity factors relative to the MYNN configuration (roughly 1 % or less; see Fig. 11). However, differences are more pronounced in the monthly diurnal composite-average comparisons, especially at night (see Fig. 10, 18:00–06:00 PST) when the capacity factors in the 3D PBL configuration are up to roughly 6 % smaller than those in the MYNN configuration. These re-

sults, along with those in Figs. 4, 8, and 9, suggest that the 3D PBL scheme's wind power predictions may be slightly closer to reality. However, comparisons to higher-frequency (e.g., hourly) turbine- or plant-level data are necessary for a more robust evaluation.

Although turbine- and plant-level data are not output by the WFP, grid-cell-level data reveal some spatial variability in the modeled monthly capacity factor. Figure 12 shows the capacity factor and total capacity in each model grid cell that contains turbines.

Results are based on the 3D PBL configuration, although those for the MYNN configuration are qualitatively similar. The capacity factor tends to be higher in the central-to-southeastern portion of the APWRA, where the southwesterly speedup flows are less obstructed by upstream terrain. This trend is consistent across the 3 months of the study period, although the overall capacity factors decrease noticeably in September. It should be noted that the Summit Wind plant, which became operational in 2021 after the study period, is located in the central APWRA to the southwest of the turbines considered here (see Hoen et al., 2018). This location is generally upstream of other plants during the summertime and likely takes advantage of the spatial trend in the

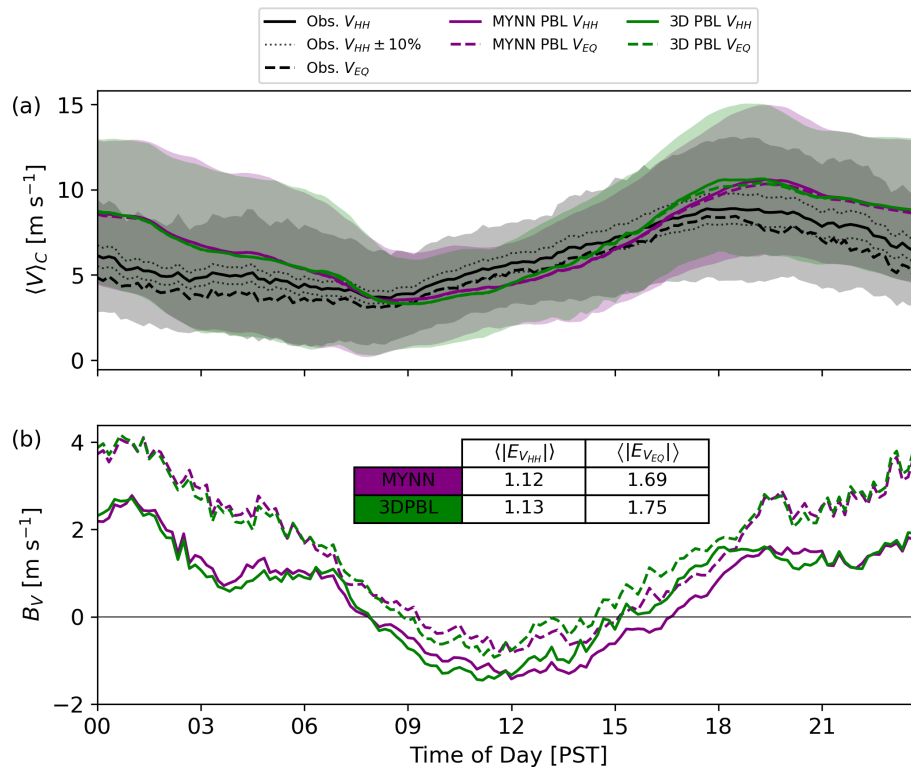


Figure 9. As in Fig. 8 but for the EOP site.

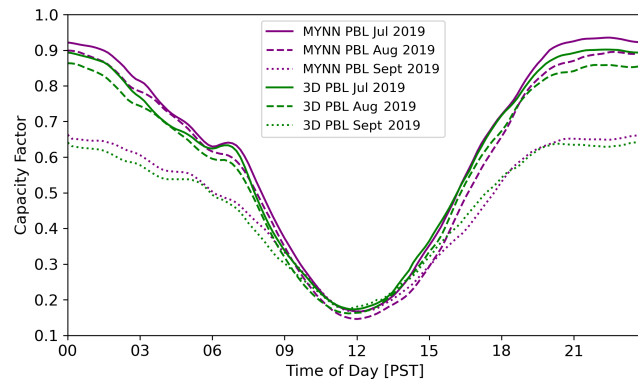


Figure 10. Diurnal composite-average capacity factor by month during the study period for modeled APWRA turbines.

capacity factor seen in Fig. 12. However, spatial variability in the APWRA capacity factor is expected to change seasonally due to shifts in the synoptic forcing and the predominant wind direction.

5 Conclusions

This study examined mesoscale model predictions of boundary layer winds and turbulence in the Altamont Pass Wind Resource Area of California, where the diurnal regional sea breeze and associated terrain-driven speedup flows drive

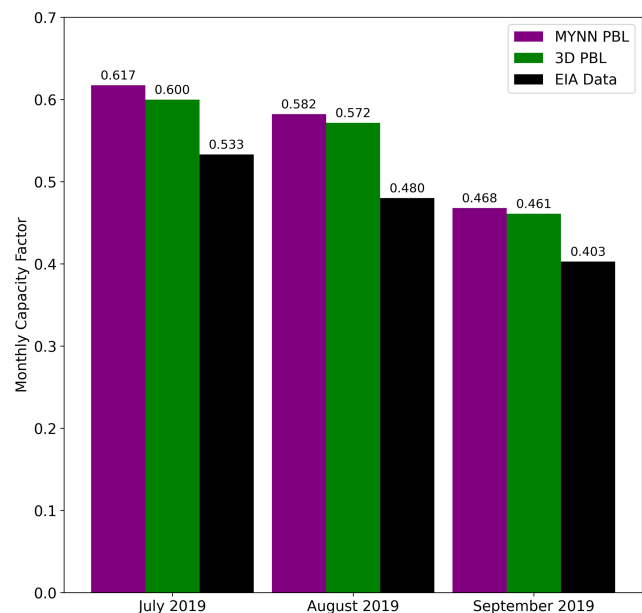


Figure 11. Comparison of modeled vs. EIA-reported (EIA, 2023a, b) monthly capacity factors in the APWRA during the study period.

wind energy production during the summer months. The recurring nature of these terrain-driven wind accelerations, as well as their importance to the wind energy industry, makes the APWRA a useful test bed for numerical weather prediction. In particular, this study focused on the treatment of turbulence in mesoscale models, which require a PBL scheme to parameterize subgrid-scale turbulent mixing. The WRF-based 3D PBL scheme of Juliano et al. (2022), which treats both vertical and horizontal turbulent mixing (here, using the PBL approximation), was evaluated in comparison to a traditional 1D PBL scheme, MYNN, which treats only vertical turbulent mixing.

Both PBL treatments were tested during the nearly 3-month-long HilFlowS experiment (Wharton and Foster, 2022), which took place near the APWRA in the summer of 2019. As noted by Banta et al. (2020) in their study of recurring marine-air intrusions, capturing repeated flow dynamics and thus repeated model errors allows for robust model evaluation. Here, as in Banta et al. (2020), composite averaging was used to analyze model errors over the course of the study period. Model predictions were evaluated against data from two profiling lidars and a meteorological tower deployed during HilFlowS, as well as surface meteorological stations within the MesoWest network. Thus, both vertical and horizontal variability in model performance was examined.

In terms of overall model skill, the 3D PBL and MYNN configurations performed similarly over the duration of the study period, with both capturing the general timing and direction of the speedup flows but overestimating their magnitude within a typical wind turbine rotor layer. Additionally, neither model configuration captured the persistent jet-like flow observed by the lidars, and thus both models underestimated near-surface wind speeds. Similar performance between the two configurations suggests that both are limited by the chosen mesoscale resolution, which does not fully represent the effects of complex terrain on local wind profiles. It follows that in the present case study, strong synoptic conditions may drive model performance more than the PBL scheme does.

Despite overall similarities in performance, several minor differences were found between PBL treatments. In terms of vertical variability, the 3D PBL scheme demonstrated slightly improved predictions of wind speed profiles during the afternoon acceleration phase of the diurnal speedup flows, and this was associated with reduced TKE relative to MYNN. Additionally, the 3D PBL scheme showed evidence of a more pronounced near-surface jet and reduced wind speeds aloft. Although this evidence is muted in the diurnal composite average, it is more pronounced on the given sample day (see Appendix A). In terms of horizontal variability, the 3D PBL scheme showed reduced positive wind speed bias at most MesoWest surface stations within the APWRA. This suggests that it more accurately captures horizontal variability over complex terrain.

In future studies, the use of increased horizontal resolution could help to further distinguish 3D PBL performance relative to MYNN. As model grid spacing progresses further into the gray zone, larger horizontal gradients will be resolved, leading to differences in flow predictions. The 3D PBL scheme has been tested successfully in the past with horizontal grid spacing between 250 and 750 m (Juliano et al., 2022; Arthur et al., 2022; Wiersema et al., 2023). Note that careful model setup, including use of the PBL approximation, is still generally required to ensure model stability. With further development of the 3D PBL scheme to improve stability, additional gains relative to MYNN or other 1D schemes may be found. Ultimately, however, accurate simulation of the observed jet-like flow at the HilFlowS site will likely require increased vertical resolution and the use of a LES closure scheme.

To further evaluate the 3D PBL scheme for wind energy applications, the mesoscale wind farm parameterization of Fitch et al. (2012) was employed. The WFP was recently coupled to the 3D PBL scheme by Rybchuk et al. (2022) and was tested in an idealized ocean environment. The present study provided an opportunity to test the 3D PBL-WFP implementation compared to the standard WRF implementation with MYNN in a realistic complex-terrain scenario. Overall, the 3D PBL-WFP performs similarly to the MYNN-WFP, providing additional confidence in the implementation.

Modeled capacity factors capture the general diurnal trend in the observed speedup flows but are roughly 7%–11% larger than EIA-reported values in the APWRA. This is likely due to overestimated wind speeds during the peak and decelerating phase of the speedup events, as well as other factors including turbine operation and differences between the modeled and actual turbines. However, because wind power is proportional to the cube of wind speed over much of a turbine's operational range, small relative improvements in the modeled wind speed translate to more noticeable improvements in modeled power production. Consistently over the 3-month study period, the 3D PBL configuration reduced overestimates of monthly capacity factors relative to the MYNN configuration.

In closing, this study has helped to establish the utility of the 3D PBL scheme for wind energy applications in complex terrain. Its overall similar performance to MYNN, a much more established PBL scheme, is encouraging, as is evidence of improved performance under certain conditions and across the spatially heterogeneous APWRA. However, the 3D PBL scheme requires additional development and testing to confirm its robustness. As mentioned above, the 3D PBL scheme allows more runtime flexibility in turbulence treatment relative to MYNN and other 1D PBL schemes, which could facilitate rapid performance improvements. Ultimately, increased understanding of model sensitivity to grid spacing and turbulence closure parameters (e.g., length scales, closure constants, and use of the PBL approximation) will guide the use

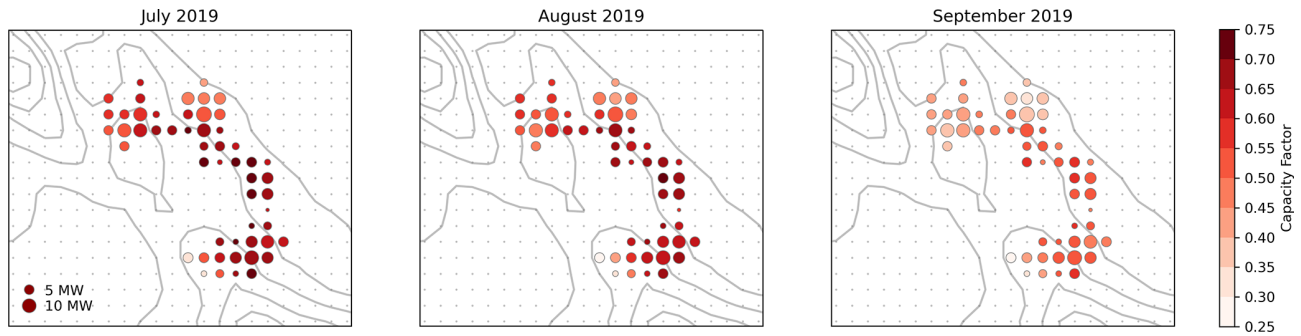


Figure 12. Spatial variability in modeled monthly capacity factors in the APWRA during the study period using data from the 3D PBL configuration. Circles are shown for each model grid cell that contains turbines; the color scale represents the capacity factor, and the size of the circle represents the total capacity in the given cell. Gray contour lines show the terrain at 100 m intervals between 100 and 1000 m a.g.l., and gray dots show cell centers on the $\Delta x = 1$ km model grid.

of the 3D PBL scheme for high-resolution numerical weather prediction and wind energy applications.

Appendix A: Sample day

To complement the composite-average wind speed results shown in the main text, this appendix shows results from a sample day during the study period: 21 July 2019. This day was chosen to highlight differences between the 3D PBL and MYNN configurations, while also showing consistency with the composite-average results. The same day was highlighted in the original HilFlowS study (Wharton and Foster, 2022; see Fig. 5 therein). Wind speed profiles at WOP are shown in Fig. A1, corresponding to Fig. 4 in the main text.

Hub-height and rotor-equivalent wind speed time series at WOP are shown in Fig. A2, corresponding to Fig. 8 in the main text.

On this day, during the peak of the evening speedup flow (18:00–03:00 PST), the 3D PBL configuration predicts a more pronounced jet-like wind speed profile (with its wind speed maximum closer to the surface) than the MYNN configuration does. This leads to improved predictions of the hub-height and rotor-equivalent wind speeds. However, both model configurations overestimate the observed rotor-layer wind speed during this time, while underestimating the near-surface wind speed. There is also evidence of reduced error for the 3D PBL configuration during the onset of the speedup event (09:00–15:00 PST). These results are generally consistent with the composite average, while also highlighting potential model improvements when the 3D PBL configuration is used.

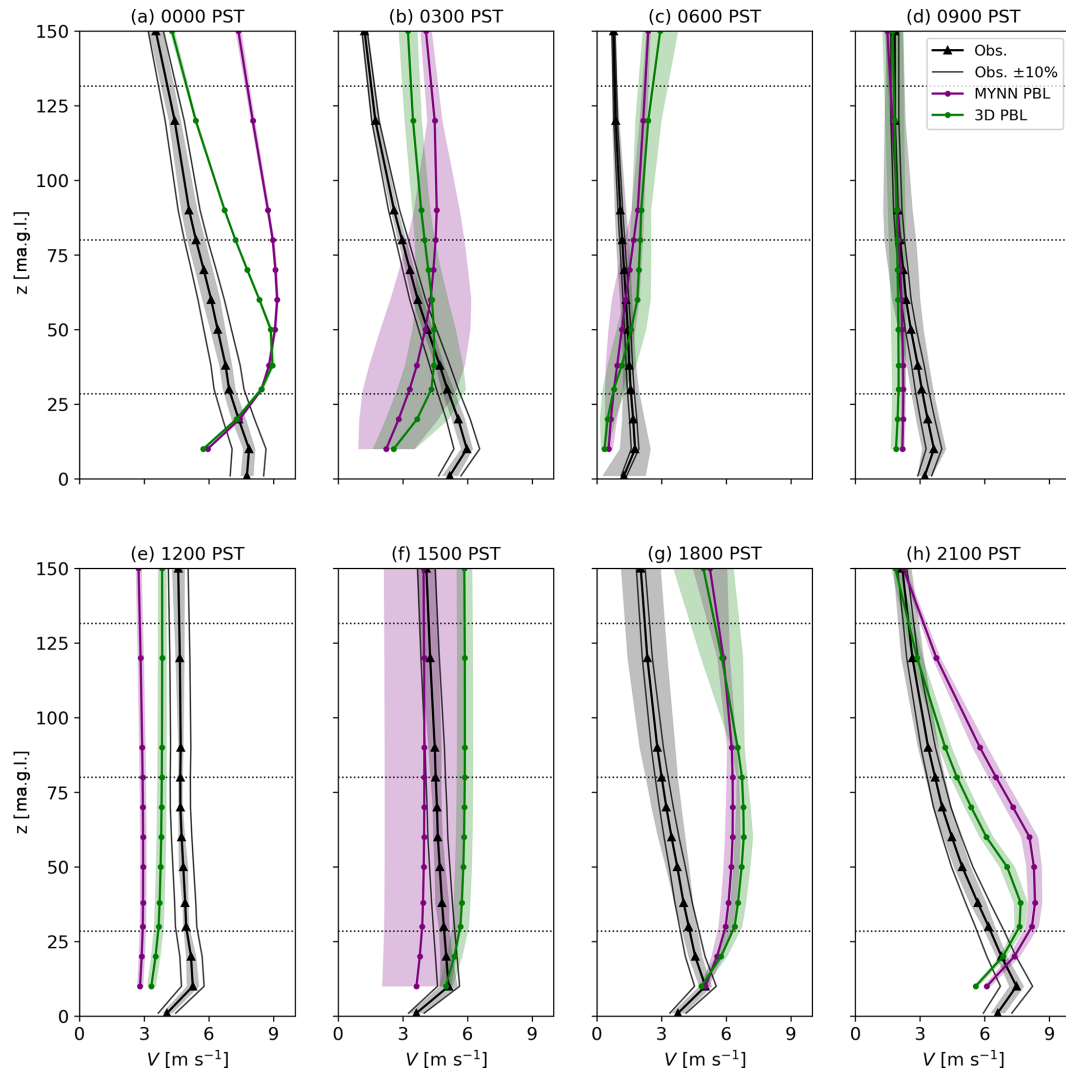


Figure A1. Wind speed profiles on 21 July 2019, shown for WOP lidar observations and both model configurations. Potential mean error bounds of $\pm 10\%$ are also shown for the lidar observations following Bingöl et al. (2009). Profiles are averaged over the hour indicated at the top of each panel, and model data have been interpolated to the vertical levels of the lidar. Note that data are included from the lidar's onboard meteorological station at 1 m a.g.l., but model errors are not evaluated at this height. The shaded regions show ± 1 standard deviation over the given hour of the sample day. Dotted lines indicate the rotor-swept area of the most prevalent generic turbine model in the simulations, with hub height $H = 80$ m and rotor diameter $D = 103$ m (NREL-1.7; see Table 1).

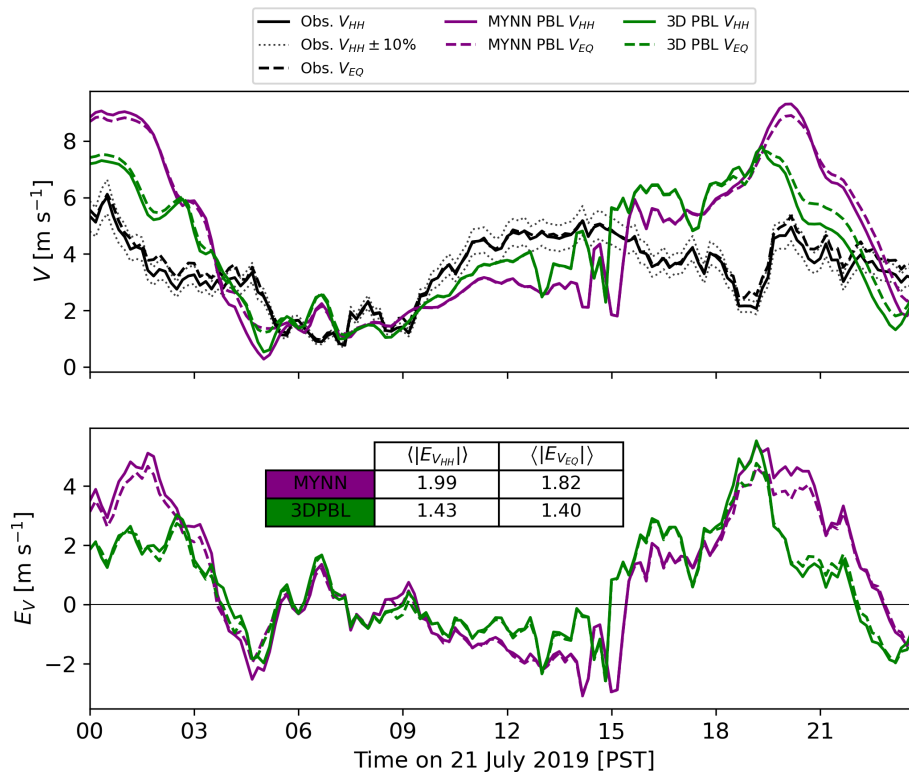


Figure A2. Hub-height wind speed V_{HH} and rotor-equivalent wind speed V_{EQ} on 21 July 2019. **(a)** Results for WOP lidar observations, including potential error bounds of $\pm 10\%$ following Bingöl et al. (2009), and both model configurations. **(b)** Model error, including a summary of absolute error values (in m s^{-1}) time averaged over the day. V_{EQ} is calculated with hub height $H = 80$ m and rotor diameter $D = 103$ m, corresponding to the most prevalent generic turbine model in the simulations (NREL-1.7; see Table 1).

Code and data availability. All HilFlowS observational data used in this work are publicly available through the United States Department of Energy’s Atmosphere to Electrons Data Archive and Portal (<https://a2e.energy.gov/about/dap>); each dataset is cited individually in the main text (<https://doi.org/10.21947/1571454>, Atmosphere to Electrons, 2019a; <https://doi.org/10.21947/1571453>, Atmosphere to Electrons, 2019b; <https://doi.org/10.21947/1571455>, Atmosphere to Electrons, 2019c). MesoWest data are available through MesoWest (2023) (<https://synopticdata.com/mesowest-users/>). The WRF code used in this work is available on GitHub at https://github.com/twjuliano/WRF/tree/develop_3dpbl_on_top (Juliano, 2022), commit f04c02387bdf9f3ab5f93a1b4b28c5f35c05a950, and is archived on Zenodo (see Juliano and Arthur, 2025, <https://doi.org/10.5281/zenodo.15724251>). The WRF configuration files are also available on Zenodo (see Arthur, 2024, <https://doi.org/10.5281/zenodo.13871641>). Modeled wind turbine specifications are based on data from the NREL (2022) (<https://github.com/nrel/openfast-turbine-models/tree/main/iea-scaled>) and wind-turbine-models.com (2024b, a) (<https://en.wind-turbine-models.com/turbines/697-bonus-b54-1000>, <https://en.wind-turbine-models.com/turbines/13-vestas-v47>), as described in the text and summarized in Table 1.

Author contributions. Writing – original draft preparation, formal analysis, and visualization by RSA; writing – review and editing by AR, TWJ, GR, SW, JKL, and JDF; software by AR, TWJ, and JKL; data curation by SW and GR; conceptualization by RSA, GR, SW, and JDF; funding acquisition and project administration by JDF and RSA.

Competing interests. At least one of the (co-)authors is a member of the editorial board of *Wind Energy Science*. The peer-review process was guided by an independent editor, and the authors also have no other competing interests to declare.

Disclaimer. The views expressed in the article do not necessarily represent the views of the DOE or the US government.

Publisher’s note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. This work was performed under the auspices of the US Department of Energy by Lawrence Livermore National Laboratory under contract DE AC52-07NA27344. The Pacific Northwest National Laboratory is operated by Battelle Memorial Institute for the US Department of Energy under contract DE-AC05-76RL01830. This work was authored in part by the National Renewable Energy Laboratory, operated by the Alliance for Sustainable Energy, LLC, for the US Department of Energy under contract no. DE-AC36-08GO28308. Co-author TWJ is grateful for support in part from the Department of Energy Wind Energy Technologies Office through contract no. DE-AC05-76RL01830 to the Pacific Northwest National Laboratory (PNNL). The National Science Foundation National Center for Atmospheric Research (NSF NCAR) is a subcontractor to PNNL under contract no. 659135. NSF NCAR is a major facility sponsored by the National Science Foundation under cooperative agreement no. 1852977. The US government retains and the publisher, by accepting the article for publication, acknowledges that the US government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for US government purposes. The authors acknowledge Chris Golaz and Tom Edmunds for their assistance with the EIA data, Tianyi Li for his assistance in calculating rotor-equivalent wind speeds, and two anonymous reviewers for their suggestions to improve the paper.

Financial support. This research has been supported by the US Department of Energy (DOE), Office of Energy Efficiency and Renewable Energy (EERE), Wind Energy Technologies Office (WETO).

Review statement. This paper was edited by Alfredo Peña and reviewed by two anonymous referees.

References

- Ali, K., Schultz, D. M., Revell, A., Stallard, T., and Ouro, P.: Assessment of five wind-farm parameterizations in the Weather Research and Forecasting model: A case study of wind farms in the North Sea, *Mon. Weather Rev.*, 151, 2333–2359, 2023.
- Archer, C. L., Wu, S., Ma, Y., and Jiménez, P. A.: Two corrections for turbulent kinetic energy generated by wind farms in the WRF model, *Mon. Weather Rev.*, 148, 4823–4835, 2020.
- Arthur, R. S.: Evaluating mesoscale model predictions of diurnal speedup events in the Altamont Pass Wind Resource Area of California, Version v1, Zenodo [data set], <https://doi.org/10.5281/zenodo.13871641>, 2024.
- Arthur, R. S., Lundquist, K. A., and Olson, J. B.: Improved prediction of cold-air pools in the Weather Research and Forecasting model using a truly horizontal diffusion scheme for potential temperature, *Mon. Weather Rev.*, 149, 155–171, 2021.
- Arthur, R. S., Juliano, T. W., Adler, B., Krishnamurthy, R., Lundquist, J. K., Kosović, B., and Jiménez, P. A.: Improved representation of horizontal variability and turbulence in mesoscale simulations of an extended cold-air pool event, *J. Appl. Meteorol. Climatol.*, 61, 685–707, 2022.
- Atmosphere to Electrons: wfp2-hilflows/met.z01.a0, maintained by A2e Data Archive and Portal for U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy [data set], <https://doi.org/10.21947/1571454> (last access: 29 November 2022), 2019a.
- Atmosphere to Electrons: wfp2-hilflows/lidar.z02.a0, maintained by A2e Data Archive and Portal for U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy [data set], <https://doi.org/10.21947/1571453> (last access: 14 December 2022), 2019b.
- Atmosphere to Electrons: wfp2-hilflows/lidar.z03.a0, maintained by A2e Data Archive and Portal for U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy [data set], <https://doi.org/10.21947/1571455> (last access: 14 December 2022), 2019c.
- Banta, R. M., Pichugina, Y. L., Brewer, W. A., Choukulkar, A., Lantz, K. O., Olson, J. B., Kenyon, J., Fernando, H. J. S., Krishnamurthy, R., Stoelinga, M. J., Sharp, J., Darby, L. S., Turner, D. D., Baidar, S., and Sandberg, S. P.: Characterizing NWP model errors using doppler-lidar measurements of recurrent regional diurnal flows: Marine-air intrusions into the Columbia River Basin, *Mon. Weather Rev.*, 148, 929–953, 2020.
- Banta, R. M., Pichugina, Y. L., Brewer, W. A., Balmes, K. A., Adler, B., Sedlar, J., Darby, L. S., Turner, D. D., Kenyon, J. S., Strobach, E. J., Carroll, B. J., Sharp, J., Stoelinga, M. T., Cline, J., and Fernando, H. J. S.: Measurements and model improvement: Insight into NWP model error using Doppler lidar and other WFP2 measurement systems, *Mon. Weather Rev.*, 151, 3063–3087, 2023.
- Benjamin, S. G., Weygandt, S. S., Brown, J. M., Hu, M., Alexander, C. R., Smirnova, T. G., Olson, J. B., James, E. P., Dowell, D. C., Grell, G. A., Lin, H., Peckham, S. E., Smith, T. L., Moninger, W. R., Kenyon, J. S., and Manikin, G. S.: A North American hourly assimilation and model forecast cycle: The Rapid Refresh, *Mon. Weather Rev.*, 144, 1669–1694, 2016.
- Bingöl, F., Mann, J., and Foussekis, D.: Conically scanning lidar error in complex terrain, *Meteorol. Z.*, 18, 189–195, 2009.
- Bulaevskaya, V., Wharton, S., Clifton, A., Qualley, G., and Miller, W. O.: Wind power curve modeling in complex terrain using statistical models, *J. Renew. Sustain. Ener.*, 7, 013103, <https://doi.org/10.1063/1.4904430>, 2015.
- Chang, J. C. and Hanna, S. R.: Air quality model performance evaluation, *Meteor. Atmos. Phys.*, 87, 167–196, 2004.
- Chow, F. K., Schär, C., Ban, N., Lundquist, K. A., Schlemmer, L., and Shi, X.: Crossing multiple gray zones in the transition from mesoscale to microscale simulation over complex terrain, *Atmosphere*, 10, 274, <https://doi.org/10.3390/atmos10050274>, 2019.
- Doubrawa, P. and Muñoz-Esparza, D.: Simulating real atmospheric boundary layers at gray-zone resolutions: How do currently available turbulence parameterizations perform?, *Atmosphere*, 11, 345, <https://doi.org/10.3390/atmos11040345>, 2020.
- Dowell, D. C., Alexander, C. R., James, E. P., Weygandt, S. S., Benjamin, S. G., Manikin, G. S., Blake, B. T., Brown, J. M., Olson, J. B., Hu, M., Smirnova, T. G., Ladwig, T., Kenyon, J. S., Ahmadov, R., Turner, D. D., Duda, J. D., and Alcott, T. I.: The High-Resolution Rapid Refresh (HRRR): An hourly updating convection-allowing forecast model. Part I: Motivation and system description, *Weather Forecast.*, 37, 1371–1395, 2022.

- EIA, U.: Form EIA-860, <https://www.eia.gov/electricity/data/eia860/> (last access: 20 October 2023), 2023a.
- EIA, U.: Form EIA-923, <https://www.eia.gov/electricity/data/eia923/> (last access: 20 October 2023), 2023b.
- Fitch, A. C., Olson, J. B., Lundquist, J. K., Dudhia, J., Gupta, A. K., Michalakes, J., and Barstad, I.: Local and mesoscale impacts of wind farms as parameterized in a mesoscale NWP model, *Mon. Weather Rev.*, 140, 3017–3038, 2012.
- Gal-Chen, T. and Somerville, R. C. J.: On the use of a coordinate transformation for the solution of the Navier-Stokes equations, *J. Comput. Phys.*, 17, 209–228, 1975.
- Goger, B., Rotach, M. W., Gohm, A., Fuhrer, O., Stiperski, I., and Holtslag, A. A. M.: The impact of three-dimensional effects on the simulation of turbulence kinetic energy in a major alpine valley, *Bound.-Lay. Meteorol.*, 168, 1–27, 2018.
- Hoen, B. D., Diffendorfer, J. E., Rand, J. T., Kramer, L. A., Garrity, C. P., and Hunt, H. E.: United States Wind Turbine Database v5.2, U.S. geological survey, american clean power association, and lawrence berkeley national laboratory data release, <https://doi.org/10.5066/F7TX3DN0> (last access: 10 October 2022), 2018.
- Honnert, R. and Masson, V.: What is the smallest physically acceptable scale for 1D turbulence schemes?, *Front. Earth Sci.*, 2, 27, <https://doi.org/10.3389/feart.2014.00027>, 2014.
- Iacono, M. J., Delamere, J. S., Mlawer, E. J., Shephard, M. W., Clough, S. A., and Collins, W. D.: Radiative forcing by long-lived greenhouse gases: Calculations with the AER radiative transfer models, *J. Geophys. Res.*, 113, <https://doi.org/10.1029/2008JD009944>, 2008.
- Jiménez, P. A. and Dudhia, J.: On the ability of the WRF model to reproduce the surface wind direction over complex terrain, *J. App. Meteorol. Climatol.*, 52, 1610–1617, 2013.
- Juliano, T. W.: Fork of WRF model with 3D PBL-WFP scheme, Github [code], https://github.com/twjuliano/WRF/tree/develop_3dpbl_on_top (last access: 7 December 2022), 2022.
- Juliano, T. W. and Arthur, R. S.: Code for: Evaluating mesoscale model predictions of diurnal speedup events in the Altamont Pass Wind Resource Area of California, Zenodo [code], <https://doi.org/10.5281/zenodo.15724252>, 2025.
- Juliano, T. W., Kosović, B., Jiménez, P. A., Eghdami, M., Haupt, S. E., and Martilli, A.: “Gray zone” simulations using a three-dimensional planetary boundary layer parameterization in the Weather Research and Forecasting model, *Mon. Weather Rev.*, 150, 1585–1619, 2022.
- Kosović, B., Munoz, P. J., Juliano, T. W., Martilli, A., Eghdami, M., Barros, A. P., and Haupt, S. E.: Three-dimensional planetary boundary layer parameterization for high-resolution mesoscale simulations, *J. Phys. Conf. Series*, 1452, 012080, <https://doi.org/10.1088/1742-6596/1452/1/012080>, 2020.
- Larsén, X. G. and Fischereit, J.: A case study of wind farm effects using two wake parameterizations in the Weather Research and Forecasting (WRF) model (V3.7.1) in the presence of low-level jets, *Geosci. Model Dev.*, 14, 3141–3158, <https://doi.org/10.5194/gmd-14-3141-2021>, 2021.
- Mazzaro, L. J., Muñoz-Esparza, D., Lundquist, J. K., and Linn, R. R.: Nested mesoscale-to-LES modeling of the atmospheric boundary layer in the presence of under-resolved convective structures, *J. Adv. Model. Earth Sy.*, 9, 1795–1810, 2017.
- Mellor, G. L.: Analytic prediction of the properties of stratified planetary surface layers, *J. Atmos. Sci.*, 30, 1061–1069, 1973.
- Mellor, G. L. and Yamada, T.: A hierarchy of turbulence closure models for planetary boundary layers, *J. Atmos. Sci.*, 31, 1791–1806, 1974.
- Mellor, G. L. and Yamada, T.: Development of a turbulence closure model for geophysical fluid problems, *Rev. Geophys.*, 20, 851–875, 1982.
- MesoWest: Synoptic Data, <https://synopticdata.com/mesowest-users/> (last access: 13 October 2023), 2023.
- Muñoz-Esparza, D., Sauer, J. A., Linn, R. R., and Kosović, B.: Limitations of one-dimensional mesoscale PBL parameterizations in reproducing mountain-wave flows, *J. Atmos. Sci.*, 73, 2603–2614, 2016.
- Muñoz-Esparza, D., Lundquist, J. K., Sauer, J. A., Kosović, B., and Linn, R. R.: Coupled mesoscale-LES modeling of a diurnal cycle during the CWEX-13 field campaign: From weather to boundary-layer eddies, *J. Adv. Model. Earth Sy.*, 9, 1572–1594, 2017.
- Nakanishi, M. and Niino, H.: An improved Mellor–Yamada level-3 model: Its numerical stability and application to a regional prediction of advection fog, *Bound.-Lay. Meteorol.*, 119, 397–407, 2006.
- NREL: OpenFAST Turbine Models, <https://github.com/nrel/openfast-turbine-models/tree/main/iea-scaled> (last access: 23 January 2023), 2022.
- Olson, J. B., Kenyon, J. S., Djalalova, I., Bianco, L., Turner, D. D., Pichugina, Y., Choukulkar, A., Toy, M. D., Brown, J. M., Angevine, W. M., Akish, E., Bao, J., Jimenez, P., Kosovic, B., Lundquist, K. A., Draxl, C., Lundquist, J. K., McCaa, J., McCaffrey, K., Lantz, K., Long, C., Wilczak, J., Banta, R., Marquis, M., Redfern, S., Berg, L. K., Shaw, W., and Cline, J.: Improving wind energy forecasting through numerical weather prediction model development, *B. Amer Meteorol. Soc.*, 100, 2201–2220, 2019.
- Radünz, W. C., Sakagami, Y., Haas, R., Petry, A. P., Passos, J. C., Miqueletti, M., and Dias, E.: Influence of atmospheric stability on wind farm performance in complex terrain, *Appl. Energy*, 282, 116149, <https://doi.org/10.1016/j.apenergy.2020.116149>, 2021.
- Rai, R. K., Berg, L. K., Kosović, B., Haupt, S. E., Mirocha, J. D., Ennis, B. L., and Draxl, C.: Evaluation of the impact of horizontal grid spacing in terra incognita on coupled mesoscale–microscale simulations using the WRF framework, *Mon. Weather Rev.*, 147, 1007–1027, 2019.
- Redfern, S., Olson, J. B., Lundquist, J. K., and Clack, C. T. M.: Incorporation of the rotor-equivalent wind speed into the Weather Research and Forecasting model’s wind farm parameterization, *Mon. Weather Rev.*, 147, 1029–1046, 2019.
- Rios, G., Arthur, R. S., and Wharton, S.: Lidar-based evaluation of HRRR performance in the Diablo Range, *Weather Forecast.*, in review, 2025.
- Rybchuk, A., Juliano, T. W., Lundquist, J. K., Rosencrans, D., Bodini, N., and Optis, M.: The sensitivity of the Fitch wind farm parameterization to a three-dimensional planetary boundary layer scheme, *Wind Energ. Sci.*, 7, 2085–2098, <https://doi.org/10.5194/wes-7-2085-2022>, 2022.
- Sathe, A., Mann, J., Gottschall, J., and Courtney, M. S.: Can wind lidars measure turbulence?, *J. Atmos. Ocean. Tech.*, 28, 853–868, 2011.

- Shaw, W. J., Berg, L. K., Cline, J., Draxl, C., Djalalova, I., Gritmit, E. P., Lundquist, J. K., Marquis, M., McCaa, J., Olson, J. B., Sivaraman, C., Sharp, J., and Wilczak, J. M.: The Second Wind Forecast Improvement Project (WFIP2): General Overview, *B. Am. Meteorol. Soc.*, 100, 1687–1699, 2019.
- Siedersleben, S. K., Platis, A., Lundquist, J. K., Djath, B., Lampert, A., Bärfuss, K., Cañadillas, B., Schulz-Stellenfleth, J., Bange, J., Neumann, T., and Emeis, S.: Turbulent kinetic energy over large offshore wind farms observed and simulated by the mesoscale model WRF (3.8.1), *Geosci. Model Dev.*, 13, 249–268, <https://doi.org/10.5194/gmd-13-249-2020>, 2020.
- Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Liu, Z., Berner, J., Wang, W., Powers, J. G., Duda, M. G., Barker, D. M., and Huang, X.: A description of the advanced research WRF model version 4, NCAR Tech. Note NCAR/TN-556+STR, 2019.
- Smagorinsky, J.: General circulation experiments with the primitive equations: I. The basic experiment, *Mon. Weather Rev.*, 91, 99–164, 1963.
- Smagorinsky, J.: Some historical remarks on the use of nonlinear viscosities, in: *Large eddy simulation of complex engineering and geophysical flows*, Proceedings of an international workshop in large eddy simulation, edited by: Galperin, B. and Orszag, S. A., 3–36, Cambridge University Press, Cambridge, UK, ISBN 0 521 43009 7, 1993.
- Smith, E. N., Gibbs, J. A., Fedorovich, E., and Klein, P. M.: WRF Model study of the Great Plains low-level jet: Effects of grid spacing and boundary layer parameterization, *J. Appl. Meteor. Climatol.*, 57, 2375–2397, 2018.
- Thompson, G. and Eidhammer, T.: A study of aerosol impacts on clouds and precipitation development in a large winter cyclone, *J. Atmos. Sci.*, 71, 3636–3658, 2014.
- Tomaszewski, J. M. and Lundquist, J. K.: Simulated wind farm wake sensitivity to configuration choices in the Weather Research and Forecasting model version 3.8.1, *Geosci. Model Dev.*, 13, 2645–2662, <https://doi.org/10.5194/gmd-13-2645-2020>, 2020.
- Van Sark, W. G. J. H. M., Van der Velde, H. C., Coelingh, J. P., and Bierbooms, W. A. A. M.: Do we really need rotor equivalent wind speed?, *Wind Energy*, 22, 745–763, 2019.
- Wagner, R., Cañadillas, B., Clifton, A., Feeney, S., Nygaard, N., Poodt, M., St. Martin, C., Tüxen, E., and Wagenaar, J. W.: Rotor equivalent wind speed for power curve measurement–comparative exercise for IEA Wind Annex 32, *J. Phys. Conf. Ser.*, 524, 012108, <https://doi.org/10.1088/1742-6596/524/1/012108>, 2014.
- Wharton, S. and Foster, K.: Deploying Taller Turbines in Complex Terrain: A Hill Flow Study (HilFlowS) Perspective, *Energies*, 15, 2672, <https://doi.org/10.3390/en15072672>, 2022.
- Wharton, S., Newman, J. F., Qualley, G., and Miller, W. O.: Measuring turbine inflow with vertically-profiling lidar in complex terrain, *J. Wind Eng. Ind. Aerod.*, 142, 217–231, 2015.
- Wiersema, D. J., Lundquist, K. A., and Chow, F. K.: Mesoscale to Microscale Simulations Over Complex Terrain with the Immersed Boundary Method in the Weather Research and Forecasting Model, *Mon. Weather Rev.*, 148, 577–595, 2020.
- Wiersema, D. J., Wharton, S., Arthur, R. S., Juliano, T. W., Lundquist, K. A., Glascoe, L. G., Newsom, R. K., Schalk, W. W., Brown, M. J., and Dexheimer, D.: Assessing turbulence and mixing parameterizations in the gray-zone of multiscale simulations over mountainous terrain during the METEX21 field experiment, *Front. Earth Sci.*, 11, 1251180, <https://doi.org/10.3389/feart.2023.1251180>, 2023.
- wind-turbine-models.com: Bonus B54/1000, wind-turbine-models.com [data set], <https://en.wind-turbine-models.com/turbines/697-bonus-b54-1000> (last access: 10 January 2024), 2024a.
- wind-turbine-models.com: Vestas V47, wind-turbine-models.com [data set], <https://en.wind-turbine-models.com/turbines/13-vestas-v47> (last access: 10 January 2024), 2024b.
- Wyngaard, J. C.: Toward numerical modeling in the “Terra Incognita”, *J. Atmos. Sci.*, 61, 1816–1826, 2004.
- Zaremba, L. L. and Carroll, J. J.: Summer wind flow regimes over the Sacramento Valley, *J. Appl. Meteorol. Climatol.*, 38, 1463–1473, 1999.
- Zhong, S. and Chow, F. K.: Meso- and fine-scale modeling over complex terrain: Parameterizations and applications, in: *Mountain weather research and forecasting: Recent progress and current challenges*, edited by: Chow, F. K., De Wekker, S. F. J., Snyder, B. J., Springer, 591–653, https://doi.org/10.1007/978-94-007-4098-3_10, 2012.