



# Inferring wind turbine operational state and fatigue from high-frequency acceleration using self-supervised learning for SCADA (supervisory control and data acquisition)-free monitoring

Yacine Bel-Hadj, Francisco de Nolasco Santos, Wout Weijtjens, and Christof Devriendt

OWI-Lab, Vrije Universiteit Brussel, Pleinlaan 2, 1050 Elsene, Belgium

**Correspondence:** Yacine Bel-Hadj (yacine.bel-hadj@vub.be)

Received: 14 November 2025 – Discussion started: 1 December 2025

Revised: 11 February 2026 – Accepted: 16 March 2026 – Published: 23 April 2026

**Abstract.** Wind turbine operation is commonly described using supervisory control and data acquisition (SCADA) systems. While high-frequency SCADA data (e.g., 1 s resolution) exist, the vast majority of fleet-wide records available for analysis consist of 10 min averages. These coarse aggregates obscure short transients and dynamic interactions, access is often restricted by proprietary control systems, and the data frequently contain gaps. To address these limitations, a SCADA-free approach is developed in which operational states are inferred directly from high-frequency nacelle acceleration, a sensor that is increasingly being installed across wind farms, e.g., to monitor loads. The proposed method is based on a denoising auto-encoder, to which a domain-adversarial neural network (DANN) mechanism and a deep embedded clustering (DEC) self-supervision are added. Compact six-dimensional representations of 1 min vibration spectra between 0 and 3 Hz are learned. Turbine-specific signatures are suppressed through a domain-adversarial regularization, leading to turbine-invariant embeddings that capture a generalized representation of turbine dynamics. A self-supervised DEC objective structures the latent space into discrete and physically meaningful operational regimes, thereby facilitating post hoc analysis of the learned embeddings. Training is performed on data from 11 out of 44 turbines on an offshore wind farm sampled at 31.25 Hz, while SCADA signals are used only for validation. Strong correspondence is observed between the learned embeddings and pitch, rotor speed, power, and wind speed, with normalized mutual information above 0.8. Turbine invariance is verified through mutual-information analysis between embeddings and turbine identity. This analysis also reveals clusters within the wind farm and indicates whether the learned representation can be consistently applied across different turbines. As an auxiliary validation, regression models were trained on the learned embeddings to predict 10 min damage-equivalent moments (DEMs). The regressors were fitted using data from only five strain-instrumented turbines and then were applied fleet-wide. Accurate fatigue predictions were obtained across all turbines, with  $R^2 = 0.96$ , surpassing SCADA-based baselines. This demonstrates that the learned embeddings generalize beyond operational description and contain sufficient load-related information to support fleet-wide fatigue estimation, enabling high-resolution monitoring without dependence on SCADA.

## 1 Introduction

Recent years have seen offshore wind growing into a cornerstone of Europe's renewable energy expansion, with turbines steadily increasing in size and farms being installed at greater distances from shore (Soares-Ramos et al., 2020). This development has intensified the demand for reliable monitoring of the assets, which are subject to harsh environmental and operational loads (Weijtens et al., 2016). Ensuring the long-term safety and efficiency of these assets requires not only tracking structural integrity but also attaining a clear understanding of their dynamic behavior under realistic operating conditions. Wind turbines are inherently time-varying systems whose responses depend on a wide range of factors, including wind speed, blade pitch angle, wind direction, and the interaction of rotating components such as rotor blades and the tower (Zhao et al., 2020). These influences give rise to a broad spectrum of operating dynamics, meaning that structural responses cannot be meaningfully interpreted without knowledge of the underlying operational state (Ozturkoglu et al., 2024). This becomes even more pertinent for modern wind farms where, due to design improvements (Byrne et al., 2019), structural reserves have been diminished and fatigue has become an operational concern. With fatigue – and, therefore, how long turbines may be operated – being inextricably linked with the turbine's operational state, accurate state description has become fundamental for operators.

More broadly, when monitoring such assets, knowledge of their operational context is indispensable. It provides the basis not only for structural health monitoring (SHM) but also for performance analysis, fault detection, condition monitoring, and fatigue-life assessment, all of which underpin safer and more cost-effective wind energy production. The importance of operational state information is reflected in international standards. At the design stage, IEC 61400-1 (IEC, 2019) defines a catalog of design load cases (DLCs) that turbines must withstand under prescribed operating and environmental scenarios. For monitoring, IEC 61400-25-6 (2016) (IEC, 2016) introduces the concept of “operational state bins”: a grouping mechanism intended to ensure that signals are only compared under similar conditions. In practice, however, the proposed binning in IEC (2016) is reduced to power alone, a simplification that is far too coarse for SHM where structural dynamics are more nuanced. For example, a rotor lock and an idling turbine may produce comparable power outputs yet represent fundamentally different dynamic states. In the specific case of damage-equivalent moment (DEM) estimation and farm-wide extrapolation, a wide range of approaches has been prescribed, from physics-guided neural networks (de N Santos et al., 2024) to probabilistic models (Hlaing et al., 2024; Avendano-Valencia et al., 2020; Singh et al., 2024). However, all studies presuppose the use of supervisory control and data acquisition (SCADA) (along with acceleration, for some) in relation to prediction

fatigue loads. The SCADA dependency is so pronounced that, in de N Santos et al. (2022), where a comparative study of model performance based on different SCADA (10 min, 1 s) and accelerometer (low- and high-quality) instrumentation scenarios was conducted, an acceleration-only approach is not even equated. In the study of de N Santos et al. (2023), a farm-wide DEM estimation study on real data, the largest errors were traced to SCADA's insufficient resolution. Short transients were not captured, and the assumption of constant yaw angle over 10 min often failed. Recent studies have therefore stressed the need to annotate operating conditions to make condition-monitoring results interpretable (Daems et al., 2023). The reliability of such annotation is further linked to the ability to evaluate operational conditions consistently, which has been recognized as being central to the stable operation of wind farms and power grids (Chu et al., 2019).

Traditionally, operational state annotation relies on SCADA systems, where multiple variables (power, rotor speed, pitch angle, wind speed) are thresholded into categories such as operating, idling, or stopped. Alternatively, data-driven approaches have attempted to automate this process: Chu et al. (2019) used principal component analysis (PCA) to reveal dominant operational modes, while Bette et al. (2023) applied bisecting  $k$ -means clustering to SCADA correlation matrices. Yet both thresholding and clustering remain limited by SCADA itself: access is often restricted, signals may be inconsistent across manufacturers, and 10 min averaging obscures transients such as load spikes or start-stop events (Korkos et al., 2022). In addition, SCADA annotation depends on multiple signals, and so the absence of a single variable can invalidate state classification – a common issue noted by Hameed et al. (2009). In contrast, acceleration-based approaches require only a single measurement modality and offer higher temporal resolution with fewer failure points. Such signals complement, rather than replace, SCADA by enabling finer detection of operational transients.

The increasing deployment of accelerometers through IoT (Internet of Things) technologies now makes it possible to collect high-frequency vibration data across entire farms. These measurements embed signatures of both environmental forcing and structural dynamics, providing a powerful alternative to infer operational states directly from vibrations. When SCADA is unavailable or unreliable, vibration-derived annotations can fill the gap, offering insight into downtime, start-stop behavior, and fatigue-relevant transients. Leveraging these high-frequency signals for operational inference is a promising direction.

Having established the need for SCADA-independent operational inference, the central challenge is to extract operational states directly from high-frequency vibration data without labeled examples. This requires identifying the essential structure within rich, high-dimensional measurements while maintaining their physical interpretability. Represent-

tation learning provides a natural framework for this task. Auto-encoders (AEs) (Hinton and Salakhutdinov, 2006) and other deep-representation-learning methods (LeCun et al., 2015; Bengio et al., 2013) learn compact latent spaces that capture dominant patterns of variation while suppressing noise and incidental detail. When applied to physical sensor data, such embeddings often acquire semantic meaning that reflects the underlying system dynamics rather than the raw signal characteristics (Ranzato et al., 2012; Vincent et al., 2010; de Nolasco Santos et al., 2025; Bel-Hadj et al., 2022, 2025; Bel-Hadj and Weijtjens, 2022). Modern AEs extend this principle by incorporating design objectives that encourage disentanglement, hierarchical organization, and clusterability (Tschannen et al., 2018). These inductive properties, often referred to as meta-priors (Bengio et al., 2013), are particularly valuable in vibration-based monitoring where a limited number of physical processes such as loading, resonance, and rotor interaction govern the measured response. At the core of these extensions lies the intrinsic meta-prior of the auto-encoder itself, which assumes that data can be efficiently represented through a lower-dimensional encoding that preserves the information required for reconstruction. In other words, the AE implicitly promotes representations that compress the signal while retaining its functional structure. Building on these principles, the present work introduces two additional priors tailored to wind turbine monitoring: a domain-adversarial regularization that enforces turbine-invariant embeddings and a clustering objective that structures the latent space into compact and interpretable operational regimes. These ideas have recently been applied within SHM. For example, convolutional auto-encoders have been used to distinguish train directions and axle counts from bridge measurements in an unsupervised setting (Bel-Hadj et al., 2022). Denoising variants improve robustness by reconstructing clean inputs from corrupted observations, which encourages embeddings that generalize across operating conditions (Vincent, 2011). Although contrastive self-supervised methods have also shown promise (Liu et al., 2021; Rahimi Taghanaki et al., 2023), auto-encoders remain a simple and effective approach for unsupervised operational-state inference in large-scale structural monitoring.

While auto-encoder frameworks provide a means to derive compact and informative embeddings, such representations often retain individual turbine biases when transferred across different assets. In wind farms, for example, turbines exhibit subtle yet systematic variations in resonance, foundation stiffness, or sensor placement, which can be encoded in the latent space. This challenge is central to the emerging field of population-based structural health monitoring (PB-SHM) (Bull et al., 2020), where the objective is to transfer knowledge across a fleet of nominally identical structures while accounting for their inherent variability. In this context, the encoder–decoder can be interpreted as learning a population *form* (a unified functional representation that cap-

tures the essential operational dynamics shared across turbines while tolerating structured variability between them). Such a form provides a common reference against which future measurements can be assessed, enabling consistent operational inference across the fleet. One prominent solution for learning such a unified functional representation is domain-adversarial learning, which explicitly enforces invariance to domain differences. The domain-adversarial neural network (DANN) (Ajakan et al., 2014) extends the adversarial training paradigm of generative adversarial networks (GANs) to representation learning by coupling the main task with a domain classifier connected through a gradient reversal layer. This forces the encoder to produce embeddings that are expressive for the main task while remaining indistinguishable across domains (i.e., different turbines). Building on this principle, recent studies have demonstrated the versatility of DANN in vibration-based monitoring: Mao et al. (2020) achieved improved transfer performance in bearing fault diagnosis under variable working conditions with a structured DANN, Li et al. (2025) proposed a partial conditional adversarial network to transfer damage knowledge from numerical models to full-scale structures, and Li et al. (2023) applied DANN to bridge monitoring by aligning finite-element simulations with field data. Similarly, Martakis et al. (2023) fused domain adaptation with feature engineering to classify unseen damage states in shake-table tests of real buildings. Collectively, these applications underscore the potential of adversarial domain adaptation for mitigating domain shifts in SHM tasks. However, its application to operational state inference in wind turbines – where turbine-specific biases are particularly pronounced – remains unexplored. Beyond adversarial approaches such as DANN, PBSHM has also explored alternative alignment strategies such as balanced distribution adaptation (BDA) (Gardner et al., 2022), although these methods are typically applied to the transfer of diagnostic knowledge, whereas our focus is solely on learning domain-invariant embeddings without transferring damage labels.

Complementing the DANN regularization, we incorporate deep embedded clustering (DEC) (Xie et al., 2016), a self-supervised framework that jointly learns feature representations and cluster assignments, thereby structuring the latent space into compact and interpretable regions and facilitating post hoc analysis of the learned embedding. DEC has proven to be effective in other domains – for instance, convolutional auto-encoders coupled with DEC have been used to separate vibroseismic, highway traffic, and airport noise sources (Snover, 2020). To the best of the authors' knowledge, DEC and its derivatives have seen limited application in SHM and wind turbine monitoring.

Together, DANN and DEC act as complementary inductive priors on the latent space: DANN enforces turbine-invariant representations, while DEC promotes clusterability and interpretability aligned with physical operating regimes.

Motivated by these developments, we ask the following: can wind turbine operational state be inferred directly from high-frequency acceleration without relying on SCADA during training? We investigate this question on a 44-turbine offshore wind farm, using acceleration sampled at 31.25 Hz. Our approach learns compact six-dimensional latent embeddings from 1 min spectrograms via a domain-adversarial auto-encoder that enforces turbine invariance while preserving operational structure, while DEC is used to improve the interpretability and clusterability of the latent space.

**Contributions.** This work advances wind turbine monitoring by (i) introducing an *acceleration-only operational-state inference* framework that learns compact latent representations directly from vibration spectrograms; (ii) achieving *cross-turbine generalization* through domain-adversarial training, enabling fleet-wide deployment without per-turbine retraining; (iii) integrating *deep embedded clustering (DEC)* within the auto-encoder to jointly learn turbine-invariant and discretized latent spaces, yielding interpretable representations aligned with distinct operational regimes; and (iv) demonstrating *practical utility* through damage-equivalent moment estimation, illustrating how the learned embeddings support structural health monitoring and fatigue assessment.

## 2 Materials and methods

This section is organized as follows. First, the offshore wind farm dataset and its instrumentation are described to establish the sensing basis of the study. Next, the preprocessing applied to the raw acceleration data is outlined. The representation-learning framework is then introduced: vibration spectra are encoded through a denoising auto-encoder whose latent space is jointly structured and discretized through deep embedded clustering (DEC), while turbine-specific effects are suppressed via domain-adversarial regularization. This integrated architecture produces turbine-invariant, clusterable embeddings that correspond to distinct operational regimes. An auxiliary procedure for estimating 10 min damage-equivalent moments (DEMs) from sequences of embeddings is also presented. Finally, the evaluation protocol is detailed, employing information-theoretic metrics to assess turbine invariance and operational informativeness.

### 2.1 Site instrumentation and operational variability

The study is based on operational data collected from an offshore wind farm comprising 44 monopile-supported turbines that are broadly similar in terms of structural dynamics. As noted by Bull et al. (2020), such a fleet can be treated as a homogeneous population, though minor variability in resonance frequencies arises from differences in seabed depth, fabrication, and installation tolerances. The layout and sensing configuration are shown in Fig. 1. All turbines are equipped with nacelle-mounted dedicated accelerometers that provide the high-frequency vibration data used in


this study. Each nacelle unit contains  $C = 3$  channels (fore-aft, side-side, and vertical directions) sampled at 31.25 Hz. SCADA signals, by contrast, are recorded by the turbine control system at a low frequency of 1/600 Hz (1 min averages) and are used solely for evaluation and interpretation. Strain gauges installed near the tower-transition piece interface on five “fleet leader” turbines are used to provide fatigue reference data but are costly; consequently, only a limited subset is instrumented, as is common in offshore monitoring (Weijtens et al., 2016). Farm-wide fatigue is typically extrapolated from these leaders using SCADA-based models (d N Santos et al., 2022). In this study, the strain-gauge measurements will be utilized only in Sect. 3.6 as the source of ground truth for 10 min damage-equivalent moments (DEMs).

### Operational variability


Wind turbine operation is traditionally classified from SCADA data using rule-based thresholds applied to variables such as rotor speed, blade pitch, power output, wind speed, and occasionally yaw. Typical operational states include the following:

- parked and rotor lock – rotor stopped (locked), no power production;
- ramp-down and ramp-up – controlled deceleration or acceleration of the rotor speed;
- idling and spinning – low rotor speed with negligible power;
- sub-rated generation – below-rated operation with increasing power and rotor speed;
- near or rated generation – high power production close to rated conditions;
- curtailed or derated: power limited by control actions or high-wind derating;
- high-wind storm control: reduced power with large pitch angles to limit loads;
- emergency stop or trip: abrupt shutdown due to protection triggers.

Such SCADA-based classification requires expert-defined thresholds; for example, distinguishing parked from idling often involves checking both rotor speed and wind speed against predefined limits. Such schemes assume stationarity, i.e., that conditions remain constant over the 10 min window. While often reasonable, this assumption hides short-term dynamics such as rotor stops and restarts. Figure 2 illustrates this point. The spectrogram of nacelle acceleration, obtained with 65 s windows, with 30 s overlap, reveals clear differences between idling and stops, as well as short-lived transitions that would not be visible in SCADA records. Restricting the spectrum to the 0–3 Hz band focuses on the dominant

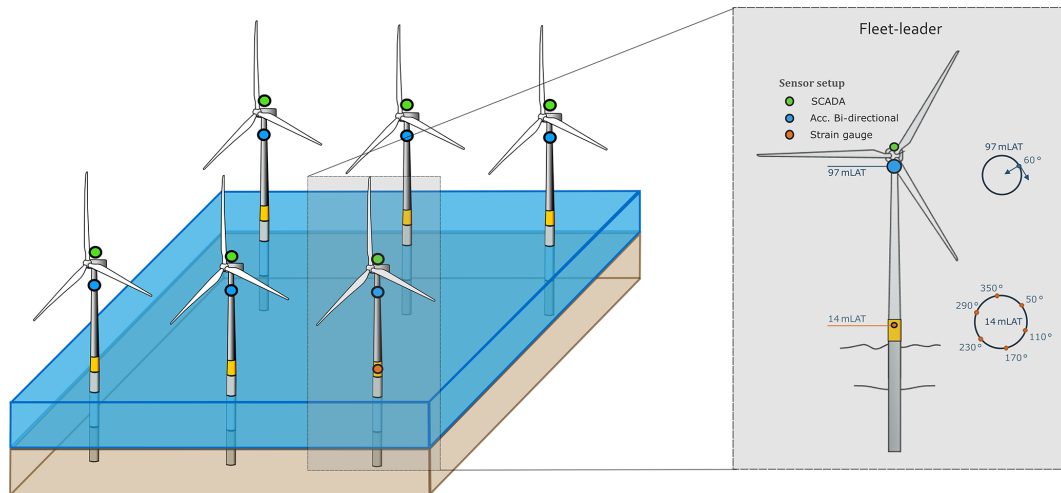

**Figure 1.** Schematic of the offshore wind farm and sensing layout: nacelle accelerometers (blue) provide high-frequency vibration data used for learning operational embeddings, and SCADA signals (green) provide supervisory and control measurements used only for evaluation and interpretation. Tower/monopile strain gauges (orange) are installed on a small subset of turbines – so-called fleet leaders.

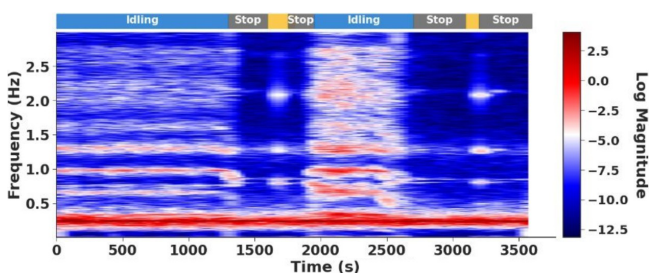

**Figure 2.** Log amplitude spectrogram (0–3 Hz) of turbine acceleration with state sequence inferred from vibrations.

rotor dynamics. These patterns indicate that the 10 min stationarity assumption does not always hold.

The acceleration-based approach developed here addresses these shortcomings. By operating directly on high-frequency vibration signals, it enables inference of operational states and transient events at sub-10 min resolution without the need for threshold specification. This enables finer temporal resolution of state estimation and allows for event counting, complementing rather than replacing SCADA. In this study, SCADA signals are used solely for interpretation and validation of the acceleration-derived representations and not for training or direct state inference.

## 2.2 Representation-learning model

The objective of this work is to derive compact, expressive, and turbine-invariant descriptors of the acceleration signals that capture operational variability across the fleet. Such descriptors are generally referred to as *representations*, and, when expressed as numerical vectors produced by a neural network, they are referred to as *embeddings*. An embedding

can be understood as a vectorized representation of a signal – a compressed summary of an input window that preserves the essential dynamical information while discarding redundancies. Conceptually, embeddings play a similar role to manually engineered statistical features (e.g., minimum, maximum, variance) but are learned automatically by the network in a data-driven manner.

In the resulting embedding space, signals recorded under similar operational and environmental conditions are expected to map close together, while signals reflecting different dynamics should be located further apart. The structure of this space should yield well-separated clusters, whereas subtler variations (e.g., between adjacent load levels) should appear to be closer. To ensure that the embeddings remain physically meaningful, they are expected to exhibit strong mutual information with key supervisory variables such as rotor speed, wind speed, and blade pitch angle, the latter being particularly important as it directly defines the turbine's control state.

The dataset is composed of accelerometer measurements recorded in multiple directions (e.g., fore–aft, side–side, vertical). These signals can be ingested by the model in several ways: (i) a separate model may be trained for each direction, (ii) a shared architecture may be used while fitting independent model instances per direction, or (iii) a multi-channel architecture may be adopted in which all directions are processed jointly.

In this work, the third strategy is adopted, with each direction being treated as an input channel, analogously to the color channels in image processing. The detailed multi-channel architecture is provided in Sect. 2.5. For clarity, the preprocessing pipeline is first described in the uni-variate (single-channel) case, and its extension to the three-channel setting is trivial.

### 2.2.1 Preprocessing of acceleration data

Acceleration records are segmented into 1 min windows with a 30 s hop size, corresponding to a 50 % overlap. This duration is sufficient to capture the dominant low-frequency turbine dynamics while remaining short enough to assume approximate stationarity of the signal. Formally, let the raw acceleration signal be

$$\mathbf{a} = [a_1, a_2, \dots, a_T], \quad (1)$$

from which overlapping windows of length  $L$  and hop size  $H$  are extracted. The  $i$ th window is denoted by

$$\mathbf{a}^{(i)} = [a_{t_i}, \dots, a_{t_i+L-1}], t_i = 1 + (i-1)H. \quad (2)$$

To prepare the time series data for neural network input, each window of acceleration measurements is transformed into the frequency domain to capture dominant operational dynamics. A Hann window  $\mathbf{w}$  is applied to reduce spectral leakage, followed by a fast Fourier transform (FFT) (Cooley and Tukey, 1965). The log amplitude spectrum is then computed and truncated to the 0–3 Hz band, which covers the range of interest for tower and rotor dynamics. Only the magnitude is retained as phase information is typically less informative in this context. The transformation is defined in Eq. (3):

$$\Phi(\mathbf{a}^{(i)}) = \log \left( \left| \text{FFT} \left( \mathbf{w} \odot \mathbf{a}^{(i)} \right) \right|_{[0, 3 \text{ Hz}]} + \varepsilon \right), \quad (3)$$

where  $\mathbf{a}^{(i)}$  denotes the  $i$ th signal window,  $\mathbf{w}$  is the Hann window, and  $\varepsilon$  is a small constant ensuring numerical stability of the logarithm. With a sampling rate of  $f_s = 31.25$  Hz and a window length of  $N = 2048$ , this procedure yields approximately  $F \approx 200$  frequency bins per channel.

Before being fed into the neural network, the spectra  $\Phi(\mathbf{a}^{(i)})$  are scaled using min–max normalization. To avoid distortion by outliers, scaling is based on the 0.1th and 99.9th percentiles of the training distribution, computed element-wise across frequency bins. Denoting these percentiles by  $q_{0.1}$ ,  $q_{99.9}$ , the normalized input is

$$\mathbf{x} = \tilde{\Phi} \left( \mathbf{a}^{(i)} \right) = \frac{\Phi \left( \mathbf{a}^{(i)} \right) - q_{0.1}}{q_{99.9} - q_{0.1}}, \quad (4)$$

which maps the bulk of the data approximately into the  $[0, 1]$  interval while preserving contrast in the presence of occasional extreme values.

### 2.2.2 Auto-encoder learning and domain-adversarial training

We assume that each high-dimensional spectrum  $\mathbf{x} \in \mathbb{R}^M$  (hundreds of frequency coefficients) is governed by a much smaller set of latent factors  $\mathbf{z} \in \mathbb{R}^d$  with  $d \ll M$ . While vibration spectra may appear to be complex, their variability

is largely explained by a handful of physical drivers such as turbine load, control settings, and environmental conditions. For instance, increasing load raises the overall vibration energy, while rotor speed introduces harmonics at multiples of the blade-passing frequency (3 p, 6 p, etc.). Our objective is therefore to learn a mapping,

$$f_{\text{enc}} : \mathbf{x} \mapsto \mathbf{z},$$

such that  $\mathbf{z}$  captures the salient operational patterns in a compact form.

### 2.2.3 Auto-encoder formulation

Auto-encoders provide a natural framework for this task. A standard auto-encoder consists of an encoder  $f_{\text{enc}}$ , which compresses an input spectrum into a latent embedding  $\mathbf{z}$ , and a decoder,  $f_{\text{dec}}$ , which attempts to reconstruct the original signal:

$$\mathbf{z} = f_{\text{enc}}(\mathbf{x}; \theta_{\text{enc}}), \quad \hat{\mathbf{x}} = f_{\text{dec}}(\mathbf{z}; \theta_{\text{dec}}). \quad (5)$$

Here,  $\mathbf{x}$  denotes the input spectrum  $\mathbf{x}$ ;  $\hat{\mathbf{x}}$  is the reconstruction; and  $\theta_{\text{enc}}$  and  $\theta_{\text{dec}}$  are the trainable parameters (weights and biases) of the encoder and decoder, respectively. The latent vector  $\mathbf{z} \in \mathbb{R}^d$  (with  $d \ll M$  when  $\mathbf{x} \in \mathbb{R}^M$ ) provides the compact embedding used in downstream analysis. The reconstruction is trained by minimizing the mean squared error (MSE) between the input and the output,

$$\mathcal{L}_{\text{AE}} = \frac{1}{N} \sum_{i=1}^N \|\mathbf{x}_i - \hat{\mathbf{x}}_i\|_2^2. \quad (6)$$

### 2.2.4 Denoising criterion

To improve robustness, we adopt the *denoising auto-encoder* (Vincent, 2011), in which inputs are corrupted by additive Gaussian noise,

$$\tilde{\mathbf{x}} = \mathbf{x} + \epsilon, \quad \epsilon \sim \mathcal{N} \left( 0, \sigma^2 I \right). \quad (7)$$

Here, the corruption  $\epsilon$  represents synthetic perturbations, and its scale  $\sigma$  controls their strength. Choosing  $\sigma$  on the order of natural measurement noise encourages the model to focus on the meaningful structure of the spectra while ignoring irrelevant fluctuations. The encoder receives  $\tilde{\mathbf{x}}$ , while the decoder is trained to recover the clean  $\mathbf{x}$ .

This inductive bias can be interpreted as a restoring mechanism: when noise perturbs the spectrum away from regions of physically plausible turbine data, the model learns to pull it back. In the small-noise limit, the reconstruction function approximates the *score function*  $\nabla_{\mathbf{x}} \log p(\mathbf{x})$  (Vincent, 2011), which always points in the direction where the likelihood of real data increases most steeply. Estimating this score is important because it provides the model with a way to distinguish between meaningful operational patterns and incidental deviations. In practice, the network learns to suppress

sensor noise or spurious fluctuations while retaining the stable vibration signatures that reflect turbine dynamics.

### 2.2.5 Domain-adversarial regularization

While the denoising criterion ensures robustness, embeddings can still encode turbine-specific signatures (e.g., resonance frequencies or sensor placement). Such features would hinder generalization to unseen turbines and complicate the interpretation of the embedding. To address this, we employ a *domain-adversarial mechanism* (Ganin and Lempit-sky, 2015), where the domain corresponds to turbine identity. This can be interpreted as a *turbine-adversarial mechanism*, whose objective is to remove turbine-specific information from the embeddings.

In practice, a domain classifier  $f_{\text{dom}}$  is attached to the encoder through a gradient reversal layer (GRL). For each embedding  $z_i$ , the classifier – implemented as a small neural network ending with a softmax layer – predicts the turbine of origin:

$$\hat{d}_i = f_{\text{dom}}(\text{GRL}(z_i); \theta_{\text{dom}}), \tag{8}$$

where  $\hat{d}_i$  is the predicted turbine label;  $\theta_{\text{dom}}$  are the classifier parameters; and  $\text{GRL}(z_i) = z_i$  in the forward pass but reverses the gradient during backpropagation,  $\frac{\partial \text{GRL}(z_i)}{\partial z_i} = -\gamma I$ .

The domain loss is defined as the cross-entropy between predicted and true turbine labels:

$$\mathcal{L}_{\text{dom}} = -\frac{1}{N} \sum_{i=1}^N \sum_{k=1}^K \mathbf{1}[d_i = k] \log p_{\theta_{\text{dom}}}(d_i = k | z_i), \tag{9}$$

where  $p_{\theta_{\text{dom}}}(d_i = k | z_i)$  is the predicted probability that embedding  $z_i$  originates from turbine  $k$ ,  $d_i$  is the true turbine identity, and  $N$  is the mini-batch size. During optimization, the classifier parameters are updated to *minimize* this loss, while the encoder receives the reversed gradient and thus learns to *maximize* it – encouraging domain invariance. This adversarial interaction ensures that the latent embeddings remain informative of operational dynamics while discarding turbine-specific biases.

### 2.2.6 Deep embedded clustering (DEC)

While the denoising and adversarial objectives produce embeddings that are robust and turbine-invariant, the latent space remains continuous, making it difficult to interpret in terms of discrete operational modes. To reveal such regimes, we adopt the deep embedded clustering (DEC) formulation (Xie et al., 2016), which jointly refines the encoder and a set of cluster centroids so that embeddings belonging to similar operating conditions are pulled closer together while those representing distinct dynamics are pushed apart.

The underlying idea is that the model should first form *compact clusters* – bringing together latent points that cor-

respond to consistent vibration patterns – and then *separate* these clusters sufficiently to produce interpretable operational regimes. To achieve this balance, DEC avoids hard assignments (which can lead to unstable optimization) and instead relies on *soft associations* that gradually sharpen over time.

For each embedding  $z_i \in \mathbb{R}^d$ , its similarity to each cluster centroid  $\mu_j$  is measured using a Student’s  $t$  kernel:

$$q_{ij} = \frac{(1 + \|z_i - \mu_j\|^2/\alpha)^{-(\alpha+1)/2}}{\sum_{j'} (1 + \|z_i - \mu_{j'}\|^2/\alpha)^{-(\alpha+1)/2}}, \tag{10}$$

where  $q_{ij}$  denotes the soft-assignment probability of sample  $i$  to cluster  $j$ . Following Xie et al. (2016),  $\alpha$  is set to 1 so that kernel has a heavy tail, ensuring that not only nearby point are attracted to the cluster center, which stabilizes cluster formation. The heavy-tailed kernel ensures that nearby points contribute strongly, while distant ones exert diminishing influence, promoting smooth cluster boundaries.

To make clusters progressively more distinct, DEC defines a sharpened *target distribution*:

$$p_{ij} = \frac{q_{ij}^2 / \sum_i q_{ij}}{\sum_{j'} (q_{ij'}^2 / \sum_i q_{ij'})}, \tag{11}$$

which amplifies confident assignments (large  $q_{ij}$ ) and down-weights uncertain ones. Intuitively,  $q_{ij}$  expresses how much a point currently belongs to a cluster, while  $p_{ij}$  represents where it *should* belong as training refines the latent structure. For instance, consider a sample located between two neighboring regimes: if its current soft assignments are  $q_{i1} = 0.6$  and  $q_{i2} = 0.4$ , the target distribution will become  $p_{i1} \approx 0.69$  and  $p_{i2} \approx 0.31$  after sharpening. This numerical shift increases the weight of the more confident cluster, gently pulling the sample toward centroid 1. As training proceeds, each embedding migrates toward its most representative cluster.

The clustering loss minimizes the Kullback–Leibler divergence between the two distributions:

$$\mathcal{L}_{\text{DEC}} = \sum_i \sum_j p_{ij} \log \frac{p_{ij}}{q_{ij}}, \tag{12}$$

thereby encouraging embeddings to move closer to their respective centroids. Each centroid acts as a gravitational attractor in the latent space, continuously pulling nearby embeddings toward a compact configuration and enhancing separation between clusters.

In practice, DEC training proceeds in two stages. First, the encoder is pretrained to solely reconstruct the input to obtain a stable and physically meaningful representation. Then, resulting embeddings are clustered using  $k$ -means to initialize the centroids  $\mu_j$ . In the second stage, the DEC objective is introduced and jointly optimized along with initial reconstruction task, gradually organizing the latent space into discrete, interpretable regions that correspond to turbine operating regimes.

### 2.2.7 Combined objective and training schedule

The encoder–decoder is trained using a composite objective that balances reconstruction fidelity, turbine invariance, and cluster compactness:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{rec}} + \lambda \mathcal{L}_{\text{domain}} + \beta \mathcal{L}_{\text{DEC}}, \quad (13)$$

where  $\mathcal{L}_{\text{rec}}$  is the mean-squared reconstruction error (Eq. 6),  $\mathcal{L}_{\text{domain}}$  the domain-adversarial cross-entropy (Eq. 9), and  $\mathcal{L}_{\text{DEC}}$  is the deep embedded clustering regularizer (Eq. 12). The weights  $\lambda$  and  $\beta$  are epoch-dependent and are chosen heuristically based on the observed training dynamics rather than a principled optimum.

Training follows a staged schedule. First, the auto-encoder is trained using  $\mathcal{L}_{\text{rec}}$  alone until epoch  $t_{\text{start,dann}}$ , allowing the encoder–decoder pair to learn a stable and physically meaningful reconstruction manifold.

Second, the domain-adversarial objective is activated, and the weighting coefficient  $\lambda$  is increased linearly from 0 to  $\lambda_{\text{max}}$  over the next  $t_{\text{duration,dann}}$  epochs. The gradient reversal mechanism forces the encoder to suppress turbine-specific information; in principle, the domain classification loss  $\mathcal{L}_{\text{domain}}$  should rise toward the random-guess baseline as turbine identity becomes unrecoverable from the embeddings.

Third, after centroid initialization by  $k$ -means (with  $n_{\text{clusters}} = 5$ ), the clustering objective is introduced at epoch  $t_{\text{start,dec}}$ , and  $\beta$  is increased linearly from 0 to  $\beta_{\text{max}}$  over  $t_{\text{duration,dec}}$  epochs. The activation of  $\mathcal{L}_{\text{DEC}}$  reshapes the latent space to promote compact and separable regimes, which can temporarily increase reconstruction error as the latent geometry reorganizes; the decoder subsequently adapts, and reconstruction error recovers.

This staged optimization avoids gradient interference between objectives that impose conflicting constraints on the latent space. Reconstruction first establishes a physically grounded representation. Domain-adversarial regularization then removes turbine-specific bias without collapsing this structure. Clustering is applied last to discretize an already stable embedding. In this order, each objective refines an existing representation rather than competing to define it, which improves training stability and preserves interpretability. The resulting training dynamics are discussed in Sect. 3.1.

### 2.3 Operational regime identification from embeddings

After training, each embedding is associated with a set of soft-assignment probabilities  $q_{ij}$  reflecting its similarity to the learned centroids  $\mu_j$  (Eq. 10). The most probable centroid is interpreted as the current operational regime.

As a result of the combined objective, the latent space remains compact, turbine-invariant, and discretized into regimes that are directly interpretable in terms of turbine operation (e.g., idling, sub-rated, rated, or curtailed states).

### 2.4 Temporal aggregation and damage-equivalent moment (DEM) inference

Although the encoder and clustering components operate on short, quasi-stationary spectral segments, fatigue-related quantities such as the 10 min damage-equivalent moment (DEM) depend on how operating conditions evolve over time. To capture these temporal dependencies, the sequence of latent embeddings produced by the encoder  $\{z_t\}$  is processed by a recurrent model that integrates information across successive windows. In practice, a two-layer long short-term memory (LSTM) network aggregates the embeddings within each 10 min interval and outputs a compact hidden representation summarizing the latent trajectory of the turbine’s dynamic state. A *linear regression head* then maps this representation to the corresponding DEM value, trained under a mean-squared-error objective using reference strain gauge measurements from the fleet leader turbines. During this stage, the encoder parameters are frozen so that the recurrent model learns to interpret the latent dynamics rather than to modify their structure.

Here, the linear regression head refers to a single fully connected layer that takes as input the LSTM output representation (context vector). The LSTM and this linear layer are trained end-to-end for DEM prediction, while the encoder remains fixed.

This design introduces a clear hierarchy: the auto-encoder acts as a spatial compressor that distills high-dimensional vibration spectra into a compact, turbine-invariant representation; the recurrent module integrates these representations temporally; and the regression head translates the aggregated latent dynamics into a physically meaningful fatigue indicator. Conceptually, this mirrors the structure of *world models* proposed by Ha and Schmidhuber (2018), in which a variational auto-encoder encodes raw observations, a recurrent model captures temporal evolution in latent space, and a lightweight head operates upon that representation. In a similar spirit, the present framework constructs a latent “world view” of turbine dynamics: one that encapsulates both the instantaneous and evolving behavior of the structure – thereby enabling fatigue estimation directly from vibration-derived embeddings without recourse to SCADA data.

### 2.5 Implementation details: multi-branch MLP over spectra

Acceleration data are stored in 1 h files, each containing three directional components, hereafter referred to as channels. Corresponding SCADA and fatigue-related data are maintained in a database with a temporal resolution of 10 min. For model training, the acceleration signals are segmented and transformed into spectrograms. Each 1 min spectrogram window is represented as a tensor  $\mathbf{x} \in \mathbb{R}^{B \times C \times F \times T}$ , with batch size  $B$ , channels  $C = 3$  (fore–aft, side–side, vertical), frequency bins  $F \approx 200$  covering 0–3 Hz, and  $T$  time frames

within the minute. The network comprises per-channel encoders, a latent fusion block, and per-channel decoders, with an LSTM head used only for DEM estimation.

*Per-channel encoders.* For each channel  $c \in \{1, \dots, C\}$ , the slice  $\mathbf{x}^{(c)} \in \mathbb{R}^{B \times F \times T}$  is reshaped to  $(BT, F)$  and passed through a small multi-layer perceptron (MLP)  $\phi_c: \mathbb{R}^F \rightarrow \mathbb{R}^{d_c}$  (three 128-unit layers with normalization and ReLU). Each timestamp is treated as an independent sample. We set  $d_c = 16$ . The resulting per-frame latents  $\{z_t^{(c)}\}_{t=1}^T$  are concatenated:

$$\mathbf{z}_t^{\text{cat}} = [z_t^{(1)}; \dots; z_t^{(C)}] \in \mathbb{R}^{Cd_c}.$$

*Fusion to shared embedding.* A compact fusion MLP  $\psi: \mathbb{R}^{Cd_c} \rightarrow \mathbb{R}^{128} \rightarrow \mathbb{R}^d$  (linear–norm–ReLU–linear) maps  $\mathbf{z}_t^{\text{cat}}$  to a shared latent  $z_t \in \mathbb{R}^d$ . Stacking over time yields  $\mathbf{Z} \in \mathbb{R}^{B \times T \times d}$ , with  $d = 6$  used throughout.

*Per-channel decoders.* Each channel is reconstructed independently from the shared latent via  $\delta_c: \mathbb{R}^d \rightarrow \mathbb{R}^{128} \rightarrow \mathbb{R}^{128} \rightarrow \mathbb{R}^F$ , producing  $\hat{\mathbf{x}} \in \mathbb{R}^{B \times C \times F \times T}$  after reshaping.

*DEM head (inference only).* For fatigue estimation, the sequence  $\mathbf{Z}$  (computed at a 30 s hop) is fed to a two-layer LSTM (hidden size  $h = 64$ ). The final context vector is mapped by a linear regressor to the 10 min DEM (Sect. 3.6). The encoder is kept fixed; only the LSTM regressor is trained for DEM.

## 2.6 Optimization details

All network parameters were optimized using the Adam optimizer (Kingma and Ba, 2014), with an initial learning rate of  $5 \times 10^{-3}$ . The learning rate was adapted using a *ReduceLROnPlateau* scheduler (reduction factor of 0.2, patience of 5, minimum learning rate of  $10^{-5}$ ), monitored on the basis of the validation reconstruction loss. A batch size of 1024 was used throughout. To ensure stable optimization, gradient clipping with a maximum  $\ell_2$  norm of 1.0 and early stopping with a patience of 50 epochs were applied.

For the final model, the gradient reversal scale was set to  $\gamma = 0.4$ , and DEC centroids were initialized using  $k$ -means with  $n_{\text{clusters}} = 5$ .

All models were trained for up to 1000 epochs, although convergence was typically achieved earlier due to early stopping. The resulting loss evolution is discussed in Sect. 3.1.

## 2.7 Evaluation methodology

For training, a random subset of 1000 h per turbine was selected from the year 2023, corresponding to approximately 6 weeks of data per turbine. Each turbine was assigned an anonymized identifier, and only 11 out of the 44 turbines were used for model training, corresponding to one-quarter

of the fleet. This split was adopted to limit overfitting and to explicitly assess generalization to unseen turbines. Model testing for operational-state inference was conducted on data from the first 2 weeks of 2024, which constitute a temporally disjointed hold-out dataset used exclusively for evaluation and visualization. For the fatigue-related task, data from June to September 2024 were used for testing as this period contains a high number of start–stop events and a wide range of operational conditions. Since high-frequency SCADA labels are unavailable, and low-frequency SCADA signals (mean power, rotor speed, pitch, wind speed), assumed to be constant within each 10 min interval, are used as a reference for evaluation. Under this assumption, a lower-bound estimate of how well the embeddings capture operational information is obtained.

After training, two key aspects are examined: (i) whether the learned embeddings eliminated turbine-specific fingerprints and achieve invariance across turbines and (ii) whether the embeddings remain informative about the underlying operational state.

### 2.7.1 Turbine invariance

A key objective is to verify that the embeddings are not dominated by turbine-specific fingerprints. A straightforward option is to train a classifier to predict turbine identity from the embeddings, but the outcome of this test depends on the chosen classifier. To avoid this dependency, we adopt an information-theoretic approach and quantify the *mutual information* (MI) between turbine identity  $T$  and the embedding  $\mathbf{Z}$ :

$$\text{MI}(T; \mathbf{Z}) = \iint p(t, \mathbf{z}) \log \frac{p(t, \mathbf{z})}{p(t)p(\mathbf{z})} dt d\mathbf{z}, \quad (14)$$

where  $p(t, \mathbf{z})$  denotes the joint distribution of  $T$  and  $\mathbf{Z}$ .

Since  $T$  has 44 classes, the global MI quantifies – in bits – the total information contained in the embeddings about turbine identity, with an upper bound of  $\log_2(44) \approx 5.46$  bits. This bound corresponds to a uniform distribution over turbines, which we approximate by randomly sampling 10 000 embeddings per turbine. While this single scalar captures overall dependence, it does not reveal how *individual turbines* relate to one another. To examine this structure, we compute pairwise MI. For each turbine pair  $(i, j)$ , the dataset is restricted to samples from turbines  $i$  and  $j$ , the identity variable is recoded as binary  $T_{ij} \in \{i, j\}$ , and we estimate

$$\text{MI}(T_{ij}; \mathbf{Z}) \leq 1 \text{ bit.}$$

Pairwise MI measures how distinguishable the embeddings of two turbines are:

- $\text{MI}(T_{ij}; \mathbf{Z}) \approx 0$  indicates nearly indistinguishable embeddings, suggesting similar dynamics;
- values approaching 1 bit indicate strong separability, suggesting systematic differences.

This pairwise MI inform us about the upper bound of the classification. By arranging all values into a symmetric matrix  $\mathbf{D} \in \mathbb{R}^{n \times n}$  with entries  $[\mathbf{D}]_{ij} = \text{MI}(T_{ij}; \mathbf{Z} | \text{turbines } i, j)$  (units: bits), a turbine similarity map is obtained. Here,  $\text{MI}(T_{ij}; \mathbf{Z} | \text{turbines } i, j)$  denotes the mutual information computed using only samples from turbines  $i$  and  $j$ . This map can be interpreted in two ways:

1. *Fleet-wide dynamic clustering.* Without adversarial training (no DANN), the map highlights clusters of turbines with similar dynamics, visible as blocks of consistently low MI values within subgroups. This is useful for grouping turbines that operate under comparable dynamic conditions.
2. *Global invariance check.* With adversarial training (DANN), turbine-specific fingerprints are suppressed: matrix entries shift toward lower MI values, indicating reduced separability by turbine identity. Therefore, the same post hoc analysis can be applied to all of the turbines.

Thus, pairwise MI not only indicates how effectively DANN suppresses turbine-specific signatures but also uncovers a data-driven similarity structure across the fleet, which is valuable for population-based SHM and cross-turbine comparisons.

### 2.7.2 Operational informativeness

The second question concerns whether operational information is preserved in the embeddings. Several evaluation strategies can be considered: (i) correlations with SCADA signals, (ii) training regressors to predict SCADA from embeddings and reporting  $R^2$ , or (iii) the use of an information-theoretic measure. For consistency, the latter approach is adopted, and the normalized mutual information (NMI) between embeddings and each SCADA variable  $S$  is computed:

$$\text{NMI}(S; \mathbf{Z}) = \frac{\text{MI}(S; \mathbf{Z})}{\sqrt{H(S)H(\mathbf{Z})}}, \quad (15)$$

where  $H(\cdot)$  denotes Shannon entropy. Normalization ensures comparability across continuous variables by scaling MI relative to the entropies of  $S$  and  $\mathbf{Z}$ . As with MI, NMI is estimated using Miller–Madow entropy estimators as implemented in Büth et al. (2025).

In practice, 10 000 embeddings are randomly sampled per turbine from the training set to compute MI and NMI. The resulting metrics are used to jointly quantify (i) turbine invariance and (ii) operational informativeness, thereby providing a robust, model-free assessment of the learned representations. Because labeled annotations of transient events are not available, direct evaluation of event detection performance is not feasible; instead, goodness is assessed indirectly via alignment with SCADA variables.

### 2.7.3 Qualitative visualization

Uniform Manifold Approximation and Projection (UMAP) dimensionality reduction (McInnes et al., 2018) was applied to project six-dimensional embeddings into 2D space for visualization. The projections were colored according to SCADA variables and turbine identity so that both operational structure and cross-turbine consistency could be assessed.

## 3 Results and discussion

The learned embeddings are evaluated along four dimensions: (i) preservation of operational information with concurrent suppression of turbine-specific signatures, (ii) generalization to unseen turbines achieved through domain-adversarial training, (iii) discretization of the latent space into interpretable regimes consistent with classical operational states, and (iv) predicting fatigue through the learned embedding as a replacement of the classical SCADA-based models. The training dynamics and loss evolution are analyzed first in Sect. 3.1, followed by the assessment of turbine invariance and operational informativeness in Sect. 3.2. Regime discretization is examined in Section. 3.5, and the presence of fatigue-related information in the latent space is evaluated in Sect. 3.6.

### 3.1 Training dynamics and loss evolution

Figure 3 summarizes the evolution of the loss components during training under the staged optimization strategy described in Sect. 2.2. During the warm-up phase (epochs 0–30), only the reconstruction loss  $\mathcal{L}_{\text{rec}}$  is optimized. The rapid decrease and subsequent stabilization of this loss indicate that the auto-encoder learns a consistent reconstruction manifold before additional objectives are introduced.

At  $t_{\text{start,dann}} = 30$ , the domain-adversarial objective is activated. Its weighting coefficient  $\lambda$  is increased linearly over  $t_{\text{duration,dann}} = 100$  epochs until it reaches  $\lambda_{\text{max}} = 0.8$ . Immediately after introduction, the domain classification loss  $\mathcal{L}_{\text{domain}}$  drops sharply. This transient behavior reflects the ability of the newly trained domain classifier  $f_{\text{dom}}$  to exploit turbine-specific information still present in the latent representation. As training progresses and the gradient reversal mechanism becomes effective, the encoder increasingly suppresses turbine identity, causing the domain classification loss to rise.

With 11 training turbines, random guessing corresponds to a cross-entropy of  $\log(11) \approx 2.4$ . As shown in Fig. 3, the domain classification loss stabilizes at 2.1. The observed plateau therefore indicates that turbine identity becomes increasingly difficult to infer from the latent space, although weak residual turbine-specific structure remains. This behavior is consistent with the objective of domain-adversarial training.

The clustering objective is introduced at  $t_{\text{start,dec}} = 60$ . Its weighting coefficient  $\beta$  is increased linearly over  $t_{\text{duration,dec}} = 100$  epochs until it reaches  $\beta_{\text{max}} = 10$ . Upon activation, the clustering loss  $\mathcal{L}_{\text{DEC}}$  initially takes on high values, reflecting the absence of well-formed clusters. As the latent space is reshaped to promote compact and separable regimes, a transient increase in reconstruction error is observed, caused by a temporary mismatch between the decoder and the reorganized latent geometry. As optimization continues, the decoder adapts, and the reconstruction loss decreases again.

The values of  $\lambda_{\text{max}}$  and  $\beta_{\text{max}}$  were selected heuristically. Moderate variations around these values did not qualitatively affect the results. The guiding principle was to scale the different loss terms at their max to comparable magnitudes once the reconstruction loss had stabilized. Excessively large values were found to be detrimental. In particular, setting  $\beta_{\text{max}} = 50$  led to a significant degradation of reconstruction quality, indicating excessive distortion of the latent space.

### 3.2 Assessment of turbine invariance and operational informativeness

This part focuses on the first two dimensions of evaluation. Turbine invariance is quantified by means of pairwise mutual information (MI) between turbine identity and the latent embeddings, while operational informativeness is evaluated through normalized mutual information (NMI) between embeddings and key SCADA variables – namely power, rotor speed, pitch angle, and wind speed.

### 3.3 Turbine invariance via pairwise MI

Turbine invariance was assessed by comparing two models: a plain auto-encoder without adversarial training ( $\gamma = 0$ ) and the same auto-encoder with a domain-adversarial component applied to the latent space ( $\gamma = 0.4$ ). The corresponding pairwise MI matrices,  $\mathbf{D}^{(0)}$  and  $\mathbf{D}^{(0.4)}$ , are presented in Figs. 4 and 5.

In the absence of DANN, elevated MI values were observed for many turbine pairs (Fig. 4), indicating that turbine-specific fingerprints were retained in the embeddings alongside operational content. Subgroups of turbines were seen to be more similar to each other than to the remainder of the fleet, consistently with residual structural or site variability encoded in the latent space.

With DANN, pairwise MI values were reduced across the matrix  $\mathbf{D}^{(0.4)}$  (Fig. 5), showing that turbine identity was suppressed while operational features were preserved. Two turbines (ID nos. 28 and 39) remained more separable than the rest, which is interpreted as a genuinely distinct dynamic rather than a training artifact. No checkerboard pattern indicative of leakage from the odd–even train–test split was observed. A small increase in reconstruction error was in-

duced by the adversarial term, but downstream use was not compromised.

The GRL scale  $\gamma$  was selected by scanning  $\{0.01, 0.2, 0.4, 0.6\}$  and monitoring the mean of the pairwise MI matrix  $\mathbf{D}$ . The mean MI was reduced from 0.65 to 0.36 and then to 0.15 and 0.12, with an elbow around  $\gamma = 0.4$ . Larger values did not yield meaningful gains and were found to risk latent collapse, and so  $\gamma = 0.4$  was adopted in the final model.

Starting from the precomputed pairwise MI matrix  $\mathbf{D}$  (Fig. 4), which was interpreted as a symmetric dissimilarity measure in bits (larger values corresponding to lower similarity), agglomerative hierarchical clustering was performed, resulting in the identification of five clusters (Appendix A). A detailed explanation of hierarchical clustering can be found in Contreras and Murtagh (2015).


In Fig. 6, the geographic layout of the wind farm is shown, with colors indicating the clusters obtained; numbers correspond to anonymized turbine identifiers. The map was examined to verify that the clustering was not a by-product of wake geometry or simple row positioning (front versus back turbines). No systematic alignment or consistent relation with water depth was observed. The clusters nevertheless appeared to be structured rather than random yet could not be explained by straightforward spatial factors. It is therefore inferred that the grouping most likely reflects a combination of site-specific conditions, control strategies, or structural variability not captured in the available metadata.

Two turbines (anonymized ID nos. 28 and 39) were assigned to single-member clusters and also remained the most separable after adversarial training, which suggests that their distinct behavior arises from genuine dynamic differences rather than artifacts of the clustering procedure.


### 3.4 Operational informativeness via NMI

A central objective of this study is to determine whether operational information typically derived from SCADA can instead be recovered directly from high-frequency acceleration. To evaluate this, normalized mutual information (NMI) values between embeddings and SCADA variables were computed on unseen turbines and are reported in Table 1. NMI was used because it captures both linear and nonlinear dependencies and provides a normalized measure that is comparable across variables, making it well suited for assessing how much operational content is retained in the embeddings.


Across all variables, higher mean NMI values were obtained after adversarial training, with improvements ranging from +0.016 for power to +0.027 for wind speed. Values in the range of 0.75–0.92 indicate that a substantial fraction of the variability in SCADA signals can be captured by the learned embeddings despite the fact that SCADA data were not used during training. This demonstrates that high-frequency acceleration contains operationally relevant infor-

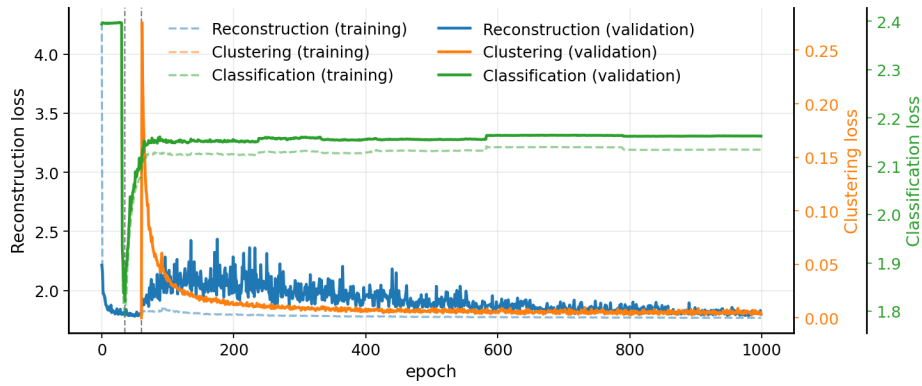

**Figure 3.** Training and validation evolution of the loss components: reconstruction loss  $\mathcal{L}_{\text{rec}}$ , domain classification loss  $\mathcal{L}_{\text{domain}}$ , and clustering loss  $\mathcal{L}_{\text{DEC}}$ .

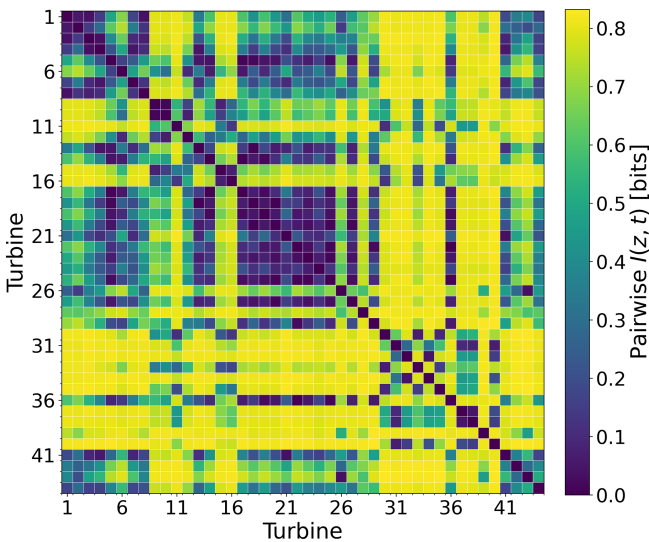

**Figure 4.** Pairwise MI between turbine ID and embeddings before adversarial training. Higher values indicate stronger turbine-specific signatures.

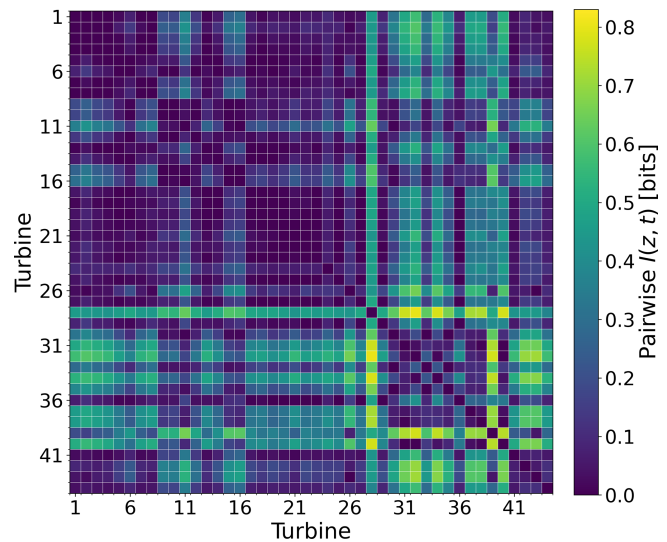


**Figure 5.** Pairwise MI after adversarial training ( $\gamma = 0.4$ ). Lower values indicate improved turbine invariance, while structured residuals highlight turbines with similar dynamics.

mation that can be effectively extracted through the proposed representation-learning framework.

As an external validation, random forest regressors ( $n_{\text{est}} = 100$ ) were trained to predict SCADA variables from the learned embeddings using a 50% train–test split. The models achieved mean  $R^2$  scores of 0.923 for power, 0.882 for pitch, 0.937 for wind speed, and 0.925 for rotor speed across the 44 turbines, indicating that the embeddings retain strong operationally relevant information.

Because SCADA variables are available only as 10 min averages, any intra-interval variability captured by the vibration-based embeddings cannot be directly validated. The reported correspondence metrics therefore quantify alignment with a temporally aggregated proxy of the operational state and should be interpreted as conservative lower bounds with respect to the unobserved instantaneous dynam-

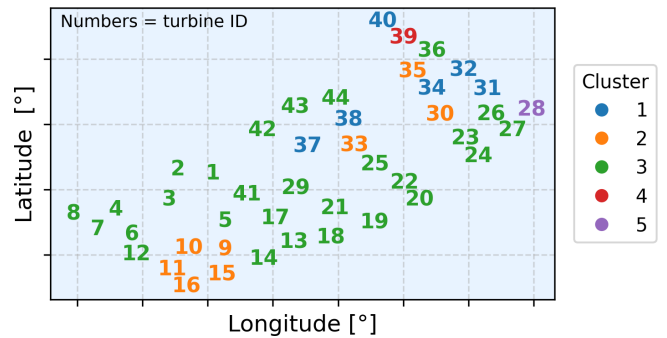

**Figure 6.** Wind farm layout. Numbers denote anonymized turbine IDs; color indicates clusters of the turbine based on the similarity derived from the pairwise MI in Fig. 4.

**Table 1.** Mean normalized mutual information (NMI) between embeddings and SCADA variables, computed on unseen turbines before and after adversarial training.  $\Delta\%$  denotes relative change.

SCADA variable	No DANN	DANN	$\Delta\%$
mean_power	0.798	0.814	+2.0 %
mean_pitch	0.753	0.771	+2.4 %
mean_windspeed	0.919	0.946	+2.9 %
mean_rpm	0.748	0.765	+2.3 %


ics rather than as an upper limit on achievable predictive performance.

### 3.5 Operational state inference from embeddings

The objective in this section is to determine whether the learned latent space can be used to identify distinct operational states of the turbine. As shown previously, the embeddings capture SCADA-like information with high accuracy; here, the focus is on whether these representations can be organized into discrete and interpretable regimes.

When no clustering constraint is applied (i.e., DEC is disabled and  $\beta = 0$ ), the latent space is shaped only by reconstruction and domain-adversarial objectives. In this setting, there is no explicit geometric incentive for the encoder to form multiple compact, well-separated operational regimes. The embedding therefore organizes primarily according to the largest, most separable dynamical differences in the data. Empirically, this yields three dominant groups, as illustrated in Fig. 9: two small clusters corresponding to non-producing conditions (standstill and parked) and one large cluster that aggregates the full continuum of producing operation. The separation between the two non-producing clusters is consistent with a control-driven distinction (mainly pitch angle differences under low or zero rotor speed), which produces distinct low-frequency spectral signatures. In contrast, within the producing regime, sub-rated, rated, and curtailed behavior form a smooth progression in spectral space (driven by gradual changes in rotor speed, aerodynamic loading, and control action) and therefore remain embedded as a single connected manifold rather than splitting into discrete clusters. This behavior is visible in Fig. 9, where producing states form a single connected manifold; the splitting is mainly driven by the pitch angle.

By introducing DEC, the latent structure is explicitly encouraged to become clusterable. DEC adds a set of learnable centroids  $\{\mu_j\}_{j=1}^K$  and optimizes the encoder such that embeddings are pulled toward these centroids via a KL divergence objective between soft assignments and a sharpened target distribution. This explicitly trades a purely continuous representation for one that partitions the operating manifold into  $K$  compact regions. With DEC enabled and  $K = 5$  (a user-defined choice), the previously broad operating manifold is refined into multiple regimes that distinguish differ-

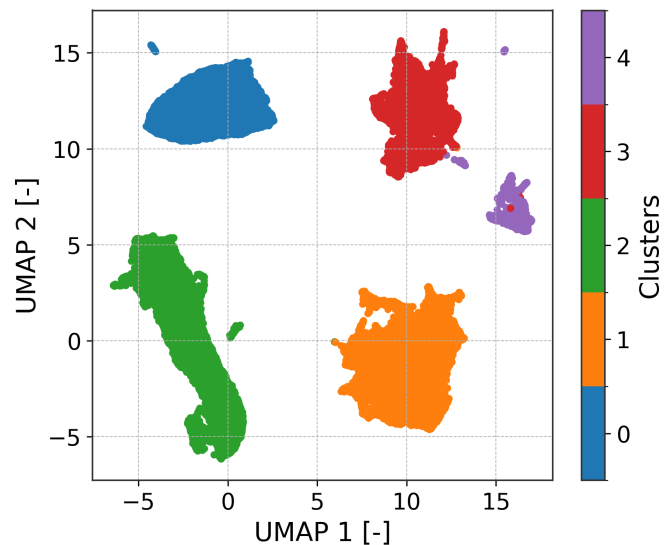

**Figure 7.** UMAP projection of the latent space colored by discovered clusters. The partitioning yields coherent operational regimes.


ent levels of power production and control action. This five-cluster configuration aligns with the canonical division of turbine behavior used in SCADA-based classification while being inferred directly from vibrations and at a higher temporal resolution.

Additionally, DEC integrates clustering into the training objective: centroids are part of the model and are refined jointly with the encoder during optimization. In that sense, regime discovery is learned end-to-end rather than imposed only as a purely post hoc clustering step on the final embeddings (although, as is standard in DEC, centroids are initialized from a preliminary clustering such as  $k$ -means before being refined during training).


Figure 7 shows the resulting latent-space partition for the first five turbines during the initial 2 weeks of 2024, serving as the calibration dataset (Sect. 2.7). The identified clusters align clearly with rotor speed thresholds, as shown in Fig. 8.

Overall, the discovered clusters correspond to well-known operating behaviors: parked or idling, standstill, sub-rated, and rated generation. Collapsing the latent geometry into discrete states provides an interpretable layer on top of the embeddings, enabling event monitoring tasks such as start-stop counting at sub-10 min resolution. In scenarios without SCADA, clusters can be interpreted by visually inspecting representative samples; once identified, they can be relabeled with meaningful operational states.

To further validate the clustering, the regimes are projected onto SCADA references. In the power curve (Fig. 10), the regimes separate into five operating zones. Clusters 3 and 4 overlap at low power, but their distinction becomes clear on the pitch versus wind speed plot (Fig. 11), where cluster 4 corresponds to high pitch (curtailed or stopped) and cluster 3 corresponds to lower pitch (idling). A small overlap is

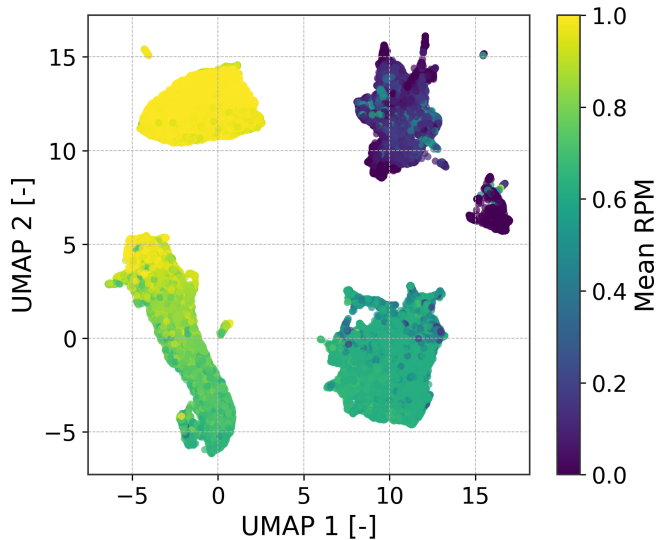


**Figure 8.** UMAP projection colored by normalized mean RPM. The smooth gradient indicates that rotor speed is preserved in the embedding.

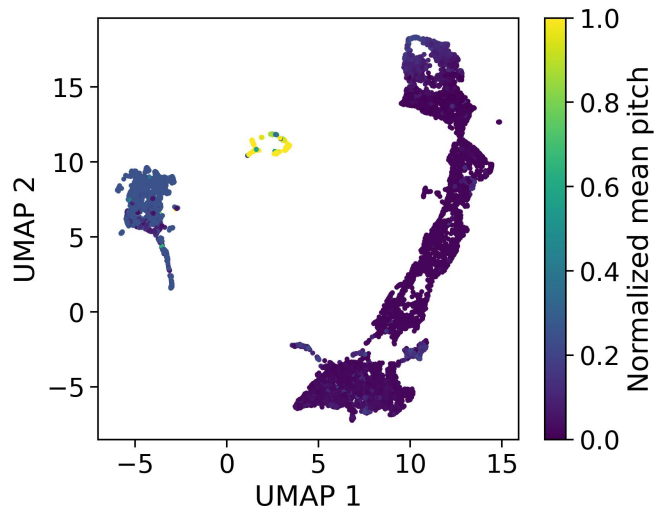


**Figure 9.** UMAP projection of the latent embeddings learned without deep embedded clustering (DEC), colored by normalized mean blade pitch. The representation separates parked and standstill conditions from operating states, but the operating regime remains a largely continuous manifold without clear sub-structure. This illustrates that, in the absence of an explicit clustering objective, the latent space is not naturally partitioned into distinct operational regimes, motivating the use of DEC to enforce clusterable and interpretable embeddings.

also observed between the rated and ramp-up regions, reflecting their similarity in terms of RPM (rotations per minute) and the resulting spectra. These comparisons should be regarded as a lower-bound validation since SCADA signals are available only as 10 min averages, whereas embeddings are

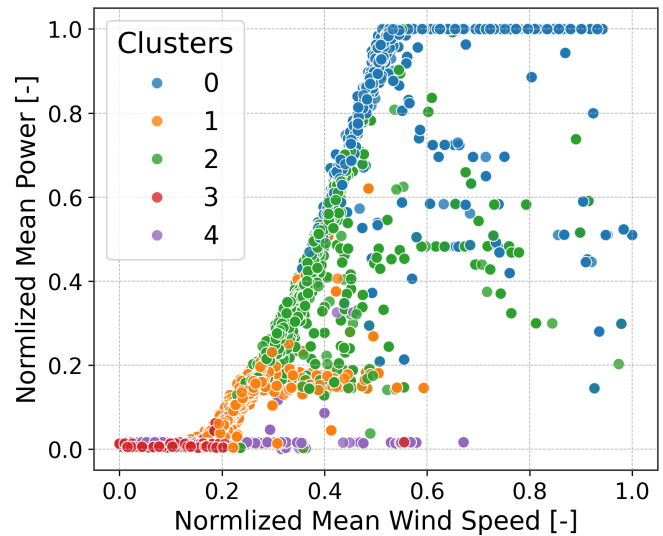


**Figure 10.** Normalized power versus wind speed, colored by latent-space clusters. Regimes align with canonical power curve regions.

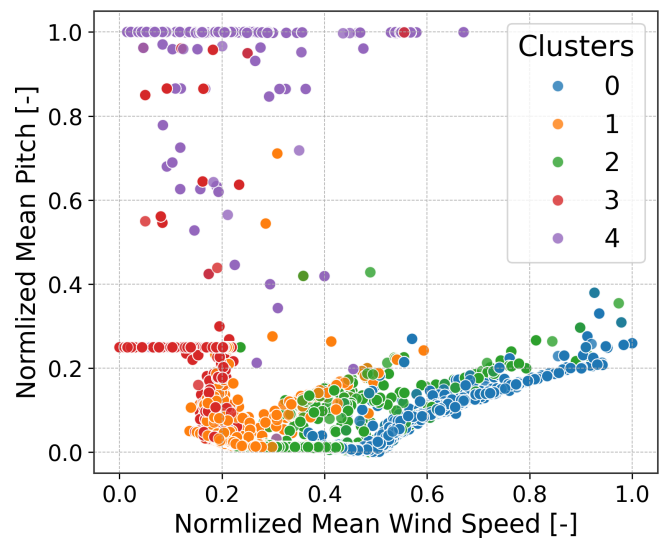

**Figure 11.** Normalized pitch versus wind speed, colored by clusters. High-pitch curtailed or stopped regimes separate from low-pitch operating regimes.

computed at a 30 s hop length. The assumption of constant SCADA over 10 min introduces unavoidable mismatches.

Finally, the method enables monitoring of high-frequency operational events. By applying the model continuously, it is possible to identify and count start–stop transitions within each hour, capturing short events that are lost in coarse 10 min SCADA averages. Figure 12 illustrates such a case: six stop–start events are detected, with transitions from low-rate production to standstill. These rapid fluctuations have direct implications for fatigue life, underlining the value of high-resolution, acceleration-based regime inference.

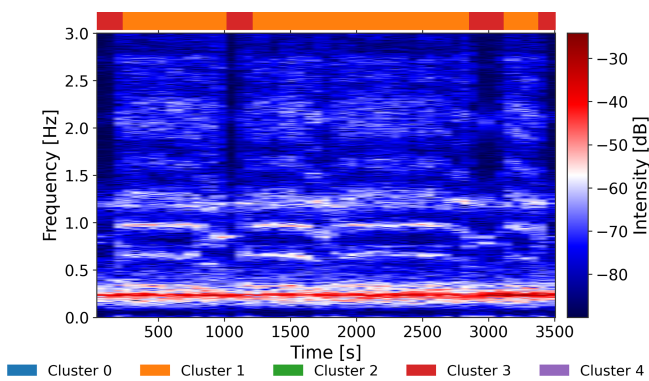

**Figure 12.** Example of high-frequency event detection from embeddings. Six stop–start transitions are resolved within 1 h, highlighting dynamic loading conditions that would be obscured in 10 min SCADA.

### 3.6 Damage estimation from embeddings

Operational-state information is fundamental for wind turbine fatigue assessment. Damage-equivalent moment (DEM) estimation is traditionally performed using SCADA-based models trained on 10 min averages and calibrated on a limited number of strain-instrumented reference turbines. In this work, DEM estimation is used as an auxiliary validation task to assess whether the learned acceleration-derived embeddings preserve load-relevant information.

#### 3.6.1 Baseline definition

In this study, the proposed method is compared against a pre-defined reference baseline. This baseline corresponds to the artificial neural-network-based fatigue estimation framework introduced in de N Santos et al. (2024). It combines standard 10 min SCADA variables with acceleration-based features derived from simple statistical descriptors of vibration signals (e.g., RMS, variance, and standard deviation). The baseline reflects the current state of practice for farm-wide DEM estimation and is actively used in operational deployments

Importantly, the comparison is asymmetric by design. The baseline model is trained on a substantially longer dataset, namely a full year of data (and 2 full years in the internal implementation). In contrast, the proposed approach is trained on only 1000 h per turbine and does not use SCADA information at any stage, although it takes full leverage of the higher sampling rate. The baseline, as such, constitutes a best-case reference rather than an information parity comparator.

Therefore, the current work does not attempt to compare a SCADA-only approach against an acceleration-only approach but rather positions our approach in relation to the current state of the art (which uses SCADA and acceleration statistics). In a previous study (albeit undertaken for a differ-

ent wind farm with different foundations), we have demonstrated how the addition of 10 min acceleration statistics to SCADA-only models improves fatigue prediction accuracy by several percentage points (de N Santos et al., 2022). It is therefore against this baseline that we benchmark our approach.

#### 3.6.2 Training and evaluation protocol

Acceleration data are stored in 1 h files, whereas DEM values are available at 10 min resolution. Each acceleration file is segmented into six non-overlapping 10 min intervals, each associated with the corresponding DEM value computed over the same time window.

The encoder is kept fixed, and only an LSTM-based regression head is trained to map sequences of embeddings to DEM values. Training and evaluation follow a train-on-four/test-on-one cross-validation strategy across the five strain-instrumented fleet leader turbines; in the reported setup, the model is trained on FL1–FL4 and evaluated on FL5, which is entirely unseen during training. Evaluation is performed exclusively over the full summer period (June–September 2024), which includes a wide range of operational conditions and numerous stop–start events.

#### 3.6.3 Results on the downstream fatigue estimation task

Across all fleet leader turbines, the proposed acceleration-only approach achieves predictive performance that is comparable to or exceeds that of the SCADA-based baseline. Differences in  $R^2$  typically remain within a narrow range of 0.01–0.02, while mean squared error is consistently similar or lower.

Given the strong advantage of the baseline in terms of training data volume and sensor availability, these results indicate that the learned embeddings preserve sufficient load-related information to support fatigue estimation without reliance on SCADA variables or manually engineered features.

Finally, fleet-wide applicability is supported by the turbine-invariant representations learned through domain-adversarial training. Pairwise mutual information analysis between embeddings and turbine identity (Fig. 5) shows that turbine-specific information is largely suppressed for most units. Turbines 28 and 39 exhibit residual turbine-specific behavior and are therefore excluded from fleet-level fatigue estimation.

## 4 Conclusions

This study has demonstrated that high-frequency nacelle acceleration can serve as a reliable foundation for inferring wind turbine operational state when SCADA is unavailable, incomplete, or too coarse. By learning compact, turbine-invariant embeddings of short-time spectrograms, the proposed framework captured operational dynamics at

**Table 2.** DEM prediction based on all strain-instrumented turbines: comparison between the SCADA-based legacy baseline and the proposed acceleration-only embedding approach. Each turbine was unseen during training (train-on-four/test-on-one). A higher  $R^2$  is better, and a lower MSE is better.

Turbine	Model	$R^2$ ( $\uparrow$ )	MSE ( $10^{10}$ , $\downarrow$ )
FL1	SCADA baseline	0.95	2.1
	Proposed approach	0.97	1.5
FL2	SCADA baseline	0.95	1.6
	Proposed approach	0.97	1.4
FL3	SCADA baseline	0.94	2.9
	Proposed approach	0.95	2.8
FL4	SCADA baseline	0.96	2.5
	Proposed approach	0.96	2.4
FL5	SCADA baseline	0.95	1.7
	Proposed approach	0.96	1.5

sub-10 min resolution and aligned closely with supervisory variables despite never being trained on SCADA. Domain-adversarial training effectively reduced turbine-specific bias, enabling consistent cross-turbine structure and supporting deployment across a mainly homogeneous fleet without per-turbine training.

Discrete operational regimes derived from the embeddings provided an interpretable bridge to classical power curve analysis, allowing events such as starts, stops, and curtailments to be resolved at finer temporal scales than is possible with standard SCADA. In an auxiliary illustration, sequences of embeddings were further shown to predict damage-equivalent moments (DEMs) with competitive accuracy relative to a SCADA-based baseline, demonstrating that acceleration-derived representations can preserve load-relevant information needed for fatigue-related applications.

While fatigue estimation was not the primary focus of this work, these results indicate that the operational embeddings retain physically meaningful variability beyond regime identification. A dedicated investigation of the interaction between domain-adversarial regularization and fatigue prediction – quantifying the trade-off between turbine invariance and preservation of load- and site-specific effects such as soil structure interaction – remains an important direction for future research. Such a study would require a broader set of strain-instrumented turbines and is therefore left for future work.


Together, these findings establish acceleration-based operational embeddings as a practical and scalable complement to SCADA for structural health monitoring and performance analysis. While the present validation was performed on a single offshore farm, the results suggest a broader potential: cross-farm transfer, integration of physics-informed constraints, and tighter coupling of embeddings to load proxies

are promising directions for future research. By leveraging ubiquitous accelerometers and modern representation learning, SCADA-free monitoring becomes a viable path toward richer, higher-resolution insight into turbine dynamics, unlocking new opportunities for condition assessment, fatigue extrapolation, and predictive maintenance across large wind fleets.

## Appendix A: Hierarchical clustering from the precomputed MI dissimilarity $\mathbf{D}$

Clustering was performed directly on the precomputed turbine  $\times$  turbine matrix  $\mathbf{D}$ , which encodes pairwise dissimilarity derived from mutual information (MI) between turbine identity and embeddings. Larger entries in  $\mathbf{D}$  indicate lower similarity (stronger turbine-specific signatures), the matrix is symmetric with a zero diagonal, and units are bits.

Agglomerative hierarchical clustering with *average linkage* (UPGMA) was applied to  $\mathbf{D}$ . The number of clusters was determined by the *largest merge jump* rule: the tree was cut at the midway between the two consecutive merges exhibiting the largest increase in linkage distance, yielding 5 clusters. Leaf labels were anonymized using the same mapping as in the main text. The linkage distance on the vertical axis shares the units of  $\mathbf{D}$  (bits). The resulting partition is the one used to color the geographic layout map in Fig. 6. The dendrogram below corresponds to embeddings trained without adversarial regularization ( $\gamma = 0$ ).

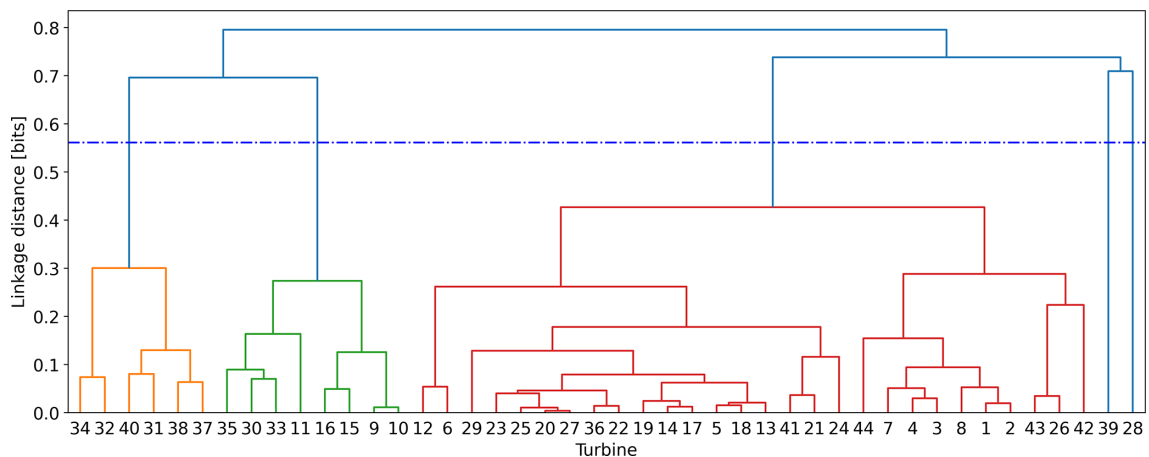

**Figure A1.** Dendrogram from pairwise mutual-information dissimilarity  $\mathbf{D}$  between turbines based on acceleration-derived embeddings (no DANN). Each merge height reflects the dissimilarity in bits; higher values indicate more distinct turbine dynamics. The five clusters obtained correspond to groups of turbines with similar vibration behavior as represented by the auto-encoder.

**Methods.** The authors used ChatGPT (version GPT-5) during the preparation of this work to improve the language. These tools were used to streamline the writing process but not to generate or interpret scientific content. All AI-assisted content was reviewed, edited, and verified by the authors as needed.

**Code availability.** The code used in this study is partially available. The implementation corresponding to the operational inference component of the proposed framework is publicly available at [https://github.com/YacineBelHadj/operational\\_state\\_from\\_autoencoder](https://github.com/YacineBelHadj/operational_state_from_autoencoder) (last access: 6 April 2026) (archived version: <https://doi.org/10.5281/zenodo.19439516>; Bel-Hadj, 2026a). The implementation corresponding to the fatigue estimation component is publicly available at [https://github.com/YacineBelHadj/dem\\_from\\_acceleration/releases/tag/v1.0.1](https://github.com/YacineBelHadj/dem_from_acceleration/releases/tag/v1.0.1) (last access: 6 April 2026) (archived version: <https://doi.org/10.5281/zenodo.19440161>; Bel-Hadj, 2026b). For confidentiality and security reasons, certain configuration files and credentials (e.g. API keys and environment-specific settings) have been removed. As a result, the repositories are not directly runnable in their published form. The complete internal pipeline used in this study, including project-specific data handling and execution infrastructure, is not publicly available.

**Data availability.** The data used in this study cannot be made publicly available. The acceleration data, SCADA data, and strain gauge measurements were provided by an industrial partner under a confidentiality agreement and are therefore not available for public release.

**Author contributions.** Y. Bel-Hadj led the conceptualization, methodology design, software implementation, data curation, formal analysis, and original draft preparation. F. de Nolasco Santos contributed to the conceptualization, methodology design, and critical revision of the paper. W. Weijtjens contributed to the conceptualization, validation, and supervision. C. Devriendt provided resources, supervision, and project administration. All of the authors contributed to the paper review and editing.

**Competing interests.** The contact author has declared that none of the authors has any competing interests.

**Disclaimer.** Views and opinions expressed are however those of the author(s) only and do not necessarily reflect those of the European Union. Neither the European Union nor the granting authority can be held responsible for them.

Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. The authors bear the ultimate responsibility for providing appropriate place names. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

**Financial support.** The present research work is part of the WILLOW project, funded by the European Union with GA No. 1011122184.

**Review statement.** This paper was edited by Nikolay Dimitrov and reviewed by two anonymous referees.

## References

- Ajakan, H., Germain, P., Laroche, H., Laviolette, F., and Marchand, M.: Domain-adversarial neural networks, arXiv preprint arXiv:1412.4446, <https://doi.org/10.48550/arXiv.1412.4446>, 2014.
- Avendano-Valencia, L. D., Chatzi, E. N., and Tcherniak, D.: Gaussian process models for mitigation of operational variability in the structural health monitoring of wind turbines, *Mech. Syst. Signal Pr.*, 142, 106686, <https://doi.org/10.1016/j.ymssp.2020.106686>, 2020.
- Bel-Hadj, Y.: YacineBelHadj/operational\_state\_from\_autoencoder: operational\_state\_from\_autoencoder\_WES (v1.0.1), Zenodo [code], <https://doi.org/10.5281/zenodo.19439517>, 2026a.
- Bel-Hadj, Y.: YacineBelHadj/dem\_from\_acceleration: DEM\_from\_acceleration (v1.0.1), Zenodo [code], <https://doi.org/10.5281/zenodo.19440161>, 2026b.
- Bel-Hadj, Y. and Weijtjens, W.: Anomaly detection in vibration signals for structural health monitoring of an offshore wind turbine, in: European Workshop on Structural Health Monitoring, pp. 348–358, Springer, [https://doi.org/10.1007/978-3-031-07322-9\\_36](https://doi.org/10.1007/978-3-031-07322-9_36), 2022.
- Bel-Hadj, Y., Weijtjens, W., and de Nolasco Santos, F.: Anomaly detection and representation learning in an instrumented railway bridge, in: ESANN, <https://doi.org/10.14428/esann/2022.ES2022-29>, 2022.
- Bel-Hadj, Y., Weijtjens, W., and Devriendt, C.: Structural health monitoring in a population of similar structures with self-supervised learning: a two-stage approach for enhanced damage detection and model tuning, *Struct. Health Monit.*, p. 14759217251324194, <https://doi.org/10.1177/14759217251324194>, 2025.
- Bengio, Y., Courville, A., and Vincent, P.: Representation learning: A review and new perspectives, *IEEE T. Pattern Anal.*, 35, 1798–1828, <https://doi.org/10.1109/TPAMI.2013.50>, 2013.
- Bette, H. M., Wiedemann, C., Wächter, M., Freund, J., Peinke, J., and Guhr, T.: Dynamics of wind turbine operational states, arXiv preprint arXiv:2310.06098, <https://doi.org/10.48550/arXiv.2310.06098>, 2023.
- Bull, L. A., Gardner, P. A., Gosliga, J., Dervilis, N., Papatheou, E., Maguire, A. E., Campos, C., Rogers, T. J., Cross, E. J., and Worden, K.: Towards population-based structural health monitoring, Part I: Homogeneous populations and forms, in: Model Validation and Uncertainty Quantification, Volume 3: Proceedings of the 38th IMAC, A Conference and Exposition on Structural Dynamics 2020, pp. 287–302, Springer, [https://doi.org/10.1007/978-3-030-47638-0\\_32](https://doi.org/10.1007/978-3-030-47638-0_32), 2020.
- Büth, C. M., Acharya, K., and Zanin, M.: infomeasure: a comprehensive Python package for information the-

- ory measures and estimators, *Sci. Rep.*, 15, 29323, <https://doi.org/10.48550/arXiv.2505.14696>, 2025.
- Byrne, B. W., Burd, H. J., Zdravković, L., McAdam, R. A., Taborda, D. M., Houlsby, G. T., Jardine, R. J., Martin, C. M., Potts, D. M., and Gavin, K. G.: PISA: new design methods for offshore wind turbine monopiles, *Revue Française de Géotechnique*, p. 3, <https://doi.org/10.1051/geotech/2019009>, 2019.
- Chu, J.-C., Yuan, L., Xie, F., Pan, L., Wang, X.-D., and Zhang, L.-Z.: Operational State Analysis of Wind Turbines Based on SCADA Data, in: 2nd International Conference on Electrical and Electronic Engineering (EEE 2019), pp. 169–173, Atlantis Press, <https://doi.org/10.2991/eee-19.2019.29>, 2019.
- Contreras, P. and Murtagh, F.: Hierarchical clustering, *Handbook of cluster analysis*, pp. 103–123, <https://doi.org/10.1201/b19706-11>, 2015.
- Cooley, J. W. and Tukey, J. W.: An algorithm for the machine calculation of complex Fourier series, *Math. Comput.*, 19, 297–301, 1965.
- Daems, P.-J., Peeters, C., Matthys, J., Verstraeten, T., and Helsen, J.: Fleet-wide analytics on field data targeting condition and lifetime aspects of wind turbine drivetrains, *Forsch. Ingenieurwes.*, 87, 285–295, 2023.
- de N Santos, F., Noppe, N., Weijtjens, W., and Devriendt, C.: Data-driven farm-wide fatigue estimation on jacket-foundation OWTs for multiple SHM setups, *Wind Energy Sci.*, 7, 299–321, <https://doi.org/10.5194/wes-7-299-2022>, 2022.
- de N Santos, F., D’Antuono, P., Robbelein, K., Noppe, N., Weijtjens, W., and Devriendt, C.: Long-term fatigue estimation on offshore wind turbines interface loads through loss function physics-guided learning of neural networks, *Renew. Energ.*, 205, 461–474, 2023.
- de N Santos, F., Noppe, N., Weijtjens, W., and Devriendt, C.: Farm-wide interface fatigue loads estimation: A data-driven approach based on accelerometers, *Wind Energy*, 27, 321–340, 2024.
- de Nolasco Santos, F., Bel-Hadj, Y., Weijtjens, W., and Devriendt, C.: Estimating Fatigue Through Latent Space Embedding of Acceleration in Offshore Wind Turbines, in: International Conference on Experimental Vibration Analysis for Civil Engineering Structures, pp. 943–951, Springer, [https://doi.org/10.1007/978-3-031-96106-9\\_96](https://doi.org/10.1007/978-3-031-96106-9_96), 2025.
- Ganin, Y. and Lempitsky, V.: Unsupervised domain adaptation by backpropagation, in: International conference on machine learning, pp. 1180–1189, PMLR, <https://doi.org/10.48550/arXiv.1409.7495>, 2015.
- Gardner, P., Bull, L. A., Gosliga, J., Poole, J., Dervilis, N., and Worden, K.: A population-based SHM methodology for heterogeneous structures: Transferring damage localisation knowledge between different aircraft wings, *Mech. Syst. Signal Pr.*, 172, 108918, <https://doi.org/10.1016/j.ymssp.2022.108918>, 2022.
- Ha, D. and Schmidhuber, J.: Recurrent world models facilitate policy evolution, *Adv. Neur. In.*, 31, <https://doi.org/10.48550/arXiv.1809.01999>, 2018.
- Hameed, Z., Hong, Y. S., Cho, Y. M., Ahn, S. H., and Song, C. K.: Condition monitoring and fault detection of wind turbines and related algorithms: A review, *Adv. Mater. Res.-Switz.*, 13, 1–39, 2009.
- Hinton, G. E. and Salakhutdinov, R. R.: Reducing the dimensionality of data with neural networks, *Science*, 313, 504–507, <https://doi.org/10.1126/science.1127647>, 2006.
- Hlaing, N., Morato, P. G., Santos, F. d. N., Weijtjens, W., Devriendt, C., and Rigo, P.: Farm-wide virtual load monitoring for offshore wind structures via Bayesian neural networks, *Struct. Health Monit.*, 23, 1641–1663, 2024.
- IEC 61400-25-6: Communications for monitoring and control of wind power plants – Logical node classes and data classes for condition monitoring, <https://webstore.iec.ch/publication/26226> (last access: 6 April 2026), 2016.
- IEC 61400-1: Wind energy generation systems – Part 1: Design requirements, <https://webstore.iec.ch/publication/26423> (last access: 6 April 2026), 2019.
- Kingma, D. P. and Ba, J.: Adam: A method for stochastic optimization, *arXiv preprint arXiv:1412.6980*, <https://doi.org/10.48550/arXiv.1412.6980>, 2014.
- Korkos, P., Linjama, M., Kleemola, J., and Lehtovaara, A.: Data annotation and feature extraction in fault detection in a wind turbine hydraulic pitch system, *Renew. Energ.*, 185, 692–703, 2022.
- LeCun, Y., Bengio, Y., and Hinton, G.: Deep learning, *Nature*, 521, 436–444, <https://doi.org/10.1038/nature14539>, 2015.
- Li, Z., Liu, Y., and Xia, Y.: Damage detection of bridges subjected to moving load based on domain-adversarial neural network considering measurement and model error, *Eng. Struct.*, 293, 116601, <https://doi.org/10.1016/j.engstruct.2023.116601>, 2023.
- Li, Z., Chen, Y., Xu, T., and Huang, H.: Cross-domain damage detection through partial conditional adversarial domain adaptation, *Mech. Syst. Signal Pr.*, 225, 110118, <https://doi.org/10.1016/j.ymssp.2025.110118>, 2025.
- Liu, D., Wang, T., Liu, S., Wang, R., Yao, S., and Abdelzaher, T.: Contrastive self-supervised representation learning for sensing signals from the time-frequency perspective, in: IEEE International Conference on Computer Communications (INFOCOM Workshops), pp. 1–6, IEEE, <https://doi.org/10.1109/ICCCN52240.2021.9522151>, 2021.
- Mao, W., He, J., Li, Y., and Yan, Y.: A new structured domain adversarial neural network for transfer fault diagnosis of rolling bearings under different working conditions, *IEEE T. Instrum. Meas.*, 70, 1–13, <https://doi.org/10.1109/TIM.2020.3038596>, 2020.
- Martakis, P., Chatzi, E., Michalis, I., and Karapetrou, S.: Fusing damage-sensitive features and domain adaptation towards robust damage classification in real buildings, *Soil Dyn. Earthq. Eng.*, 166, 107739, <https://doi.org/10.3929/ethz-b-000593193>, 2023.
- McInnes, L., Healy, J., and Melville, J.: UMAP: Uniform Manifold Approximation and Projection for Dimension Reduction, *arXiv preprint arXiv:1802.03426*, <https://doi.org/10.48550/arXiv.1802.03426>, 2018.
- Ozturkoglu, O., Ozcelik, O., and Günel, S.: Effects of Operational and Environmental Conditions on Estimated Dynamic Characteristics of a Large In-service Wind Turbine, *J. Vib. Eng. Technol.*, 12, 803–824, 2024.
- Rahimi Taghanaki, F. et al.: Self-supervised human activity recognition with localized time-frequency contrastive representation learning, in: Proceedings of the 30th ACM International Conference on Multimedia, ACM, <https://doi.org/10.1145/3581783.3612063>, 2023.
- Ranzato, M., Monga, R., Devin, M., Chen, K., Corrado, G., Dean, J., Le, Q. V., and Ng, A. Y.: Building high-level features using large scale unsupervised learning, in: Proceedings of the 29th International Conference on Machine Learning (ICML-12), pp. 81–88, <https://doi.org/10.48550/arXiv.1112.6209>, 2012.

- Singh, D., Dwight, R., and Viré, A.: Probabilistic surrogate modeling of damage equivalent loads on onshore and offshore wind turbines using mixture density networks, *Wind Energ. Sci.*, 9, 1885–1904, <https://doi.org/10.5194/wes-9-1885-2024>, 2024.
- Snover, D.: Urban Seismic Noise Identified with Deep Embedded Clustering Using a Dense Array in Long Beach, CA, Master's thesis, University of California San Diego, [https://noiselab.ucsd.edu/group/Thesis/DSnover\\_MastersThesis.pdf](https://noiselab.ucsd.edu/group/Thesis/DSnover_MastersThesis.pdf) (last access: 6 April 2026), 2020.
- Soares-Ramos, E. P., de Oliveira-Assis, L., Sarrias-Mena, R., and Fernández-Ramírez, L. M.: Current status and future trends of offshore wind power in Europe, *Energy*, 202, 117787, <https://doi.org/10.1016/j.energy.2020.117787>, 2020.
- Tschannen, M., Bachem, O., and Lucic, M.: Recent advances in autoencoder-based representation learning, arXiv preprint arXiv:1812.05069, <https://doi.org/10.48550/arXiv.1812.05069>, 2018.
- Vincent, P.: A connection between score matching and denoising autoencoders, *Neural Comput.*, 23, 1661–1674, 2011.
- Vincent, P., Larochelle, H., Lajoie, I., Bengio, Y., Manzagol, P.-A., and Bottou, L.: Stacked denoising autoencoders: Learning useful representations in a deep network with a local denoising criterion, *J. Mach. Learn. Res.*, 11, <https://www.jmlr.org/papers/volume11/vincent10a/vincent10a.pdf> (last access: 6 April 2026), 2010.
- Weijtens, W., Noppe, N., Verbelen, T., Iliopoulos, A., and Devriendt, C.: Offshore wind turbine foundation monitoring, extrapolating fatigue measurements from fleet leaders to the entire wind farm, in: *Journal of Physics: Conference Series*, vol. 753, p. 092018, IOP Publishing, <https://doi.org/10.1088/1742-6596/753/9/092018>, 2016.
- Xie, J., Girshick, R., and Farhadi, A.: Unsupervised deep embedding for clustering analysis, in: *International conference on machine learning*, pp. 478–487, PMLR, <https://doi.org/10.48550/arXiv.1511.06335>, 2016.
- Zhao, Y., Pan, J., Huang, Z., Miao, Y., Jiang, J., and Wang, Z.: Analysis of vibration monitoring data of an onshore wind turbine under different operational conditions, *Eng. Struct.*, 205, 110071, <https://doi.org/10.1016/j.engstruct.2019.110071>, 2020.