



Reductions in wind farm main bearing rating lives resulting from wake impingement

Julian Quick¹, Edward Hart², Marcus Binder Nilsen¹, Rasmus Sode Lund¹, Jaime Liew¹,
Piinshin Huang¹, Pierre-Elouan Rethore¹, Jonathan Keller³, Wooyong Song⁴, and Yi Guo⁵

¹Technical University of Denmark, Lyngby, Denmark

²University of Strathclyde, Glasgow, UK

³National Laboratory of the Rockies, Golden, CO, USA

⁴Offshore Renewable Energy (ORE) Catapult, Blyth, UK

⁵Department of Mechanical Engineering, Clemson University, North Charleston, SC, USA

Correspondence: Julian Quick (juqu@dtu.dk)

Received: 7 April 2025 – Discussion started: 9 May 2025

Revised: 18 December 2025 – Accepted: 13 January 2026 – Published: 13 February 2026

Abstract. This paper studies the impacts of wake impingement on main bearing rating lives predicted during the wind turbine design stage. A computational tool chain was developed to explore and quantify these effects across a wind farm populated by 10 MW wind turbines. Wind field and turbine load modelling was undertaken using the Dynamiks Python package, including application of a dynamic wake meandering model. The ISO 281 basic bearing rating life formulation was subsequently applied in order to evaluate impacts from wake effects. Analyses included a two-turbine parametric analysis, followed by a full wind farm analysis undertaken for the TotalControl 32-turbine reference wind farm, including full wind rose simulations across all operational wind speeds. Site conditions were accounted for using a Weibull wind speed distribution and a range of parametric wind direction rose models. Results indicate that wind farm main bearing rating lives are negatively impacted by the effects of wake impingement, resulting in rating life reductions for the analysed wind farm of the order of 16 % on average and as much as 20 %–25 %, both for the locating main bearing. Despite these high sensitivities, it is important to note that these resultant rating lives (i.e. the *predicted* lives) still far exceed the standard wind turbine operational lifetimes of 20–30 years. Wake impacts were also found to be asymmetrically related to the side on which the rotor is impinged, suggesting that, for the main bearing, there may be a “better” side for wake impingement to occur. Rating life sensitivities to wind rose shape were also observed. While these findings must be interpreted with due consideration for the various methodological limitations present, they provide compelling evidence that wake effects at the wind farm level should necessarily be included when undertaking main bearing operational load modelling, rating life assessment, or other load-related analyses.

Copyright statement. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes.

1 Introduction

Main bearing failures remain a significant reliability challenge within the wind industry, with recent high-volume

studies indicating that only around half of a main bearing population’s minimum design life¹ (20 years) may be attained in practice (Hart et al., 2023; EPRI, 2024). As is elaborated on below, there is therefore a significant gap between the main bearing (predicted) rating life and (observed) field life. It is anticipated that main bearing failure rates may grow with the increase in turbine rated power (EPRI, 2024), which

¹Life in the context of bearings refers to the time at which 10 % of the population has failed.

is consistent with the observation that main bearing loading scales unfavourably with turbine size (Hart et al., 2022). No principal root cause of main bearing field failures has yet been identified; observed damage modes have included those stemming from surface and subsurface initiation, stray currents, lubrication failures, overloading, and improper bearing assembly/fit (Hart et al., 2023; EPRI, 2024). Efforts are therefore ongoing to determine a set of fundamental drivers leading to premature main bearing failures and, in turn, identify strategies to resolve or ameliorate these issues.

Bearing design and selection normally include the application of ISO standards (ISO 281, ISO 281:2007(E), 2007, and ISO 16281), which seek to estimate lifetime across a population of identical bearings at risk from surface- and subsurface-initiated rolling contact fatigue (RCF). An important caveat to the ISO standards is that they make no claims concerning expected lifetimes for out-of-scope damage modes. Those alternative damage mechanisms tend to be difficult to model and hard to predict, hence the lack of comparable and generalized life assessment formulations. Investigations of potential causes of premature main bearing failures therefore commonly utilize the ISO standards (Zheng et al., 2020; Kenworthy et al., 2024; Krathe et al., 2024; Ishihara et al., 2025). A limitation of such approaches is the resulting focus on surface and subsurface RCF and therefore the exclusion of other potentially important damage modes. However, field observations include damage that may have resulted from RCF (Hart et al., 2023), and it has not been conclusively demonstrated that RCF is not an important factor in main bearing field failures. A key question in this context is therefore *can ISO-based main bearing rating life assessments, in conjunction with realistic system² modelling, account for reported levels of main bearing failures?* This gives rise to the following related question: *what constitutes a sufficiently realistic system model in this context?* Kenworthy et al. (2024) investigated the first question by applying ISO 281 to the main bearing of an individually modelled 1.5 MW wind turbine. While the question was answered in the negative for that setup, the results included high levels of sensitivity to vertical wind shear flow asymmetry. As a result, lateral flow asymmetry caused by wake impingement from an upwind turbine was posited as a possibly overlooked life reduction factor, i.e. a potential insufficiency in the model. The current work seeks to contribute towards addressing both of the above questions by considering the following: *for a candidate model wind farm, what is the relative change in main bearing rating life when including the effects of wake-impinged operation?*

²“System” in this context refers to the various interacting components, processes, and phenomena which together determine wind turbine and/or wind farm operational and loading conditions: a bearing within a drivetrain in a wind turbine that interacts with atmospheric flow in a wind farm, etc.

The remainder of the paper is organized as follows. Section 2 presents and discusses relevant background information. Section 3 outlines the methods and cases examined in this study. Results are then presented and discussed in Sects. 4 and 5, respectively. Finally, conclusions are presented in Sect. 6.

2 Background

The current section outlines relevant theory, prior work, and extant modelling capabilities which are pertinent to and/or utilized within the current study. Section 2.1 introduces the ISO 281 bearing rating life assessment standard. Section 2.2 reviews previous applications of the ISO 281 standard to wind turbine bearings. Section 2.3 discusses relevant approaches for modelling wind farms.

2.1 ISO 281 bearing rating life assessment

ISO 281 formulations provide an estimate of bearing life across a population of identical rolling bearings. The basic rating life is the life that 90 % of the bearing population is expected to attain or exceed; equivalently, this is the point at which 10 % of the population is expected to have failed. A detailed review and application case study in the context of main bearings was previously provided by Kenworthy et al. (2024). The basic rating life for a radial roller bearing takes the form

$$L_{10} = \left(\frac{C_D}{P_{eq}} \right)^{10/3}, \quad (1)$$

where C_D is the basic dynamic load rating, generally supplied by the bearing manufacturer. The dynamic equivalent radial load, P_{eq} , is calculated from the applied radial and axial bearing loads, F_r and F_a , as

$$P_{eq} = X F_r + Y F_a. \quad (2)$$

Coefficient values X and Y are prescribed by ISO 281, and they depend on the bearing nominal contact angle and the load ratio F_a/F_r . ISO equations give L_{10} values in millions of revolutions; these are then readily converted to units of time using the rotational speed of the wind turbine low-speed shaft.

The above equation pertains to the case of a constant applied-load combination, F_r and F_a . Variable operating conditions, such as those experienced by wind turbine bearings, are accommodated using an assumption of linear damage accumulation for consumed bearing life. Under this assumption, the resultant rating life, L_{res} , for a bearing operated in n different sets of conditions with associated rating lives $L_1, \dots, L_n$ takes the form of a harmonic mean (Kenworthy et al., 2024):

$$L_{res} = \frac{1}{\frac{\phi_1}{L_1} + \frac{\phi_2}{L_2} + \dots + \frac{\phi_n}{L_n}}, \quad (3)$$

where ϕ_i is the proportion of total operation that occurred under operating condition i . The combination of condition-specific rating lives into a resultant life may be undertaken in stages. The multistage approach has been shown to be equivalent to a single simultaneous combination of all cases (Kenworthy et al., 2024). This provides a convenient and staged approach to resolving the resultant bearing rating life in practice.

While both the *modified* rating life of ISO 281 and the enhanced formulations of ISO 16281 seek to account for more detailed factors – such as contamination, the bearing internal load distribution, clearance, and misalignment – additional technical and environmental data are required. It has also been shown that the load distribution within large main bearings is highly sensitive to model fidelity, with the influence of bearing housing and turbine bedplate deflections playing an important role (Kock et al., 2019). As a result, and given that the focus of the current study is quantifying the *relative* impacts of wake impingement, the ISO 281 basic rating life formulation was applied.

2.2 Main bearing fatigue life analysis

A number of studies have applied ISO 281 to assess main bearing rating lives. Kenworthy et al. (2024), discussed previously, studied the rating life prediction for an individually modelled 1.5 MW wind turbine main bearing resulting from IEC 61400-1 and ISO 281 design processes. Rating life assessment was carried out for various combinations of bearing temperature, wind field characteristics, lubricant viscosity, and contamination levels; main bearing loading was estimated from aeroelastically derived turbine-hub loading via a static force balance at each time step. The results of this analysis implied that the prescribed life assessment process did not account for reported rates of main bearing failures in 1 to 3 MW wind turbines. It was also suggested that the impacts of wake impingement on main bearing rating life should be considered in future work. Ishihara et al. (2025) sought to quantify the role of system inertial loading on main bearing rating life by proposing a novel main bearing “pounding” model, which estimates the load augmentation resulting from impact events at bearing interfaces. The potential influence on RCF life was assessed by calculating the mean inertial increase in bearing loading and the impacts of bearing clearance and passing these adjusted values into ISO 281 rating life equations. Their inclusion of inertial loading and bearing clearance significantly reduced the bearing L_{10} rating life from 144 years down to 39 years (accounting for clearance only) or 9.7 years (accounting for inertial loading and clearance). While their findings and the presented model are interesting, there are both conceptual and implementation issues present, which make it difficult to determine the validity of their results. First, “pounding” of the main bearing is described as beginning once internal wear results in increased bearing clearance. However, if wear is present to

this extent, then the bearing has already failed or is at least in the process of failing. Furthermore, wear is precisely one of the out-of-scope damage modes for which ISO 281 claims do not apply. Second, the pounding model clearance (which determines the gap across which the shaft can accelerate) was set by manually measuring the bearing’s radial clearance uptower while the turbine was nonoperational. This is problematic, since the main bearing in question is a three-point-mounted double-row spherical roller bearing which reacts to both axial (thrust) and radial loads. Turbine thrust loading results in downwind displacement of the low-speed shaft, with a subsequent force response from the downwind bearing row (Hart, 2020; Guo et al., 2022; de Mello et al., 2023). Axial displacement of this kind reduces the effective bearing radial clearance during operation. This includes periods of full circumferential loading of the downwind row (Guo et al., 2022), where the effective clearance becomes zero. The value of radial clearance used for the pounding model and “life ratio” of Ishihara et al. (2025) is therefore likely excessive. For the above reasons, it is not clear to what extent the rating life results of this previous study should be considered valid or representative at this stage.

Krathe et al. (2024) investigated the sensitivity of main bearing rating life, per ISO 281, to the choice of turbulence model. The Kaimal and Mann standard kinematic turbulence models were compared, in this context, to wind fields generated via constrained extrapolation of large-eddy simulation (LES) data. A coupled medium-fidelity drivetrain model was developed and implemented in OpenFAST, including verification against a more complex multibody drivetrain model. RCF life consumption based on ISO 281 was found to be the fastest for the upwind bearing by 2 orders of magnitude, while the upwind bearing C_D value was only 23 % greater than that of the downwind bearing in their four-point drivetrain. Differences between turbulence models were found to be small (2 %–10 %) for the upwind bearing but more significant (10 %–40 %) for the downwind bearing. Of the two standard turbulence models, the Mann model most closely re-created the rating life values obtained using LES-extrapolated inflow data. This work highlights turbulence as an important and open aspect of model sufficiency in main bearing research. Krathe et al. (2025) analysed main bearing response to wake impingement for a pair of 15 MW floating direct-drive wind turbines under three atmospheric turbulence conditions, modelled using large-eddy simulation for 8 m s^{-1} inflow and five rear-turbine offsets. Asymmetric rating life consumption impacts were observed with respect to the offset position of the downwind turbine, with the most “damaging” conditions occurring when the wake partially impinges on an upward-travelling blade. Rating life consumption on the locating main bearing was found to be slower for the waked turbine compared to the unwaked turbine in all cases. This was attributed to a reduction in thrust for the waked turbine. While undoubtedly interesting, the study only considers two turbines and a single wind speed.

This was due to the computational expense of the large-eddy simulations. In addition, since floating wind turbines were modelled, it is not possible to delineate which results hold in general and which are specific to floating turbines.

Other works have implemented ISO 16281 formulations for the purpose of wind turbine main bearing rating life analysis (Zheng et al., 2020; Jiang et al., 2022a, b); however, these are principally focused on developing modelling and analysis capabilities themselves rather than on their application to fundamental questions of failure drivers and expected field lives.

2.3 Modelling wind turbines, wind farms, and wakes

The wind turbine wake is a downstream region of air with increased vorticity and decreased velocity, sometimes persisting for several kilometres (Dong et al., 2022). Within a wind farm, practical design and cost considerations generally result in turbines being sited at a proximity which necessitates operation within the wake of other turbines the majority of the time. The rapid evolution of wind turbines in the past few decades towards larger and more powerful machines has resulted in increasingly complex wake dynamics. The full impacts of wake impingement on downstream turbines are not yet fully understood, but it is known that impingement can increase structural loads, reduce expected service lives, and limit energy capture (Veers et al., 2023). Loading from partial wake impingement can influence the optimal wind farm control strategy (Stanley et al., 2022). The IEC standard has some provisions for modelling wake impacts on turbines, though these often manifest as enhanced inflow turbulence without partial wake overlap. To date, analyses of load impacts from wake impingement have generally focused on turbine blades and towers (Riva et al., 2020; Stanley et al., 2020; Shaler et al., 2022). Where the main bearing or drivetrain has been considered, rating life impacts have not been quantified (van Binsbergen et al., 2020), only the added turbulence aspect of wakes was modelled (Moghadam et al., 2023), or the analysis was limited by the number of turbines and operating points considered (Krathe et al., 2025).

Wake and large-scale turbine dynamics can be modelled using the Dynamiks Python package (Technical University of Denmark, 2025). Dynamiks is a modular framework used to simulate dynamic wind farm flows. The dynamic wake meandering model (Larsen et al., 2008; Liew et al., 2023) is used to model the turbine wakes by tracking wake particles as they convect downstream of wind turbines. The software is highly modular, allowing for the specification of custom inflow, particle motion, deficit, deflection, and superposition models. A Dynamiks site is defined in terms of the mean wind field characteristics, turbulence intensity, shear, and a turbulence field. It is common to model the turbulence field using a turbulence box generated via the Mann model (Mann, 1998). It can be configured to run simple turbine representations, or it can be coupled with the HAWC2 aeroelastic analysis soft-

ware for detailed turbine simulations (Larsen and Hansen, 2007; Madsen et al., 2020).

The distribution of wind speed and wind direction at a wind farm will strongly affect both energy yield and component reliability, especially when wake effects are considered. The two-parameter (scale C and shape k) Weibull distribution is a standard model for representing the 10 min mean wind speed distribution (Kenworthy et al., 2024). A typical shape parameter is $k = 2$, and C may be estimated using k and a specified site annual mean wind speed (Gryning et al., 2016). A parametric model for describing the distribution of wind direction at a site has recently been proposed (Hart, 2025). The parametric model utilizes ellipses of unit area to specify wind roses, with the probability associated with any direction segment being equal to that segment's area. The resulting *generalized elliptical wind direction rose* has three parameters: a prevailing wind direction (θ_{prev}), an elliptical parameter (a), and a folding parameter (f). Restricting the ellipse to be of unit area results in a single parameter, a , which determines the shape of the baseline ellipse, from circular to increasingly elongated. The folding parameter then specifies a proportion (from 0 to 1) of probability mass to be “folded” across the ellipse minor axis, thereby establishing a chosen level of bi- versus unidirectionality. Finally, the resulting wind rose model is rotated to obtain the specified prevailing wind direction, θ_{prev} . Together, the above models (Weibull and elliptical wind rose) for parametrically describing distributions of wind speed and wind direction at a site readily enable resource characterization.

3 Methodology

This study was conducted in two principal stages. First, a two-turbine parametric analysis was undertaken to characterize the impacts on main bearing rating lives from a single wake for different levels of impingement and turbine separation. Second, a complete (IEC 61400-1 compliant) wake-inclusive full-wind-rose main bearing rating life assessment was undertaken for all main bearings within a 32-turbine reference wind farm. The current section details the full modelling and analysis tool chain (Sect. 3.1), followed by a description of the two-turbine parametric analysis (Sect. 3.2) and the complete wind farm analysis (Sect. 3.3).

3.1 Modelling tool chain

Various modelling tools, introduced in Sect. 2, were utilized and combined in this study. The specifics of their applications within our modelling framework are described below.

Flow field modelling. Ambient turbulence was generated via the Mann model using a length scale of 33.6 m, the eddy lifetime parameter set to $\Gamma = 3.9$, and a turbulence intensity of 5 % (a low-to-moderate offshore turbulence level, Marek et al., 2016). A power-law vertical wind shear profile was ap-

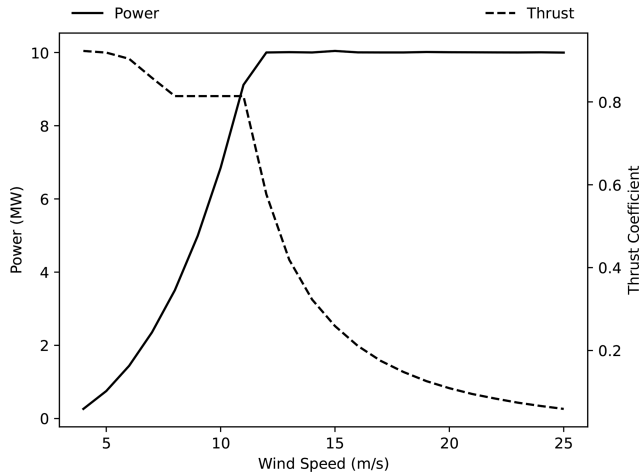


Figure 1. The power and thrust coefficient curves of the reference DTU 10 MW turbine, based on the data in Bak et al. (2013b).

plied throughout, with a shear exponent of 0.2. Wake and large-scale turbine dynamics were modelled using the Dynamiks software package (Technical University of Denmark, 2025), including a dynamic wake meandering model (Larsen et al., 2008; Liew et al., 2023). Wake dynamics approximations used 21 radial segments, a maximum of 30 particles per turbine wake, a minimum travel distance of $0.1D$ (where D is the turbine rotor diameter), and a maximum radius of 294 m to model the wake profile. Overlapping wake deficits were summed linearly. These flow simulations were run using a time step of 1 s, using the cutoff frequency suggested by Lio et al. (2021). Note that this is a far-wake model, which can be considered to be effective from approximately $3D+$ downstream of the wake-producing turbine (Quick et al., 2024).

Wind turbine simulation. Within Dynamiks, each wind turbine was modelled using HAWC2 representations of the Technical University of Denmark’s (DTU’s) 10 MW reference wind turbine (Bak et al., 2013a). This turbine has a hub height of 119 m, a rotor diameter of 178.3 m, and a shaft tilt of 5° . The associated power and thrust coefficient curves are shown in Fig. 1. Hub-centre loading time series in 6 degrees of freedom were extracted from each simulated turbine and applied to main bearing load estimation. The turbines were controlled using the DTU basic controller (Hansen and Henriksen, 2013). These turbine simulations were run with a time step of 0.01 s. The individual turbine wind fields were updated every 5 s to capture relevant dynamics while maintaining performance.

Main bearing load estimation. Hub loads calculated using HAWC2 were inputted to a simplified analytical drivetrain model, which consists of two main bearings and a main shaft (approximated as rigid), shown in Fig. 2. This quasi-static model, previously applied by Hart et al. (2022), estimates

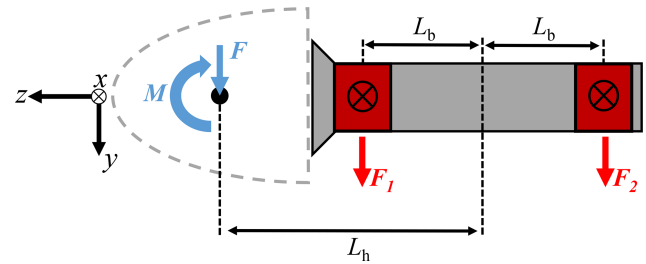


Figure 2. Force diagram of a main shaft in a four-point support drivetrain. Note that the z axis is aligned with the turbine drivetrain and hence sits at a tilt angle relative to the ground. Force and moment vector components (including the definition of “positive direction”) at each location are defined via the depicted HAWC2 reference frame.

main bearing loads via a static force and moment balance at each time step under the following assumptions:

1. All non-torque loads are reacted by the main bearings.
2. The main bearings provide a force response only; i.e. they do not support moments individually.
3. The rotor-side main bearing carries the axial load.
4. The contribution of the main shaft and/or gearbox or generator weight to main bearing loads is small and may be neglected for the purposes of this “relative impact” study.
5. Similarly, the contribution of rotor and drivetrain weight to the axial load (via rotor tilt) is small.

The reference frame for hub loads in HAWC2 is also provided in Fig. 2 and, importantly, differs from that used in Hart et al. (2022). The applied model has $L_b = 1$ m and $L_h = 3.7$ m. The main bearing force response equations (also in the depicted HAWC2 reference frame) are

$$F_1^x = -\frac{1}{2} \left(\left(1 + \frac{L_h}{L_b} \right) F_h^x + \frac{M_h^y}{L_b} \right), \quad (4)$$

$$F_1^y = -\frac{1}{2} \left(\left(1 + \frac{L_h}{L_b} \right) F_h^y - \frac{M_h^x}{L_b} \right), \quad (5)$$

$$F_2^x = -\frac{1}{2} \left(\left(1 - \frac{L_h}{L_b} \right) F_h^x - \frac{M_h^y}{L_b} \right), \quad (6)$$

$$F_2^y = -\frac{1}{2} \left(\left(1 - \frac{L_h}{L_b} \right) F_h^y + \frac{M_h^x}{L_b} \right), \quad (7)$$

$$F_1^z = -F_h^z, \quad (8)$$

$$F_2^z = 0, \quad (9)$$

where $F_h^{x,y,z}$ and $M_h^{x,y}$ denote the axial (z) and radial (x and y) hub-centre force and bending moment components obtained from HAWC2 models.

Table 1. Bearing properties.

Bearing	Nominal contact angle (deg.)	Dynamic capacity, C_D (MN)	Pitch diameter (m)
Rotor side	22.1	56.58	3.39
Generator side	0	46.21	2.91

Main bearing rating life assessment. The modelled wind turbine drivetrains consist of a rotor-side double-row tapered roller bearing, which supports both radial and axial loads, and a generator-side cylindrical roller bearing, which supports radial loads only. The relevant parameters from ISO 281 for both bearings are given in Table 1. Bearing pitch diameters³ are included to indicate the physical size of these bearings. For the locating (rotor-side) bearing in this case, ISO 281 specifies $X = 1$ and $Y = 0.45 \cot(22.1^\circ) = 1.108$ when $F_a/F_r \leq 1.5 \tan(22.1^\circ) = 0.609$ and $X = 0.67$ and $Y = 0.67 \cot(22.1^\circ) = 1.65$ when $F_a/F_r \geq 0.609$. For the non-locating bearing, $X = 1$ and $Y = 0$ at all times. These bearings were designed by the Offshore Renewable Energy Catapult, within a commercial project, for application in benchmarking and comparative analyses. The utilized bearing specifications should, therefore, be considered representative rather than definitive. Importantly, the current study is mainly concerned with *relative* effects, and (from Eqs. 1 and 3) it can be shown that

$$L_{\text{res}} \propto C_D^{10/3}. \quad (10)$$

Relative rating life impacts are, therefore, unchanged by the specific choice of C_D . Estimated radial loads at each bearing were combined into a radial load magnitude

$$F_{r,i} = \sqrt{(F_i^x)^2 + (F_i^y)^2} \quad \text{for } i = 1 \text{ and } 2$$

and, together with the estimated axial loads $F_{a,i} = |F_i^z|$, were inputted to ISO 281 basic rating life formulations (see Sect. 2.1). A rating life (in units of years) is calculated for each time step in each individual simulation, and a single simulation-resultant rating life is calculated using Eq. (3), with equal weightings across all time steps (since the conditions present within each individual time step persist for the same amount of time).

3.2 Two-turbine parametric analysis

The above tool chain was applied to a simple two-turbine setup to investigate rating life impacts from single wakes. This parametric analysis was performed by placing the two turbines at a downstream distance of $5D$ from each other

³The bearing pitch diameter is the diameter of the circle connecting all rolling element centres around the bearing when each has the same amount of clearance to both races.

and then varying the cross-flow distance between the turbines (see Fig. 3a). We chose 5 rotor diameters as a quantity that is often examined (e.g. in Simley et al., 2020a), and similar geometries have been used when validating novel control strategies (e.g. Simley et al., 2020b). We also conducted the same analysis at $3D$ and $4D$ separations and found qualitatively similar results. The relevant inflow generation parameters are listed in Table 2. The mean inflow direction was kept constant (from left to right in Fig. 3a) with both turbines yawed so as to face the wind. The analysis included a total of 31 cross-flow offsets (ranging from $-1.5D$ to $1.5D$). Full sets of simulations were performed at hub-height mean wind speeds of 7.5 , 11 , and 15 m s^{-1} , which were chosen as operating points in the maximum efficiency, near-rated, and above-rated operating regions. Furthermore, the complete analysis was completed six times, using different turbulence seeds in each case. These simulations were each run for 2000 s, discarding the first 1000 s of results before processing. This was done out of an abundance of caution – the discarded initial 1000 s allows for the flow to fully develop within the domain, and the remaining 1000 s is nearly double the standard 600 s measurement period. As the Mann turbulence box is statistically stationary (Mann, 1998), there is no danger involved in discarding the initial transient flow. The resultant rating lives were calculated for each set of input parameters and each turbulent seed individually, without further combination. The results of this analysis therefore give resultant rating lives which assume that a given set of conditions hold across the full bearing lifetime. A total of 558 simulations were performed.

3.3 Wind farm analysis

The same tools were applied to undertake a complete wake-inclusive full-wind-rose (i.e. all wind directions) main bearing rating life assessment for all main bearings within the 32-turbine TotalControl reference wind farm (Andersen et al., 2018). This wind farm has an east–west turbine spacing of $10D$ and a north–south spacing of $5D$, where D is the rotor diameter. Since the site is regarded as being offshore, there are no modelled terrain effects. The site is assumed to have the same Weibull wind speed distribution for each inflow direction, with $k = 2$ and an annual mean wind speed of 10 m s^{-1} , with the same inflow generation parameters as listed in Table 2. Simulations were undertaken for a total of 72 inflow directions (5° direction bins). For each inflow direction, simulations were performed for hub-height ambient mean wind speeds from 6 to 24 m s^{-1} , in 2 m s^{-1} increments. A power-law vertical wind shear profile was applied throughout, with a shear exponent of 0.2 . These large wind farm cases were run for 2000 s with the first 1000 s being discarded, except for the cases with 6 and 8 m s^{-1} inflow, which were run for 3000 s with the initial 2000 s being discarded. This was again done out of an abundance of caution – these lower-wind-speed cases did not develop quite

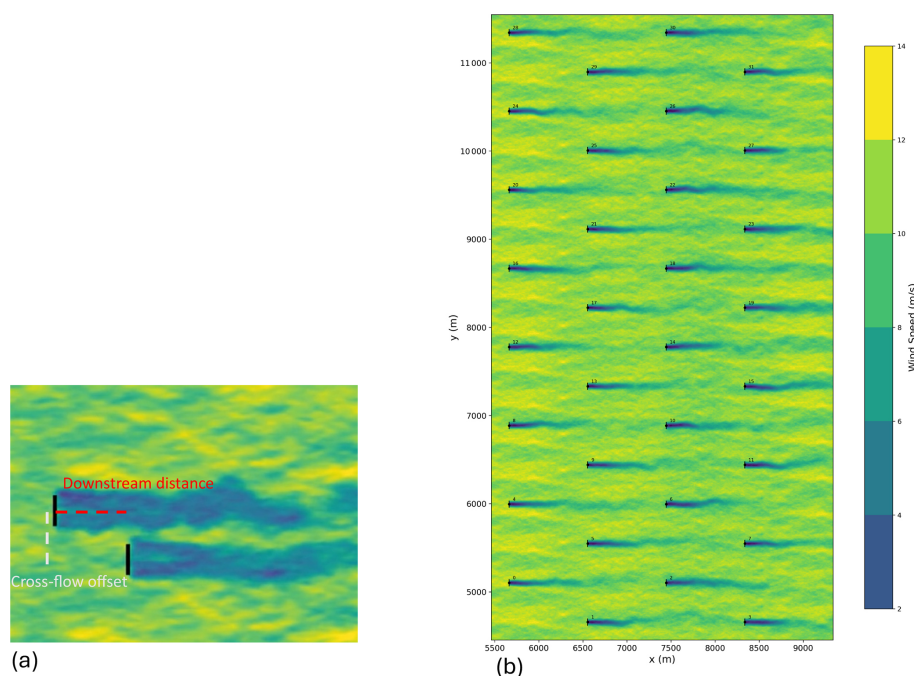


Figure 3. Layouts considered in this study. **(a)** A snapshot of the two-turbine parametric analysis. The downstream distance was held at $5D$, and the cross-flow offset distance between the turbines varied. Note that a negative cross-flow offset is shown in the figure. **(b)** Layout and flow-field visualization of the TotalControl 32-turbine reference wind farm (Andersen et al., 2018), including wake effects. Turbine indexes are also given.

fully after 1000 s, so 2000 s was discarded, and the remaining 1000 s was examined. Simulations using each set of parameters were repeated six times, using a different turbulent seed for each. A total of 4320 simulations were performed using DTU's Sophia supercomputer (Technical University of Denmark, 2019). A flow-field visualization of one such simulation, in which the wind farm layout can also be seen, is shown in Fig. 3b. For each main bearing within the wind farm and each wind direction, (1) outputs of each simulation were first combined into a single simulation rating life, as previously described; (2) turbulent seed results were then combined for each value of mean wind speed, again using equal weightings; and (3) a rating life combination over wind speed values was then undertaken, with weightings determined (see Kenworthy et al., 2024) using the specified Weibull distribution. At this stage, each bearing therefore had a single resultant main bearing rating life associated with each inflow direction. A single, final resultant rating life was then determined for each bearing using weightings specified by a generalized elliptical wind direction rose (Hart, 2025). Given the expected sensitivity of the results to wind direction, a range of direction roses was considered. Based on model fitting to offshore wind farm data in Hart (2025), sensible/realistic ranges for wind rose model parameters a and f were identified ($0.6 \leq a \leq 0.8$, $0.1 \leq f \leq 0.6$), and results were determined for a range of wind roses which span these values (see Fig. 4). The prevailing (highest-probability) wind direction

corresponded throughout to the left-to-right flow direction apparent in Fig. 3b.

4 Results

Results are presented in the current section for both the two-turbine parametric analysis and the wind farm study. Given that the main bearing – which supports both axial and radial loads (the rotor-side bearing in the current paper) – is known to be the most common to fail (Hart et al., 2023), that bearing will be the main focus here.

4.1 Two-turbine parametric analysis results

The results of the two-turbine parametric analysis are presented in Fig. 5. Considering the (unwaked) front turbine results first, rotor- and generator-side bearing rating lives can be seen to far exceed the minimum design life of 20 years, as would be expected based on previous work (Kenworthy et al., 2024). This again highlights the key domain challenge presented by main bearings which have a sufficiently large dynamic capacity, C_D , according to rating life formulations (Kenworthy et al., 2024) but which still fail prematurely in large numbers (Hart et al., 2023; EPRI, 2024). As discussed in Kenworthy et al. (2024), interpretation of such rating lives is nuanced, since rating life formulations are generalized, simplified, and do not account for all mechanisms of fail-

Table 2. Inflow generation and site condition parameters for the wind farm simulation.

Category	Parameter	Value	Description
Turbulence	Turbulence model	Mann model	The specific spectral model used to generate the stochastic 3D ambient turbulence field
	Turbulence intensity (TI)	5 %	A low-to-moderate level of turbulence specified for the ambient wind field
	Eddy lifetime (Γ)	3.9	A dimensionless parameter defining the anisotropy of the turbulence due to wind shear
	Length scale (L)	33.6 m	The characteristic size of the energy-containing eddies in the turbulent flow
	Ambient field resolution	(3.0, 3.0, 3.0 m)	The grid spacing (dx, dy, dz) of the main ambient turbulence box
	Wake turbulence resolution	(3.8, 1.5, 1.5 m)	The grid spacing (dx, dy, dz) of the turbulence box for each turbine wake
	Turbulent seeds	6	Number of repetitions of each simulation (with given parameter values) using different turbulent seeds
Mean wind	Shear model	Power law	The model describing the increase in mean wind speed with height above the ground
	Shear exponent (α)	0.2	The exponent defining the shape and steepness of the vertical wind shear profile
	Wind speeds (two-turbine analysis)	7.5, 11, 11.5 m s ⁻¹	Hub-height mean wind speeds used in two-turbine simulations
	Wind speeds (wind farm analysis)	6, 8, 10, ..., 24 m s ⁻¹	Hub-height mean wind speeds used in wind farm simulations
	Inflow direction (wind farm analysis)	0, 5, 10, ..., 355°	Mean direction of the flow passing through the simulated wind farm

ure. The current analysis is, however, principally interested in the relative impacts of wake impingement in this setting as a route to considering questions of bearing load modelling sufficiency. Given the rating life results obtained for the back (waked) turbine, significant wake-driven impacts are observable. Interestingly, this includes a strong asymmetry, depending on the direction in which an offset occurs (recall that a negative offset is that shown in Fig. 3a). The observable asymmetry also becomes more pronounced at higher wind speeds, possibly as a result of increased aerodynamic sensitivities stemming from wind-speed-squared lift and drag terms. Differences are also observable between wake impacts seen for the rotor-side versus generator-side main bearing due to the former reacting to axial and radial loads and the latter reacting to radial loads only.

As hypothesized in Kenworthy et al. (2024), wake impingement can reduce the main bearing rating life, with negative offset partial impingement ($-0.5D$) driving reductions of as much as 73.5 % for the rotor-side bearing and 96.7 % for the generator-side bearing. Despite the larger percentage reduction on the generator side, the smallest rating life is still

observed for the rotor-side main bearing (116 years on the rotor side versus 212 years on the generator side). Positive offsets, on the other hand, can either elicit a less dramatic reduction in rating life or increase rating life above that of the unwaked case (as seen for 15 m s⁻¹ wind speeds). Subsequent investigations of this phenomenon revealed that these effects are the result of wake-driven aerodynamic blade load perturbations and their interactions with rotor weight. To elaborate, a positive offset partial wake causes the downwind turbine to experience a reduced flow velocity across downward-travelling blades. Lift for such blades acts towards the ground and so augments the gravitational force. Reducing the lift on such blades therefore lessens the augmentation effect and so reduces the mean load on the hub and therefore the main bearing. This in turn causes an increase in the bearing rating life. Alternatively, a negative offset partial wake causes the downwind turbine to experience a reduced flow velocity across upward-travelling blades. Lift for such blades acts away from the ground and against the gravitational force. Reducing the lift on such blades therefore lessens the countering effect and increases the mean load on the hub and therefore

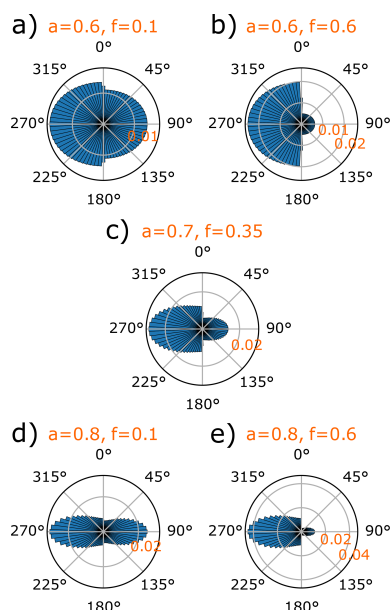


Figure 4. Edge case wind direction roses, in terms of a and f values, are shown in subplots (a), (b), (d), and (e). The full envelope of applied wind direction roses fell between these bounding cases, each with a prevailing wind direction of 270° . The “median” wind rose, i.e. with a and f values at the centre of each variable’s range, is shown in subplot (c).

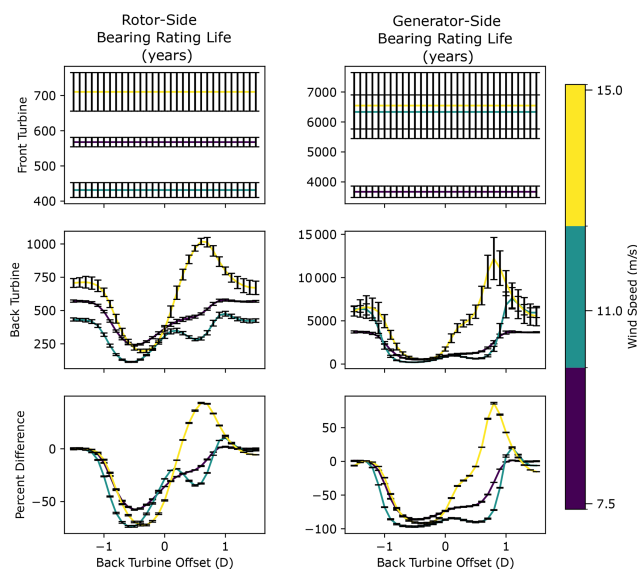


Figure 5. Results of the two-turbine parametric analysis. Error bars indicate seed-to-seed variation across six turbulent seeds.

the main bearing. This in turn causes a reduction in the bearing rating life. Such interactions, with gravity as the principal driver of observed asymmetries, are clearly demonstrated by undertaking an identical analysis in the absence of gravity. As shown in Fig. A1 (see Appendix A), removing gravitational forcing removes the observed asymmetries. These re-

sults highlight the fact that, due to gravitational loading, the baseline main bearing mean load is significantly offset from zero. Subsequent effects and aerodynamic interactions therefore need to be considered relative to that nonzero starting point. Overall, the two-turbine parametric analysis results indicate that main bearing rating lives are strongly influenced by wake impingement (of the order of 75 % for the axially supporting bearing), with the most significant reductions seen for partial wake impingement ($-0.5D$) occurring across upward-travelling blades. Within a wind farm, the standard grid spacing between turbines will commonly be of the order of $6D$ – $10D$ in the prevailing wind direction and $3D$ – $5D$ in the cross-wind direction (Manwell et al., 2010). As the wind direction changes, the cross-flow offset between turbines (relative to the inflow direction) will vary continuously across the full range analysed in this parametric analysis and beyond.

4.2 Wind farm results

Wind farm analysis results for the axial load support rotor-side main bearing are now considered. As a baseline, the unwaked bearing rating life was determined for all bearings in the left-hand row of Fig. 3b, using all turbulence seeds and wind speeds while keeping the inflow direction fixed (left to right only) to ensure no wake impingement occurred. These front-row rating lives were then averaged to obtain a single representative value for the unwaked rating life. Figure 6a presents rating life results for all turbines for the wind rose with parameters taken at the centre of each parameter range, $a = 0.7$ and $f = 0.35$ (see Fig. 4c). The baseline unwaked rating life is also shown. Figure 6b shows the same results, expressed as the percentage reduction in main bearing rating life (due to wake impingement) relative to the unwaked case. First, it is important to note that a decrease in rotor-side main bearing rating life was obtained for every turbine in the wind farm. Therefore, while it has been shown that some specific conditions can result in rating life increases (see Fig. 5), the more commonly observed life-reducing cases appear to dominate overall. The relative rating life reductions in Fig. 6b range from 6 %–22 %, with an average value of 16 %. A second key takeaway is that when accounting for a representative wind direction distribution, rating life reductions were found to be smaller than the worst-case scenarios observed during the parametric analysis.

It also proves instructive to consider which turbines experience the greatest wake-driven rating life reductions. The four greatest reductions occurred, in descending order, for turbines 18, 14, 10, and 22, all of which (see Fig. 6b) are located in the wind farm interior and within the “back” interior row relative to the prevailing wind inflow direction (left to right in Fig. 3b). The next four greatest reductions occurred for turbines 19, 15, 23, and 6. These turbines include one in the interior back row and the remainder in the exterior back row, relative to the prevailing wind direction.

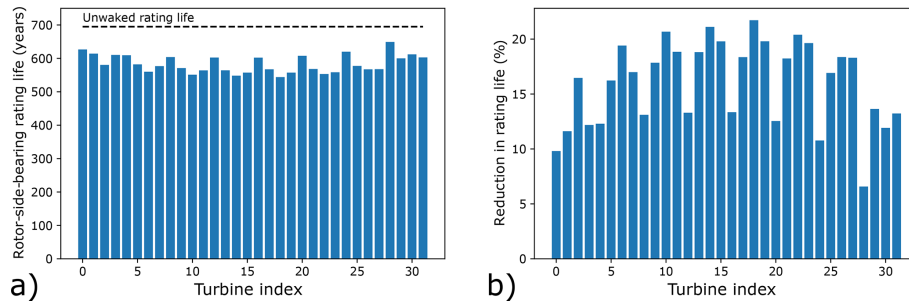


Figure 6. (a) Rating life results for all rotor-side main bearings, obtained from a wind direction rose with parameters $a = 0.7$ and $f = 0.35$. The rating life corresponding to unwaked operation is also shown. (b) Percentage reductions in rotor-side main bearing rating lives, for the same wind rose, relative to the unwaked rating life.

Via the folding parameter, the wind rose therefore imposed a notion of “front” and “back” turbines on the wind farm, with the most severe rating life impacts affecting the more consistently waked turbines, namely those in the back rows (interior and then exterior). Additionally, these most impacted eight turbines are all centrally located with respect to the vertical (y coordinate) layout of the farm; this is another factor leading to a greater incidence of wake-impinged operation for these turbines.

Wind farm rating lives were then determined for the full range of wind rose parameters. Figure 7 shows the results of this analysis, quantified via the mean percentage change in main bearing rating life across the wind farm (Fig. 7a) and the maximum percentage rating life reduction across the wind farm (Fig. 7b), both calculated relative to the unwaked case. Mean effects can be seen to vary little as the wind rose parameters are adjusted; the observable changes are almost entirely driven by the elliptical parameter. This result makes intuitive sense, since the folding parameter symmetrically adjusts the wind rose direction dominance. As previously described, a notion of “front” and “back” is thus being imposed on the turbines; the low sensitivity of the mean value to changes in f indicates that the (relative) rating life reductions at some locations are commensurate with the rating life increases in others. The impacts from varying a are also intuitive, given that turbine spacings are smaller in the vertical direction than in the horizontal direction (see Fig. 3b). This being the case, “rounder” wind roses mean more time spent with the wind directions in the vertical direction (the y direction in Fig. 3b), where wake effects are stronger due to the smaller vertical spacing. Despite being small in magnitude, wind rose shape impacts are clearly discernible here. A different pattern emerges when considering the maximum reductions in main bearing rating lives across the wind farm (Fig. 7b). In this case, we see a greater sensitivity to wind rose parameters, with maximum percentage reductions falling between 19.8 % and 23.4 %. Similar logic as above holds for a . For f , turbines in the more commonly waked back rows of the wind farm spend increasingly large proportions of time in more deleterious waked conditions as

the value of f increases. Again, wind rose shape impacts are clearly discernible here, and, interestingly, the results are approximately equally sensitive to the value of elliptical and folding parameters.

5 Discussion

Overall, the presented results indicate that wind farm main bearing rating lives are reduced by the effects of wake impingement, resulting in rating life reductions of the order of 16 % on average and of the order of 20 %–25 % at maximum (for the axially fixed main bearing). Consistent with an earlier study (Krathe et al., 2025), rating life impacts were found to be asymmetrically related to the side on which impingement occurs due to differing interactions between aerodynamic force perturbations and their orientations relative to gravity. If one has a choice, the “better” side to partially wake is the one on which blades travel towards the ground – a result which could prove useful in the design of wake steering control algorithms. The same analysis indicated that mean bearing loading is a strong indicator of rating life impacts (as has previously been noted, Kenworthy et al., 2024; Krathe et al., 2024), which could prove useful if seeking to implement simple heuristic bearing impact metrics in layout and/or control co-design codes, similar to Stanley et al. (2023). A two-turbine parametric analysis demonstrated that the greatest reductions in rating life occur when a wake covers half of the downstream turbine rotor area ($0.5D$ impingement), another result with the potential to inform wake steering approaches. In contrast to the results of Krathe et al. (2025), our wind farm wake impingement results showed a decrease in rating life (relative to the unwaked case) for every rotor-side main bearing in the wind farm. This discrepancy could, among other things, relate to differences in wake modelling methodologies or floating/fixed turbine load response. Further consideration of these differing results is therefore warranted. Our wind farm results also indicated that rating life impacts are sensitive to the shape of the site wind rose, with the most reduced lives associated with more unidirectional

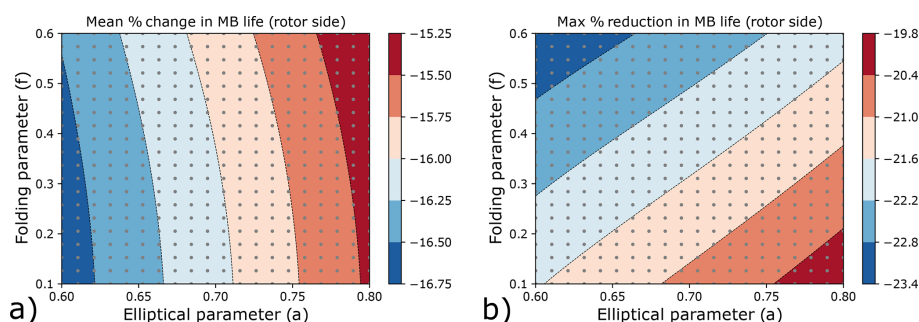


Figure 7. (a) Mean percentage change in rotor-side main bearing rating lives (relative to the unwaked case) across the wind farm, as a function of wind direction rose parameters. (b) Maximum percentage reduction in rotor-side main bearing rating life (relative to the unwaked case) observed within the wind farm, as a function of wind direction rose parameters. The grey dots indicate the parameter combinations considered and therefore the data locations used to determine the resulting contours.

wind roses, as well as those with larger probability mass in directions along which turbines are spaced more closely.

The above results must be interpreted with care and, critically, with careful consideration of the appropriate interpretation of the ISO 281 rating life, in particular regarding its limitations (see Sects. 1 and 2 and Kenworthy et al., 2024). Similarly, one must also appreciate the limitations of the present study, in which simplified (to different extents) representations were utilized for modelling the ambient wind field, wakes, wind turbines, and drivetrains. Since all simulations were undertaken for a low-to-moderate level of turbulence (5 % TI), it is possible that the magnitude of observed wake impacts would be reduced in higher-turbulence conditions where wake recovery is faster. The present study was also undertaken using 10 MW wind turbine models; in future work it would therefore be beneficial to quantify how main bearing wake impacts manifest at different scales. With the above caveats in place, and in the context of the discussions in Sects. 1 and 2 on modelling sufficiency, the following high-level observations and recommendations are made:

1. Wake impingement has been found to reduce ISO 281 main bearing rating lives by 16 % on average and by as much as 20 %–25 % at maximum.
2. Wake effects should be considered a necessary effect for model inclusion to help ensure the sufficiency of main bearing operational load models.
3. If other effects (such as drivetrain and bearing housing elasticity, inertial loading, or those which may be accounted for using ISO 16281) are also incorporated, this could conceivably result in ISO-derived (281 or 16281) rating lives that can account for the reported rates of main bearing failures. This, in turn, would be evidence in support of a view that rolling contact fatigue might in fact still underpin many (or even most) main bearing failures.

4. Future work should therefore look to establish a realistic and detailed high-fidelity modelling chain that both captures and combines the various important rating life reduction effects, which now include wake impingement, while remaining open to the possibility that alternative failure modes (not captured within rating life formulations) may still underlie the majority of main bearing failures. Validations against field data would be an important consideration during such future work.

6 Conclusions

This paper sought to quantify the relative change in main bearing rating lives across a wind farm when including the effects of wake-impinged operation. Beyond evaluating the extent to which wakes may be a contributing factor in premature main bearing failures, this research was also motivated by questions concerning the sufficiency of models used to assess main bearing design and reliability. Background context and modelling techniques were discussed, and a modelling tool chain was established for quantifying the effects of wake impingement on main bearing rating lives across a wind farm populated by 10 MW wind turbines. Turbine loads were computed using the Dynamiks Python package, including application of a dynamic wake meandering model. A two-turbine parametric analysis was undertaken first, showing that partial wake impingement can reduce the axially supporting main bearing rating life associated with a single set of conditions by as much as 50 %–75 %. These parametric results do not account for varying site conditions. Rating life impacts were also found to be asymmetrically related to the side on which impingement occurs, indicating that, for the main bearing, there may be a “better” side for wake impingement to occur. A full wind farm analysis was then undertaken for the TotalControl 32-turbine reference wind farm, including full wind rose simulations across all operational wind speeds. The full wind farm analysis results properly accounted for varying site conditions via a Weibull wind speed distribution

and a range of parametric wind direction rose models. Results showed that, overall, the wind farm main bearing rating lives were reduced by the effects of wake impingement of the order of 16 % on average and as much as 20 %–25 %, both for the locating main bearing. Sensitivities of the maximum rating life reductions to the shape of the site wind rose were also discernible. It was then highlighted that these results must be interpreted with careful consideration of methodological limitations, with an appropriate understanding of the ISO 281 rating life, and with an appreciation for the modelling simplifications which are present in the overall tool chain. Based on the outlined research findings, it was concluded that wind-farm-level wake effects should necessarily be included when undertaking main bearing operational load modelling and rating life assessment. It was also recommended that a realistic and detailed high-fidelity modelling chain be developed in future work (and validated against field data) to combine various important rating life reduction effects alongside wake impingement.

Appendix A

The two-turbine parametric analysis was repeated without a simulated gravity force. These results are shown in Fig. A1 and indicate that the previously observed asymmetries are predominantly due to interactions between aerodynamic and gravitational loads.

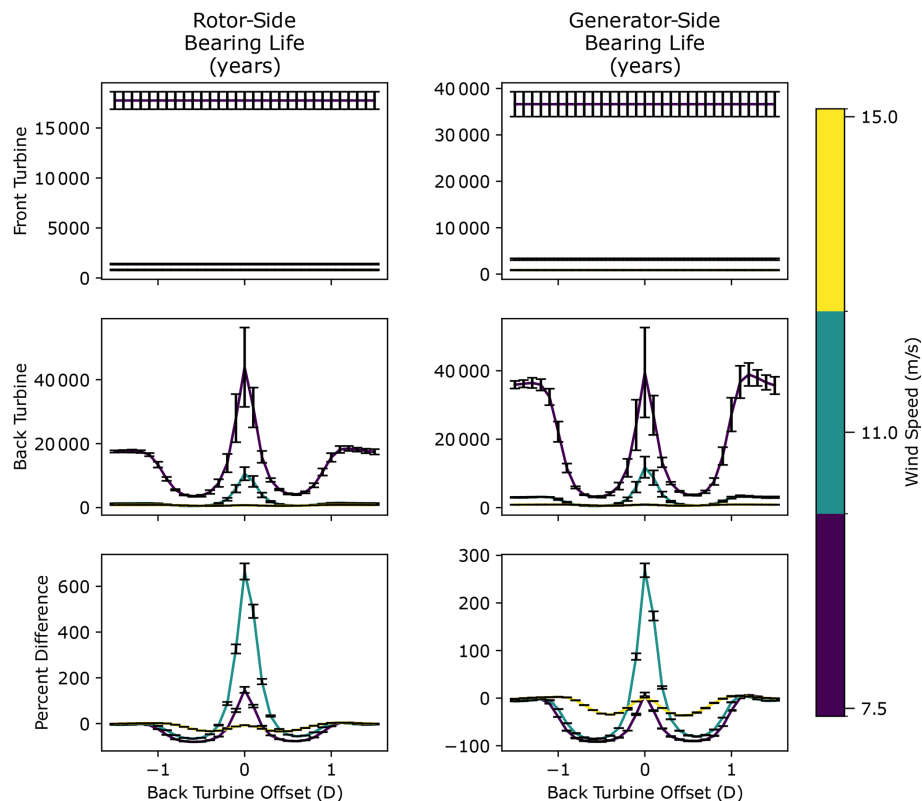


Figure A1. Results of the two-turbine parametric analysis with gravity turned off. Error bars indicate seed-to-seed variation across six turbulent seeds.

Data availability. The scripts used to conduct this analysis are available at <https://doi.org/10.5281/zenodo.15148660> (Binder Nilsen et al., 2025).

Author contributions. JQ, EH, and YG conceived the study. JQ, EH, MBN, RSL, and JL implemented the computational framework. EH developed the bearing life analysis. All authors contributed to the interpretation of results and writing of the paper.

Competing interests. At least one of the (co-)authors is a member of the editorial board of *Wind Energy Science*. The peer-review process was guided by an independent editor, and the authors also have no other competing interests to declare.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. The authors bear the ultimate responsibility for providing appropriate place names. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government.

Acknowledgements. Edward Hart is funded by the EPSRC Innovation Launchpad Network+ Researcher in Residence Fellowship

(EP/W037009/1), in collaboration with the Offshore Renewable Energy Catapult. This research has been supported by the SUDOCO project, which is funded through the European Union's Horizon Europe programme under grant agreement no. 101122256. Numerical simulations were run on the Technical University of Denmark's Sophia supercomputer (Technical University of Denmark, 2019). This work was also authored in part by the National Laboratory of the Rockies operated by the Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy (DOE) under contract no. DEAC36-08GO28308. Funding was provided by the U.S. Department of Energy Office of Energy Efficiency and Renewable Energy Wind Energy Technologies Office.

Financial support. This research has been supported by the Engineering and Physical Sciences Research Council (grant no. EP/W037009/1); the Horizon Europe Climate, Energy and Mobility (grant no. 101122256); and the U.S. Department of Energy (grant no. DEAC36-08GO28308). This research has been supported by the SUDOCO project, which is funded through the European Union's Horizon Europe Programme (grant no. 101122256).

Review statement. This paper was edited by Amir R. Nejad and reviewed by two anonymous referees.

References

- Andersen, S., Madariaga, A., Merz, K., Meyers, J., Munters, W., and Rodriguez, C.: TotalControl Reference Wind Power Plant – D1.03 – Horizon2020 project 727680, <https://www.totalcontrolproject.eu/-/media/Sites/TotalControl/Publications/Public-deliverables/TotalControl-D1-03-Reference-Wind-Farm.ashx> (last access: 30 January 2026), 2018.
- Bak, C., Zahle, F., Bitsche, R., Kim, T., Yde, A., Henriksen, L. C., Hansen, M. H., Blasques, J. P. A. A., Gaunaa, M., and Natarajan, A.: Description of the DTU 10 MW Reference Wind Turbine, DTU Wind Energy Report-I-0092, <https://orbit.dtu.dk/en/publications/the-dtu-10-mw-reference-wind-turbine/> (last access: 30 January 2026), 2013a.
- Bak, C., Zahle, F., Bitsche, R., Kim, T., Yde, A., Henriksen, L. C., Natarajan, A., and Hansen, M.: Description of the DTU 10 MW reference wind turbine, DTU Wind Energy Report-I-0092, 5, 905, https://windlogisticsgroup.com/onewebmedia/DTU_Wind_Energy_Report-I-0092.pdf (last access: 30 January 2026), 2013b.
- Binder Nilsen, M., Quick, J., and Hart, E.: Scripts to Reproduce Bearing Wake Impacts Study, Zenodo [code], <https://doi.org/10.5281/zenodo.15148660>, 2025.
- de Mello, E., Hart, E., Guo, Y., Keller, J., Dwyer-Joyce, R., and Boateng, A.: Dynamic modelling of slip in a wind turbine spherical roller main bearing, *Forschung im Ingenieurwesen*, 87, 297–307, 2023.
- Dong, G., Li, Z., Qin, J., and Yang, X.: How far the wake of a wind farm can persist for?, *Theoretical and Applied Mechanics Letters*, 12, 100314, <https://doi.org/10.1016/j.taml.2021.100314>, 2022.
- EPRI: Wind turbine main bearing reliability analysis, operations, and maintenance considerations, Technical report 3002029874, <https://restservice.epri.com/publicdownload/000000003002029874/0/Product> (last access: 30 January 2026), 2024.
- Gryning, S.-E., Floors, R., Peña, A., Batchvarova, E., and Brümmner, B.: Weibull wind-speed distribution parameters derived from a combination of wind-lidar and tall-mast measurements over land, coastal and marine sites, *Boundary-Layer Meteorology*, 159, 329–348, 2016.
- Guo, Y., Thomson, A., Bergua, R., Bankeström, O., Erskine, J., and Keller, J.: Acoustic emission measurement of a wind turbine main bearing, Tech. rep., National Renewable Energy Lab. (NREL), Golden, CO, United States, <https://doi.org/10.2172/1893358>, 2022.
- Hansen, M. H. and Henriksen, L. C.: Basic DTU wind energy controller, DTU Wind Energy E No. 0028, ISBN 978-87-92896-27-8, 2013.
- Hart, E.: Developing a systematic approach to the analysis of time-varying main bearing loads for wind turbines, *Wind Energy*, 23, 2150–2165, 2020.
- Hart, E.: Brief communication: An elliptical parameterisation of the wind direction rose, *Wind Energ. Sci.*, 10, 1821–1827, <https://doi.org/10.5194/wes-10-1821-2025>, 2025.
- Hart, E., Stock, A., Elderfield, G., Elliott, R., Brasseur, J., Keller, J., Guo, Y., and Song, W.: Impacts of wind field characteristics and non-steady deterministic wind events on time-varying main-bearing loads, *Wind Energ. Sci.*, 7, 1209–1226, <https://doi.org/10.5194/wes-7-1209-2022>, 2022.
- Hart, E., Raby, K., Keller, J., Sheng, S., Long, H., Carroll, J., Brasseur, J., and Tough, F.: Main bearing replacement and damage-a field data study on 15 gigawatts of wind energy capacity, <https://doi.org/10.2172/1992019>, 2023.
- Ishihara, T., Wang, S., and Kikuchi, Y.: Fatigue prediction of wind turbine main bearing based on field measurement and three-dimensional elastic drivetrain model, *Engineering Failure Analysis*, 167, 108985, <https://doi.org/10.1016/j.engfailanal.2024.108985>, 2025.
- ISO 281:2007(E): ISO 281:2007(E). Rolling bearings – Dynamic load ratings and rating life, Standard, International Organization for Standardization, Geneva, CH, urn:iso:std:iso:281:ed-1:en, 2007.
- Jiang, Z., Huang, X., Liu, H., Zheng, Z., Li, S., and Du, S.: Dynamic reliability analysis of main shaft bearings in wind turbines, *International Journal of Mechanical Sciences*, 235, 107721, <https://doi.org/10.1016/j.ijmecsci.2022.107721>, 2022a.
- Jiang, Z., Huang, X., Zhu, H., Jiang, R., and Du, S.: A new method for contact characteristic analysis of the tapered roller bearing in wind turbine main shaft, *Engineering Failure Analysis*, 141, 106729, <https://doi.org/10.1016/j.engfailanal.2022.106729>, 2022b.
- Kenworthy, J., Hart, E., Stirling, J., Stock, A., Keller, J., Guo, Y., Brasseur, J., and Evans, R.: Wind turbine main bearing rating lives as determined by IEC 61400-1 and ISO 281: A critical review and exploratory case study, *Wind Energy*, 27, 179–197, 2024.
- Kock, S., Jacobs, G., and Bosse, D.: Determination of wind turbine main bearing load distribution, *Journal of Physics*:

- Conference Series, 1222, 012030, <https://doi.org/10.1088/1742-6596/1222/1/012030>, 2019.
- Krathe, V. L., Jonkman, J., Gebel, J., Rivera-Arreba, I., Nejad, A., and Bachynski-Polić, E. E.: Investigation of Main Bearing Fatigue Estimate Sensitivity to Synthetic Turbulence Models Using a Novel Drivetrain Model Implemented in OpenFAST Wind Energy, 28, e70005, <https://doi.org/10.1002/we.70005>, 2024.
- Krathe, V. L., Thedin, R., Jonkman, J. M., Nejad, A. R., and Bachynski-Polić, E. E.: Main bearing response in a waked 15 MW floating wind turbine in below-rated conditions, *Forschung im Ingenieurwesen*, 89, 37, <https://doi.org/10.1007/s10010-025-00808-z>, 2025.
- Larsen, G. C., Madsen, H. A., Thomsen, K., and Larsen, T. J.: Wake meandering: A pragmatic approach, *Wind Energy*, 11, 377–395, <https://doi.org/10.1002/we.267>, 2008.
- Larsen, T. J. and Hansen, A. M.: How 2 HAWC2, the user's manual, Riso National Laboratory, 1597, ISBN 978-87-550-3583-6, 2007.
- Liew, J., Göçmen, T., Lio, A. W. H., and Larsen, G. Chr.: Extending the dynamic wake meandering model in HAWC2Farm: a comparison with field measurements at the Lillgrund wind farm, *Wind Energ. Sci.*, 8, 1387–1402, <https://doi.org/10.5194/wes-8-1387-2023>, 2023.
- Lio, W. H., Larsen, G. C., and Thorsen, G. R.: Dynamic wake tracking using a cost-effective LiDAR and Kalman filtering: Design, simulation and full-scale validation, *Renewable Energy*, 172, 1073–1086, 2021.
- Madsen, H. A., Larsen, T. J., Pirrung, G. R., Li, A., and Zahle, F.: Implementation of the blade element momentum model on a polar grid and its aeroelastic load impact, *Wind Energ. Sci.*, 5, 1–27, <https://doi.org/10.5194/wes-5-1-2020>, 2020.
- Mann, J.: Wind field simulation, *Probabilistic Engineering Mechanics*, 13, 269–282, 1998.
- Manwell, J. F., McGowan, J. G., and Rogers, A. L.: Wind energy explained: theory, design and application, John Wiley & Sons, <https://doi.org/10.1002/9781119994367>, 2010.
- Marek, P., Grey, T., and Hay, A.: A study of the variation in offshore turbulence intensity around the British Isles, Poster PO.293, Wind Europe, Hamburg, <https://windeurope.org/summit2016/conference/allposters/PO293.pdf> (last access: 2 February 2026), 2016.
- Moghadam, F. K., Chabaud, V., Gao, Z., and Chapaloglou, S.: Power train degradation modelling for multi-objective active power control of wind farms, *Forschung im Ingenieurwesen*, 87, 13–30, <https://doi.org/10.1007/s10010-023-00617-2>, 2023.
- Quick, J., Mouradi, R.-S., Devesse, K., Mathieu, A., Van Der Laan, M. P., Leon, J. P. M., and Schulte, J.: Verification and Validation of Wind Farm Flow Models, *Journal of Physics: Conference Series*, 2767, 092074, <https://doi.org/10.1088/1742-6596/2767/9/092074>, 2024.
- Riva, R., Liew, J., Friis-Møller, M., Dimitrov, N., Barlas, E., Réthoré, P.-E., and Beržonskis, A.: Wind farm layout optimization with load constraints using surrogate modelling, *Journal of Physics: Conference Series*, 1618, 042035, <https://doi.org/10.1088/1742-6596/1618/4/042035>, 2020.
- Shaler, K., Jonkman, J., Barter, G. E., Kreeft, J. J., and Muller, J. P.: Loads assessment of a fixed-bottom offshore wind farm with wake steering, *Wind Energy*, 25, 1530–1554, 2022.
- Simley, E., Fleming, P., and King, J.: Design and analysis of a wake steering controller with wind direction variability, *Wind Energ. Sci.*, 5, 451–468, <https://doi.org/10.5194/wes-5-451-2020>, 2020a.
- Simley, E., Fleming, P., and King, J.: Field validation of wake steering control with wind direction variability, *Journal of Physics: Conference Series*, 1452, 012012, <https://doi.org/10.1088/1742-6596/1452/1/012012>, 2020b.
- Stanley, A. P., King, J., and Ning, A.: Wind farm layout optimization with loads considerations, *Journal of Physics: Conference Series*, 1452, 012072, <https://doi.org/10.1088/1742-6596/1452/1/012072>, 2020.
- Stanley, A. P. J., King, J., Bay, C., and Ning, A.: A model to calculate fatigue damage caused by partial waking during wind farm optimization, *Wind Energ. Sci.*, 7, 433–454, <https://doi.org/10.5194/wes-7-433-2022>, 2022.
- Stanley, A. P. J., Bay, C. J., and Fleming, P.: Enabling control co-design of the next generation of wind power plants, *Wind Energ. Sci.*, 8, 1341–1350, <https://doi.org/10.5194/wes-8-1341-2023>, 2023.
- Technical University of Denmark: Sophia HPC Cluster, Technical report, Research Computing at DTU, <https://doi.org/10.57940/FAFC-6M8110.57940/FAFC-6M81>, 2019.
- Technical University of Denmark: DYNAMIKS: Dynamic Wind System Simulator, version 0.0.4.post1.dev0+g05a10bd.d20250110, <https://gitlab.windenergy.dtu.dk/DYNAMIKS/dynamiks> (last access: 2 February 2026), 2025.
- van Binsbergen, D. W., Wang, S., and Nejad, A. R.: Effects of induction and wake steering control on power and drivetrain responses for 10 MW floating wind turbines in a wind farm, *Journal of Physics: Conference Series*, 1618, 022044, <https://doi.org/10.1088/1742-6596/1618/2/022044>, 2020.
- Veers, P., Bottasso, C. L., Manuel, L., Naughton, J., Pao, L., Paquette, J., Robertson, A., Robinson, M., Ananthan, S., Barlas, T., Bianchini, A., Bredmose, H., Horcas, S. G., Keller, J., Madsen, H. A., Manwell, J., Moriarty, P., Nolet, S., and Rinker, J.: Grand challenges in the design, manufacture, and operation of future wind turbine systems, *Wind Energ. Sci.*, 8, 1071–1131, <https://doi.org/10.5194/wes-8-1071-2023>, 2023.
- Zheng, J., Ji, J., Yin, S., and Tong, V.-C.: Fatigue life analysis of double-row tapered roller bearing in a modern wind turbine under oscillating external load and speed, *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*, 234, 3116–3130, 2020.