




Case	Load	Unit	LF1	LF2	LF3	LF4	Tip
Difference absolute	40%	mm	-0.1	0.4	0.5	0.1	0.5
	60%	mm	-0.4	0.0	-0.1	-1.1	-0.7
	80%	mm	-0.7	-0.1	-0.4	-1.5	-1.4
	100%	mm	-0.9	-0.2	-0.5	-1.9	-2.3
Difference relative	40%	%	-1.5	2.5	1.3	0.1	0.7
	60%	%	-2.8	0.2	-0.2	-1.2	-0.7
	80%	%	-3.5	-0.2	-0.5	-1.2	-1.0
	100%	%	-4.0	-0.5	-0.5	-1.3	-1.2

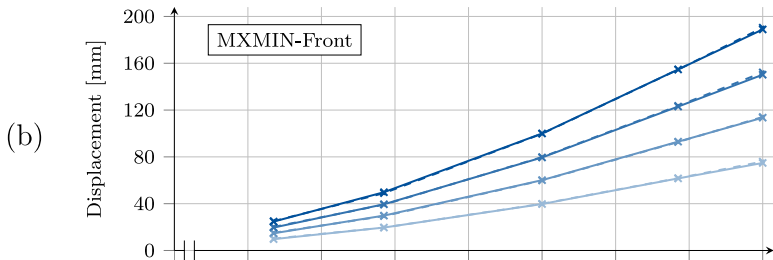

Case	Load	Unit	LF1	LF2	LF3	LF4	Tip
Difference absolute	40%	mm	0.4	0.0	0.2	0.2	1.2
	60%	mm	0.4	-0.4	-0.2	-0.3	0.6
	80%	mm	0.5	-0.3	0.3	0.6	2.0
	100%	mm	0.4	-0.8	-0.2	-0.1	1.5
Difference relative	40%	%	3.8	-0.1	0.5	0.3	1.7
	60%	%	2.7	-1.4	-0.4	-0.3	0.5
	80%	%	2.6	-0.8	0.4	0.5	1.3
	100%	%	1.8	-1.6	-0.2	-0.1	0.8

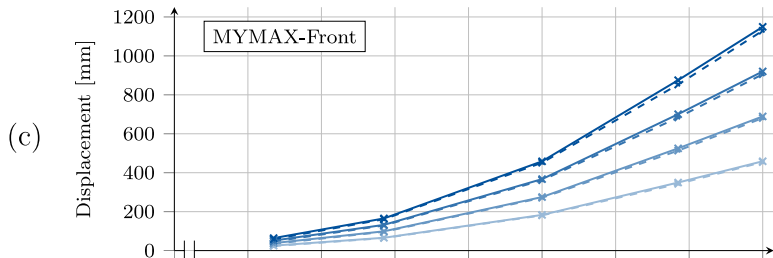

Case	Load	Unit	LF1	LF2	LF3	LF4	Tip
Difference absolute	40%	mm	-2.2	-1.4	-2.4	-6.9	-4.3
	60%	mm	-3.5	-2.3	-3.7	-11.7	-8.4
	80%	mm	-4.5	-3.2	-5.7	-16.9	-14.5
	100%	mm	-5.6	-4.0	-7.3	-22.4	-19.8
Difference relative	40%	%	-8.8	-2.2	-1.3	-2.0	-0.9
	60%	%	-9.0	-2.3	-1.4	-2.2	-1.2
	80%	%	-8.8	-2.4	-1.6	-2.4	-1.6
	100%	%	-8.7	-2.4	-1.6	-2.6	-1.7

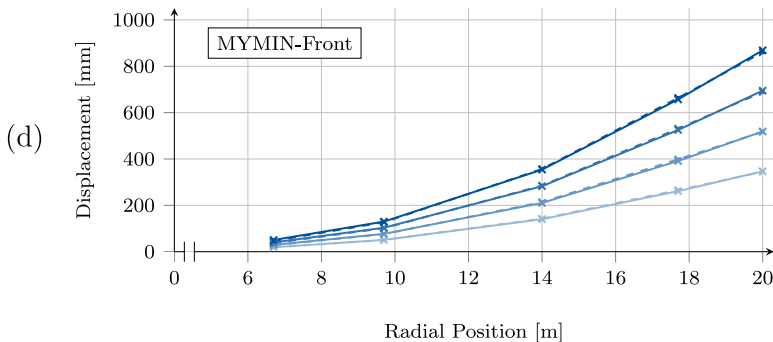

Case	Load	Unit	LF1	LF2	LF3	LF4	Tip
Difference absolute	40%	mm	-0.9	-0.3	2.3	4.4	-1.8
	60%	mm	-1.6	-0.8	3.5	7.1	-1.6
	80%	mm	-2.7	-1.9	2.6	6.0	-5.8
	100%	mm	-3.7	-2.8	2.6	6.3	-8.3
Difference relative	40%	%	-4.6	-0.6	1.6	1.7	-0.5
	60%	%	-5.5	-1.0	1.6	1.8	-0.3
	80%	%	-6.8	-1.8	0.9	1.1	-0.8
	100%	%	-7.3	-2.2	0.7	1.0	-1.0

—x— Exp: 40% L. —+— Sim: 40% L. —x— Exp: 60% L. —+— Sim: 60% L. —x— Exp: 80% L. —+— Sim: 80% L. —x— Exp: 100% L. —+— Sim: 100% L.