

Response to Editor

Dear Luciano Castillo,

the attached manuscript was revised considering the author's answers to the two referees as well as your request for further minor corrections. The mayor changes to the previous document are marked in italics.

Kind Regards,

Lukas Vollmer, Gerald Steinfeld and Martin Kühn

Transient LES of an offshore wind turbine

Lukas Vollmer^{1,2}, Gerald Steinfeld¹, and Martin Kühn¹

¹ForWind, Carl von Ossietzky Universität Oldenburg, Küpkersweg 70, 26129 Oldenburg, Germany.

²Fraunhofer IWES, Küpkersweg 70, 26129 Oldenburg, Germany.

Correspondence to: Lukas Vollmer (lukas.vollmer@uni-oldenburg.de)

Abstract. The estimation of the cost of energy of offshore wind farms has a high uncertainty, which is partly due to the lacking accuracy of information on wind conditions and wake losses inside of the farm. Wake models that aim on reducing the uncertainty by modeling the wake interaction of turbines for various wind conditions need to be validated with measurement data before they can be considered as a reliable estimator. *In this paper a methodology is evaluated that enables a direct comparison of modeled with measured flow data. To create the simulation data, a model chain of mesoscale model, Large-Eddy-Simulation model and wind turbine model is used. Different setups are compared to assess the capability of the method to reproduce the wind conditions at the hub height of current offshore wind turbines.* The two-days long simulation of the ambient wind conditions and the wake simulation generally show good agreements with data from a met mast and lidar measurements, respectively. *Wind fluctuations due to boundary layer turbulence and synoptic scale motions are resolved with a lower representation of mesoscale fluctuations.* Advanced metrics to describe the wake shape and development are derived from simulations and measurements but a quantitative comparison proves to be difficult due to the scarcity and the low sampling rate of the available measurement data. Due to the implementation of changing synoptic wind conditions in the LES, the methodology could be also beneficial for case studies of wind farm performance or wind farm control.

1 Introduction

Offshore wind energy still remains an expensive alternative to onshore wind energy which has been established as one of the cheapest options to generate electricity. One of the reasons for the comparatively high costs of offshore wind energy is the scarcity of long-term atmospheric measurements at existing or planned wind farms. The resource assessment at these locations is difficult and prone to large errors (Walker et al., 2016). In addition, missing measurements during operation prohibit the thorough analysis of turbine malfunctions and unexpected underperformance.

Only few offshore wind farms deploy permanent met masts that allow for studying the influence of atmospheric conditions on wind farm performance. The available measurements indicate that due to the generally lower level of turbulent kinetic energy offshore, compared to onshore, the wakes of the wind turbines are frequently more persistent, which leads to higher wake losses at downwind turbines even over larger distances. An even lower turbulence level caused by stable atmospheric stratification leads to a further increase of wake losses (Barthelmie and Jensen, 2010; Hansen et al., 2012; Dörenkämper et al., 2014).

Several numerical models have been developed with the purpose to calculate the optimal layout of offshore wind farms

under consideration of the wake losses. Simplified engineering models allow a fast calculation of multiple wind scenarios and an optimization of wind farm layouts (Sanderse et al., 2011). These steady state models however have a low representation of the flow physics and rely largely on the parametrization of turbulence and on a simplified interaction of turbine and flow.

5 A high fidelity solution for wind farm simulations are Large-Eddy-Simulations (LES). Coupled with wind turbine models, LES provide a detailed solution of the flow inside of a wind farm with a high representation of the relevant physics. Due to the high computational costs, LES of offshore wind farms have yet been restricted to simulations of idealized atmospheric conditions or to case studies of specific situations, e.g. Churchfield et al. (2012); Dörenkämper et al. (2015); Lu and Porté-Agel (2011).

10 An issue of all wind farm models is the need for validation with measured data to evaluate the capability of the model to reproduce the actual wind conditions and performance of the wind farm under these conditions (Moriarty et al., 2014). Besides performance measurements from the data acquisition system of wind turbines, that are often kept confidential, flow measurements using the light detection and ranging methodology (lidar) have become a widespread tool for scientific research. To optimize this technique for model validation, the lidar measurement campaigns have to be designed and postprocessed to allow for a meaningful comparison with simulations. One aspect of the measurement design is the measurement of free flow
15 conditions which can be used as meteorological boundary conditions for the simulations.

Especially offshore the measurement or derivation of boundary conditions to set up simulations is challenging. For example, onshore LES are often run with boundary conditions derived from near-surface measurements (e.g. heat flux measurements) and are compared to wind profiles derived from lidar devices (Mirocha et al., 2015; Machefaux et al., 2015) or met masts. This procedure is rarely possible at offshore sites because usually near-surface measurements and wind speed profiles are not
20 available. Furthermore, for many models additional input is required, e.g. the height of the atmospheric boundary layer or a largescale pressure gradient to drive the flow. These properties have to be estimated or set to default values.

In this paper we investigate a methodology to use profiles and boundary conditions derived from a mesoscale simulation for a continuous LES of an offshore wind turbine wake over several hours. *The purpose is to evaluate if this model chain can be used to conduct wake simulations in a wind field with the same turbulent properties and the same profile shape as measured.*
25 *Measurements from an offshore met mast are used for the evaluation. The model chain is further evaluated by a comparison of the flow distortion by a wind turbine model with the wind field extracted from lidar measurements (van Dooren et al., 2016) of a wake during the simulated time period.*

Recently, long term LES of multiple days up to one year have been run with this approach to study the changes of meteorological conditions at a measurement site (Neggers et al., 2012; Schalkwijk et al., 2015; Heinze et al., 2017). In the context
30 of wind energy the approach was yet only used in Vollmer et al. (2015), where the measurement and simulation setup of this paper was briefly introduced. Here we extend the study in Vollmer et al. (2015) by analyzing a much larger time interval of measurements and simulations, by a sensitivity study of the method and by a quantitative comparison of wake characteristics.

2 Data and methodology

2.1 Measurement data

The case study that is analyzed in this paper is based on measurements on 20 February 2014 at the German offshore wind farm *alpha ventus*. Two independent data sets were used for comparison with the model results. The simulated ambient wind conditions without turbine were compared to measurements from the met mast FINO1 located at N 54° 01', E 6° 35'. Time series from cup anemometers, wind vanes and temperature probes at different heights as well as sea surface temperature from a buoy were provided by the Bundesamt für Seeschifffahrt und Hydrographie (BSH). These time series provide mean values obtained from averaging over ten minutes. For the wind speed 1 Hz measurements were made available by DEWI (UL International GmbH). The wind directions of the wind vanes at all heights were corrected using a direction-dependent bias (DEWI, personal communication). During the analyzed time period the flow measurement devices did neither operate in the mast shadow nor in the wake of a wind turbine, thus should provide accurate information of the undisturbed marine atmospheric boundary layer.

The lidar measurements, that were used for comparison with the simulated wakes, are part of a measurement campaign that took place from August 2013 until March 2014. During the analyzed day two long range lidar devices (Windcube WLS200S) executed single elevation plan position indicator scans in the wake of turbine AV10 with one lidar positioned on FINO1 and the other one on the converter station of the wind farm (Fig. 1).

The line of sight velocities of the lidars were combined and averaged to get a ten-minute mean horizontal vector wind field at hub height (van Dooren et al., 2016). Measurements were filtered at both ends of the range of the Carrier-to-Noise level to remove low backscatter data as well as reflections from objects. Time periods in which a yaw activity of more than 3° was observed were removed from the database. Averaging was done on volumes with a diameter of 20 m centered at hub height. Because both lidars scan over a relatively small range of azimuth angles (Fig. 1), seven (WLS2) and five (WLS3) sweeps over the scan area contribute to the calculation of the mean velocities. The view of the lidar devices to certain areas of the scan is blocked by other wind turbines, thus a varying total of 100 - 350 individual line-of-sight wind speed values contribute to the average at each grid point of the final wind field. Grid points with a lower number of values were removed. The coordinate system, in which the flow field is presented, is oriented north by scanning the distance to the turbines of the wind farm with known geographical coordinate positions. More information on the calculation of the vector field from the line of sight velocities can be found in van Dooren et al. (2016).

2.2 Model equations

Revision 1928 of the PARallelized Large-eddy simulation Model (PALM) (Maronga et al., 2015) was used for this study with the same numerical schemes as in Vollmer et al. (2016), using a Deardorff model for the sub-grid-scale (SGS) fluxes. The extension of the model equations to include time-dependent forcing is based on Heinze et al. (2017) with an extension to

include largescale advection of momentum. The modified equation of motion before applying any approximations is:

$$\begin{aligned}
\frac{\partial u_i}{\partial t} = & \underbrace{-u_j \frac{\partial u_i}{\partial x_j}}_1 - \underbrace{\epsilon_{ijk} f_j u_k}_2 - \underbrace{\frac{1}{\rho} \frac{\partial p}{\partial x_i}}_3 \\
& + \underbrace{\nu_m \left(\frac{\partial^2 u_i}{\partial x_j^2} + \frac{1}{3} \frac{\partial}{\partial x_i} \frac{\partial u_j}{\partial x_j} \right)}_4 - \underbrace{\epsilon_{i3j} f_3 u_{qj}|_{LS}}_5 \\
& + \underbrace{\frac{\partial u_i}{\partial t}|_{LS}}_6 - \underbrace{\frac{\langle u_i \rangle - u_{i,LS}}{\tau}}_7
\end{aligned} \tag{1}$$

- 5 with term 1 representing the momentum advection, term 2 the Coriolis force with the Coriolis parameter f_j , term 3 the pressure gradient and term 4 the friction terms with the kinematic viscosity of momentum ν_m . Terms 5-7 are the external forcing terms. For the external forcing a largescale velocity denoted by $|_{LS}$ is defined. Term 5 defines a largescale pressure gradient by prescribing a horizontal geostrophic wind speed u_g . Term 6 prescribes a largescale sink or source of momentum and term 7 is a time relaxation of the momentum towards a largescale state (Neggers et al., 2012; Heinze et al., 2017).
- 10 The momentum relaxation has no physical justification but is used to prevent a drift of the model from the largescale state. The term depends on the difference between the horizontal average $\langle u_i \rangle$ of each velocity component and the largescale velocity component $u_{i,LS}$, scaled by a relaxation time constant of τ . All largescale properties are horizontally homogeneous to preserve the turbulent structures.

The equation for scalars $s \in (\Theta, q)$ is:

$$\frac{\partial s}{\partial t} = \underbrace{-u_j \frac{\partial s}{\partial x_j}}_1 + \underbrace{\nu_s \frac{\partial^2 s}{\partial x_j^2}}_4 + \underbrace{\frac{\partial s}{\partial t}|_{LS}}_6 - \underbrace{\frac{\langle s \rangle - s_{LS}}{\tau}}_7 + \underbrace{S_s}_8 \tag{2}$$

with terms 1, 4, 6 and 7 equivalent to the corresponding terms in eq. 1, with ν_s being the molecular diffusivity of the scalar. Term 8 is the surface flux of either the specific humidity q or the potential temperature Θ .

- Time-dependency of the external forcing is achieved by prescribing profiles of the time-variant geostrophic wind, source terms of horizontal momentum and of scalar properties, as well as of the largescale state of the relaxation term. The surface fluxes are calculated by making use of the Monin-Obhukov similarity theory, with the values of the surface pressure, temperature and humidity also prescribed by the time-dependent largescale state.

3 Simulation of free stream flow

- In this section we analyze the simulation of the ambient conditions with the largescale forcing derived from the output of a mesoscale simulation. Different parameters are modified to analyze their influence on the results. In Sec. 3.1 we look at the meteorological conditions that were present at the day of the measurements. In Sec. 3.2 we compare profiles from the

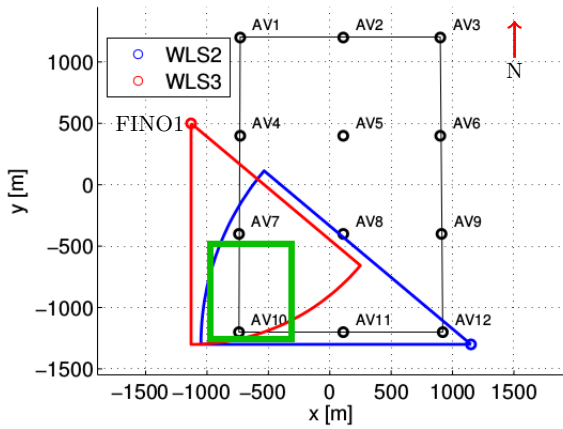


Figure 1. Layout of *alpha ventus* and position of the two lidars that were used for the construction of the wind field. Circular segments denote the scan areas of the lidars. The green box denotes the region of the vector wind field reconstruction.

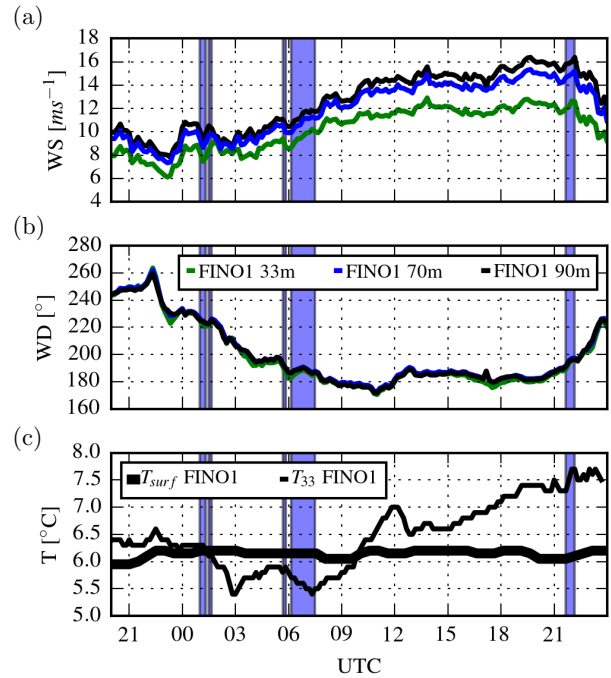


Figure 2. Meteorological conditions on 20 February, 2014, as measured at FINO1. (a,b) Wind speed and wind direction at different heights. (c) Temperature as measured at height and temperature of the sea surface. The periods of the selected lidar measurements are shaded in blue.

mesoscale model with the FINO1 measurements and in Sec. 3.3 we compare the LES model output of different setups with the mesoscale model and the FINO1 measurements.

3.1 Meteorological conditions

The lidar measurements were conducted on 20 February, 2014. After filtering according to the criteria mentioned in Sec. 2.1, 15 ten-minute time periods remained for further analysis. The 15 time periods can be sorted into three periods, with three measurements starting at 01:00 UTC (night period), nine around 06:00 UTC (morning period) and another three starting at 21:40 UTC (evening period) (Fig. 2).

The wind direction at FINO1 is south-west during the night and south during the rest of the day with an increase of the wind speed at hub height of the *alpha ventus* wind turbines (90 m) from about 8 ms^{-1} to about 16 ms^{-1} . The day is a rather warm winter day, with the measured temperature at 35 m ranging from 5.5 to $8 \text{ }^\circ\text{C}$. Compared to onshore, the diurnal cycle of surface temperature is very small at offshore locations because of the large heat capacity of the ocean surface. The observed drop of

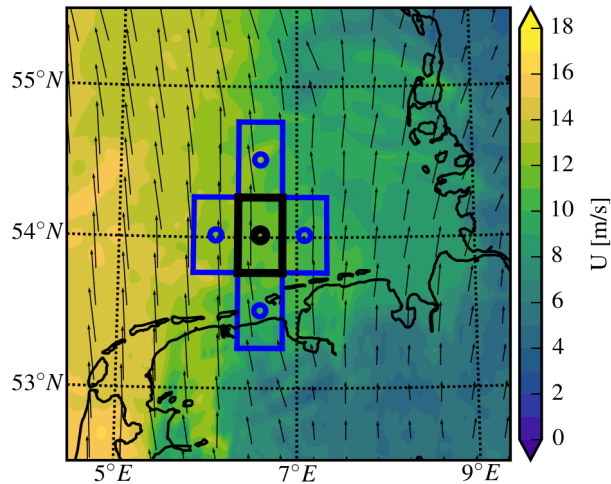


Figure 3. COSMO-DE wind speed and direction at 20 February, 2014, 07:00 UTC on the model level of 73.5 m. The black square marks the averaging domain surrounding FINO1 and the blue squares the neighboring domains that are used for the calculation of the gradients.

air temperature during the morning hours is thus most likely related to the advection of colder air from the land. The German coast is approximately 45 km to the south of *alpha ventus*. The advected cold air leads to thermally slightly unstable conditions between about 2 am and 9 am. During the rest of the day the stratification is slightly stable.

5 3.2 Input data from COSMO-DE

The profiles for the largescale tendencies are calculated from the operational analysis of the COSMO-DE model (Baldauf et al., 2009) of the German Weather Service (DWD). COSMO-DE has a horizontal resolution of 2.8 x 2.8 km and 50 vertical levels in total with 20 vertical levels in the lower 3000 m of the atmospheric boundary layer. The DWD delivers hourly model data.

Following Heinze et al. (2017) three-dimensional and surface data are averaged over a horizontal averaging domain of multiple grid points. The nearest grid cell to the FINO1 coordinates is chosen as the center of the averaging domain. Because of the necessary spin-up time of the LES for the development of turbulence, 24 hours of simulation time (February 19, whole day) were added. The profile of the geostrophic wind is calculated using the pressure gradient between neighboring averaging domains (Fig. 3). The component of the geostrophic wind along the west-east axis is defined by:

$$u_{g1}^{I,J}|_{LS} = -\frac{gf}{\rho^{I,J}} \frac{P^{I,J+1} - P^{I,J-1}}{2dX_2} \quad (3)$$

with $P^{I,J}$ and $\rho^{I,J}$ the domain-averaged quantities of density and pressure in domain (I,J), f the Coriolis parameter and dX_i the length of the averaging domain. The north-south wind component $u_{g2}^{I,J}$ is defined accordingly. The source terms $\frac{\partial u_i}{\partial t}|_{LS}$,

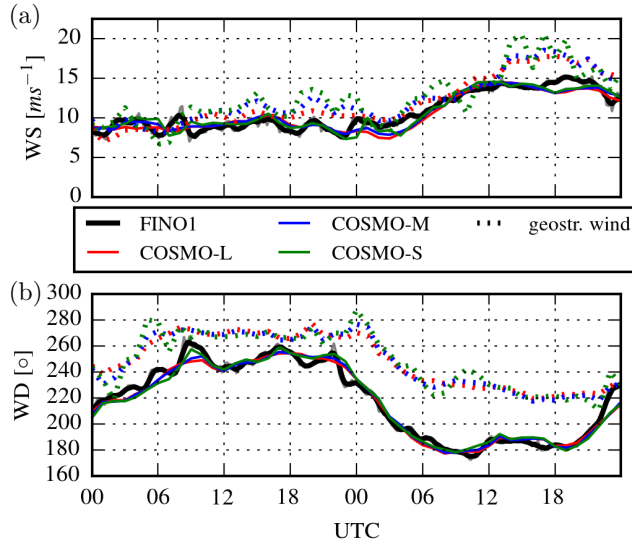


Figure 4. Time series for Feb. 19 and 20, 2014 of (a) Wind speed at 70 m. (b) Wind direction at 70 m. FINO1 1-hour running average (black). COSMO-DE averaging domain sizes of $(1/8)^2$ degrees (COSMO-S), $(1/2)^2$ degrees (COSMO-M), 2^2 degrees (COSMO-L). Dotted lines represent the calculated geostrophic wind speed and direction at the same height.

$\frac{\partial \Theta}{\partial t}|_{LS}$ and $\frac{\partial q}{\partial t}|_{LS}$ result from the advection into the averaging domain. The source term of the potential temperature Θ for example is defined by:

$$\begin{aligned} \frac{\partial \Theta}{\partial t}|_{LS} = & U_1^{I,J} (\Theta^{I+1,J} - \Theta^{I-1,J}) \\ & + U_2^{I,J} (\Theta^{I,J+1} - \Theta^{I,J-1}) \end{aligned} \quad (4)$$

- 5 We analyzed the influence of the size of the averaging domain on the profiles required by the LES model by comparing three different quadratic domain sizes with grid lengths of $1/8$ degree, $1/2$ degree and 2 degree. Fig. 4 compares the measured 70 m wind speed and direction from FINO1 with the horizontal and the geostrophic wind speed and direction from the different averaging domains.

The comparison of the different averaging domains (Fig. 4) shows that the smaller domains contain more fluctuation, but not necessarily at the same time as the measurements. In addition the geostrophic wind that is calculated from the pressure gradients in the model becomes noisier with decreasing averaging domain size (Fig. 4). Because the geostrophic wind is directly used in the equations of motion we chose to use the middle sized domain. It generally contains less noise than the small domain and in contrast to the large domain, it covers just grid points over the sea, thus representing a horizontally rather homogeneous area.

Figure 5 shows Hovmöller diagrams of most of the large-scale forcing data we used for the LES model. As assumed from

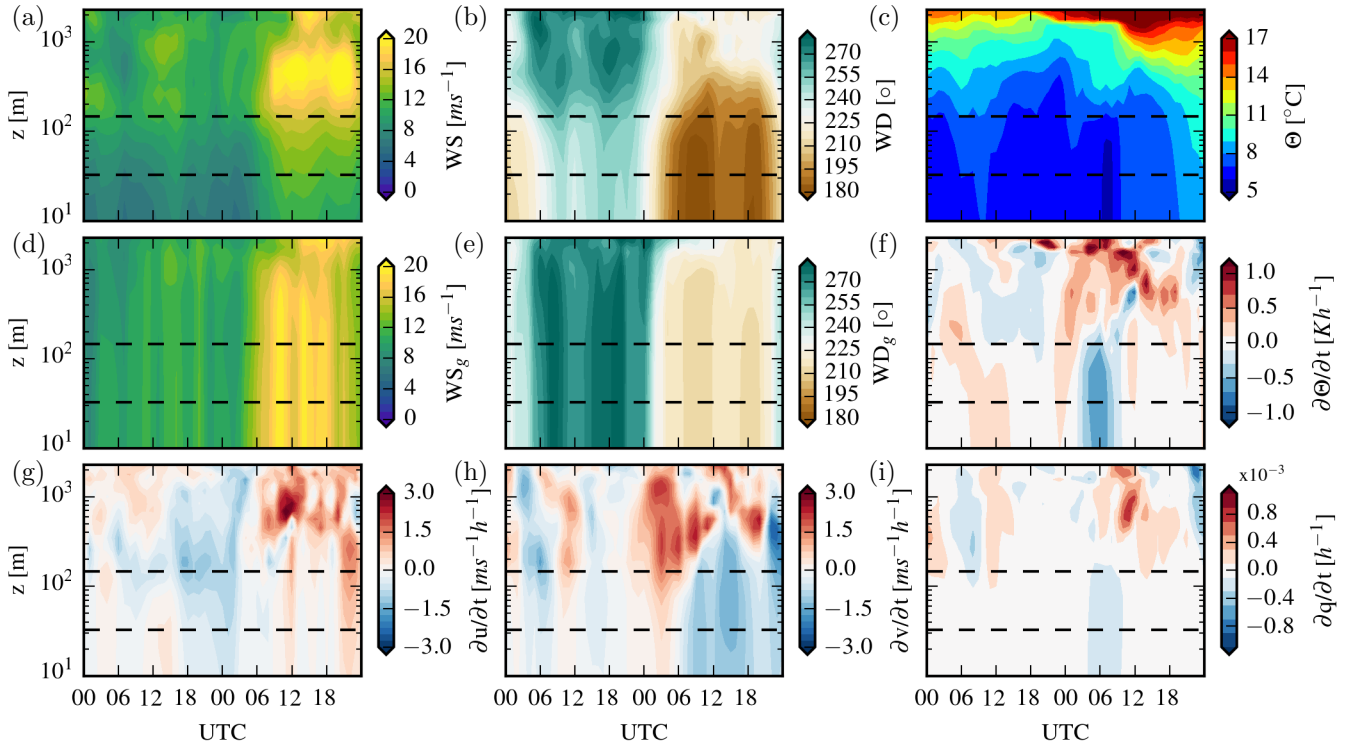


Figure 5. Time development of the vertical input profiles for the LES run. (a) Wind speed, (b) wind direction, (c) potential temperature, (d) geostrophic wind speed, (e) geostrophic wind direction, (f) advection of potential temperature, (g) advection of zonal wind speed, (h) advection of meridional wind speed, and (i) advection of humidity. Dashed horizontal lines represent the lower and upper rotor tip height.

the measurements, an advection of colder temperature during the morning hours of the second day is visible in the mesoscale simulation (Fig. 5(f)). The change of wind direction with height is mostly related to the Ekman turning, which can be seen in the differences between the geostrophic and the effective wind direction (Fig. 5 (b) and (e), respectively).

3.3 Comparison with met mast data

- 5 To transfer the input profiles from the COSMO-DE time steps and height levels to the LES model, they were linearly interpolated on the vertical LES grid and on the time steps of the simulation. The LES were initialized with the set of large-scale profiles at 19 February, 00:00 UTC and nudging was applied only after six hours to enable a free development of turbulence in the first simulation hours.

All simulations had a domain size of 3200 m x 3200 m x 1700 m and were run with cyclic boundary conditions. The roughness length of momentum was taken from the COSMO-DE model ($z_0 = 1.23 \cdot 10^{-4}$ m), the roughness lengths of temperature and humidity were $z_0^{\Theta, q} = 0.1 z_0$.

Five different simulations with a rather coarse grid were run with different configurations (Table 1). One of the setups was

Table 1. Comparison of the different simulation setups and the RMSE of the difference between the time series of simulated wind direction and wind speed of simulations P_x , and the time series of the COSMO-DE input (C), the FINO1 measurements (F1) and the reference simulation (P_{ref}), respectively.

Sim	Setup		RMSE					
	τ [h]	$\Delta x, z$ [m]	WD_C [°]	WD_{F1} [°]	$WD_{P_{ref}}$ [°]	WS_C [ms ⁻¹]	WS_{FINO1} [ms ⁻¹]	$WS_{P_{ref}}$ [ms ⁻¹]
P_{ref}	4	20/10	5.8	6.6	-	0.79	1.08	-
P_{τ_1}	1.5	20/10	4.0	5.1	2.5	0.73	0.99	0.16
P_{τ_2}	48	20/10	7.5	8.3	2.8	0.70	1.10	0.36
$P_{\partial_t u=0}$	4	20/10	8.5	9.4	6.2	1.53	1.76	1.02
$P_{\partial_t \theta=0}$	4	20/10	6.9	7.6	1.8	0.77	1.08	0.14
P_{hi}	4	5/5	5.7	6.5	1.4	0.46	0.91	0.42

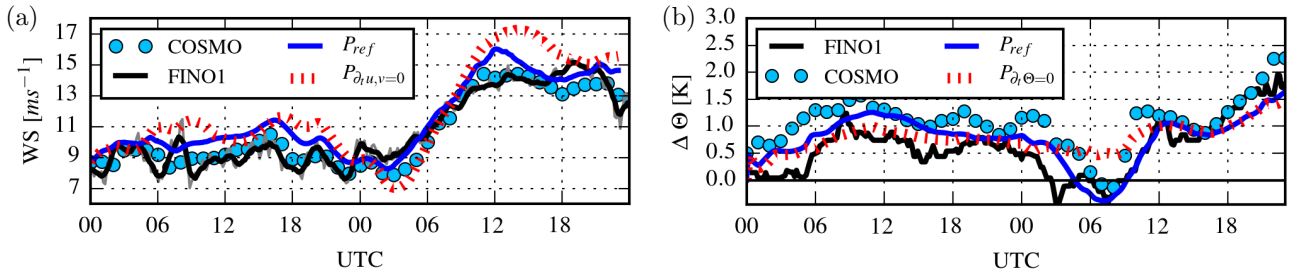


Figure 6. (a) Wind speed at 70 m with and without momentum advection. (b) Potential temperature difference between 35 m and the surface with and without temperature advection.

then run with a finer resolution as basis for the turbine simulations. The chosen setup is regarded as the reference simulation P_{ref} and the simulation with higher spatial resolution is called P_{hi} . Two alternative relaxation time constants were set in P_{τ_1} and P_{τ_2} and advection of either momentum or potential temperature was switched off in $P_{\partial_t u=0}$ and $P_{\partial_t \theta=0}$.

For evaluation we selected the ten-minute mean wind speed and direction at 70 m, as they are close to the hub height and also available from the COSMO-DE model. For better comparison the raw ten-minute values from the anemometers and wind vanes were smoothed by means of a one-hour running mean. The root mean square error (RMSE) between each simulation time series and the references is compared in Tab. 1.

The evaluation shows that switching off momentum advection appears to have the largest influence on the wind speed and wind direction deviation from the input data. Figure 6(a) reveals that the impact of momentum advection is largest between 12 and 18 UTC of the second day, after the increase of the mean wind speed during the morning hours. In this period the mean wind speed remains too high when momentum advection is turned off. As illustrated in Neggers et al. (2012), the flow in the

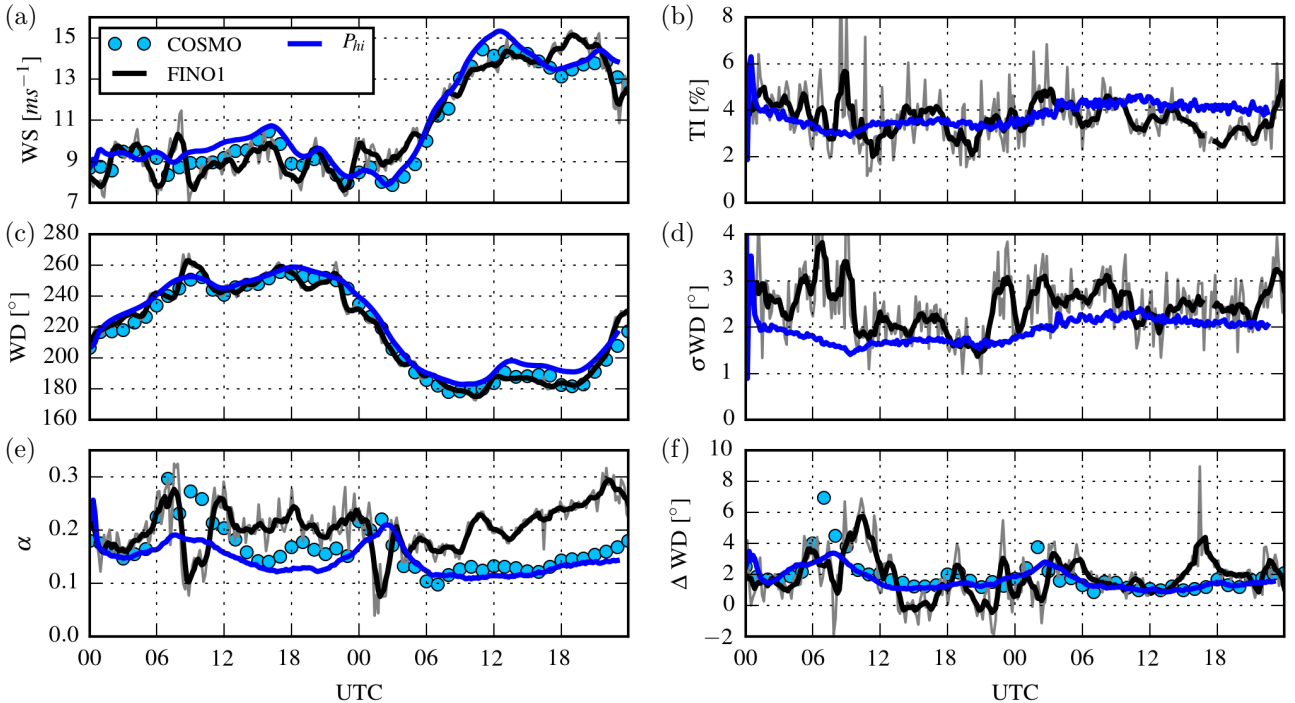


Figure 7. Comparison of P_{hi} to COSMO-DE and one hour running means (black) and ten-minute averages (grey) of FINO1 measurements. All time series at 70 m, if not specified otherwise. (a) wind speed, (b) turbulence intensity, (c) wind direction, (d) ten-minute standard deviation of the wind direction, (e) vertical power law coefficient, and (f) change of the wind direction between 33 m and 70 m.

LES contains inertia, that delays the reaction to changing boundary conditions. The nudging term is one option to dampen the inertial fluctuations. Here we find that momentum advection is an complementary option. The advection of potential temperature does not have a large effect on the time series of the wind speed at 70 m. But Fig. 6(b) shows the importance of the temperature advection for the thermal stability as the sign-change of the temperature gradient can indeed be closely related to advection.

The higher resolved simulation run, that was used as the basis for the turbine simulations, was computed with a relaxation time constant of $\tau = 4 h$, even though the result with a smaller relaxation time provides a slightly lower deviation to the measurements at hub height. We chose the larger relaxation constant to reduce the influence of the unphysical domain-wide relaxation on the wake simulations. Heinze et al. (2017) and Schalkwijk et al. (2015) found that the overall boundary layer properties are quite independent from the relaxation constant, if it is in the magnitude of hours.

The time series of the domain averaged results of P_{hi} are compared to the measurements and the large-scale forcing data in Fig. 7. The ten-minute turbulence intensity TI and the standard deviation of the wind direction are calculated and averaged over multiple virtual met masts evenly distributed over the model domain. The power law coefficient is calculated for the FINO1 measurements and the LES from a fit to the data between 33 and 90 m, and for COSMO-DE by using the model levels at 35

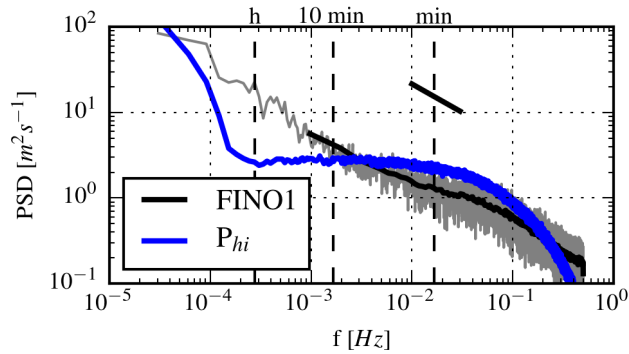


Figure 8. Power spectral density derived from the 1 Hz measurements at 90 m height and the simulation time series at 90 m. Grey and black lines represent different window sizes for the Fourier transformation. The short black lines denotes the slope of the Kolmogorov cascade.

and 73 m.

LES Wind speed and wind direction follow the general trend of the input and measurement data. The averaged magnitude of the turbulent fluctuations on the ten-minute scale is also reproduced. The largest discrepancy between simulation and measurements exists in the shear of the vertical wind profile which is almost constantly lower in the LES.

- 5 The destabilization of the boundary layer is observable as an decrease of the vertical shear of the LES and the measurements (Fig. 7 (e)) on the second day between 00:00 UTC and 06:00 UTC. The event appears to occur earlier in reality than in the simulations, which is likely related to the earlier change of sign of the temperature gradient (Fig. 6). The restratification also starts later in the LES and the vertical shear remains constantly lower during the rest of the day.

10 *The comparison of modeled and measured time series show that the measurements contain additional fluctuations that are not replicated by the model chain of mesoscale and microscale model. Figure 8 compares the power spectra of the two time series at hub height. The LES data show the typical stronger drop in the highest frequencies related to the cut-off by the implicit SGS filtering. At longer periods of about 0.5 to 12 h, the gradient of the measured energy cascade is maintained, while the simulation contains less energy in this range. The model chain thus enables to replicate the synoptic scale motions and the boundary layer turbulence, but fails to reproduce the impact of mesoscale motions. The horizontal averaging of the mesoscale model output to derive smooth boundary conditions might factor into the result. Vincent et al. (2013), however, show that even current high resolved mesoscale model output is not able to capture mesoscale fluctuations. As this paper only considers a small time period we relate to Schalkwijk et al. (2015) for a more profound discussion of this topic.*

15

4 Wind turbine wake simulations

4.1 Model setup

The wind turbine wake simulations are run with the same domain and setup as the high resolution simulation P_{hi} , just with the added body forces from the wind turbine, placed in the center of the domain. Due to the cyclic horizontal boundary conditions, the wind turbine wake reenters the domain through the southern after having left it through the northern boundary. However, as the wind direction in the simulations is never directly from south, the turbine is not subject to its own wake. The turbulence of the wake still modifies the state of the atmospheric boundary layer after some time. Thus, we simulated only intervals of 30 min with wind turbine, preceded by a 3 min precursor phase for the development of the wake. Wind fields from P_{hi} were used as the initial fields of these simulations.

10 An enhanced actuator disc model with rotation (ADM-R) is used to calculate the forces of the wind turbine on the flow (Witha et al., 2014). The model divides the rotor surface into annulus segments, and the local velocities at the segments and tabulated lift and drag coefficients are used to calculate lift and drag forces. Tower and nacelle of the turbine are parameterized by constant drag coefficients. The parameterized wind turbine AV10 is an Adwen AD 5-116 with a rotor diameter (D) of 116 m and a rated power of 5 MW. The hub height of the turbine is at 90 m. Adaptation to the current wind conditions is ensured by a baseline generator torque and pitch controller as described in Jonkman et al. (2009) and a simple yaw controller. Simulations of the generator torque and pitch controller in idealized conditions were performed to ensure that the reference thrust and power curves are replicated. The yaw controller is implemented as described in Storey et al. (2013) with a temporal averaging window of the wind direction of 30 s and a tolerated maximum misalignment of 5 degrees.

4.2 Comparison with lidar measurements

20 Figure 9 compares parameters that indicate the state of the atmospheric boundary layer measured at FINO1 with the simulated state during the selected 15 ten-minute time periods of the lidar measurements at *alpha ventus*. As discussed earlier, the biggest disagreement is found in the vertical shear which is constantly lower in the simulations. The TI is slightly higher in the simulations. Changes of atmospheric stability are small between the different times of measurements with the night and evening period in slightly stable conditions and the morning period in neutral conditions according to the classification in Peña et al. (2010), with the Monin-Obukhov length derived from the model fluxes.

For the wind turbine the three periods represent different operating conditions. With a rated wind speed of the turbine of 12.5 ms^{-1} , the wind speed range lies below rated wind speed during the night period. Below rated wind speed the turbine's power and thrust coefficient are nearly constant. During the evening period the wind speed is clearly above rated conditions, so the rotor speed is controlled by collective pitch movement of the blades, and the thrust coefficient decreases with increasing wind speed. The morning period represents conditions that are around rated wind speed where the thrust coefficient should be lower and pitch control is occasionally applied.

Figure 10 shows ten-minute averages of the normalized hub-height wind speed during selected time intervals from simulation and measurements. For better comparison the LES results were averaged on cubes with a side length of 20 m centered at hub

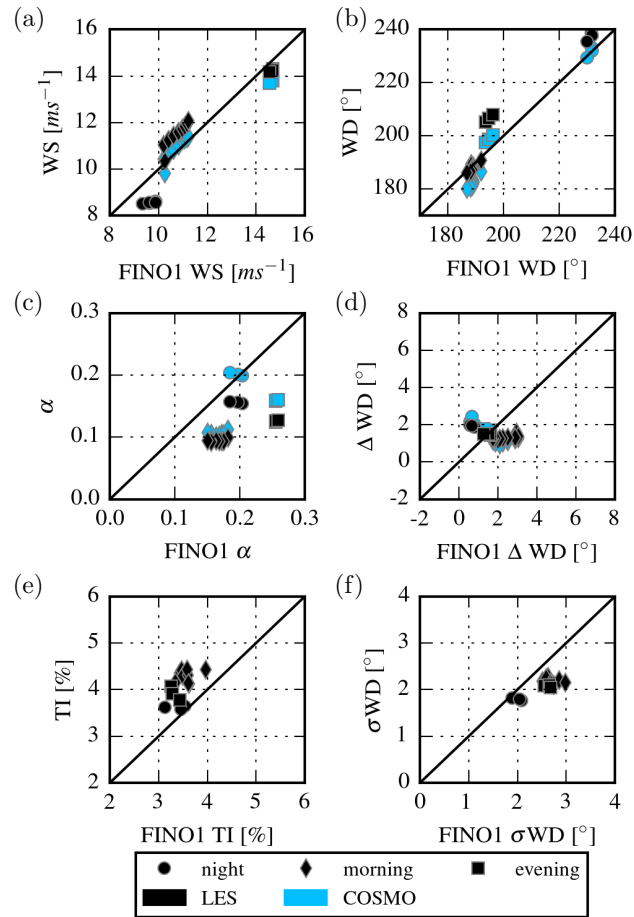


Figure 9. Comparison of the simulated state of the boundary layer with the measured state during the 15 ten-minute time periods of the lidar measurements. Night period between 01:00 UTC and 01:40 UTC, morning period between 5:40 UTC and 7:30 UTC and evening period between 21:40 UTC and 22:10 UTC.

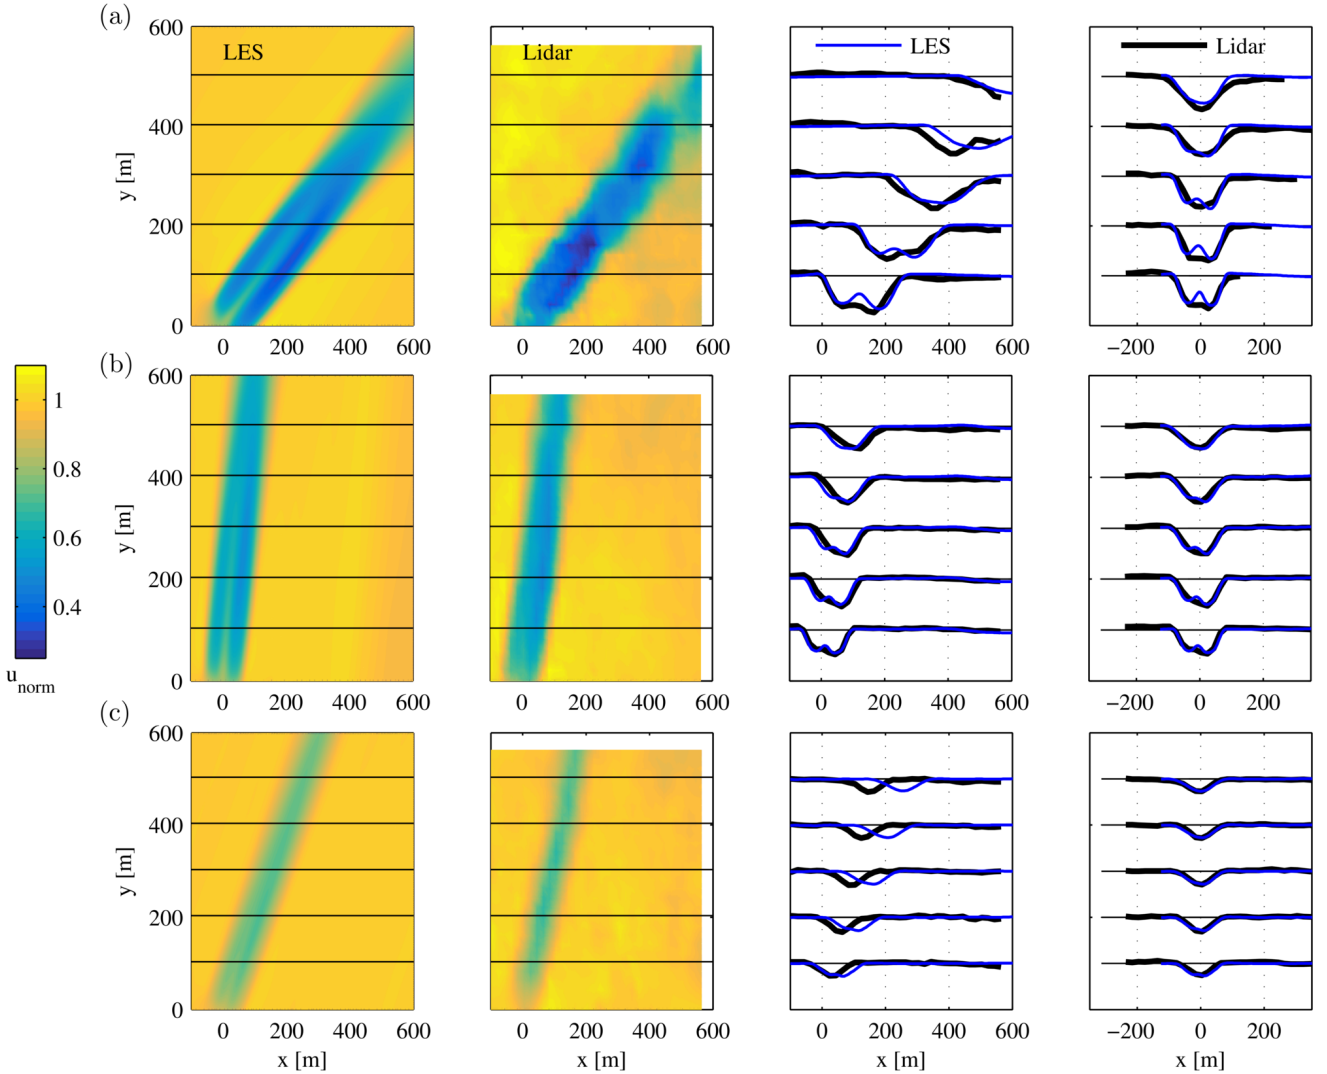


Figure 10. Normalized wind fields from LES and lidar measurements. The third column shows horizontal cross sections along the lines at constant y , as depicted in the first two columns. The fourth column shows cross section at the same distances with the zero coordinate coinciding with the center line of the wake. The full vertical distance between the horizontal lines in the cross section panels equals to a normalized velocity of one. The rows represent individual ten-minute time periods starting at (a) 1:30 UTC (b) 6:50 UTC (c) 21:40 UTC.

height, similar to the postprocessing of the lidar data as explained in Sec. 2.1. The slight disagreement of the inflow wind speed was approached by normalizing the velocities of both flow fields. Lidar and LES wind speeds are normalized with the 90 m wind speed measured in the non-wake measurements or simulation data, respectively. To further remove the disagreement caused by the difference in wind direction, the flow fields were rotated in Fig. 10 (rightmost panels), so that the wake propagates

5 along the y -axis.

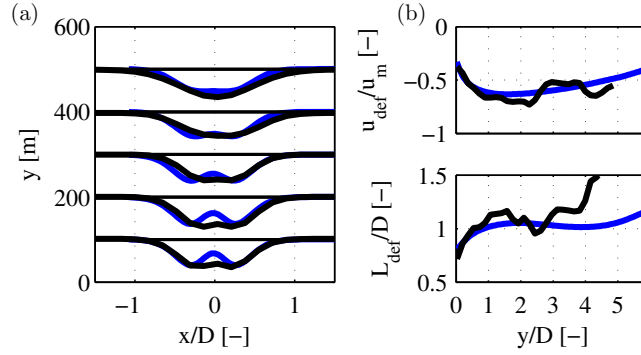


Figure 11. Fitted functions to the wake at 1:30 UTC. (a) Profiles in different distances. (b) Development of normalized deficit and wake width. LES (blue) and lidar (black).

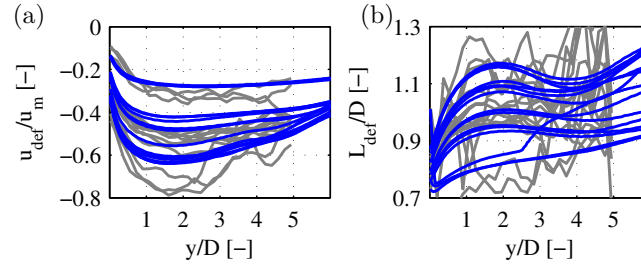


Figure 12. (a) Wake deficit and (b) wake width development from LES (blue) and lidar (grey).

The ten-minute averaging does apparently not filter all turbulent structures of the measured wake field. The reason is most probably the much lower sampling rate of the lidar measurements. Approximately 8000 single values contribute to the average on the 20 m grid in the LES, considering a time step of about 2 Hz and the original grid resolution of 5 m. In contrast, the sample velocities contributing to the lidar average vary from 100 to 350 individual line-of-sight wind speed values and are not evenly distributed in space and time.

The results show that the unrotated wakes (Fig. 10(third column)) match very well during the morning period where the wind direction appears to be nearly identical. In this period an asymmetry in the horizontal profile of the wake is also clearly visible, a phenomena related to the interaction of vertical wind shear with the rotation of the wake as shown for example in Vollmer et al. (2015). The amplitude of the wake deficit appears to be best simulated in the above-rated region in which the turbine operates during the evening period. The lower thrust leads to a wake that shows no signs of a double minimums in the near wake as visible in the other measurements and simulations.

In the following an attempt is made to make a quantitative comparison between the measured and simulated wakes. *To derive*

statistics of the wakes the profiles of all 15 time intervals were fitted to a curve consisting of two Gaussian-like functions:

$$u_w(x) = b \exp\left(-\left(\frac{x-c}{d}\right)^2\right) - e b \exp\left(-\left(\frac{x-c}{f d}\right)^2\right) \quad (5)$$

Within this function, the central region of lower deficit in the near wake is represented by the second exponential function, with $e, f \in [0, 1]$. The wake width (90th percentile) was defined as $L_{def} = \sqrt{2} \cdot 1.64 \cdot d$, as deficit u_{def} the minimum value of u_w was chosen. Figure 11 shows an example of the fits to the data and Fig. 12 the fitted deficit and wake width for all time periods. Minimums of the deficits can be identified in both data sets at a distance of between one and two D downstream for the high thrust situations and at a distance of about three D for the low thrust situations. In general the trajectories from the measurements exhibit much more noise, which makes a comparison especially of the wake widths difficult.

A direct comparison of the wake properties at selected downstream distances is presented in Fig. 13. Regression through the origin shows quite a good agreement between lidar and LES wake deficit, though the LES shows a tendency to simulate a higher wake deficit during the morning period and lower deficits otherwise. As no time series of thrust measurements of the turbine were available, we can only speculate if the difference is related to a different thrust of the turbine than in the constructors' specification or if either model or measurement data are inaccurate. The spread decreases by normalizing the deficits and the slope of regression between simulated and measured normalized deficits is 1.05. The simulated wakes are slightly wider in average, except when the turbine is being operated in below-rated conditions (night period), where the measured wakes are both wider and have a higher deficit.

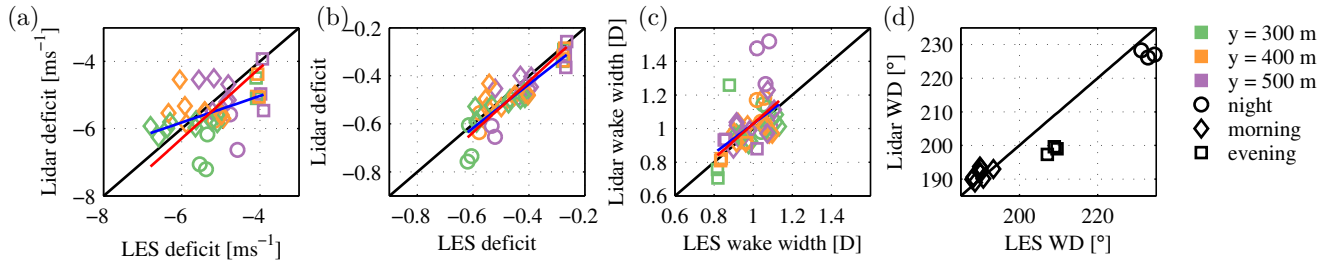


Figure 13. Scatter plots of the properties derived from the Gaussian-like fit to the wake profiles of (a) the wake deficits, (b) the normalized deficits, (c) the wake widths and (d) the wind direction derived from the propagation direction of the wakes. The three different time intervals are marked with different markers as in Fig. 9. Colors represent the downstream distance from the turbine. Lines show simple linear regression (blue) and regression through the origin (red).

5 Discussion

As demonstrated in this paper the forcing of LES with mesoscale model profiles allows for time-dependent LES that change according to the synoptic meteorological conditions. Thus, a transient state of the atmospheric boundary layer can be used for the analysis of wind farm model performance. This allows for example for a direct validation of wake simulations with measured

data, which represents a different approach to the classical statistically derived validation data for wind farm models.

The comparison of the ambient flow created by the model chain with met mast data indicates that the synoptic trend of wind speed and direction is maintained and that the average properties of the simulated wind profile during the two-day period are close to the measured. Time series and power spectra however reveal a gap of energy contained in the mesoscale fluctuation range. These fluctuations might be partly resolved with a much larger LES domain, if they origin from thermal effects (Schalkwijk et al., 2015). An inclusion of measurement data as relaxation data set (Rodrigo et al., 2016) might also lead to a closer tracking of the measurements, but requires measurements at higher heights than available in this case.

As this paper only looks at a very short time period, we refrain from drawing general conclusions about the model chain's ability to replicate the evolving state of the ABL and refer to Schalkwijk et al. (2015); Heinze et al. (2017), which analyze longer time periods. For wind energy purposes we think that the mesoscale model remains the crucial part of the presented model chain to improve the spectral and vertical representation of the wind field. However, at least for the spectral part, current combinations of models and reanalysis data do not appear to be sufficient (Vincent et al., 2013).

The comparison of the wake simulations with the measured wakes represents one of the suggested applications of the model chain. Instead of averaging over similar wind profile states, a direct time series comparison is done. The visual comparison of simulated with measured wakes shows a good match, indicating that wind direction and wake profile are well replicated. Derived wake statistics of the downstream development, however, reveal that the available measurement data still requires a more statistical treatment to be able to conclude about the goodness of the wake representation in the simulations.

Alternatives to the presented approach for LES of wind turbines in the atmospheric boundary layer are idealized quasi-stationary setups or nested LES inside a mesoscale model. Both of these approaches have advantages and disadvantages compared to the method in this paper. An idealized setup enables to study an identified quasi-stationary state of the atmospheric boundary layer in detail, as in e.g. Vollmer et al. (2016); Mirocha et al. (2015), or to replicate an idealized transient state (Abkar et al., 2016). For the simulation of an observed transient states, however, information from a larger scale model becomes necessary. Boundary conditions of quasi-stationary states can also be derived from a mesoscale model with the method presented in this paper, if no sufficient measurement information is available.

The approach of a nested LES domain inside of a mesoscale model domain might enable to include frequencies of the flow in the range of mesoscale fluctuations or the advection of a different level of turbulence created by upstream obstacles, but needs a large LES domain for the development of microscale turbulence (Muñoz-Esparza et al., 2014) or a good solution to initialize the turbulence at the inflow boundary. It also requires to run a mesoscale model in parallel, which is not necessary for the offline coupling approach which can be started from external data sources as shown in this paper by the use of the COSMO-DE data.

6 Conclusions

In this paper we introduce and test a method to simulate a wind turbine wake in the offshore atmospheric boundary layer with LES driven by forcing derived from a mesoscale simulation. The methodology enables to simulate a transient state of

the atmospheric boundary layer for the evaluation of wind farm performance or the validation of wake simulations. The comparison with met mast data shows that the model chain is able to reproduce the synoptic trends and the boundary layer turbulence of the marine wind field during the analyzed two days. Most of the mesoscale fluctuations found in the measurements are not replicated, which is most likely related to the deficiencies of the mesoscale model. The wake simulations are compared to lidar measurements downstream of a turbine of *alpha ventus*. In certain periods the modeled and measured wakes are very similar as especially the wind direction matches well. A direct comparison of measures to describe the downstream wake development proves to be difficult with a high scatter of the measured wakes. Thus, the limited data set of the lidar measurements and the still prevailing turbulent structures in the ten-minute averages of the data makes it difficult to validate the performance of the whole model chain. We think that the methodology might be especially valuable for transient non-neutral states of the atmospheric boundary layer, where the boundary conditions to set up LES are difficult to derive. In these case, the presented method might not only be valuable for the comparison of simulations with measurement data but could be also applied to study wind turbine or wind farm control in changing wind conditions.

Acknowledgements. The authors gratefully acknowledge the efforts of the Wind Energy Systems group of ForWind who carried out the lidar measurements at *alpha ventus*, including Jorge Schneemann, Davide Trabucchi, Juan-Jose Trujillo and Stephan Vo. The work presented in this study was conducted within the German national research projects "GWWakes" and "OWEA Loads" (FKZ 0325397A and 0325577B), funded by the Federal Ministry for Economic Affairs and Energy (BMWi) and within the project "ventus efficiens" (ZN3024, ministry of science and culture of Lower Saxony). Computer resources have been partly provided by the North German Supercomputing Alliance (HLRN). We thank Deutscher Wetterdienst (DWD) for providing analysis data. We thank the BSH and DEWI for providing measurement data from FINO1 (FINO project by BMWi).

References

- Abkar, M., Sharifi, A., and Porté-Agel, F.: Wake flow in a wind farm during a diurnal cycle, *Journal of Turbulence*, 17, 420–441, doi:10.1080/14685248.2015.1127379, 2016.
- Baldauf, M., Förstner, J., Klink, S., Reinhardt, T., Schraff, C., Seifert, A., and Stephan, K.: Kurze Beschreibung des Lokal-Modells Kurzzeit COSMO-DE (LMK) und seiner Datenbanken auf dem Datenserver des DWD, Deutscher Wetterdienst, Geschäftsbereich Forschung und Entwicklung, Offenbach, Germany, 2009.
- Barthelmie, R. J. and Jensen, L. E.: Evaluation of wind farm efficiency and wind turbine wakes at the Nysted offshore wind farm, *Wind Energy*, 13, 573–586, doi:10.1002/we.408, 2010.
- Churchfield, M. J., Lee, S., Michalakes, J., and Moriarty, P. J.: A numerical study of the effects of atmospheric and wake turbulence on wind turbine aerodynamics, *J. Turbulence*, 13, 1–32, doi:10.1080/14685248.2012.668191, 2012.
- Dörenkämper, M., Tambke, J., Steinfeld, G., Heinemann, D., and Kühn, M.: Atmospheric Impacts on Power Curves of Multi-Megawatt Offshore Wind Turbines, *J. Phys. Conf. Ser.*, 555, 012 029, doi:10.1088/1742-6596/555/1/012029, 2014.
- Dörenkämper, M., Witha, B., Steinfeld, G., Heinemann, D., and Kühn, M.: The impact of stable atmospheric boundary layers on wind-turbine wakes within offshore wind farms, *J. Wind Eng. Ind. Aerodyn.*, doi:10.1016/j.jweia.2014.12.011, 2015.
- Hansen, K. S., Barthelmie, R. J., Jensen, L. E., and Sommer, A.: The impact of turbulence intensity and atmospheric stability on power deficits due to wind turbine wakes at Horns Rev wind farm, *Wind Energy*, 15, 183–196, doi:10.1002/we.512, 2012.
- Heinze, R., Moseley, C., Böske, L. N., Muppa, S. K., Maurer, V., Raasch, S., and Stevens, B.: Evaluation of large-eddy simulations forced with mesoscale model output for a multi-week period during a measurement campaign, *Atmospheric Chemistry and Physics*, 17, 7083–7109, doi:10.5194/acp-17-7083-2017, 2017.
- Jonkman, J. M., Butterfield, S., Musial, W., and Scott, G.: Definition of a 5-MW reference wind turbine for offshore system development, Technical Report NREL/TP-500-38060, National Renewable Energy Laboratory, 1617 Cole Boulevard, Golden, Colorado 80401-3393, doi:10.2172/947422, 2009.
- Lu, H. and Porté-Agel, F.: Large-eddy simulation of a very large wind farm in a stable atmospheric boundary layer, *Phys. Fluids*, 23, 065 101, doi:10.1063/1.3589857, 2011.
- Machefaux, E., Larsen, G. C., Koblitz, T., Troldborg, N., Kelly, M. C., Chougule, A., Hansen, K. S., and Rodrigo, J. S.: An experimental and numerical study of the atmospheric stability impact on wind turbine wakes, *Wind Energy*, 19, 1785–1805, doi:10.1002/we.1950, 2015.
- Maronga, B., Gryschka, M., Heinze, R., Hoffmann, F., Kanani-Sühring, F., Keck, M., Ketelsen, K., Letzel, M. O., Sühring, M., and Raasch, S.: The Parallelized Large-Eddy Simulation Model (PALM) version 4.0 for atmospheric and oceanic flows: model formulation, recent developments, and future perspectives, *Geosci. Model Dev.*, 8, 2515–2551, doi:10.5194/gmd-8-2515-2015, 2015.
- Mirocha, J. D., Rajewski, D. A., Marjanovic, N., Lundquist, J. K., Kosović, B., Draxl, C., and Churchfield, M. J.: Investigating wind turbine impacts on near-wake flow using profiling lidar data and large-eddy simulations with an actuator disk model, *J. Renew. Sust. Energ.*, 7, 043143, doi:10.1063/1.4928873, 2015.
- Moriarty, P., Rodrigo, J. S., Gancarski, P., Churchfield, M., Naughton, J. W., Hansen, K. S., Machefaux, E., Maguire, E., Castellani, F., Terzi, L., Breton, S.-P., and Ueda, Y.: IEA-Task 31 WAKEBENCH: Towards a protocol for wind farm flow model evaluation. Part 2: Wind farm wake models, *Journal of Physics: Conference Series*, 524, 012 185, doi:10.1088/1742-6596/524/1/012185, 2014.
- Muñoz-Esparza, D., Kosovic, B., Mirocha, J., and van Beeck, J.: Bridging the Transition from Mesoscale to Microscale Turbulence in Numerical Weather Prediction Models, *Boundary-Layer Meteorol.*, 153, 409–440, doi:10.1007/s10546-014-9956-9, 2014.

- Neggers, R. A. J., Siebesma, A. P., and Heus, T.: Continuous Single-Column Model Evaluation at a Permanent Meteorological Supersite, *Bulletin of the American Meteorological Society*, 93, 1389–1400, doi:10.1175/BAMS-D-11-00162.1, 2012.
- Peña, A., Gryning, S.-E., and Mann, J.: On the length-scale of the wind profile, *Quarterly Journal of the Royal Meteorological Society*, 136, 2119–2131, doi:10.1002/qj.714, 2010.
- 5 Rodrigo, J. S., Churchfield, M., and Kosovic, B.: A wind energy benchmark for ABL modelling of a diurnal cycle with a nocturnal low-level jet: GABLS3 revisited, *J. Phys. Conf. Ser.*, 753, 032 024, <http://stacks.iop.org/1742-6596/753/i=3/a=032024>, 2016.
- Sanderse, B., van der Pijl, S., and Koren, B.: Review of computational fluid dynamics for wind turbine wake aerodynamics, *Wind Energy*, 14, 799–819, doi:10.1002/we.458, 2011.
- Schalkwijk, J., Jonker, H. J. J., Siebesma, A. P., and Bosveld, F. C.: A Year-Long Large-Eddy Simulation of the Weather over Cabauw: An
 10 Overview, *Monthly Weather Review*, 143, 828–844, doi:10.1175/MWR-D-14-00293.1, 2015.
- Storey, R., Norris, S., and Cater, J.: Large Eddy Simulation of Wind Events Propagating through an Array of Wind Turbines, in: *Proceedings of the World Congress on Engineering 2013 Vol III, WCE 2013, July 3 - 5, 2013, London, U.K.*, 2013.
- van Dooren, M. F., Trabucchi, D., and Kühn, M.: A Methodology for the Reconstruction of 2D Horizontal Wind Fields of Wind Turbine Wakes Based on Dual-Doppler Lidar Measurements, *Remote Sensing*, 8, 809, doi:10.3390/rs8100809, 2016.
- 15 Vincent, C., Larsén, X., Larsen, S., and Sørensen, P.: Cross-Spectra Over the Sea from Observations and Mesoscale Modelling, *Boundary-Layer Meteorology*, 2, 297–318, doi:10.1002/joc.2175, 2013.
- Vollmer, L., van Dooren, M., Trabucchi, D., Schneemann, J., Steinfeld, G., Witha, B., Trujillo, J., and Kühn, M.: First comparison of LES of an offshore wind turbine wake with dual-Doppler lidar measurements in a German offshore wind farm, in: *Journal of Physics: Conference Series*, vol. 625, p. 012001, IOP Publishing, doi:10.1088/1742-6596/625/1/012001, 2015.
- 20 Vollmer, L., Steinfeld, G., Heinemann, D., and Kühn, M.: Estimating the wake deflection downstream of a wind turbine in different atmospheric stabilities: an LES study, *Wind Energy Science*, 1, 129–141, doi:10.5194/wes-1-129-2016, 2016.
- Walker, K., Adams, N., Gribben, B., Gellatly, B., Nygaard, N. G., Henderson, A., Marchante Jiménez, M., Schmidt, S. R., Rodríguez Ruiz, J., Paredes, D., Harrington, G., Connell, N., Peronne, O., Cordoba, M., Housley, P., Cussons, R., Håkansson, M., Knauer, A., and Maguire, E.:
 25 An evaluation of the predictive accuracy of wake effects models for offshore wind farms, *Wind Energy*, 19, 979–996, doi:10.1002/we.1871, 2016.
- Witha, B., Steinfeld, G., Dörenkämper, M., and Heinemann, D.: Large-eddy simulation of multiple wakes in offshore wind farms, *J. Phys. Conf. Ser.*, 555, 012 108, doi:10.1088/1742-6596/555/1/012108, 2014.