

Responses to Reviewer Comments on “Effect of tip spacing, thrust coefficient and turbine spacing in multi-rotor wind turbines and farms”

Niranjan S. Ghaisas, Aditya S. Ghate, Sanjiva K. Lele

1 Response to Reviewer 1

The authors employ large-eddy simulations (LES) to quantify the difference in wake effects between a four-rotor wind turbine and an equivalent single-rotor wind turbine, for both an isolated wind turbine and a row of five wind turbines. The present work is a continuation of a conference article, where more parameters are investigated. An engineering wake model is calibrated with the LES data and its performance for a row of five four-rotor wind turbine is investigated. The article is well written and provides interesting results. I have written a list of main and minor comments below:

We thank Dr. M. Paul van der Laan for his careful reading and constructive comments on the manuscript. Responses to his comments are given below.

Main comments:

1. Pages 1-2, Lines 57-64. You explain the difference choices compared to van der Laan et al. (2019), however, there are some misunderstandings:

(a) You are right that in van der Laan et al. (2019) the thrust coefficient was different between the top and bottom rotors due to the shear and the rotor interaction, and the thrust force distribution was non-uniform for most of the published results by using body forces based on airfoil data. However, in the wake recovery analysis (which you focus on in this work) based on the Reynolds-averaged Navier-Stokes model, the same thrust force distribution and total thrust force was prescribed for the multi-rotor wind turbine and the equivalent single-rotor wind turbine, in order to make the comparison of the wake recovery more fair.

Response: We thank the reviewer for the clarification. The revised manuscript has been modified accordingly (around line 123).

(b) The inflow in van der Laan et al. (2019) is logarithmic, which corresponds

to a neutral atmospheric surface layer (where the boundary height is infinite and the flow solution is independent of the Reynolds number). This means that the flow solution scales with the rotor diameter (d) and hub or multi-rotor reference height (Ht). In other words, the normalized wake deficit for using $d = 29:2$ m or $d = 50$ are the same, as long as Ht is also up-scaled accordingly and the turbulence intensity, thrust coefficient, and tip clearances are the same. However, you can mention in your work, that you actually use a finite boundary layer height, instead of logarithmic profile with an infinite boundary layer height, as used in van der Laan et al. (2019).

Response: The revised manuscript has been modified as pointed out by the reviewer (lines 63-66).

2. You lack a recent reference to van der Laan and Abkar (2019), where the work of van der Laan et al. (2019) has been extended to multi-rotor wind farms. (The work was presented at the Wake Conference 2019 in May, but has been published online with some delay, in July, so you probably have missed this.) In this article, simulations suggest that multi-rotor wind farms produce 0.3-1.7% more annual energy production compared to equivalent single-rotor wind farms. The increase is mainly caused by the first downstream wind turbine in a wind farm and for row-aligned wind directions. This is in contradiction with your previous work Ghaisas et al. (2018) and it is related to the large rotor spacing of $1d$ that you had chosen, as shown in van der Laan and Abkar (2019). I think you should reference this work and highlight (in the introduction) that the difference between the single-rotor wind farm and multi-rotor wind farm in Ghaisas et al. (2018) was large due to the chosen tip clearance of $1d$. You could mention that the present work is used to investigate more realistic tip clearances. It is nice to see that you get similar trends in the power deficit (Figures 9 and 10), as published in van der Laan and Abkar (2019).

Response: A citation to this paper is included in the revised manuscript. This paper is discussed on lines 46-52 and 274-276.

3. Page 4, Line 79: The relation $C_T = 16C'_T/(C'_T + 4)^2$ is only true for an axial induction factor a_x of $1/3$, since 1D Momentum Theory for a single-rotor in a uniform flow gives: $C_T =$ (which you also show in equation A1). In Table I: you investigate three different thrust coefficients (0.64, 0.75, 8/9). For 1D Momentum Theory for a single rotor in a uniform flow we have that $C_T = 4a_x(1-a_x)$ or $a_x = 1/2(1 - \sqrt{1 - C_T})$. Hence, for $C_T = 0 : 64; 0 : 75; 8/9$ we get $a_x = 0 : 2; 0 : 25; 1/3$, respectively. I would replace $C_T = 16C'_T/(C'_T + 4)^2$ with equation A1.

Response: We thank the reviewer for pointing out this oversight. It has been corrected in the revised manuscript.

4. Lines 275-277: When you change the tip clearance, the amount of poten-

Table 1: Potential power and potential power normalized by 1-Rotor potential power for isolated turbines with varying tip spacings.

s/d	1-Rot	0	0.05	0.1	0.2	0.25	0.5	1.0
P_{pot}	11.21	11.17	11.15	11.13	11.09	11.07	10.95	10.59
P_{pot}/P_{pot}^{1-Rot}	1.000	0.996	0.995	0.993	0.989	0.987	0.976	0.945

tial power changes due to the shear. Have you investigated how this affects your results? My guess is that the shear is the main reason why the power of the first wind turbine changes with different tip clearances (as you shown in Figure 11a).

Response: The reviewer is correct in saying that the potential power is different for 4-rotor turbines with different tip clearances. Due to the sheared inflow velocity profile, the upper rotors of the 4-rotor turbine are subjected to a higher wind speed as compared to the wind speed seen by the 1-rotor turbine. Similarly, the lower rotors of the 4-rotor turbine see a lower wind speed. Thus, the potential power is expected to be dependent on the tip spacing, since the undisturbed velocity seen by the rotors is dependent on the tip spacing. However, we find that this does not explain the differences between the powers of the first turbine shown in Fig. 11b, as explained in more detail below.

The potential power is computed as $P_{pot} = (\pi D^2/8)C_P U_{0,disk}^3$, where $U_{0,disk}$ is obtained by averaging the logarithmic profile (shown in Fig. 2a) over the rotor disks. P_{pot} and P_{pot}/P_{pot}^{1-Rot} , or the potential power normalized by that of the 1-rotor isolated turbine, are shown in Table 1. A representative value of $C_P = 0.5625$ is used, but this precise number does not matter when we compare the normalized potential powers.

The normalized potential powers can be seen to be almost equal to 1 for all the tip spacings. In fact, the normalized potential powers reduce slightly as the tip spacing increases. The net effect of shear and the chosen dimensions of the turbines is such that the reduction in power of the lower two rotors dominates the increase in power of the upper two rotors. This effect is not very strong, as seen in the Table 1, being only 2.4% for $s/d = 0.5$. The same conclusion is reached if we use the hub height velocities instead of the disk-averaged velocities in computing P_{pot} . Thus, the differences between the powers of the isolated 4-rotor turbines cannot be attributed to differences in the potential powers. These exact same observations hold for the first turbines in the multi-rotor wind farm cases (powers shown in Fig. 12b).

We hypothesize that the differences for different tip spacings is due to discrepancies between the simulations and the predictions of the inviscid actuator disk (AD) theory. The predictions of the AD theory and the current LES can be either due to inadequate resolution, or due to the effect of turbulent mixing (we refer to Nishino and Wilden (2012) for a discussion on the effect of mixing on thrust and power coefficients of a turbine), which is not accounted for in the AD theory. To rule out the effect of grid resolution on the results, the implied nom-

Table 2: Implied nominal thrust coefficient for different grid resolutions and two different cases.

Grid Size	1-Rotor	$s/d = 0.05$
GR1	0.890	0.971
GR2	0.798	0.859
GR3	0.799	0.853

inal thrust coefficient (C_T) is shown in Table 2 for the isolated 1-rotor case and the isolated 4-rotor case with $s/d = 0.05$. These values are calculated from the LES using the definition $C_T = C'_T U_{disk}^2 / U_{0,disk}^2$. It is seen that these values are quite well converged. Changing the grid resolution from GR2 to GR3 changes C_T by 0.1% for the 1-rotor case and 0.6% for the 4-rotor case. We conclude that the discrepancies with the inviscid actuator disk theory are due to the effects of turbulent mixing, which are different for different tip clearances. In any case, as also appreciated by the reviewer in a separate comment, the discussion in the appendix further clarifies that these differences between the first turbine powers do not affect the qualitative conclusions drawn. To keep the paper focused, we do not include the above discussion in detail in the main manuscript. We have added an appendix quantifying the change in potential power with changing tip spacings (Appendix B) and added a sentence in Sec. 4.2 (lines 309-311) stating that these discrepancies cannot be explained by the differences in power potential. The response to the reviewer in this present document is available online for readers interested in more details.

5. *Figure 6c: The single-rotor wind turbine seems to have a much higher disk averaged ambient turbulence intensity. Why is this the case?*

Response: We appreciate the reviewer’s eye for detail. The larger ambient turbulence intensity seen in Fig. 6c actually corresponds to the 4-Rotor $s/d = 1$ case. We apologize for the confusion: the line styles chosen for the 1-Rotor and 4-rotor $s/d = 1$ cases were very similar to each other. In the updated manuscript, a different line style has been used for the $s/d = 1$ case.

It should be noted that the integrals are carried out over different regions corresponding to the areas spanned by the rotors in the different cases. Thus, the ambient TI_{disk} values are slightly different for all cases. The differences are apparent on the scale of the figure only for the $s/d = 1$ case, which is why it appears to be an outlier.

When I looked at the integrated added wake turbulence intensity, I found that the four-rotor wind turbine has a higher integrated added wake turbulence intensity in the near wake compared single-rotor wind turbine, while the opposite is found for the far wake, see Figure 18 in van der Laan et al. (2019).

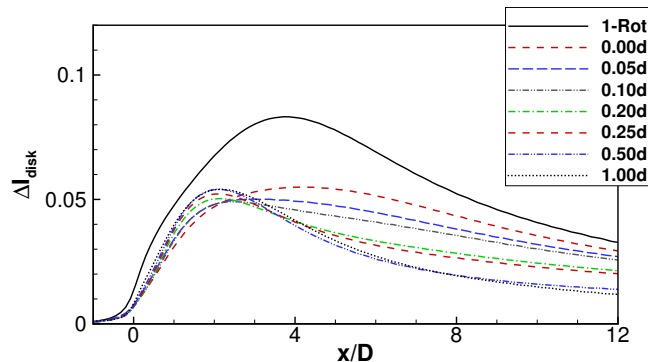


Figure 1: Added turbulence intensity ΔI_{disk} for isolated 1-rotor and 4-rotor turbines with varying tip spacings denoted in the label, for $C_T' = 4/3$.

Response: This is an interesting observation, that is not reproduced in our LES. It should be noted that the quantities plotted in our Fig. 6c and in Figs. 18(b,d,f) in van der Laan et al. (2019) are different. For a fair comparison between the two sets of results, the disk-averaged added turbulence intensity, defined as

$$\Delta I_{disk} = \frac{\sqrt{2TKE_{disk}/3}}{U_{disk}} - I_{0,disk}, \quad (1)$$

where

$$I_{0,disk} = \frac{\sqrt{2TKE_{0,disk}/3}}{U_{0,disk}}, \quad (2)$$

is plotted in Figure 1. The subscript ‘disk’ denotes disk-average and the subscript ‘0’ denotes upstream region, or the region between $x/D = -4$ to $x/D = -1$ in our simulations, where the quantities are almost constant. This measure of added turbulence intensity is compared to Figs. 18(b,d,f) of van der Laan et al. (2019).

It is seen that ΔI_{disk} for all the 4-rotor cases is always smaller than for the 1-rotor case. The qualitative differences between the near-wake and far-wake regions are not observed in our LES results. A closer examination of the results in van der Laan et al. (2019) suggests that ΔI_{disk} is larger for the 4-rotor case in the near-wake region only for $I_{ref} = 5\%$ and 10% , but not for $I_{ref} = 20\%$. Thus, our results may be considered to be qualitatively similar to the results of van der Laan et al. (2019) for $I_{ref} = 20\%$. It is difficult to gauge the accuracy of one LES with another LES as a benchmark, so we refrain from commenting on which LES result is more accurate. This information is included in Fig. 6(d) of the revised manuscript and in Section 3.2 (lines 218-224).

6. Pages 18-22: Engineering wake model vs LES:

(a) Please motivate the use of a spatial varying wake expansion parameter k_x .

Response: Using a spatially constant k_* always leads to a gradual drop in the relative power prediction. The recovery in relative power, which is typically observed after the second turbine in conventional 1-rotor wind farms and after the third turbine in the 4-rotor wind farms with $s/d = 0.1$ and 0.25 , is not seen in the model predictions using a constant k_* . This is the reason for preferring a framework where the value of k_* is tied to the local turbulence intensity. While this framework relies on an empirical relation between k_* and the local turbulence intensity, it yields better qualitative and quantitative results, and is preferred here. It is possible for individual 4-rotor wind farm cases (particularly those with $s/d = 0.5$) to be better predicted using a constant k_* value in combination with some value for σ_0/D . However, we could not arrive at a simple consistent rule that yielded good predictions for all cases, and conclude that the spatially varying k_* framework works better than a spatially-constant k_* . We have added Figure 14 to the revised manuscript and accompanying discussion to Sec. 4.3 (lines 358-371).

(b) Do I understand correctly, that you only fit k_ from the single-rotor wind farm simulations and use this directly to predict the deficits in a multi-rotor wind farm (Figure 13)?*

Response: Yes, the k_* vs I_x correlation is derived from only the 1-rotor LES results. This is done for the present to avoid complications arising from lateral merging of the wakes of the four rotors of one 4-rotor turbine and axial merging of wakes of different 4-rotor turbines.

(c) Figures 21 and 22: Please define the numbers colored in red in the caption, I guess it is the relative error. How did you compute it?

Response: The absolute error between the LES result and the model prediction of the relative power is computed at each of the four downstream turbines (turbines 2 through 5), and then averaged. Thus, the numbers in red in Figures 15 and 16 are $(1/4) \sum_{i=2}^5 |(P_i/P_1)^{LES} - (P_i/P_1)^{model}|$. We do not normalize the absolute errors any further (say with the average relative power given by the LES) because it would lead to misleadingly small numbers for cases where the average relative power is large (for example, the $S_X = 4D$, $C'_T = 1$ case). The formula for the error is included in the revised manuscript on line 375 and the captions to Figures 15 and 16.

(d) How large are the differences between the wake model and LES if you had used a constant k_ ? This is a relevant question because it is the standard usage of the chosen wake model.*

Response: Please see response to point 6(a) above and the revised manuscript (Figure 14; Sec. 4.3, lines 358-371).

7. Page 20, Discussion: Some wording needs to be changed here:

(a) Line 337: Please remove the word novel, since the four-rotor wind turbine design is not new.

Response: The word has been removed.

(b) Lines 338-340: Please remove for the first time, since there are several authors (including yourself) have investigated the four-rotor wind turbine design.

Response: The phrase has been removed.

8. Line 354: Please change between different units to between different wind turbines, or do you mean something else?

Response: We did mean wind ‘turbines’. The word has been replaced as suggested.

9. Line 286 and Lines 363-364: What do you mean by The effect of the axial spacing on the benefit is ambiguous, since it is non-monotonic.?

Response: As seen in Figure 11(d), the wake-related benefits of multi-rotor wind farms are largest for $S_X = 4D$ and smallest for $S_X = 5D$ (comparing cases with $C'_T = 4/3$ only). Thus, the benefits do not monotonically increase or decrease with S_X . This is clarified better in the revised manuscript (lines 416-418).

10. Appendix A: It is nice that you have added this appendix in order to make the comparison of a single-rotor and multi-rotor wind farm more fair, but you forgot to refer to it in the text.

Response: A reference to the appendix has been added in Sec. 4.2 of the revised manuscript (lines 322-323).

Minor comments

1. Figures 5, 14 and 15 have very large labels compare to the rest of the figures. I would look nicer to keep the same label size.

Response: The label sizes on these figures have been reduced in the revised manuscript.

2. You have normalized the velocity deficits by u_* , but this makes it hard to see how large the deficit actually is. It would be more interesting to normalize by the freestream velocity (which could be an integral over the disk area). When

you normalize the turbulent kinetic energy by u_^2 , you could instead plot the turbulence intensity or added wake turbulence intensity, which is more common for wind turbine wake studies.*

Response: We agree with the reviewer that normalizing by the (disk-averaged) freestream velocity would be an interesting alternative way of plotting the results. The current way of normalizing by the friction velocity of the ABL is also valuable because it allows for comparison between the different cases presented in any one figure. The reader can compare with Figure 2 to get a sense for the magnitudes of the deficits with respect to the freestream velocity. The turbulence intensity is shown in Figures 6 and 7 for isolated turbine cases and Figures 9, 10 and A1 for multiple turbine simulations.

3. You both mention thrust coefficient and local thrust coefficient when you talk about C'_T . I would stick with local thrust coefficient everywhere to avoid confusion.

Response: We feel the need to introduce both thrust coefficients because the local thrust coefficient (C'_T) is used in the LES while the nominal thrust coefficient (C_T) is used in the analytical model. It would be awkward to denote C_T in the model expressions without having introduced it earlier.

4. Figures 8, 9, 10, 12 and 13: I would write the wind turbine number (1, 2, 3, 4, 5) on the x-axis instead of x/D . This also corresponds better to the text, because you often talk about wind turbine numbers.

Response: Turbine numbers are added to Figures 8, 9, 10, 12, 13, 14 and A1 in the revised manuscript.

5. Figure 8: There are additional numbers plotted in Figure 8a.

Response: These numbers are included in Figure 8a (as well as in Figure 4a) deliberately, so as to draw attention to specific contour levels, as explained in the figure caption.

6. You could refer to Niayifar and Porté-Agel (2015) when you talk about the relation between the local turbulence intensity and the wake recovery parameter k_ . Niayifar and Porté-Agel (2015) derived a relation between the freestream turbulence intensity and k_* based on LES data.*

Response: We have referred to this paper in the revised manuscript (Sec. 4.3, lines 366-371).

References

Ghaisas, N. S., Ghatge, A. S. ., and Lele, S. K.: Large-eddy simulation study

of multi-rotor wind turbines, *Journal of Physics: Conference Series*, 1037, 1, <https://doi.org/10.1088/1742-6596/1037/1/072021>, 2018.

Niayifar, A. and Porté-Agel, F.: A new analytical model for wind farm power prediction, *J. Phys.: Conf. Ser.*, 625, 1–10, <https://doi.org/10.1088/1742-6596/625/1/012039>, 2015.

van der Laan, M. P. and Abkar, M.: Improved energy production of multi-rotor wind farms, *J. Phys.: Conf. Ser.*, 1256, 1–11, <https://doi.org/10.1088/1742-6596/1256/1/012011>, 2019.

van der Laan, M. P., J., A. S., Ramos García, N., Angelou, N., Pirrung, G. R., Ott, S., Sjöholm, M., Sørensen, K. H., Vianna Neto, J. X., Kelly, M., K., M. T., and Larsen, G. C.: Power curve and wake analyses of the Vestas multi-rotor demonstrator, *Wind Energy Science*, 4, 251–271, <https://doi.org/10.5194/wes-4-251-2019>, 2019.

2 Response to Reviewer 2

Overall: The article present numerous LES of both single rotor and multi-rotor consisting of 4 turbines. The different turbine configurations are compared, including the effects of tip spacing in the multi-rotor, thrust coefficient and turbine spacing for farm scenarios. Additionally, the authors compare to the analytical model by Bastankhah and Porté-Agel. The article follows a number of other recent articles on multi-rotors and provides new results. The article is generally well-written and the results are interesting, so the article is recommended for publication with revisions according to the comments below.

Response: We thank the reviewer, Dr. S. J. Andersen, for his careful assessment of our manuscript and for the detailed and constructive comments.

General comments:

1. Resolution and degree of detail.

- The number of grid points are given in Table 1. However, it would be beneficial to report what these values correspond to the actual spatial resolution. Please correct me if wrong, but as far as I can tell, the main grid of 256x128x160 grid points has a width of $\pi/2 \cdot 1000\text{m}$, i.e. the lateral discretization is $1570.8\text{m}/128 = 12.3\text{ m}$. Same resolution in the vertical. This means that there are only 4 points for a single actuator disc and only 2 for a small rotor in the multi-rotor. Is this correct? Tip spacing clearings corresponding to approximately 0.6m, 1.2m, 2.5m and 3m are investigated. How are the effect of tip spacing properly resolved when the mesh is so coarse?

Response: Assuming that the boundary layer height H is 1000 m, the grid resolution for the main $256 \times 128 \times 160$ grid (G2) is $12.3 \times 12.3 \times 6.25$ m. The single-rotor turbine has a diameter of $D = 0.1H = 100$ m. Thus, we have approximately 8 grid points across the disk in the spanwise direction and 16 points across the disk in the vertical direction. For each of the rotors in the multi-rotor turbines, the diameter is $d = 0.05H = 50$ m, which leads to 4 and 8 grid points in the spanwise and vertical directions respectively. It should be noted that for the combined 4-rotor system, the number of grid points is again similar to that for the larger single-rotor configuration (8×16). The dimensional values for the tip spacings are (2.5, 5, 10, 12.5, 25, 50) m corresponding to $s/d = (0.05, 0.1, 0.2, 0.25, 0.5, 1)$, respectively.

Using upwards of 8 grid points across the disk is an established rule-of-thumb following the study by Wu and Porté-Agel (2011). Other studies have used smaller number of grid points across the disk, particularly in the spanwise direction (e.g. (Stevens et al., 2014) used only 4 points across the disk in the spanwise direction in their main grid A3). Thus, the resolution used here with grid G2 is consistent with previous studies. In addition, the grid independence study in Section 3.1 of our manuscript quantifies the change in results between

grids G2 and G3. The change in mean velocities is marginal, while the change in added turbulent kinetic energy (TKE) is about 9 % near the top-tip height, and about 2% when averaged over the disk regions. We believe this level of convergence is sufficient to derive confidence in our results.

While the tip spacings for several s/d values are smaller than the grid spacing in the spanwise direction, the effect of tip spacing is captured because the actuator disk model appropriately adjusts the distribution of the thrust force across the discretization points. The details between the tips are obviously missed with this coarse resolution, but the wake effects are appropriately captured. The grid independence study referred to above was carried out for the smallest non-zero spacing, $s/d = 0.05$, as well as for the largest $s/d = 1$, and showed similar level of convergence. Details of the grid dependence for the $s/d = 1$ case are not shown in this manuscript for brevity, but may be found in Ghaisas et al. (2018).

- Please rephrase your sentence in the conclusion stating: "are studied in detail for the first time.". This is stretching it too far in my opinion for several reasons:

a) It could be argued that the degree of detail was larger in the article by van der Laan et al. (2019) due to higher resolution and using actuator lines rather than actuator disc as well as changing thrust due to a more realistic controller. Likewise, several of the conclusions found here corroborates the findings of other previous studies, but your present article still has merit. Additionally, the majority of the conclusions investigate integral quantities, e.g. power or disk-averaged velocity deficits.

Response: We agree with the reviewer that some of the findings here corroborate those in van der Laan et al. (2019). The phrase pointed out has been removed.

b) A recent article by van der Laan and Abkar (2019) also investigates multi-rotors in wind farms and find similar conclusions. Please include as reference and discuss when results are similar or different. This is mainly that the benefit of multi-rotors seems to vanish further into the farm, as seen in Figure 9(c)+(f). The authors should comment on this more, because it also explains why the analytical model ends up giving reasonable results further into the farm as it approaches the same level as for single rotor wind farms. Therefore, the conclusion by the authors "Wind farms comprised of multi-rotor turbines always show benefits over similar..." is perhaps also stretching the conclusions a bit as it does not show a benefit from the 4th turbine onwards.

Response: We thank the reviewer for pointing out this new article. In the revised manuscript, we refer to this article in the introduction as well as in the results sections (lines 46-53 and 272-275). The statement that multi-rotor wind farms are always beneficial is correct in the sense that the relative power averaged over all downstream rows is larger for multi-rotor farms as compared

to for single-rotor farms because the relative power of the first downstream row is always larger in the multi-rotor farm compared to in the single-rotor farm. However, we agree with the reviewer that this needs to be qualified, so a statement to the effect that the benefit is only due to the first downstream turbine in realistic tip spacing cases is included in the revised manuscript (lines 414-415).

2. Effect of CT . The authors discuss how a constant CT is used as opposed to the varying thrust level seen in van der Laan et al.(2019). Please comment on what is more realistic. Part of the discussion from the appendix on how to assess to CT could also be included in the main text.

Response: A constant C_T vs varying thrust level occurs in two respects. First, the thrust coefficient is fixed in time in our simulations, while in van der Laan et al. (2019), pitch and torque controllers are adopted in the simulations, which effectively lead to dynamically varying force coefficients. This information is included in Sec. 1 (lines 67-70) in the revised manuscript. Second, field measurements and related simulations in van der Laan et al. (2019) show that the thrust coefficients are different between the top and bottom pairs of rotors in the multi-rotor configuration, while identical thrust coefficients are used for all rotors in our simulations. This information is included in the revised manuscript in Sec. 2.2 (lines 120-124). Following comments from the other reviewer of this manuscript (Dr. M. Paul van der Laan), we realize that the simulations in van der Laan et al. (2019) also impose identical forcing to all rotors of the multi-rotor turbine for the purposes of comparing the wake recovery features.

We could not find a way to incorporate the material in the appendix into the main manuscript without taking the focus away. Hence, we choose to retain the material in the appendix. A reference to the appendix was missing from the main text of the original manuscript, which has now been included in Sec. 4.2 (lines 309-311).

3. Wake superposition. Wake superposition is not a trivial task and the focus of much research. The authors state in p. 5, line 124 that a new hybrid gives the best results. However, please elaborate on this, because it appears somewhat arbitrary. Best by what metric? It would be beneficial to include a comparison in an Appendix.

Response: We agree with the reviewer that wake superposition is an important topic of research currently. We have added an appendix to the manuscript to elaborate on why we use the hybrid method in this manuscript. The appendix shows that linear superposition of adjacent wakes is better than quadratic superposition, and that quadratic superposition of downstream wakes is better than linear superposition.

4. Reference/Comparison. Finding the appropriate reference for comparing a multirotor with a single rotor is not necessarily straightforward. Increasing the tip spacing a lot, has several implications for the presented results:

a) *The upper multi-rotor will effectively see a higher wind speed than the single turbine and multi-rotor with smaller tip spacing. This will affect all the reported power increases, e.g. in Fig. 11.*

b) *As the tip spacing is increased, the wake merging is delayed and the authors state in p. 9, line 185-186: "...behave independently up to increasingly larger downstream distances". However, that means that it essentially becomes a comparison of a single wake behind a large rotor versus the wake behind a single small rotor. It can be seen in Figure 6(a) which also looks as if they would almost coincide if scaled properly by the corresponding rotor diameter and inflow velocity. Therefore, it seems that the conclusion by the authors is that is is beneficial to separate the rotors as much as possible, e.g. p. 15, line 285 "The benefit of 4-rotor wind farms increases with increasing tip spacing...". However, doing so would remove the potential beneficial interaction of the tip vortices, which makes the wake break down faster, and hence recover faster. The authors state that "...the 4-rotor turbine allows for greater entrainment". This is correct, but part of the increase might simply be an artifact of the reference no longer being appropriate. The question is if the entrainment from the center is more beneficial than the wake interaction? For details of the wake flow and how the wake interact to facilitate a faster breakdown, please see the published presentation with DOI by Andersen and Ramos-Garcia from WESC, 2019.*

Response: We thank the reviewer for pointing out the interesting study on the interaction between tip-vortices of adjacent rotors in the multi-rotor configuration leading to a faster breakdown and recovery of the wake. We agree with all the points mentioned: (a) too large of a tip-spacing can lead to diminished benefits because it would reduce the interaction between the tip-vortices; (b) complications involved in designating a single-rotor configuration as being equivalent to a multi-rotor configuration.

With regards to point (a), we have mentioned this in Section 5 (lines 430-433). With regards to point (b), we have calculated the potential power of the multi-rotor turbine for different tip spacings. As discussed in a new appendix (Appendix B) in the revised manuscript, the potential power of the multi-rotor configuration differs from the potential power of the 1-rotor configuration by fairly small numbers (less than 2.4% for s/d up to 0.5). The difference is 5.5% for $s/d = 1$, which is admittedly large. For the present study, the chosen 1-rotor configuration may be considered to be appropriate as a reference, since its potential power varies by less than 2.4% (a small, but admittedly arbitrary number) for the majority of the multi-rotor configurations. This information is included in Appendix B in the revised manuscript.

5. *Analytical Model - The text in p. 19, line 310-313 does not seem to match Fig. 13: "Fig. 13(b) also show a similar sensitivity to the value of sigma"? It appears that sigma=0.28 gives better results for the velocity deficit, but worse for the power. Please explain this, because power should be proportional to U^3 .*

Response: The point we wanted to make here was that $\sigma_0/D = 0.28$ gives better results for the velocity deficit only in the region approximately $1D - 3D$ downstream of each turbine, but not close to the turbine. $\sigma_0/D = 0.32$ gives better prediction closer to the turbine. Thus, better modeling of the region at and close to the turbine is important for predicting power. We have reworded the paragraph to hopefully make these points more clear.

Technical Corrections:

Response:

- p. 1, line 20. Please define the "planform energy flux"

Response: We have replaced 'planform energy flux' with the more appropriate 'power density' and defined it in the first paragraph.

- p. 2, line 28-29: I doubt the cubic scaling laws were first realized in 2012. Please rephrase or find older reference.

Response: We tried to find an older reference (in papers and textbooks) without success. The sentence has been slightly rephrased.

- p. 2, line 33: "Overwhelmed" appears a odd choice of word. Please rephrase.

Response: The sentence has been rephrased.

- p. 2, line 46: It is a little unclear which article "this paper" refers to, i.e. van der Laan et al. (2019) or Chasapogiannis et al. (2014). For the former, it is not entirely correct that the study by van der Laan et al. only considered isolated multi-rotors as it shows how the wind farm area can be significantly reduced due to faster wake recovery which inherently deals with multiple multi-rotors. Please rephrase accordingly.

Response: We meant to refer to van der Laan et al. (2019). This sentence has been rephrased.

- p. 3, line 71+74: What are the "standard" here? Or what would the non-standard be? Perhaps it would be beneficial to elaborate on the simulations framework.

Response: We have included a reference to our previous work (Ghate and Lele, 2017) where equations and numerical details have been mentioned.

- p. 3, line 98-99: Please specify what this correspond to in physical time.

Response: The numbers are added to the revised manuscript.

- p. 4, line 80: *It is unclear to me how you simply state that the SGS stresses can simply be neglected? Does that mean you're effectively turning off your SGS model? Please clarify.*

Response: We apologize for this confusion. This was a typo. 'Subgrid' has been corrected to 'viscous' in the revised manuscript. We ignore viscous stresses throughout the domain except through the wall model at the bottom wall. The subgrid (or sub-filter) scale stresses are active throughout the domain.

- p. 6, line 131-33: *Does equation 4 not give the deficit, rather than "mean velocity"? Please define u_{tot}*

Response: Eq. (4) gives the mean velocity, using the total deficit (Δu_{tot}) defined in eq. (3). There is no variable named u_{tot} .

- p. 8, Fig. 3: *Please be consistent in plotting. The linewidth in the symbols change from left to right, i.e. symbols are less clear.*

Response: The symbol linewidths are now uniform.

- p. 11, line 195: *"Grazing" appears a odd choice of word. Please rephrase.*

Response: This word has been replaced in the revised manuscript.

- p. 15, line 158-261: *Please rephrase these sentences. It does not appear as if turbine 3 in Fig. 11(f) produce "appreciable larger" power than for a single rotor.*

Response: The reviewer probably meant "Fig. 9(f)" and not "11(f)", and lines "258-261" and not "158-261" in his comment. We have rephrased these lines in the revised manuscript.

- p. 15, line 268-270: *The authors state "It is seen that P2-5 is larger for all 4-rotor wind farms...". This is not correct. If you look at Figure 10(c) there is actually a cross-over for the 3rd turbine, where the single rotor produces more. Be careful, when you do the aggregate statistics, because it gets lost. Please rephrase.*

Response: In Fig. 11 and the accompanying discussion, we talk about average of the relative powers of turbines 2 through 5 (aggregate statistics) and not individual turbine powers. The individual relative power values, and whether they are smaller or larger in the 4-rotor wind farms compared to the 1-rotor wind farms, have already been presented prior to this in Figs. 9 and 10 and associated discussion (lines 246-296), so we do not repeat the same observations here.

- p. 16, Fig. 9: The axes on Fig. 9(a)+(d) seems wrong? If the velocity deficit is normalized, should the axes not be between 0 and 1?

Response: The velocity deficits are normalized by the friction velocity of the precursor (ABL) simulation. So the values need not range from 0 to 1.

- p. 17, Fig. 10: Please improve the figure. It is very difficult(impossible) to tell the lines apart as the symbols are so large that they cover the full vs broken lines. Comment on the cross-over at the 3rd turbine.

Response: The figure has been modified. The differences between the lines are hopefully clear now. Comments on the crossover are added to Sec. 4.2 (lines 293-296).

- p. 18, Fig. 11(b): Only three lines are visible. Please explain/comment in the text.

Response: Three of the lines, corresponding to fixed $C'_T = 4/3$ and varying $S_X = 4D, 5D$ and $6D$, lie on top of each other. This is included in the revised manuscript (lines 305-306).

- p. 19, line 328: Typo. Correct to "reproduced".

Response: The typo has been corrected.

- p. 20, Fig. 13: The axes on Fig. 9(a)+(d) seems wrong? If the velocity deficit is normalized, should the axes not be between 0 and 1?

Response: The reviewer probably meant "Fig. 13(a)-(d)" here. The velocity deficits are normalized by the friction velocity of the precursor (ABL) simulation. So the values need not range from 0 to 1.

- p. 21-22, Fig. 14-15: Please include explanation of the red values and how they are computed. Figures should be self-contained.

Response: The red values are the absolute error between the LES result and the model prediction of the relative power, computed at each of the four downstream turbines (turbines 2 through 5), and then averaged. Thus, the numbers in red in Figures 15 and 16 are $(1/4) \sum_{i=2}^5 |(P_i/P_1)^{LES} - (P_i/P_1)^{model}|$. The formula for the error is included in the revised manuscript on line 375 and in the figure captions.

Additional references:

1. van der Laan, M. P. and Abkar, M.: Improved energy production of multirotor wind farms, *J. Phys.: Conf. Ser.*, 1256, 1–11, <https://doi.org/10.1088/1742-6596/1256/1/012011>, 2019.

2. Andersen and Ramos-Garcia: Dynamic Analysis of the Multi-rotor: Performance and Wake, *WESC*, 2019 <https://doi.org/10.5281/zenodo.3357790>

References

- N. S. Ghaisas, A. S. Ghatge, and S. K. Lele. Large-eddy simulation study of multirotor wind turbines. *Journal of Physics: Conference Series*, 1037:072021, 2018.
- A. Ghatge and S. Lele. Subfilter-scale enrichment of planetary boundary layer large eddy simulation using discrete Fourier-Gabor modes. *Journal of Fluid Mechanics*, 819:494–539, 2017.
- T. Nishino and R. H. J. Wilden. Effects of 3D channel blockage and turbulent wake mixing on the limit of power extraction by tidal turbines. *International Journal of Heat and Fluid Flow*, 37:123–135, 2012.
- R. Stevens, D. Gayme, and C. Meneveau. Large eddy simulation studies of the effects of alignment and wind farm length. *Journal of Renewable and Sustainable Energy*, 6:023105, 2014.
- M. P. van der Laan, S. J. Andersen, N. R. Garcia, N. Angelou, G. R. Pirrung, S. Ott, M. Sjöholm, K. H. Sørensen, J. X. Vianna Neto, M. Kelly, T. K. Mikkelsen, and G. C. Larsen. Power curve and wake analyses of the Vestas multi-rotor demonstrator. *Wind Energy Science*, 4:251–271, 2019.
- Y.-T. Wu and F. Porté-Agel. Large-Eddy Simulation of Wind-Turbine Wakes: Evaluation of Turbine Parameterisations. *Boundary-Layer Meteorology*, 138: 345–366, 2011.

Effect of tip spacing, thrust coefficient and turbine spacing in multi-rotor wind turbines and farms

Niranjan S. Ghaisas¹, Aditya S. Ghate², and Sanjiva K. Lele^{1,2,3}

¹Center for Turbulence Research, Stanford University, Stanford, CA 94305, USA.

²Department of Aeronautics and Astronautics, Stanford University, Stanford, CA 94305, USA.

³Department of Mechanical Engineering, Stanford University, Stanford, CA 94305, USA.

Correspondence: Niranjan S. Ghaisas (nghaisas@stanford.edu)

Abstract. Large eddy simulations (LES) are performed to study the wakes of a multi-rotor wind turbine configuration comprising of four identical rotors mounted on a single tower. The multi-rotor turbine wakes are compared to the wake of a conventional turbine comprising of a single rotor per tower with the same frontal area, hub height and thrust coefficient. The multi-rotor turbine wakes are found to recover faster, while the turbulence intensity in the wake is smaller, compared to the wake of the conventional turbine. The differences with the wake of a conventional turbine increase as the spacing between the tips of the rotors in the multi-rotor configuration increases. The differences are also sensitive to the thrust coefficients used for all rotors, with more pronounced differences for larger thrust coefficients. The interaction between multiple multi-rotor turbines is contrasted with that between multiple single-rotor turbines by considering wind farms with five turbine units aligned perfectly with each other and with the wind direction. Similar to the isolated turbine results, multi-rotor wind farms show smaller wake losses and smaller turbulence intensity compared to wind farms comprised of conventional single-rotor turbines. The benefits of multi-rotor wind farms over single-rotor wind farms increase with increasing tip spacing, irrespective of the axial spacing and thrust coefficient. The mean velocity profiles and relative powers of turbines obtained from the LES results are predicted reasonably accurately by an analytical model assuming Gaussian radial profiles of the velocity deficits and a hybrid linear-quadratic model for merging of wakes. These results show that a larger power density can be achieved without significantly increased fatigue loads by using multi-rotor turbines instead of conventional, single-rotor turbines.

Copyright statement. TEXT

1 Introduction

Wind energy is among the fastest growing sources of renewable energy worldwide. Understanding and mitigating the deleterious effects of interactions between wakes of multiple turbines is critical for efficient utilization of the wind resource. In large wind farms, the wake interactions can limit the power density, or the power extracted per unit land area. The turbulent wake interactions also determine fatigue loads on downstream turbines, which has a direct bearing on the levelized cost of energy. Previous work has shown that wake losses are closely tied to wind farm layout parameters such as inter-turbine spacing

(Meyers and Meneveau, 2012; Yang et al., 2012), alignment between columns and the wind direction (Stevens et al., 2014a; Ghaisas and Archer, 2016), horizontal staggering between adjacent rows (Archer et al., 2013) and vertical staggering of similar or dissimilar turbines (Vasel-Be-Hagh and Archer, 2017; Xie et al., 2017; Zhang et al., 2019).

The idea of mounting multiple rotors per tower has been explored in recent years (Jamieson and Branney, 2012, 2014; Chasapogiannis et al., 2014; Ghaisas et al., 2018; van der Laan et al., 2019). For example, Jamieson and Branney (2012) pointed out that the scaling laws for power and weight with the diameter of a turbine (the ‘square-cube law’) pose a challenge to upscaling the design of current single-rotor turbines to very large systems, but make multi-rotor turbines an attractive alternative. Structural considerations with designing a 20 MW multi-rotor system were investigated in Jamieson and Branney (2014). Their results suggested that for a 45-rotor 20 MW system, the benefits due to reduced rotor and drive train costs would outweigh potential challenges associated with a more complicated tower structure. Chasapogiannis et al. (2014) studied the aerodynamics of a 7-rotor system, with the tips of the blades of adjacent rotors spaced 0.05 diameters apart. Interference due to adjacent rotors was found to lead to approximately 3 % increase in power, while about 2 % increase in the blade loading amplitude was observed.

Analysis of the wake of a 4-rotor turbine was carried out in our previous work (Ghaisas et al., 2018) using large eddy simulation (LES). It was shown that the multi-rotor turbine wakes recover faster compared to wakes of an equivalent single-rotor turbine. The turbulent kinetic energy added due to multi-rotor turbines was also lesser than that due to an equivalent single-rotor turbine. Wind farms comprising of five aligned turbines spaced four diameters apart were also considered in this study. The potential for reduced wake losses as well as reduced fatigue loads was clearly pointed out.

The results for the wake of an isolated turbine were confirmed recently in van der Laan et al. (2019) using a combination of field observations and numerical simulations. van der Laan et al. (2019) also studied the aerodynamics of individual and combined rotors. It was found that rotor interaction can lead to an increase of up to 2 % in the power generation, similar to that reported in Chasapogiannis et al. (2014). Isolated multi-rotor turbines were studied in detail in van der Laan et al. (2019), and potential benefits in multi-rotor wind farms were discussed.

Interactions between several multi-rotor wind turbines arranged in a 4×4 grid were studied using several Reynolds-Averaged Navier Stokes (RANS) simulations and one large eddy simulation (LES) in van der Laan and Abkar (2019). The annual energy production of multi-rotor wind farms was found to be 0.3 – 1.7% larger compared to that of equivalent single-rotor wind farms. The benefit was confined to the first downstream turbine row and for cases where the wind direction was fully aligned with the turbine columns. This discrepancy with the results of Ghaisas et al. (2018) can be attributed to the large tip spacings considered in Ghaisas et al. (2018). In the present work, we study more realistic tip spacings, and observe consistent qualitative and quantitative trends with the results of van der Laan and Abkar (2019).

In this paper, we extend our previous work (Ghaisas et al., 2018) by considering a larger number and range of multi-rotor wind turbine and farm design parameters. A schematic of the multi-rotor turbine considered here is shown in Fig. 1(b). Four rotors with identical diameters, d , are mounted on a tower with height H_T (Fig. 1b). The tips of the rotors are separated by s_h and s_v in the horizontal and vertical, respectively. As a result, the rotors are centered at $H_T \pm (s_v + d)/2$, and the mean hub-height is H_T . The multi-rotor configuration (henceforth referred to as 4-rotor turbine) is compared to a conventional turbine

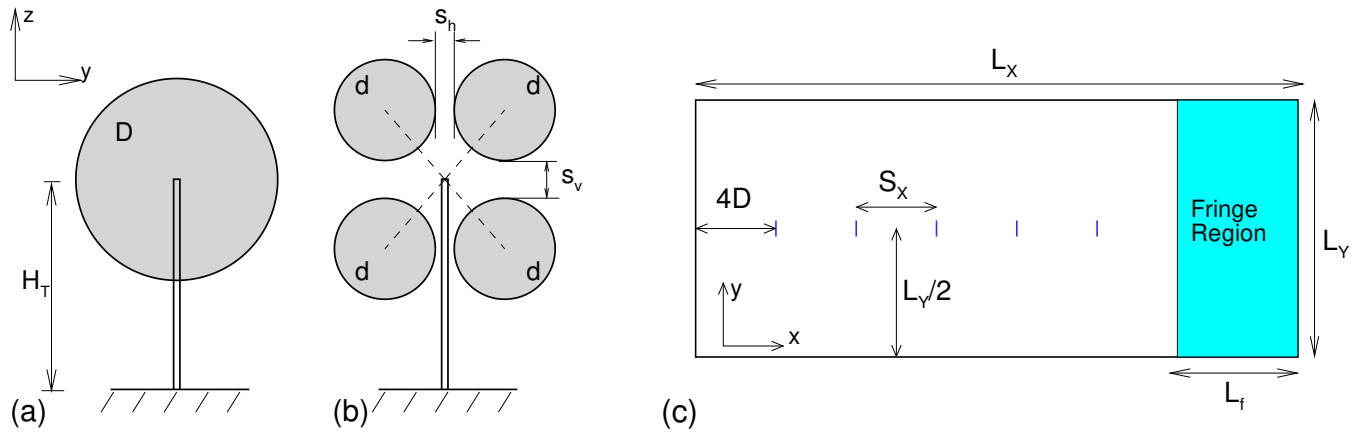


Figure 1. Schematic of (a) conventional 1-rotor turbine and (b) 4-rotor turbines. Tower height H_T is identical for both turbines. Diameters are related by $D = 2d$. Spacing between tips is s_h in horizontal and s_v in vertical. (c) Schematic of the computational domain in plan view, not to scale. Blue lines denote turbine locations.

with a single rotor (referred to as 1-rotor turbine) with diameter $D = 2d$ per tower with height H_T (Fig. 1a). The total frontal rotor area is $\pi D^2/4$ in each case.

60 The primary aim of this paper is to quantify the benefits associated with the wakes of multi-rotor turbines for a wide range of tip spacings, thrust coefficients and inter-turbine spacings using LES. A second aim is to develop an analytical modeling framework, combining elements from previously published studies, and to evaluate its ability to predict the mean velocity profiles in the wakes of multi-rotor wind farms. This study differs from that of van der Laan et al. (2019) mainly in the manner in which the undisturbed inflow profiles are imposed. The inflow in van der Laan et al. (2019) is a logarithmic profile corresponding to the neutrally stratified atmospheric surface layer, with an effectively infinite boundary layer height, while an ABL with a finite height is used as the inflow in the present study. Three levels of turbulence intensity at the hub-height were considered in van der Laan et al. (2019), while all cases in the present study have a fixed turbulence intensity. Pitch and torque controllers were adopted in the simulations of van der Laan et al. (2019), which produced realistic power curves over the entire region of operation of the single-rotor and multi-rotor turbines. In the present study, a constant thrust coefficient is imposed,
 65 which is a reasonably accurate representation of a turbine operating in ‘Region II’ of the power curve (Stevens et al., 2014a).
 70

This paper is organized as follows. The LES methodology, details of the simulations and the analytical framework are described in Sect. 2. Results of isolated 4-rotor turbines are described in Sect. 3, while results of wind farms comprised of 4-rotor turbines are described in Sect. 4. In each case, LES results are presented followed by predictions of the analytical modeling framework. Sect. 5 presents a brief summary and the conclusions.

75 2 Numerical Methodology

2.1 Simulation Framework

The LES-filtered incompressible Navier-Stokes equations are solved on a structured uniform Cartesian mesh using Fourier-collocation in x and y directions, sixth-order staggered compact finite-differences in the z direction and a total variation diminishing (TVD) fourth-order Runge-Kutta time-stepping scheme. Non-periodicity is imposed in the x direction using a fringe region technique (Nordström et al., 1999). Partial dealiasing is achieved by applying the 2/3 rule in x, y and the use of skew-symmetric form for the convective terms in the z direction. [The governing equations and numerical discretization details may be found in Ghate and Lele \(2017\) \(Appendix A\).](#) The effect of sub-filter scales is modeled using the Anisotropic Minimum Dissipation (AMD) model (Rozema et al., 2015). Wind turbine forces are modeled as momentum sinks using the actuator drag-disk model (Calaf et al., 2010). The turbine forces in the LES are defined in terms of the disk-averaged velocity and a ‘local thrust coefficient’, C'_T . The local thrust coefficient (assuming validity of the inviscid actuator-disk theory) is related to the nominal thrust coefficient, C_T , [through the relations \$C'_T = C_T/\(1-a\)^2\$ and \$a = \(1 - \sqrt{1 - C_T}\)/2\$, where \$a\$ is the axial induction factor.](#) Algebraic wall models based on the Monin-Obukhov similarity theory are used to specify the shear stresses at the bottom wall. [Viscous](#) stresses in the rest of the domain are smaller than the sub-filter scale stresses by around 8-10 orders of magnitude and, hence, are neglected in these simulations. The code has been validated over several previously published studies (Ghate and Lele, 2017; Ghaisas et al., 2017; Ghate et al., 2018).

2.2 Cases Simulated

Half-channel (HC) simulations are carried out using the concurrent precursor-simulation methodology (Stevens et al., 2014b) on domains of length L_x, L_y, L_z in the three coordinate directions. A schematic of the simulation domain is shown in Fig. 1(c). All simulations use $(L_y, L_z) = (\pi/2, 1)H$, while $L_x = \pi H$ or $1.25\pi H$, depending on the case. Here H is the height of the half-channel. The flow in the ‘precursor’ simulation is driven by a constant imposed pressure gradient, $-u_*^2/H$, where u_* is the friction velocity at the bottom wall. The HC configuration is used as a model for the neutrally-stratified atmospheric boundary layer (ABL) with the Coriolis forces neglected (Stevens et al., 2014a; Calaf et al., 2010), and we use the terms HC and ABL interchangeably. The surface roughness height at the bottom wall is $z_0 = 10^{-4}H$. This corresponds to rough land, and has been used in previous wind turbine studies (Calaf et al., 2010). The turbulence intensity at a typical hub height of $0.1H$ is approximately 8%. All results are normalized using scales H and u_* , with typical values $H = 1000$ m, $u_* = 0.45$ m/s.

Precursor simulations (without turbines and with streamwise periodicity) are carried out first for 50 time units (1 time unit = H/u_*), so as to achieve a fully-developed statistically stationary state. These velocity fields are then used to initialize the ‘precursor’ and ‘main’ simulation domains. Turbines are introduced in the ‘main’ domain, and a portion of this domain, of length $L_f = 0.15L_x$, is forced with the velocity field from the ‘precursor’ domain at each time step. Simulations in this concurrent precursor-simulation mode are carried out for a further 20 time units, with time-averaging performed using samples stored every 10 time steps over the last 12 time units. [For the typical values of \$H\$ and \$u_*\$ mentioned above, this corresponds to approximately 12.3 hours of simulations with turbines, out of which statistics are collected over approximately 7.4 hours.](#)

Table 1. Suite of isolated turbine (sets IT*) and wind farm (sets WF*) simulations. Domain lengths are non-dimensionalized by height H , with label D1 denoting $(\pi \times \pi/2 \times 1)$ and DA denoting $(1.25\pi \times \pi/2 \times 1)$. Grid sizes shown are for ‘main’ domain. Equal number of grid points are additionally required for the ‘precursor’ domain in each case. Label G1 denotes $192 \times 96 \times 128$; G2 denotes $256 \times 128 \times 160$; G3 denotes $320 \times 160 \times 200$; and G2A denotes $320 \times 128 \times 160$ grid points. Axial spacing is undefined for isolated turbine simulations. Local thrust coefficients are $C'_T = 1, 4/3, 2$, corresponding to nominal $C_T = 0.64, 0.75, 8/9$, respectively.

Set	Domain	Grid	Tip Spacing, $s_h/d = s_v/d = s/d$	Thrust Coefficient, C'_T	Axial Spacing, S_X
IT1-s	D1	G1	1-Rot, 0.05	4/3	-
IT2-s	D1	G2	1-Rot, 0.0, 0.05, 0.1, 0.2, 0.25, 0.5, 1.0	4/3	-
IT3-s	D1	G3	1-Rot, 0.05	4/3	-
IT2- C'_T	D1	G2	1-Rot, 0.1	1.0, 2.0	-
WF2- C'_T	D1	G2	1-Rot, 0.1, 0.25, 0.5	1.0, 4/3, 2.0	$4D$
WF2-SX	DA	G2A	1-Rot, 0.1, 0.25, 0.5	4/3	$5D, 6D$

The suite of simulations carried out is listed in Table 1. In the first set of simulations (IT1, IT2, IT3), isolated turbines are simulated with a baseline 1-rotor configuration with $D = 0.1H$, and a baseline 4-rotor configuration with $d = 0.05H$ and $s_h = s_v = s = 0.05d$. Six additional (set IT2) isolated 4-rotor turbine simulations are carried out with varying s to study the effect of tip spacing in the 4-rotor configuration. The thrust coefficient is fixed for this first set of simulations. In the second set (IT2- C'_T), four isolated turbine simulations are carried out to study the effect of varying thrust coefficient. In the third set of simulations (sets WF*), a line of five 1-rotor turbines separated by a distance S_X in the streamwise direction is compared to a similar configuration with a line of five 4-rotor turbines separated by S_X in the streamwise direction. A total of 20 wind farms are simulated, considering different combinations of S_X , C'_T and s . The same thrust coefficient is used for all rotors in one simulation. All isolated turbines, and the most upstream turbine in the five-turbine cases, are located at $x = 0$, where the domain inlet is at $x = -4D$. The turbine towers are located at $y = Ly/2$ in the spanwise direction and the tower height is $H_T = 0.1H$ for all turbines. The domain size in the x-direction is increased to 1.25π to accommodate larger axial spacings for the cases with $S_X = 5D$ or $6D$.

Field measurements and simulations reported in van der Laan et al. (2019) show that the bottom pair of rotors has a slightly larger thrust coefficient than the top pair of rotors. However, for simplicity, the same thrust coefficient is used for all rotors in one simulation. The methodology of keeping thrust forces identical across all rotors of the multi-rotor turbine was adopted by van der Laan et al. (2019) as well in the part of their study that focused on comparing wakes of multi-rotor and single-rotor turbines. The effect of variable operating conditions for the top and bottom pairs of rotors can be studied systematically in the future. Finally, the appropriateness of considering a single-rotor turbine with the same total frontal area, thrust coefficient and mean hub height as that of the multi-rotor turbine is evaluated in Appendix B.

2.3 Analytical Model

An analytical modeling framework based on the model by Bastankhah and Porté-Agel (2014) is evaluated for the multi-rotor configuration in this paper. The model assumes that the velocity deficit in the wake decays in the streamwise (x) direction, and follows a Gaussian profile in the radial directions. The deficit due to turbine rotor i located at (x_i, y_i, z_i) at a downstream point (x, y, z) is given as

$$\frac{\Delta \bar{u}_i(x, y, z)}{\bar{u}_{up}(z)} = C(x) \times \exp\left(-\frac{(y - y_i)^2 + (z - z_i)^2}{2(k^*(x - x_i) + \sigma_0)^2}\right), \quad (1)$$

$$C(x) = \left(1 - \sqrt{1 - \frac{C_T}{8(k^*(x - x_i)/d_0 + \sigma_0/d_0)^2}}\right), \quad (2)$$

for $x > x_i$. The length scale d_0 equals D for 1-rotor and d for 4-rotor cases. The argument of the square-root in eq. (2) is set to zero whenever it is less than zero, which happens very close to the turbines.

The combined effect of multiple turbine rotors has been modeled in the past using several empirical techniques. Primary among these are addition of velocity deficits (implying linear addition of momentum deficit), square-root of sum of squares (implying addition of kinetic energy deficit; also termed as quadratic merging), and considering the largest deficit to be dominant. In this study, a hybrid between the first two approaches is found to give best results. [Appendix A presents brief comments justifying the hybrid approach](#). The hybrid approach involves linear merging of wakes originating at the same x location, with quadratic merging of wakes originating at different x locations. This can be written as

$$\Delta \bar{u}_{tot}(x, y, z) = \left[\sum_{i=1}^{N_{xt}} (\Delta \bar{u}_{lin})_i^2 \right]^{1/2}; \quad (\Delta \bar{u}_{lin})_i = \sum_{j=1}^{N_r(x_t)} \Delta \bar{u}_j(x, y, z). \quad (3)$$

N_{xt} is the number of unique axial locations where a turbine is located. $N_r(x_t)$ is the number of rotors at the location x_t . In this paper, N_{xt} is 1 for the isolated turbine cases, and 5 for the wind farm cases. Furthermore, since we only consider either an isolated turbine or a wind farm with one column of turbines, N_r is 1 for the 1-rotor cases and 4 for the 4-rotor cases. Finally, the mean velocity at each point in the domain is calculated according to

$$\bar{u}(x, y, z) = \bar{u}_{up}(z) - \Delta \bar{u}_{tot}(x, y, z). \quad (4)$$

The upstream velocity is assumed to follow the logarithmic profile, $\bar{u}_{up}(z) = (u_* / \kappa) \ln(z/z_0)$, with $\kappa = 0.4$.

This modeling framework involves two empirical parameters, k^* and σ_0 . Comments regarding selecting these parameters are provided in the appropriate sections below.

3 Isolated Turbine Results

3.1 Grid Convergence and Baseline Cases

Precursor ABL simulation results are shown first in Fig. 2. These results are averaged over time and the horizontal directions. As expected, the mean streamwise velocity profiles follow the logarithmic law of the wall, particularly in the lower 20% of

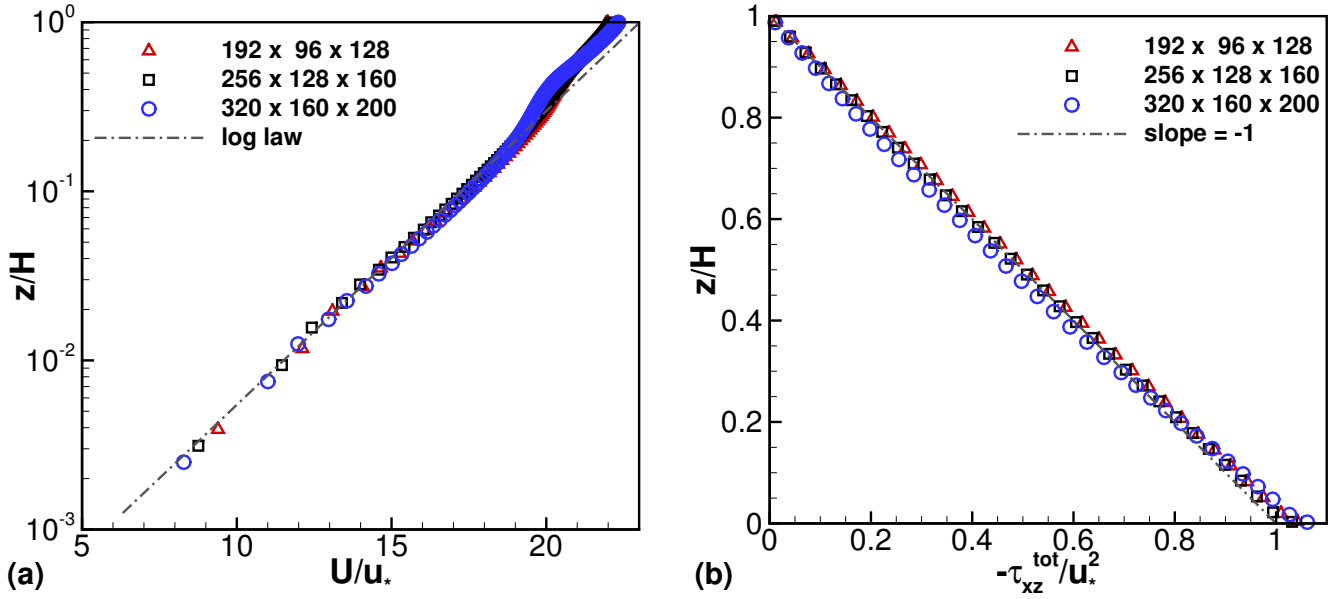


Figure 2. Profiles of time- and horizontally-averaged (a) streamwise velocity, and (b) negative of total shear stress from the ABL (precursor) simulations with varying grid sizes. Total shear stress is the sum of resolved, subgrid-scale and wall-modeled components.

155 the domain. The total shear stress profiles also follow the expected line with slope equal to -1. This indicates that the vertical transport of momentum by the ABL is correctly represented by the numerical method and AMD subgrid-scale model, and that the ABL simulations are statistically stationary. Figure 2 also shows that the spatial resolution employed is adequate for these ABL simulations, since the results are almost independent of the grid size.

Results of an isolated 1-rotor turbine and an isolated 4-rotor turbine with $s/d = 0.05$ are shown in Fig. 3. Vertical profiles in 160 the mid-span planes at several locations downstream of the turbine are shown. The mid-span plane is located at $Y_{cen} = L_Y/2$ for the 1-rotor configuration. The 4-rotor configuration has two mid-span planes, $Y_{cen} = L_Y/2 \pm (1 + s_h)d/2$. Results at only one of these, at $L_Y/2 - (1 + s_h)d/2$, are shown, since both planes are statistically identical.

Figure 3(a) shows that the velocity deficit profiles for the 1-rotor turbine have a single peak close to $z/H = 0.1$. Two distinct peaks, close to $z/H = 0.1 \pm (1 + s_v)d/2$, are seen for the 4-rotor turbine wake in Fig. 3(b) only at $x/D = 2$. Further 165 downstream, at $x/D = 4$ and 6, two distinct peaks are not easily discernible, indicating that the wakes have merged. The added turbulent kinetic energy (TKE) profiles in Figs. 3(c-d) show similar evidence of a single large wake for the 1-rotor turbine and two distinct wakes at $x/D = 2$, which merge further downstream, for the 4-rotor turbine.

Simulations with varying grid sizes (the IT*-s cases) show that the differences between the intermediate (G2) and finest (G3) grids employed are almost negligible for the velocity deficits. The added TKE profiles show greater sensitivity to the resolution 170 than the mean velocity deficits. The added TKE normalized by the TKE is computed for different grid sizes. The variation of this quantity between the grids G2 and G3 is found to be at most 9 % close to the top tip height, $z/H = 0.1 + (1 + s_v)d/2$, at $x/D = 4$. The variation of added TKE averaged over the rotor area to the TKE averaged over the rotor area between grids

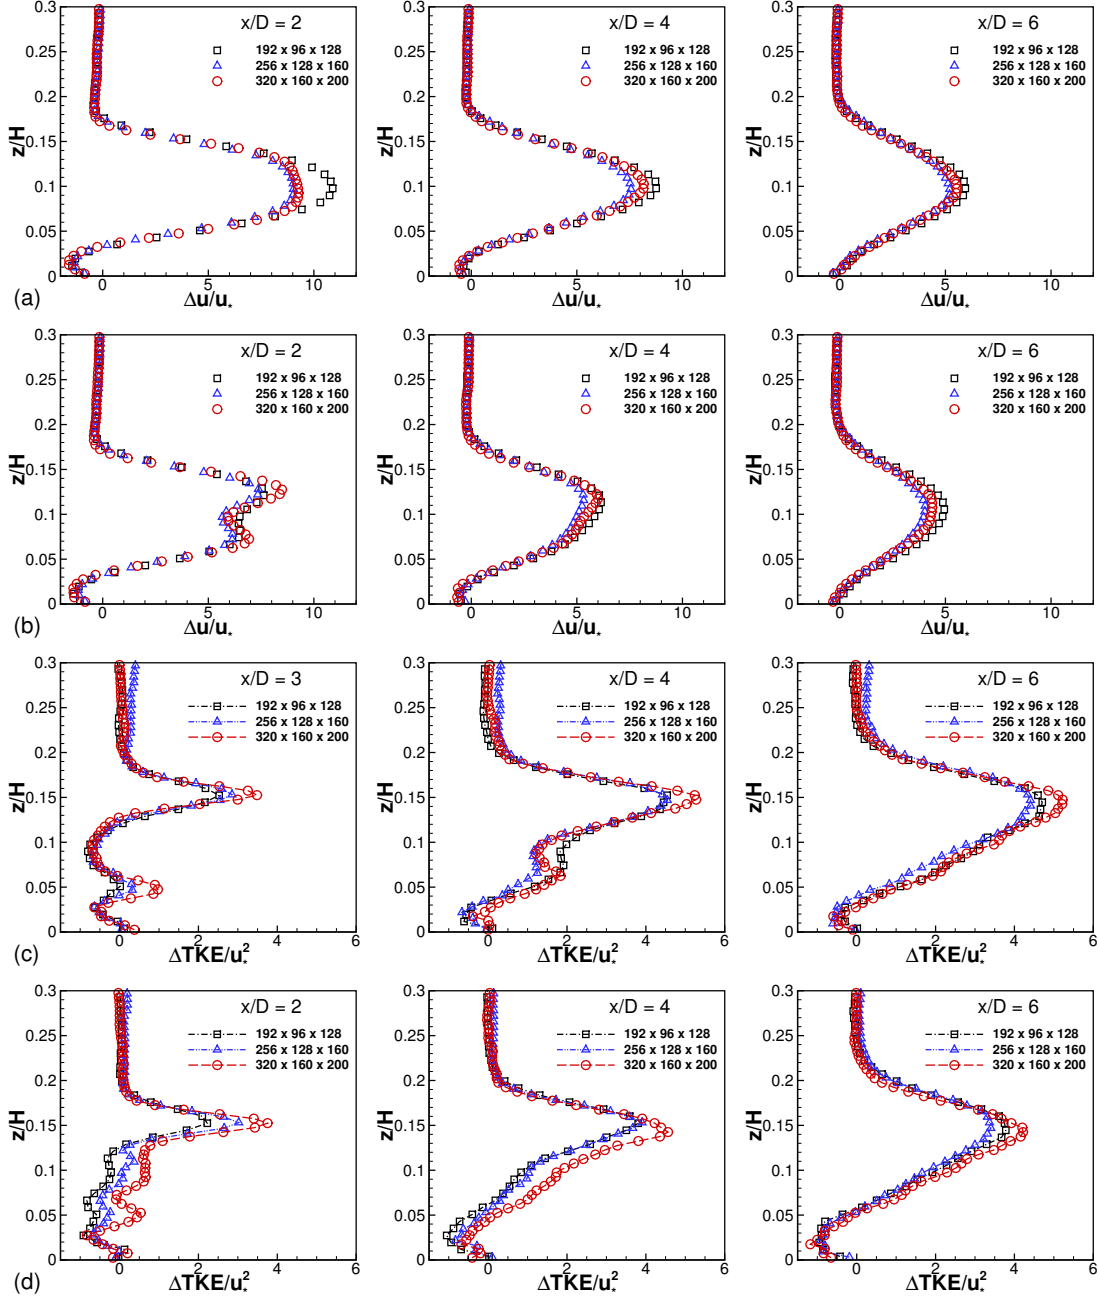


Figure 3. Profiles of mean velocity deficit at the centerline and downstream of an isolated (a) 1-rotor turbine and (b) 4-rotor turbine with $s = 0.05d$ for three different grid resolutions. Profiles of added turbulent kinetic energy (TKE) downstream of (c) 1-rotor turbine and (d) 4-rotor turbine with $s = 0.05d$. Mean velocity deficit and added TKE are defined as $\Delta u(x, z) = u(-1D, Y_{cen}, z) - u(x, Y_{cen}, z)$ and $\Delta TKE(x, z) = TKE(x, Y_{cen}, z) - TKE(-1D, Y_{cen}, z)$, respectively. Y_{cen} is $L_Y/2$ for 1-rotor turbine and $L_Y/2 - (1 + s_h)d/2$ for 4-rotor turbine.

G2 and G3 is found to be at most 2.1 %, again at $x/D = 4$. Similar magnitude of variation with grid size was observed for the 4-rotor turbine with $s/d = 1$, and the results are not repeated here for brevity. The variation with grid size of 1-rotor turbine wakes is smaller than that of 4-rotor turbine wakes. Similar results were also reported in Ghaisas et al. (2018). We conclude that the intermediate grid, with $256 \times 128 \times 160$ grid points, is sufficient for obtaining converged results, and all further simulations are carried out using this resolution. For the wind farm cases with domain size increased to 1.25π in the x direction, the number of points in the x direction is increased to 320 to retain the same resolution. This grid is labeled as G2A in Table 1.

3.2 Effect of Tip Spacing

Isolated 4-rotor turbines with varying tip spacings, $s_h = s_v = s$, are studied in this subsection (IT2-s cases). Contours of the mean streamwise velocity deficit and the TKE (Fig. 4) in the mid-span planes show that one large wake immediately downstream of a 1-rotor turbine is replaced by four smaller wakes immediately downstream of the four rotors of the 4-rotor turbines. Comparing Figures 4(a,c,e), it is clear that the wake of a 4-rotor turbine at any downstream location (e.g. at $x/D = 4$), is weaker in magnitude than that of the 1-rotor turbine. This is also seen in the profiles shown in Fig. 5. In other words, the wake of a 4-rotor turbine is seen to recover faster than the wake of a 1-rotor turbine with the same thrust coefficient and rotor area. Figure 5 also shows that greater the tip spacing of the 4-rotor turbine, faster is the wake recovery. This is also indicated by the shortening of the contour lines corresponding to $\Delta u/u_* = 1$ and 2.5 in Fig. 4 with increasing tip spacing.

An intuitive explanation for the increasing rate of wake recovery with increasing tip spacing is as follows. The characteristic length scale of the wake of the 1-rotor turbine is diameter D , while that for the individual wakes of the 4-rotor turbines is the smaller diameter d . Furthermore, the spacing between the tips of the 4-rotor turbine allows for greater entrainment of low-momentum fluid into the 4-rotor turbine wakes. As a result, the rate of wake recovery is larger for the 4-rotor turbine as compared to the 1-rotor turbine, and increases with increasing s .

The wakes of the individual rotors of a 4-rotor turbine expand with downstream distance, and eventually merge to form a single wake. The axial distance where individual wakes of the four rotors may be considered to have merged increases with increasing s . This is seen clearly in Fig. 5, where two peaks in the velocity deficit profiles are not seen at $x/D = 4$ for the $s/d = 0.1$ turbine, while two peaks are clearly visible at $x/D = 6$ for the $s/d = 0.5$ turbine.

The contour plot of TKE shown in Fig. 4(b) is strikingly similar to those reported previously (e.g. Fig. 18 in Abkar and Porté-Agel (2015)) for an isolated 1-rotor turbine. The TKE contours in Fig. 4(b) are similar in shape to those in Fig. 4(d) beyond approximately $x/D = 4$, but are quite dissimilar to the contours in Fig. 4(f). This is further evidence for the observation that the wake-merging distance increases with increasing s . The rotors of the 4-rotor turbine behave independently up to increasingly larger downstream distances with increasing s .

A succinct representation of the effect of tip spacing on the wake of an isolated 4-rotor turbine with respect to that of an isolated 1-rotor turbine is shown in Fig. 6, where rotor-disk-averages of four quantities is plotted as a function of the axial distance . The rotor-disk averages are calculated at each axial (x/D) location and over different regions in the $y - z$ plane depending on the turbine configuration. The averages are computed over one disk of diameter D , centered at $(L_Y/2, 0.1H)$ for the 1-rotor turbine, and over four disks of diameters d each, centered at $(L_Y/2 \pm (1 + s_h)d/2, 0.1H \pm (1 + s_v)d/2)$, for the

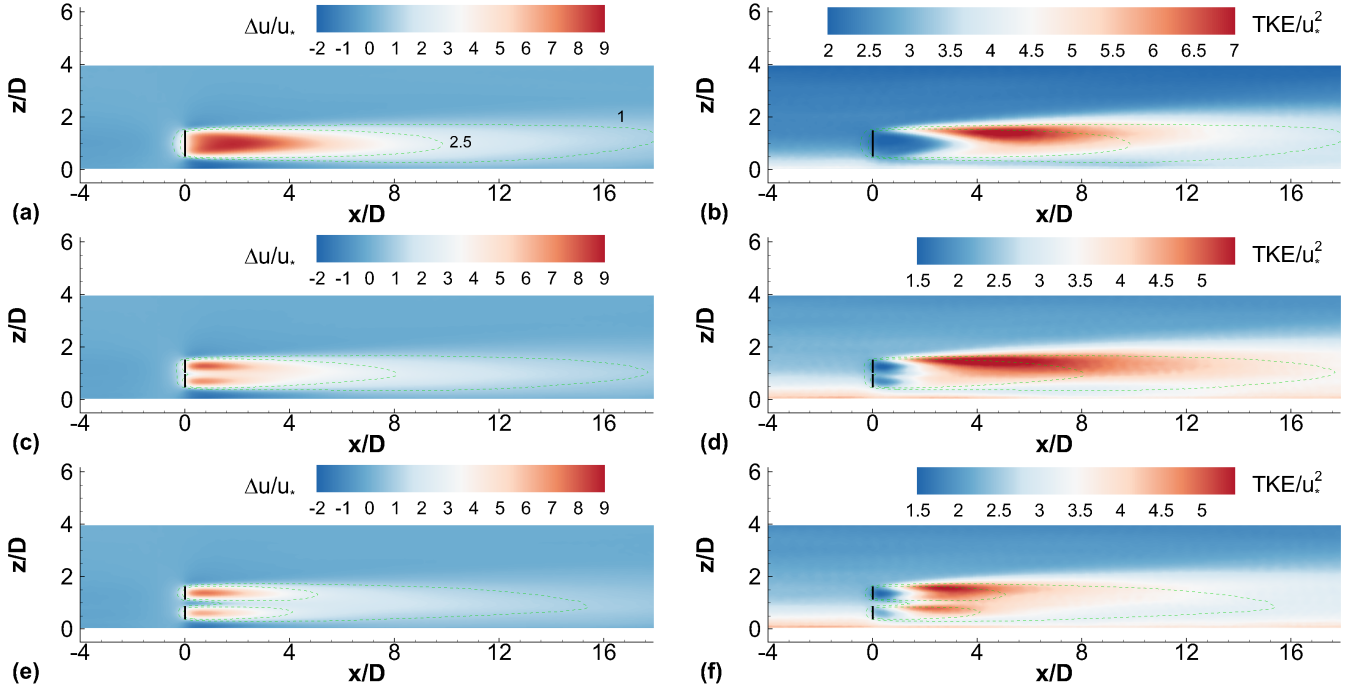


Figure 4. Contours of (a,c,e) mean velocity deficit and (b,d,f) TKE at the centerline, for (a,b) 1-rotor turbine, and 4-rotor turbines with tip spacings (c,d) $s = 0.1d$ and (e,f) $s = 0.5d$. Centerline Y_{cen} varies with turbine configuration. Black solid lines denote turbine rotors. Dashed lines are velocity deficit contours corresponding to the levels $\Delta u/u_* = 1$ and 2.5.

4-rotor turbines. The disk averaged TI is actually the ratio of the **square-root of the** disk-averaged TKE and disk-averaged mean streamwise velocity, being slightly different from the disk-average of the point-wise turbulence intensity. **The disk-averaged added turbulence intensity is defined as, $\Delta I_{disk}(x) = I_{disk}(x) - I_{disk}(-1D)$, where $I_{disk} = \sqrt{(2/3)TKE_{disk}}$.**

210 Figure 6(a) shows that the streamwise velocity deficits are always smaller for a 4-rotor turbine than for a 1-rotor turbine, and that deficits decrease monotonically with increasing tip spacing. Interestingly, the 4-rotor turbine with **no clearance between the** rotor blades (tip spacing $s/d = 0$) also shows reduced velocity deficits in the intermediate downstream region, i.e. $x/D = 4$ and $x/D = 6$. The curves corresponding to the $s/d = 0$ turbine and the $s/d = 1$ turbine act as bounds to the curves corresponding to intermediate tip spacings. The disk-averaged added TKE and TI_{disk} curves (Figures 6(b) and (c), respectively) do not show
 215 a monotonic behavior at all downstream locations with increasing s . The curves corresponding to the $s/d = 0$ and $s/d = 1$ turbines do not act as bounds for the curves corresponding to the intermediate tip spacings. However, in general, the second order turbulent statistics show a decrease in magnitude with increasing tip spacing.

The disk-averaged added turbulence intensity can be compared to that reported in Figures 18(b,d,f) of van der Laan et al. (2019). For ambient turbulence intensities of 5% and 10% investigated in van der Laan et al. (2019), ΔI_{disk} values were found
 220 to be larger for the 4-rotor case than for the 1-rotor case in the near-wake region, and smaller further downstream. For the largest ambient turbulence intensity of 20%, the ΔI_{disk} values for the 4-rotor case were always smaller than for the 1-rotor case. The

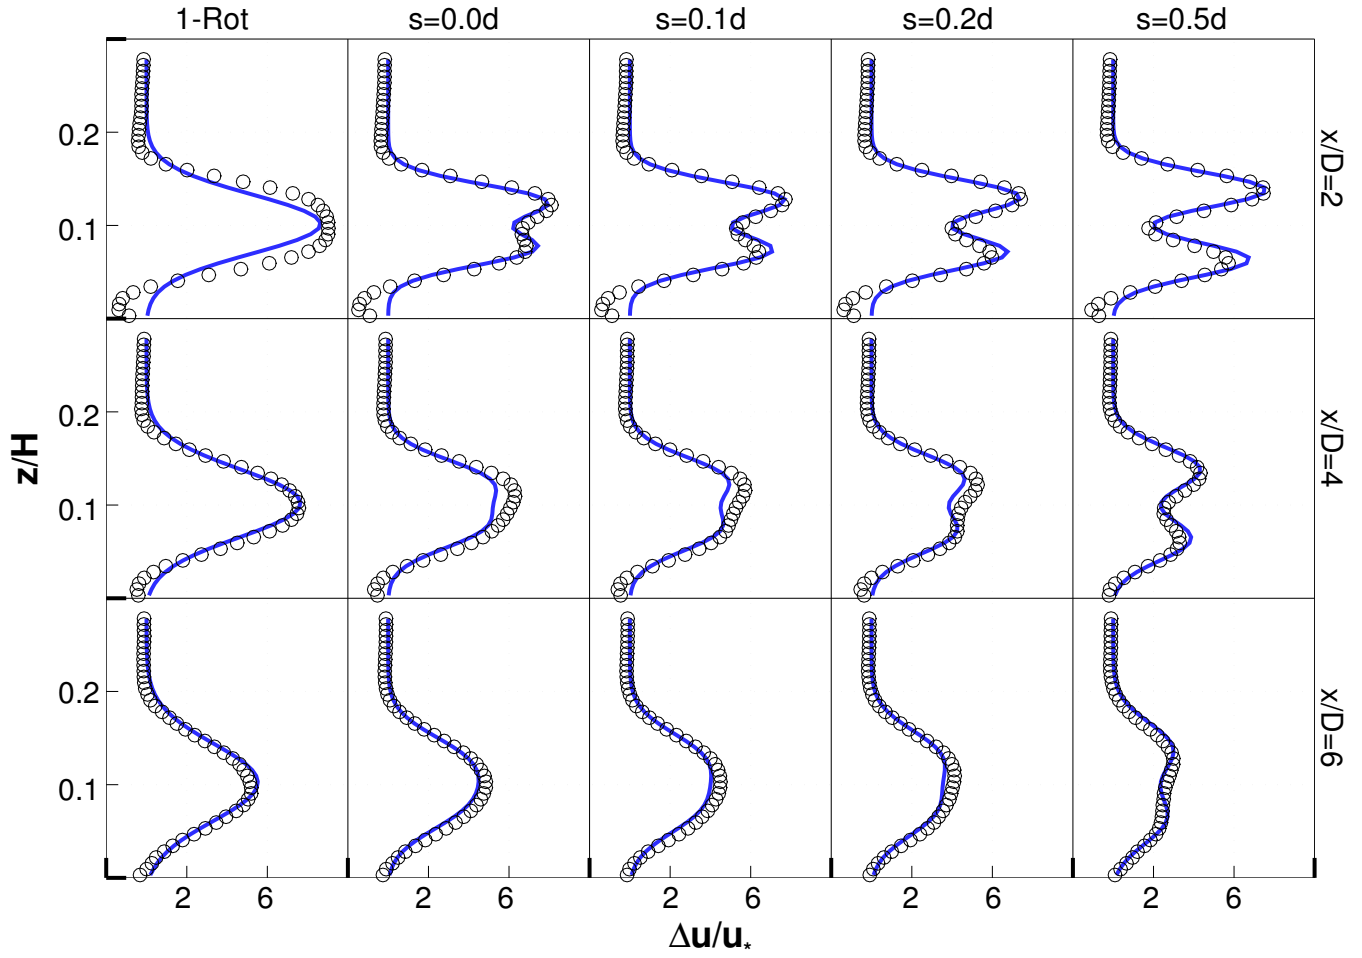


Figure 5. Velocity profiles downstream of an isolated 1-rotor turbine and isolated 4-rotor turbines with different tip spacings, $s/d = 0, 0.1, 0.2$ and 0.5 . Black symbols are LES results and blue lines are analytical model results.

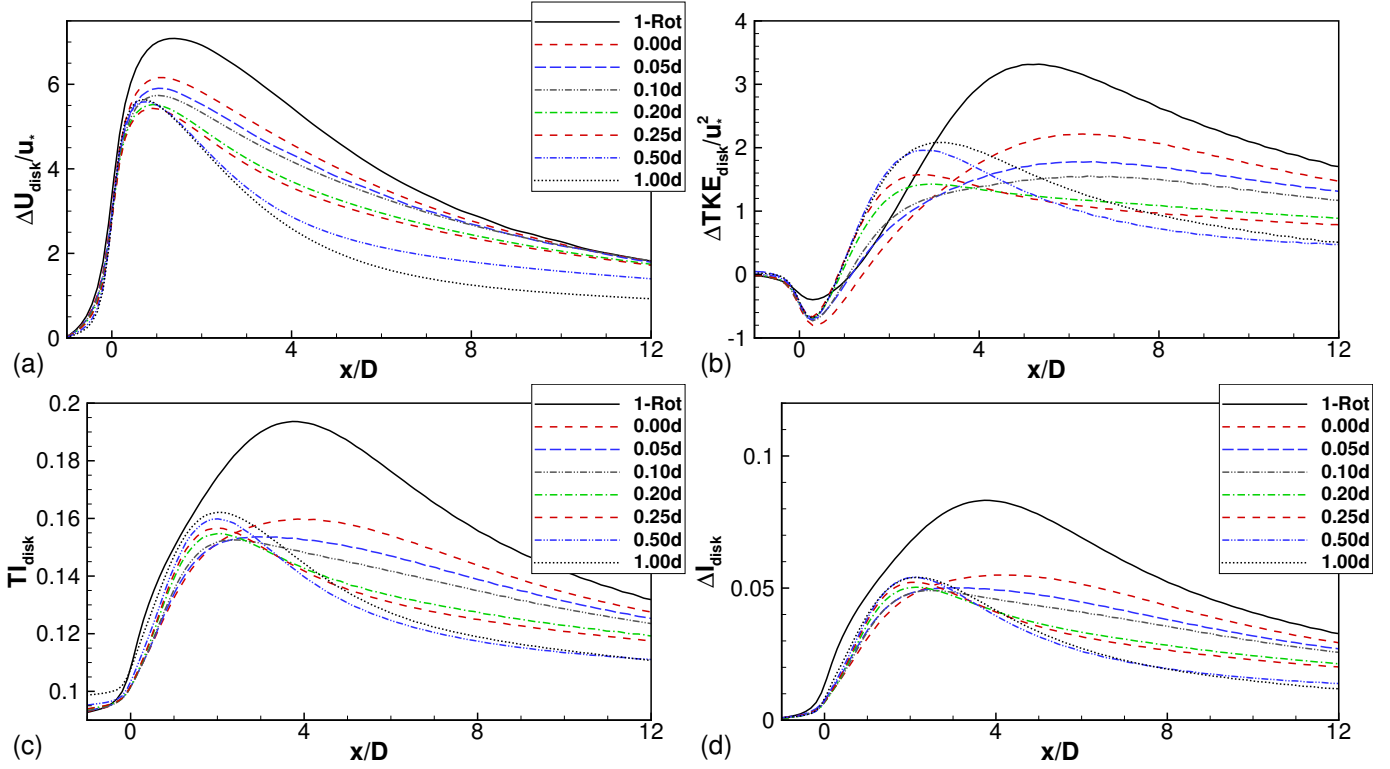


Figure 6. Effect of tip spacing on disk-averaged (a) mean velocity deficit, (b) added TKE, (c) turbulence intensity and (d) added turbulence intensity. Disk averages are computed over rotor disk area(s) corresponding to each turbine configuration. Disk-averaged turbulence intensity is the ratio of the square-root of the disk-averaged TKE to the disk-averaged velocity $TI_{disk} = \sqrt{TKE_{disk}}/U_{disk}$. Added disk-averaged turbulence intensity is $\Delta I_{disk} = I_{disk} - I_{disk}(-1D)$, with $I_{disk} = \sqrt{(2/3)TI_{disk}}$.

current LES results are qualitatively similar to the highest ambient turbulence intensity level results in van der Laan et al. (2019), although the ambient turbulence intensity in our current LES is approximately 8%. The reasons for this discrepancy are not clear and should be studied in future work.

225 3.3 Effect of Thrust Coefficient

The IT2- C'_T cases, along with two cases from the IT2-s set of simulations, are compared to study the effect of thrust coefficient. Only one 4-rotor configuration, with tip spacing $s/d = 0.1$, is considered here. Figure 7 shows that the trends observed for $C'_T = 4/3$ hold for the other two thrust coefficients studied as well. The disk-averaged velocity deficits are smaller for the 4-rotor turbine than for the corresponding 1-rotor turbine. The added TKE (not shown) and TI_{disk} are also smaller for the
 230 4-rotor turbine than for the 1-rotor turbine for all the thrust coefficients studied.

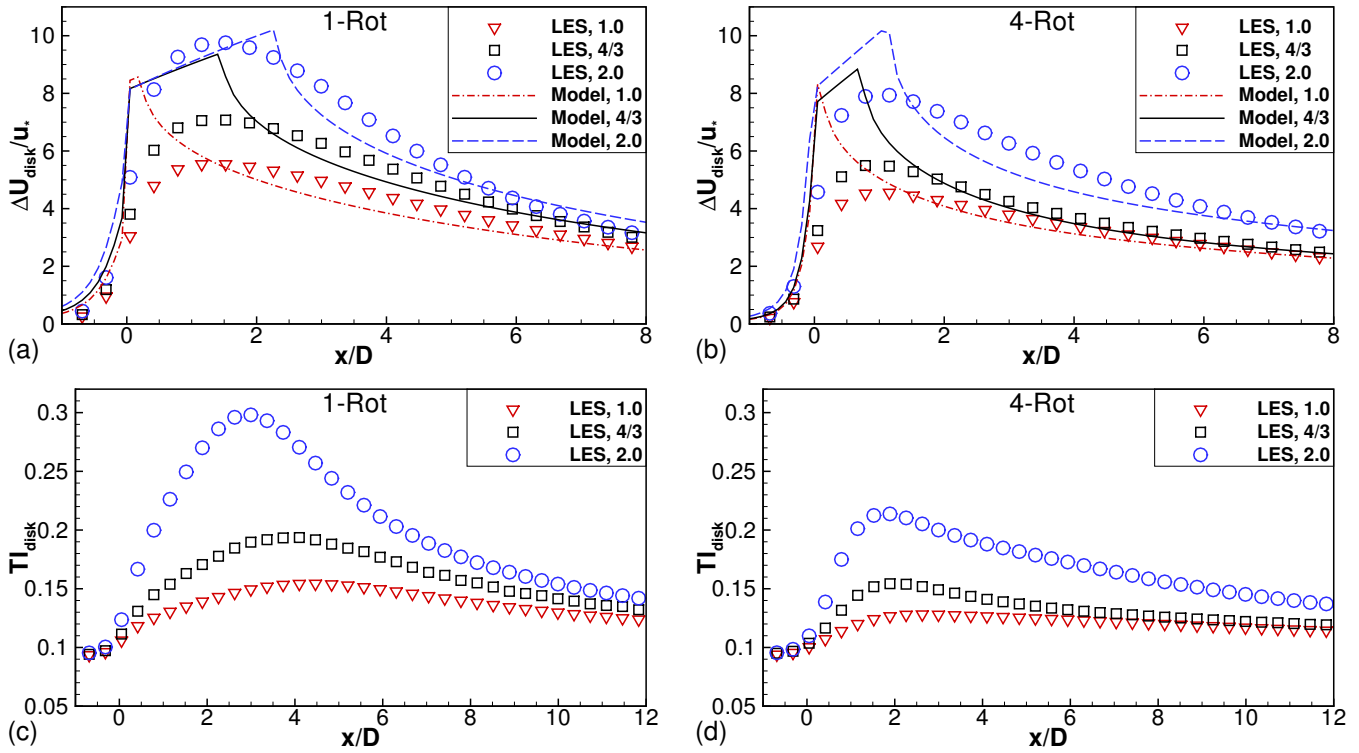


Figure 7. Effect of thrust coefficient on disk-averaged (a,b) velocity deficit and (c,d) turbulence intensity for (a,c) 1-rotor turbine and (b,d) 4-rotor turbine with $s/d = 0.1$.

3.4 Analytical Model

The analytical modeling framework predicts the mean velocity deficits of the 1-rotor and 4-rotor turbines accurately. Empirical parameters values $k_* = 0.025$ and $\sigma_0/d_0 = 0.28$ were found to lead to accurate predictions for all the cases investigated. Here, d_0 equals D for the 1-rotor cases and equals d for the 4-rotor cases. These values of k_* and σ_0 are slightly different from those proposed in Bastankhah and Porté-Agel (2016), but within the range mentioned in Bastankhah and Porté-Agel (2014). In particular, Fig. 5 shows that the radial profiles of the velocity deficit at several downstream locations, and for turbines with different tip spacings, are predicted quite accurately. Slight under-predictions or over-predictions are observed very close to the turbine, but the overall predictions are accurate, particularly beyond $x/D = 2$. Disk-averaged velocity deficit profiles are also predicted accurately, but are not shown on Fig. 6(a) to avoid clutter. Figures 7(a-b) show that the Gaussian analytical model is reasonably accurate at predicting the disk-averaged velocity deficit for all thrust coefficients beyond the very-near-wake region, i.e. approximately beyond $x/D = 2$.

4 Multi-Turbine Simulation Results

Wind farms comprised of a line of five turbines aligned with each other and with the mean wind direction are studied here. These cases are labeled WF* in Table 1.

245 4.1 Effect of Tip Spacing

The effect of tip spacing on the contours of velocity deficit and TKE are seen in Fig. 8. The axial spacing between different turbines in the wind farm is kept fixed at $4D$ and the thrust coefficient is $4/3$ for all rotors of all turbines. It is clear that the velocity deficits are significantly different between the 1-rotor and 4-rotor wind farms, as well as between 4-rotor wind farms with different tip spacings. The single wake behind the turbines in the 1-rotor wind farm are replaced by four smaller wakes
250 behind the turbines in the 4-rotor wind farms. The wakes move further apart in the radial directions as the tip spacing increases. Similar to the TKE distribution behind an isolated 1-rotor turbine, the TKE values are largest around the top-tip height of the turbines.

The effect of tip spacing on 4-rotor wind farms is quantified in Fig. 9. Focusing on Fig. 9(a-b), the profiles of the velocity deficits averaged over the rotor disk and TI_{disk} have local maxima close to the turbine locations, i.e. at $x/D = 0, 4, 8, 12$ and
255 16. The velocity deficit profile for the 1-rotor wind farm has a maximum close to turbine 2 (located at $x/D = 4$), as seen in Figures 9(a) and 8(a). The velocity deficit profile saturates from turbine 3 onward, i.e. the local maxima at $x/D = 8, 12$ and 16 have approximately equal magnitudes. The TI_{disk} profiles in Fig. 9(b) show similar behavior for the 1-rotor wind farm.

The velocity deficits of the 4-rotor turbines are seen in Fig. 9(a) to be smaller than those of the 1-rotor turbine for the first two turbines ($x/D = 0, 4$). In this region, $x/D < 8$, the deficits decrease with increasing tip spacing, which is consistent with the
260 observations for isolated turbines (Fig. 6(a)). The deficits accumulate and the disk-averaged profiles for all 4-rotor wind farms are almost equal to that for the 1-rotor wind farm for turbine rows 3 onward (for $x/D > 8$). The turbulent intensity profiles are smaller for the 4-rotor wind farms than for the 1-rotor wind farm, and decrease with increasing s/d . This sensitivity to the tip spacing persists downstream of all turbines, unlike the velocity deficits, which are sensitive only downstream of the first two turbines.

265 The relative powers of the turbines are shown in Fig. 9(c). The power of the first (or front) turbine is used for normalization in each wind farm. Thus, the relative power for turbine i is calculated as $P_i/P_1 = \overline{u_i^3}/\overline{u_1^3}$, where the overhead bar represents time-averaging and subscript i denotes the location of the turbine within the wind farm. The relative power of turbine 2 ($x/D = 4$) in the 1-rotor wind farm is minimum, and the relative power profile shows a slight recovery for turbines 3-5. This is consistent with the maximum for the velocity deficit at turbine 2, seen in Fig. 9(a). The relative powers of turbines in the 4-rotor wind
270 farms are sensitive to the tip spacing as well as the turbine location. For $s/d = 0.1$, only turbine 2 has larger relative power than turbine 2 of the 1-rotor wind farm, while for $s/d = 0.5$, turbines 2-4 have larger relative powers than the corresponding turbines of the 1-rotor wind farm. All these trends are consistent with the velocity deficit profiles seen in Fig. 9(a). [These results are consistent with the findings of van der Laan and Abkar \(2019\), where the benefit was restricted to only the first downstream](#)

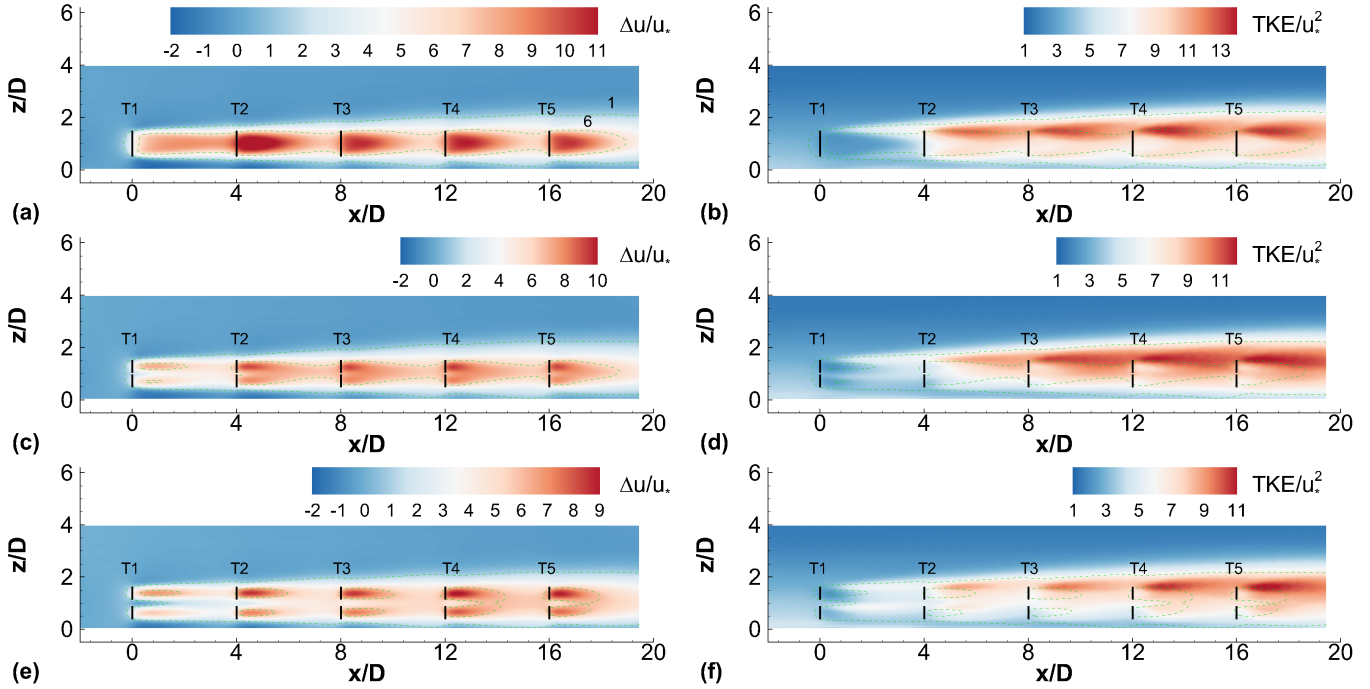


Figure 8. Contours of (a,c,e) streamwise velocity deficit and (b,d,f) TKE at the centerline for (a,b) 1-rotor wind farm, and 4-rotor wind farms with tip spacings (c,d) $s/d = 0.1$ and (e,f) $s/d = 0.5$. Axial spacing is $4D$ in each wind farm. Black lines denote turbine rotors. Dashed lines are velocity deficit contours corresponding to levels $\Delta u/u_* = 1$ and 6 .

275 [turbine row for tip spacing of 0.1d. Our results further quantify how far downstream into the wind farm the benefit propagates with increasing tip spacing.](#)

4.2 Effect of Axial Spacing and Thrust Coefficient

The effect of axial spacing on the performance of 4-rotor wind farms can be studied by comparing Figures 9(d-f) to Figures 9(a-c). While the same qualitative trends are seen for axial spacings of $S_X = 4D$ and $6D$, there are significant quantitative differences. The larger spacing between turbines in the $6D$ wind farms allows the wakes to recover to a greater extent before another turbine is encountered. Thus, the disk averaged velocity deficits and turbulence intensities are, in general, smaller in the wind farms with axial spacing of $6D$. Consequently, comparing Figures 9(c) and (f), the relative power values are larger for wind farms with larger axial spacing.

280 Interaction between the effects of tip spacing and axial spacing are also seen on comparing Figures 9(c) and (f). For instance, the relative powers of turbines 2 and 3 of the wind farm with $s/d = 0.5$ are appreciably larger than the corresponding turbines of the 1-rotor wind farm, when the axial spacing is $4D$. However, relative power of only turbine 2 of the wind farm with tip spacing $s/d = 0.5$ is appreciably larger than that of the corresponding 1-rotor wind turbine, when the axial spacing is increased to $6D$. Thus, tip spacing has a greater effect on the relative power in a closely spaced wind farm.

Figure 10 shows that the trends observed for $C'_T = 4/3$ hold for other values of thrust coefficient as well. The velocity deficit and turbulence intensity are larger for cases with larger thrust coefficient. For each value of C'_T , the velocity deficit of the 4-rotor wind farm is generally smaller than that of the 1-rotor wind farm downstream of the first two turbines (for approximately $x/D < 8$) and are almost equal beyond this. Since the tip spacing of the 4-rotor wind farm is $s/d = 0.1$, only turbine 2 shows a larger relative power in the 4-rotor wind farm compared to the 1-rotor wind farm, consistent with the observation made in Figure 9. For $C'_T = 2$, the velocity deficit profiles cross over, and the 4-rotor profile is larger than the 1-rotor profile, in a small region upstream of turbine 3. As a result, the relative power of turbine 3 is smaller in the 4-rotor wind farm compared to the 1-rotor wind farm. However, this crossover in power is smaller in magnitude than the values for turbine 2, such that the collective relative power of the downstream turbines is larger for the 4-rotor wind farm than for the 1-rotor wind farm.

The effect of all governing parameters (s, S_X, C'_T) on the wake losses in multi-rotor wind farms is presented succinctly in Fig. 11. Figure 11(a) shows the average power of turbines 2 through 5 ($P_{2-5} = (1/4) \sum_{i=2}^5 P_i$), normalized by the power of the front turbine in each wind farm. It is seen that P_{2-5}/P_1 is larger for all 4-rotor wind farms than the corresponding 1-rotor wind farm with the same thrust coefficient and axial spacing. The benefit increases with increasing tip spacing.

Each data point in Fig. 11(a) is normalized by the power of the front turbine in the respective wind farm. The front turbine power is expected to be similar to that of an isolated turbine, and hence, is expected to be dependent on the thrust coefficient, but not on the axial spacing. This is seen to be the case in Fig. 11(b), where the power of the front turbine extracted from the different wind farm cases are shown. For comparison across cases with different thrust coefficients, all powers are normalized by the power of the front turbine in the 1-rotor wind farm with the same thrust coefficient. The front turbine powers are independent of the axial spacing, and lines corresponding to $S_X = 5D$ and $6D$ lie on top of the line corresponding to $S_X = 4D$. Figure 11(b) also shows that the front turbine power in 4-rotor wind farms is weakly dependent on the tip spacing. As the tip spacing varies over $s/d = 0.1$ to 0.5 , the front turbine power varies by 3.5%, 2.7% and 3.2%, with the thrust coefficients fixed at 1, $4/3$ and 2, respectively. We note that this variation cannot be explained by the variation in power potential due to different tip spacings (see Appendix B), and is likely caused by the effects of turbulent mixing in the wake (Nishino and Wilden, 2012), which are different for different tip spacings.

To account for the differences in the front turbine power, the average power of turbines 2 through 5 is replotted in Fig. 11(c), with only the 1-rotor front turbine powers used for normalization. The same qualitative conclusions can be drawn from Fig. 11(c), as were drawn from Fig. 11(a), although the magnitudes of the benefit are larger. Finally, the differences between the relative powers of the 4-rotor and 1-rotor configurations are plotted in Fig. 11(d). This plot is directly derived from Fig. 11(c) by subtracting the data points corresponding to the 1-rotor wind farm from the 4-rotor wind farm data, i.e. $\Delta P_{2-5} = P_{2-5} - P_{2-5}^{1-Rot}$. This quantity measures the extent by which wake losses in a 4-rotor wind farm are smaller than wake losses in a 1-rotor wind farm with the same inter-turbine spacing and with all rotors operating with the same thrust coefficient. The benefit of 4-rotor wind farms increases with increasing tip spacing and with decreasing thrust coefficient. The effect of axial spacing on the benefit is slightly ambiguous. For a fixed thrust coefficient and tip spacing, the benefits are largest for $S_X = 4D$, and are almost equal for $S_X = 5D$ and $6D$.

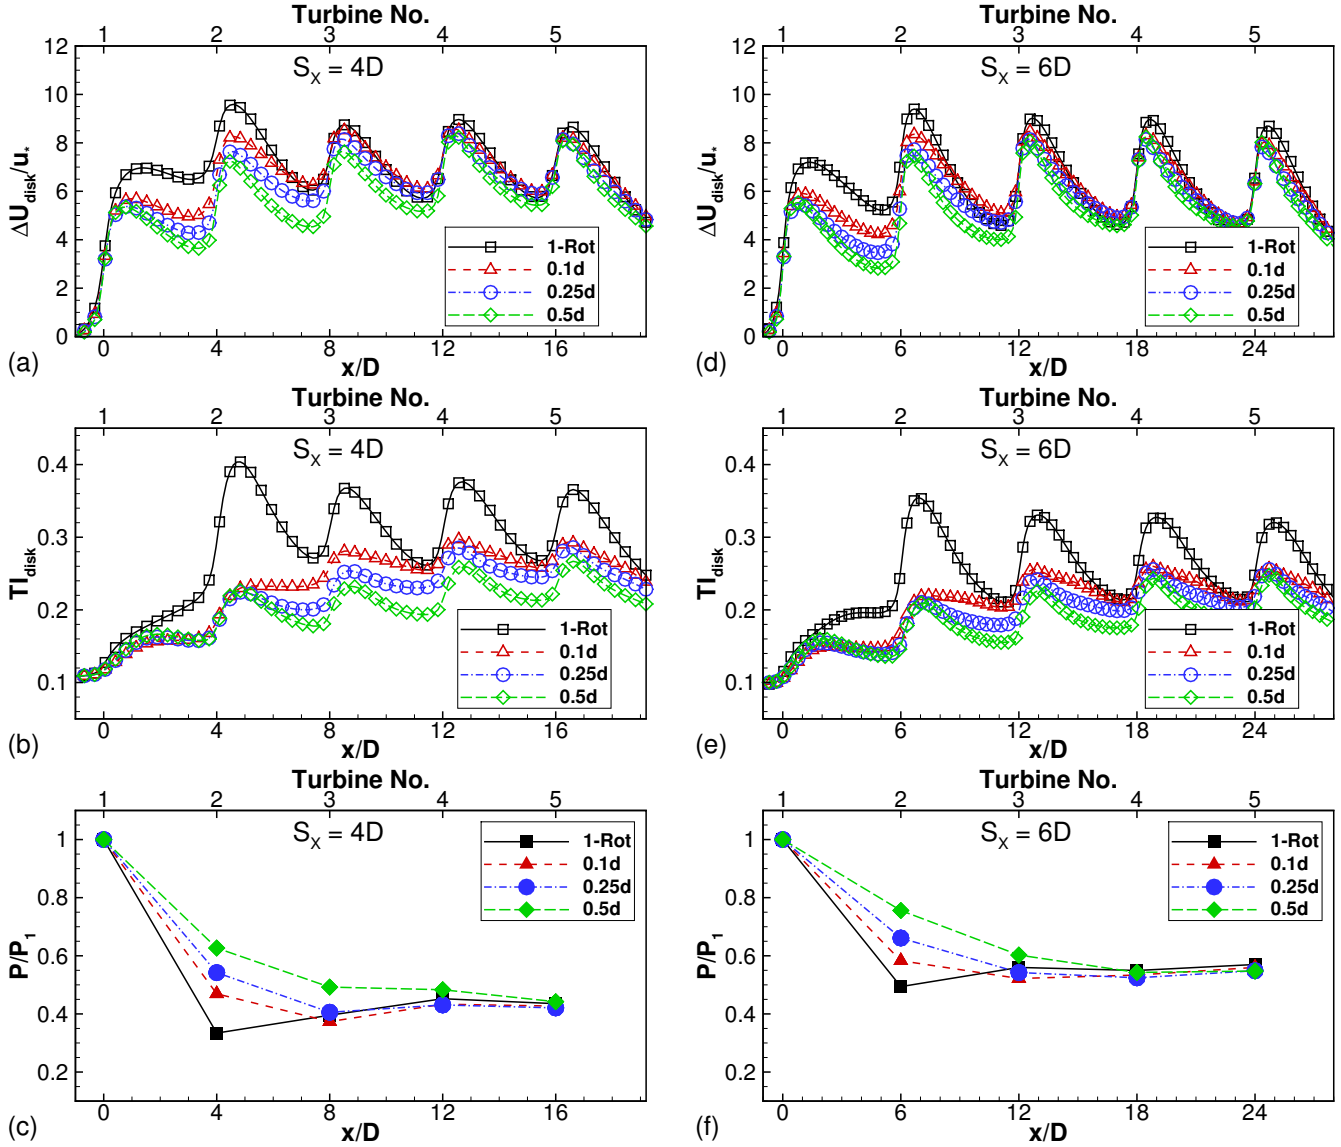


Figure 9. Disk-averaged (a) velocity deficit and (b) turbulence intensity, and (c) relative power for wind farms with $S_x = 4D$ and varying tip spacings. Power is normalized by front turbine in each wind farm to compute relative power. (d,e,f) Corresponding results for wind farms with $S_x = 6D$.

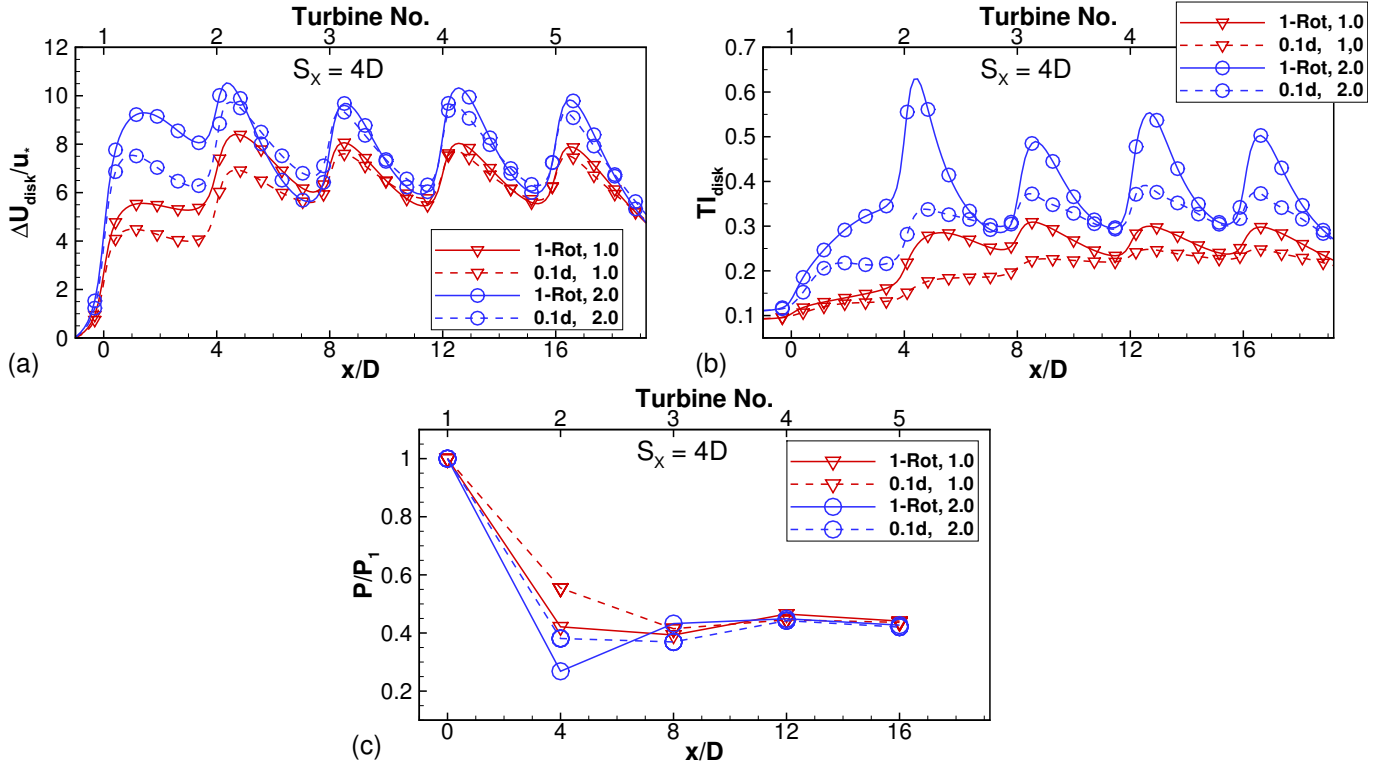


Figure 10. Disk-averaged (a) velocity deficit and (b) turbulence intensity, and (c) relative power for 1-rotor and 4-rotor wind farms with $S_x = 4D$ and varying thrust coefficient. Legend denotes the pair $(s/d, C'_T)$.

Appendix C shows that the conclusions drawn above are not affected by the fact that the first turbine powers are significantly different between the 1-rotor and 4-rotor wind farms.

4.3 Analytical Model

325 Predictions of the analytical modeling framework for wind farms comprised of a line of five turbines are examined in this section. The parameter k_* , which controls the growth rate of the wake, is extracted from all the 1-rotor wind farm LES. First, the wake widths in the y and z directions are calculated using the definition outlined in Bastankhah and Porté-Agel (2016).

$$\sigma_y(x) = \frac{1}{\sqrt{2\pi}\Delta\bar{u}_{max}(x)} \int_{-\infty}^{\infty} \Delta\bar{u}(x, \hat{y}, Z_{cen}) d\hat{y}, \quad (5)$$

$$\sigma_z(x) = \frac{1}{\sqrt{2\pi}\Delta\bar{u}_{max}(x)} \int_{-\infty}^{\infty} \Delta\bar{u}(x, Y_{cen}, \hat{z}) d\hat{z}, \quad (6)$$

330 where $(Y_{cen}, Z_{cen}) = (L_Y/2, 0.1H)$ are the mid-span and mid-vertical planes of the 1-rotor wind turbine wakes, and $\Delta\bar{u}_{max}(x)$ is the maximum of the velocity deficit at location x . The wake width is then calculated as the geometric mean of the wake widths in the two transverse directions, $\sigma = \sqrt{\sigma_y\sigma_z}$.

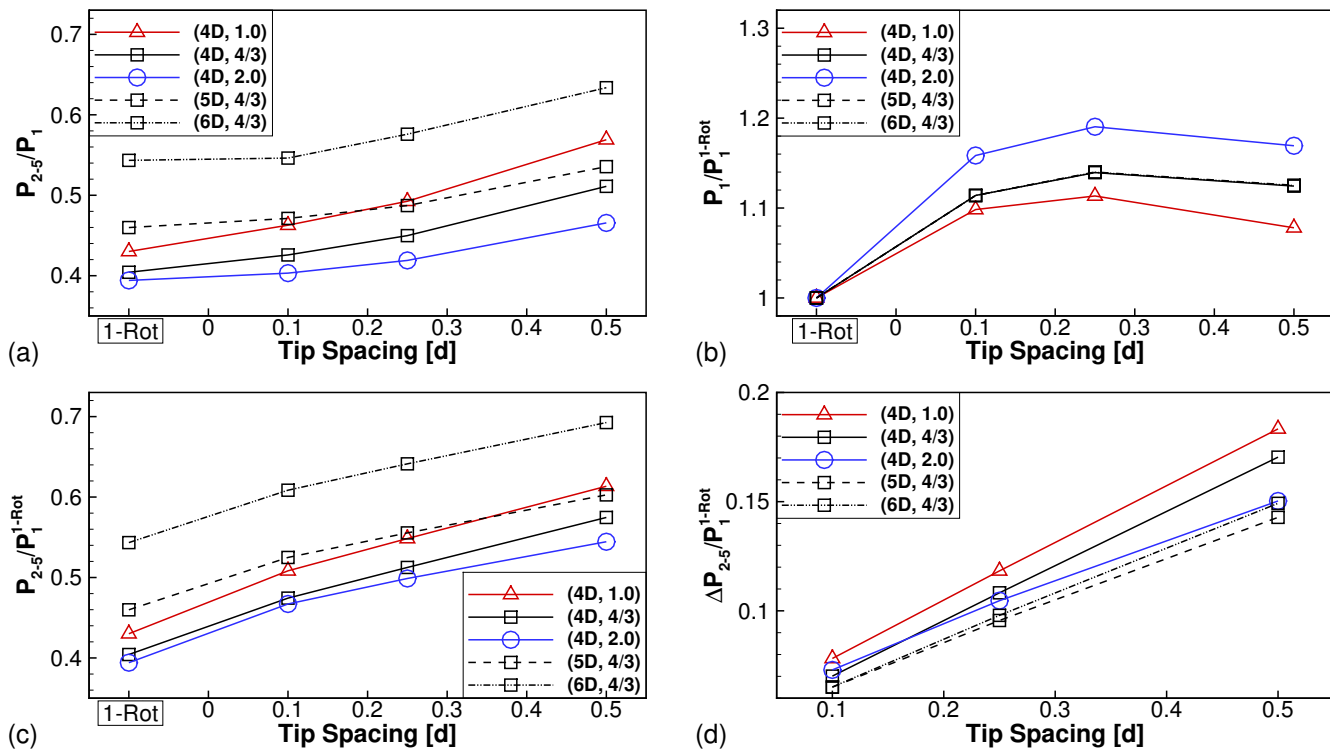


Figure 11. Effect of tip spacing, thrust coefficient and axial spacing on (a) power of turbines 2 through 5 normalized by power of front turbine, (b) power of front turbine and (c) power of turbines 2 through 5 normalized by power of front turbine of corresponding 1-rotor wind farm. (d) Benefit of 4-rotor wind farms over corresponding 1-rotor wind farm.

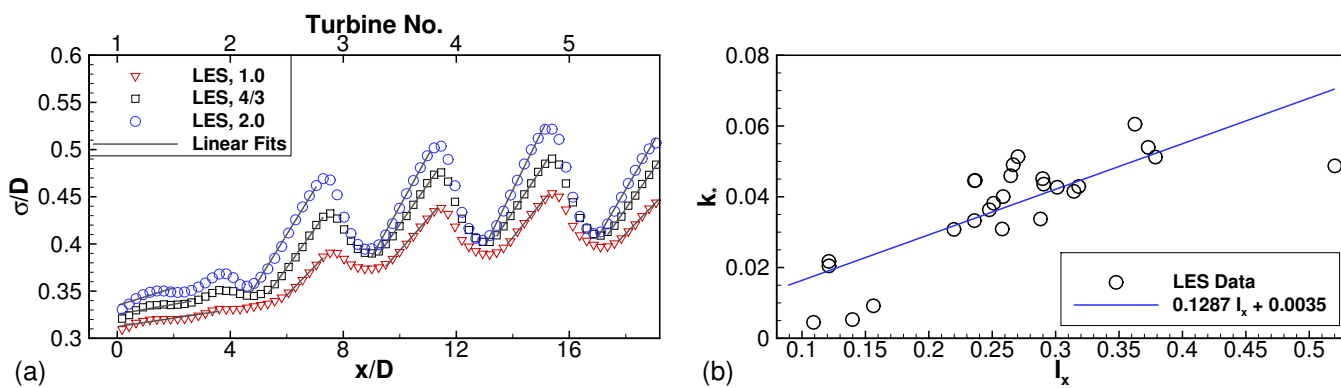


Figure 12. (a) Wake width, σ/D , extracted from LES of 1-rotor wind farms with axial spacing $S_X = 4D$ and varying thrust coefficient indicated in the legend. Slopes of black fitting lines give wake growth rate parameter k_* . (b) Wake growth rate parameter as a function of disk-averaged streamwise turbulence intensity extracted from all LES of 1-rotor wind farms. Blue line is the linear fit to the LES data.

Wake widths extracted from three 1-rotor LES with fixed $S_X = 4D$ and varying thrust coefficient are shown in Fig. 12(a). Turbines are located at $x/D = 0, 4, 8, 12$ and 16 in this plot. Moving downstream from one turbine location, the wake widths generally increase, until the effect of the next downstream turbine is felt. The wake width profiles show dips close to the turbine locations, followed by regions of growth. Regions where the wake widths grow approximately linearly are identified with black solid lines in Fig. 12(a). These black solid lines are linear fits to the data, and the extents of the linear fitting region are identified visually. The slopes of these lines yield the wake growth rate parameter, k_* .

The wake growth rate parameter values for all turbines in the 1-rotor wind farm simulations are compiled in Fig. 12(b). The k_* values are plotted against the streamwise turbulence intensity, I_x , at each turbine rotor disk. As observed in previous studies, the wake growth rate increases with increasing turbulence intensity. The solid blue line fits the data with a correlation coefficient of 0.8. In subsequent model runs for 1-rotor and 4-rotor wind farms, this linear regression model is used to determine k_* , with I_x extracted from the LES results.

Model predictions are compared to LES results for two cases in Fig. 13. The sensitivity of the model predictions to the second tunable parameter, the initial wake width σ_0 , is seen in this figure. Figure 13(a) shows that the disk-averaged velocity deficit is over-predicted by the analytical model with $\sigma_0/D =$ very close to the turbines, while it is under-predicted (to a lesser degree) with $\sigma_0/D = 0.32$. Farther away from the turbines, approximately between $1D$ to $3D$ downstream of each turbine, using $\sigma_0/D = 0.28$ yields good agreement with the LES results, while using $\sigma_0/D = 0.32$ continues to yield under-predictions. The power predictions shown in Fig. 13(b) also show sensitivity to the value of σ_0 . The relative power of turbine 2 is captured accurately with $\sigma_0/D = 0.28$, while the relative powers of further downstream turbines are under-predicted by around 10%. With $\sigma_0/D = 0.32$, the relative power of turbine 2 is over-predicted, while that of further downstream turbines is in better agreement with the LES results. Similar conclusions can be drawn from the results of the 4-rotor turbine with $s/d = 0.1$, shown in Figures 13(c) and (d). In summary, $\sigma_0/D = 0.28$ leads to better prediction of the mean velocity deficit in the wake region ($1D - 3D$ downstream), while $\sigma_0/D = 0.32$ leads to better prediction at the turbine locations, as evidenced by the better predictions of the power. Thus, the combination of model parameters which leads to accurate predictions in the wake does not necessarily lead to accurate predictions of power, for which, the values at and very close to the turbines need to be predicted accurately.

The influence of using spatially constant values for the wake growth rate parameter on the model predictions is shown in Figure 14. Predictions for two values of k_* (0.025 and 0.04) are shown for each of the two values of σ_0/D . Predictions for intermediate values of k_* are not shown but lie within the bounds shown by the lines corresponding to $k_* = 0.025$ and 0.04. It is seen that using a spatially non-varying k_* leads to a gradual decrease in the relative power with turbine number. The LES results show the characteristic feature of recovery of the relative power after turbine 2 in the 1-rotor wind farm and after turbine 3 in the 4-rotor wind farm. This feature is not captured for any combination of σ_0/D and non-varying k_* . Comparing Figures 14(a,b) and Figures 13(b,d) respectively, it is clear that the power degradation recovery is better captured using k_* that varies spatially depending on the local turbulence intensity. Similar observations were reported previously for 1-rotor wind farms (Niayifar and Porté-Agel, 2016), and are seen here to hold for several 4-rotor wind farms as well. It is possible for some cases, particularly the $s/d = 0.5$ wind farms, where the relative power continues to gradually decrease until the fifth turbine

(see Figures 15 and 16), to be better predicted using a spatially constant k_* value. However, no single combination of spatially-constant k_* and σ_0/D values was found that resulted in good predictions for all cases. In view of the cases investigated here, we prefer the use of a spatially-varying k_* dependent on the local turbulence intensity, consistent with previous studies for 1-rotor wind farms (Niayifar and Porté-Agel, 2016).

Relative power predictions for all the wind farm cases are compared to LES results in Figures 15 and 16. The average error in predicting the relative powers of turbines 2 through 5 are shown in each case. The k_* values are obtained as outlined above, while $\sigma_0/d_0 = 0.28$ is used for all cases, where d_0 equals D for the 1-rotor cases and equals d for the 4-rotor cases. The absolute errors in relative power averaged over turbines 2 through 5 ($(1/4) \sum_{i=2}^5 |(P_i/P_1)^{LES} - (P_i/P_1)^{model}|$) are shown in Figures 15 and 16. It should be noted that this level of accuracy is similar to that observed in previous studies (Stevens et al., 2015, 2016) of wind farms that are finite in axial as well as spanwise directions, and where the wind is directed along only one direction, or averaged over a very narrow (less than 2°) sector.

The errors are seen to be smallest for the 1-rotor cases. For 1-rotor wind farms, typically, the power of the second turbine is smallest, and there is a slight recovery for turbines 3, 4 and 5. This behavior is reproduced well by the analytical model. In the 4-rotor cases, the relative power saturates farther into the wind farm, typically at the third row for $s/d = 0.1$ and 0.25 . For $s/d = 0.5$, the power continues to decrease until the fifth row for most cases. The model predictions, on the other hand, typically saturate by the second row. Thus, the errors are largest for the second row, although the relative power level of turbines in the fourth and fifth rows is typically well captured.

In conclusion, the analytical modeling framework is capable of reproducing LES results of 1-rotor and 4-rotor wind farms with reasonable accuracy, comparable to previous results for 1-rotor turbines (Stevens et al., 2015). Improved prediction of the region very close to the turbine is needed to further improve the accuracy of the model at predicting the power degradation and wake losses in wind farms.

5 Discussion and Summary

This paper is devoted to studying the turbulent wake of a multi-rotor wind turbine configuration, and to comparing it with a conventional single-rotor wind turbine wake. The potential benefits offered by this configuration, with four rotors (with diameters $d = D/2$) mounted on a single tower, over the conventional single-rotor turbine (with diameter D) are studied in detail. Large eddy simulation is used as the primary tool for this work, Applicability of an analytical modeling framework based on the assumption of Gaussian radial profiles of velocity deficits to the multi-rotor configuration is also examined.

The LES results outlined in Sect. 3 show that an isolated 4-rotor turbine wake recovers faster compared to an isolated 1-rotor turbine wake. The isolated 4-rotor turbine wake also shows smaller TKE levels in the rotor disk region. A simple physical reason for this faster wake recovery and lower TKE levels is that the greater perimeter-to-area ratio of the multi-rotor turbine allows for greater entrainment of low momentum fluid into the wake. The behavior of the wake is sensitive to the tip spacing (s/d), with faster wake recovery seen for larger s/d . This is consistent with the simple physical reasoning presented above, since if s/d is very large, each rotor of the multi-rotor turbine behaves independently of other rotors, and the wake of each

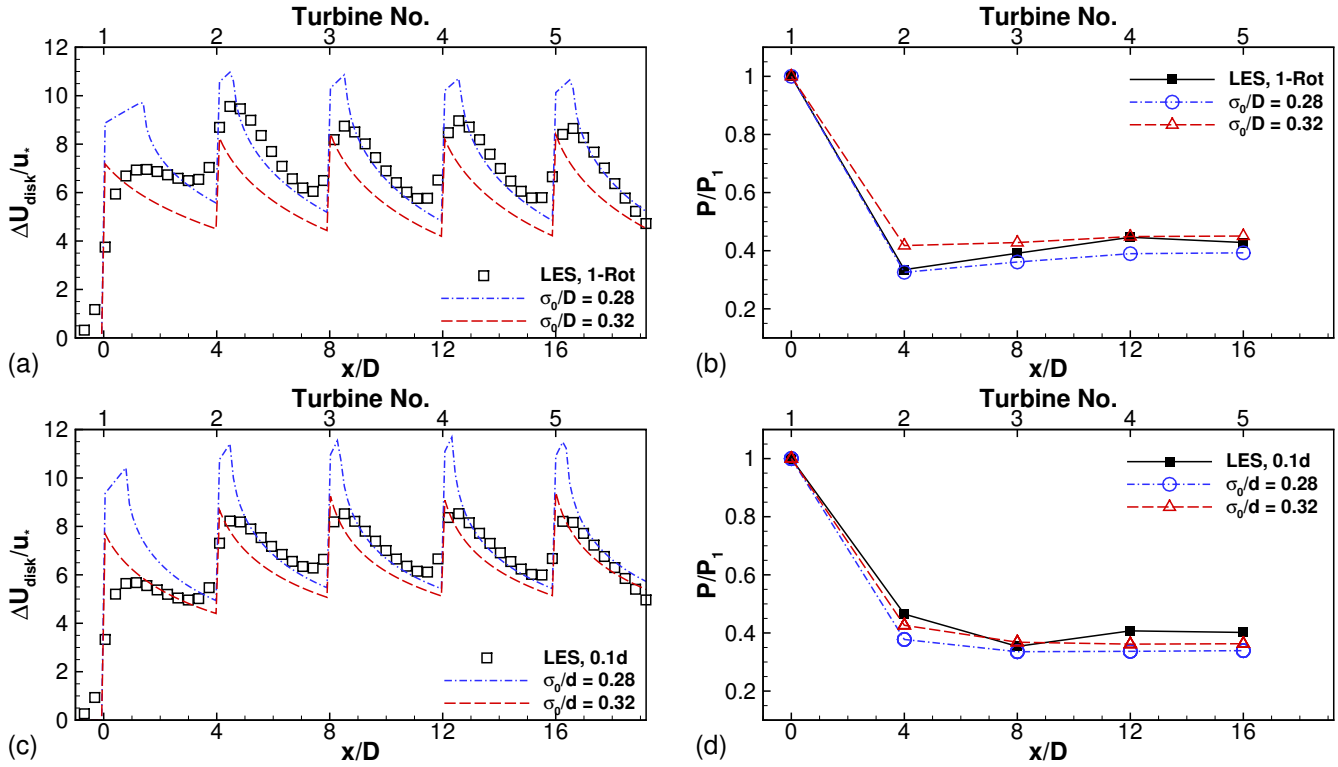


Figure 13. LES results and model predictions of (a) disk-averaged velocity deficit and (b) relative power for 1-rotor wind farm with $S_X = 4D$ and $C'_T = 4/3$. (c,d) Corresponding results for 4-rotor wind farm with $s = 0.1d$.

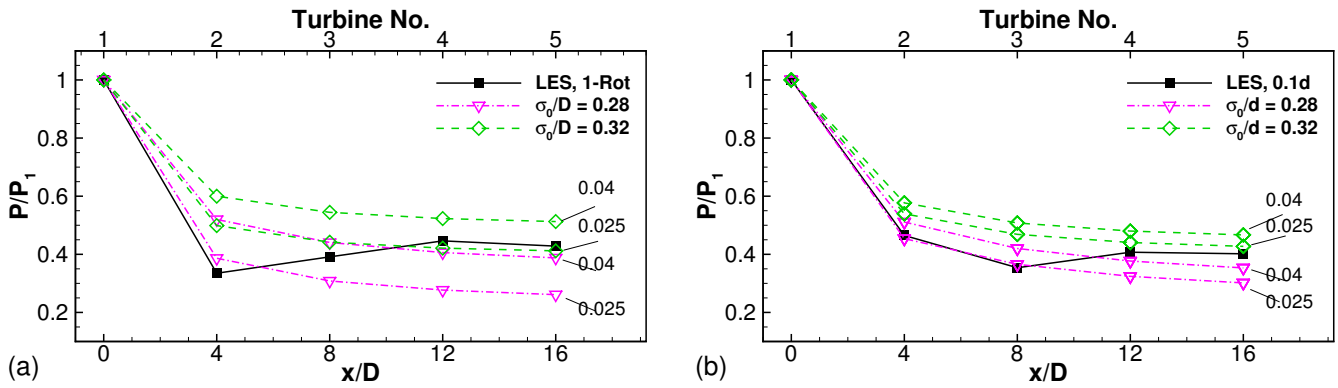


Figure 14. LES results and model predictions of relative power using spatially constant k_* for (a) 1-rotor wind farm and (b) 4-rotor $s/d = 0.1$ wind farm with $S_X = 4D$ and $C'_T = 4/3$.

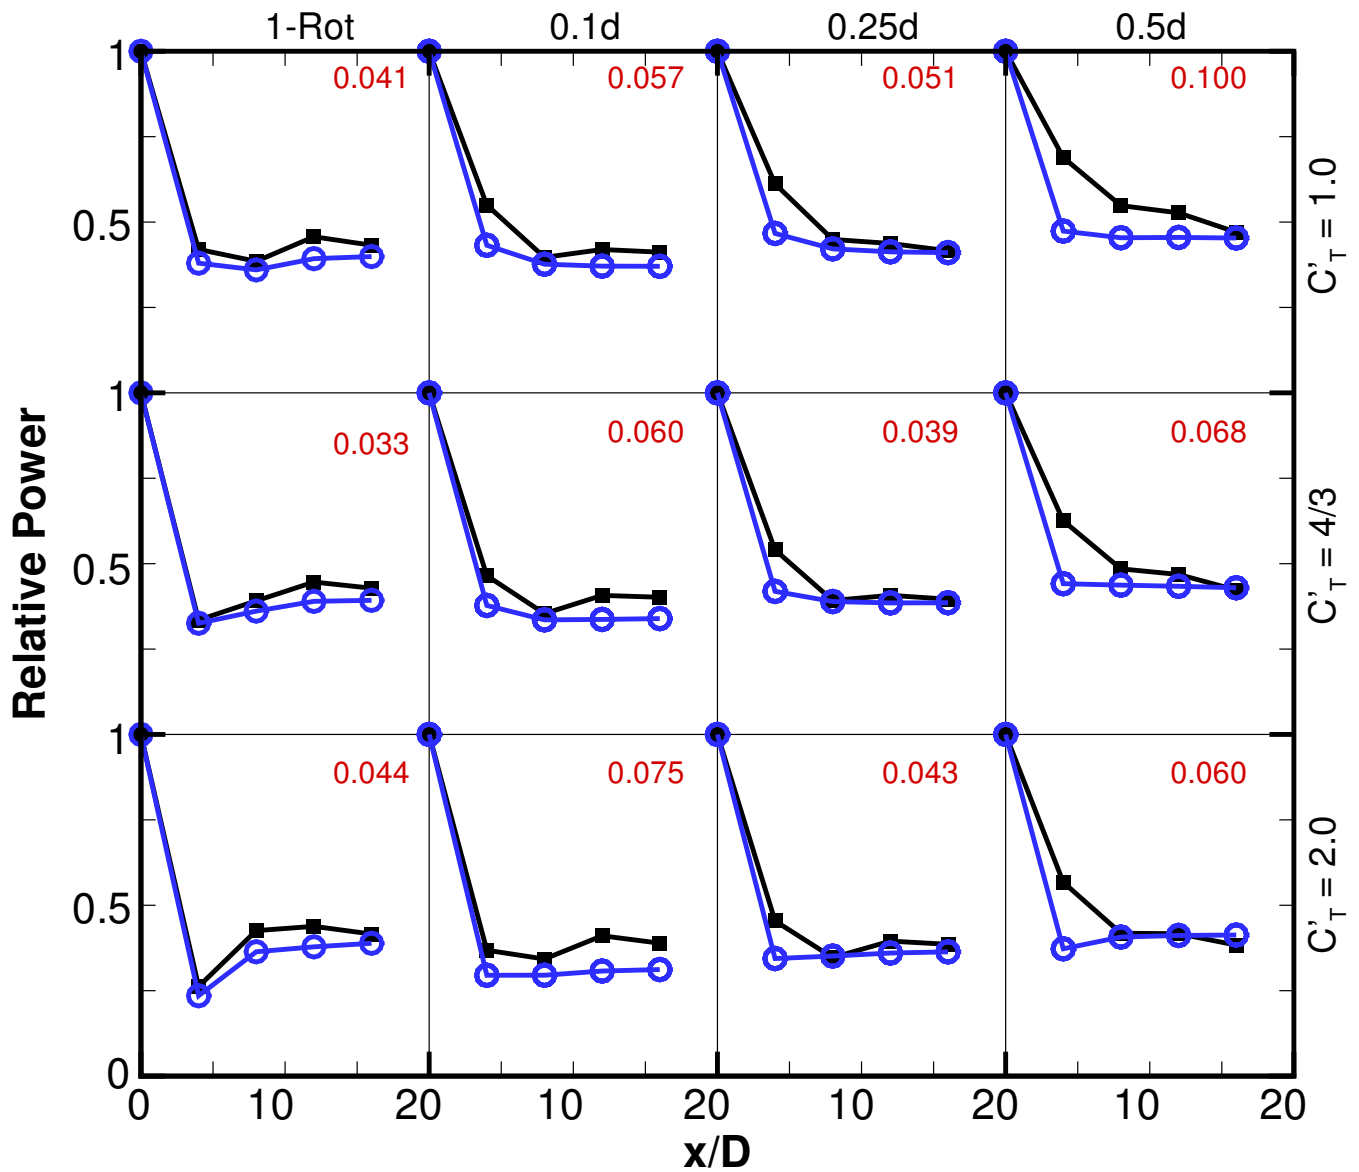


Figure 15. Relative power for 1-rotor and 4-rotor wind farms with fixed $S_X = 4D$, and varying tip spacing and thrust coefficient. Black squares are LES results. Blue circles are model predictions. Numbers in red are absolute errors in relative power averaged over turbines 2 through 5, $((1/4) \sum_{i=2}^5 |(P_i/P_1)^{LES} - (P_i/P_1)^{model}|)$.

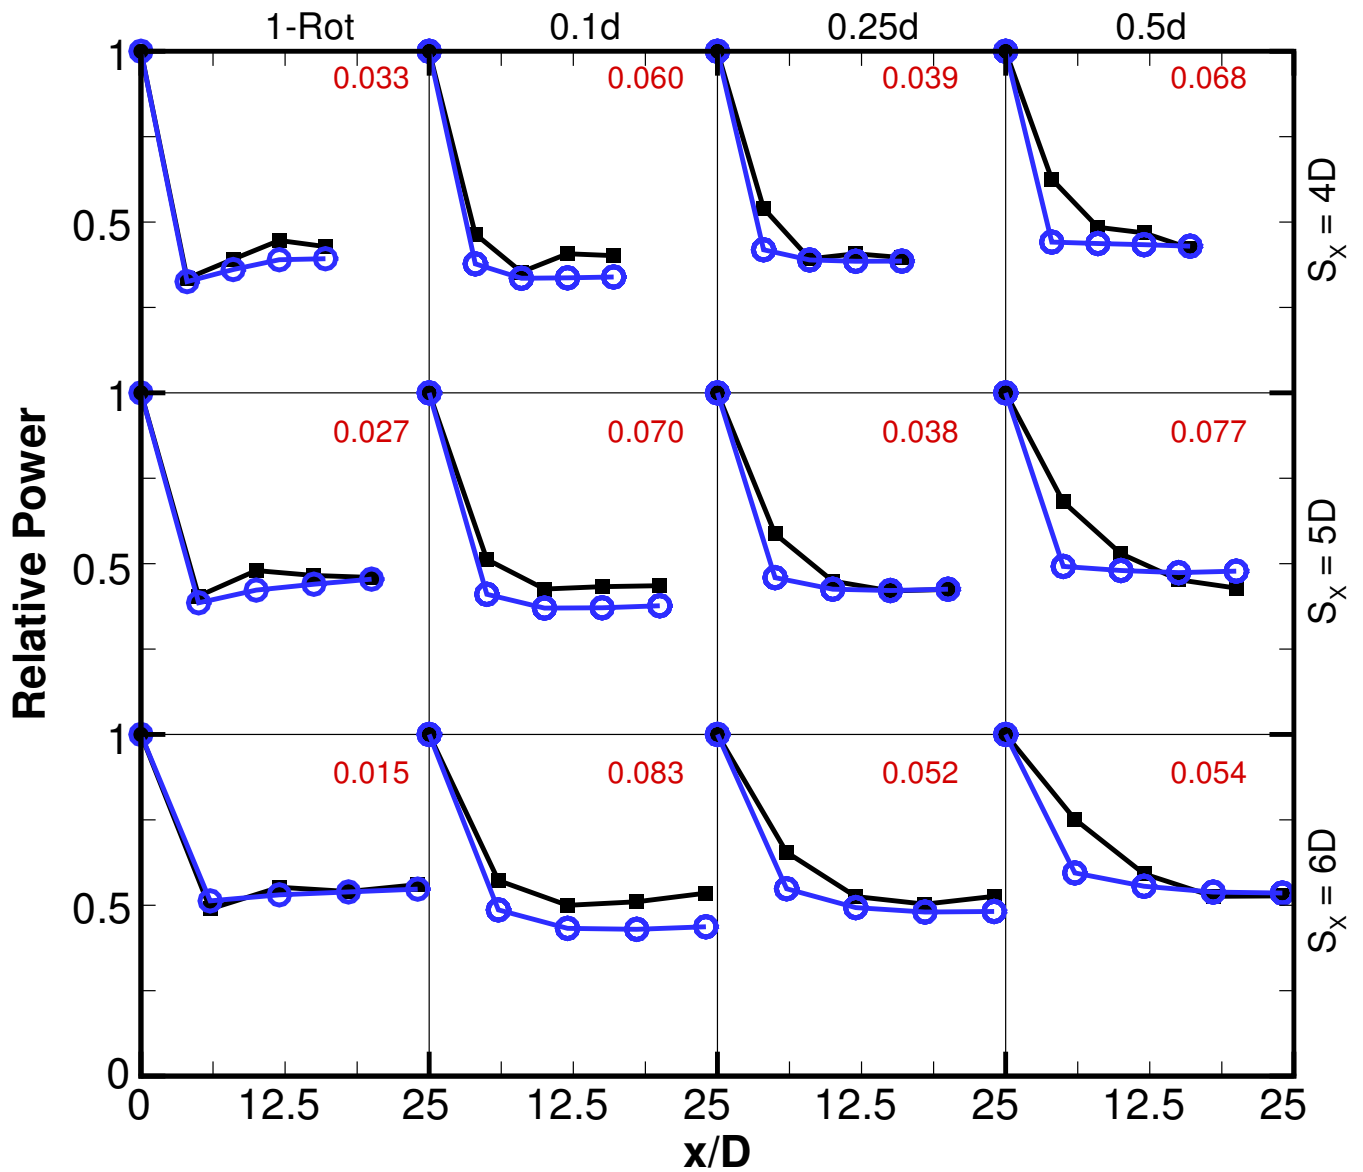


Figure 16. Relative power for 1-rotor and 4-rotor wind farms with fixed $C'_T = 4/3$, and varying tip spacing and axial spacing. Black squares are LES results. Blue circles are model predictions. Numbers in red are absolute errors in relative power averaged over turbines 2 through 5, $((1/4)\sum_{i=2}^5 |(P_i/P_1)^{LES} - (P_i/P_1)^{model}|)$.

rotor is characterized by the smaller length scale, d . For realistic values of $s/d \sim 0.1 - 0.5$, the rotor wakes do not act entirely independent of each other, and the wakes do interact and merge with each other beyond a certain downstream distance. The reduced TKE levels suggest potential for reduced fatigue loads on the blades. These results for an isolated turbine are shown to be consistent for all thrust coefficient (C'_T) values evaluated.

405 In Sect. 4, a line of 5 turbines is evaluated to study the interaction between several multi-rotor wind turbines. For these wind farm simulations, the axial spacing (S_X) between different turbines is an important parameter, in addition to the tip spacing and the thrust coefficient. Consistent with the results of the isolated turbine LES, the velocity deficits are smaller in 4-rotor wind farms than in the corresponding 1-rotor wind farms until a certain distance into the wind farm. This distance increases with increasing s/d and decreasing S_X . The turbulence intensity levels are significantly smaller for all downstream locations, 410 which indicates potentially smaller fatigue loads for downstream turbines, for all combinations of s/d and S_X . These results are, again, consistent for all C'_T values evaluated using LES.

The effect of smaller velocity deficits is reflected in the relative powers, or equivalently, the wake losses experienced by wind farms. Wind farms comprised of multi-rotor turbines always show benefits over similar wind farms comprised of 1-rotor turbines. The benefits are due to smaller wake losses only for the first downstream turbine (i.e. the second turbine in the array) 415 for a realistic tip spacing of 0.1 times the diameter of the smaller rotor. The benefit increases with increasing tip spacing, and decreasing thrust coefficient. The benefit is largest for the smallest axial spacing studied here ($4D$), but does not decrease monotonically as the axial spacing is increased. The benefit is slightly larger for the largest axial spacing ($6D$) than for the intermediate spacing ($5D$). The effect of axial spacing on the benefit should be investigated in more detail in the future.

The analytical model predictions are sensitive to the tunable parameters. The results in Sect. 3.4 and 4.3 show that with 420 appropriate choices, reasonably accurate predictions of the LES results can be obtained. The predictions are quite accurate beyond approximately $2D$ downstream of an isolated 1-rotor or 4-rotor turbine. In multi-turbine cases, the predictions are accurate for 1-rotor wind farms, and most 4-rotor wind farms. The model, however, fails to reproduce the trend of gradual decrease in relative power with turbine row, which is particularly pronounced for wind farms with larger s/d . The difficulties in accurately reproducing these trends are partly due to the fact that the Gaussian wake model is valid only beyond a certain 425 distance downstream of a turbine, and is not valid immediately upstream and immediately downstream of a turbine. Thus, this study points to the need for better analytical modeling of the region very close (upstream as well as downstream) to the turbine.

The actuator drag-disk model provides a crude representation of the processes occurring very near the turbine disks. While this crude representation is sufficient for the purposes of capturing the interactions between the turbines and the atmospheric boundary layer, future studies should focus on using the actuator disk/line models with rotation of the blades included. Potential 430 benefits associated with co-rotation and counter-rotation of the rotors in the multi-rotor configuration can be studied. Recent work by Andersen and Ramos-Garcia (2019) suggests that interaction between tip vortices of the individual rotors of the multi-rotor turbine aids in breakdown and recovery of the wake. These beneficial interactions might be missing from multi-rotor turbines with very large tip spacings, thus slowing down the rate of wake recovery. This issue can also be studied in the future. Fatigue loads on individual blades of isolated multi-rotor turbines as well as multi-rotor turbines downstream of other turbines

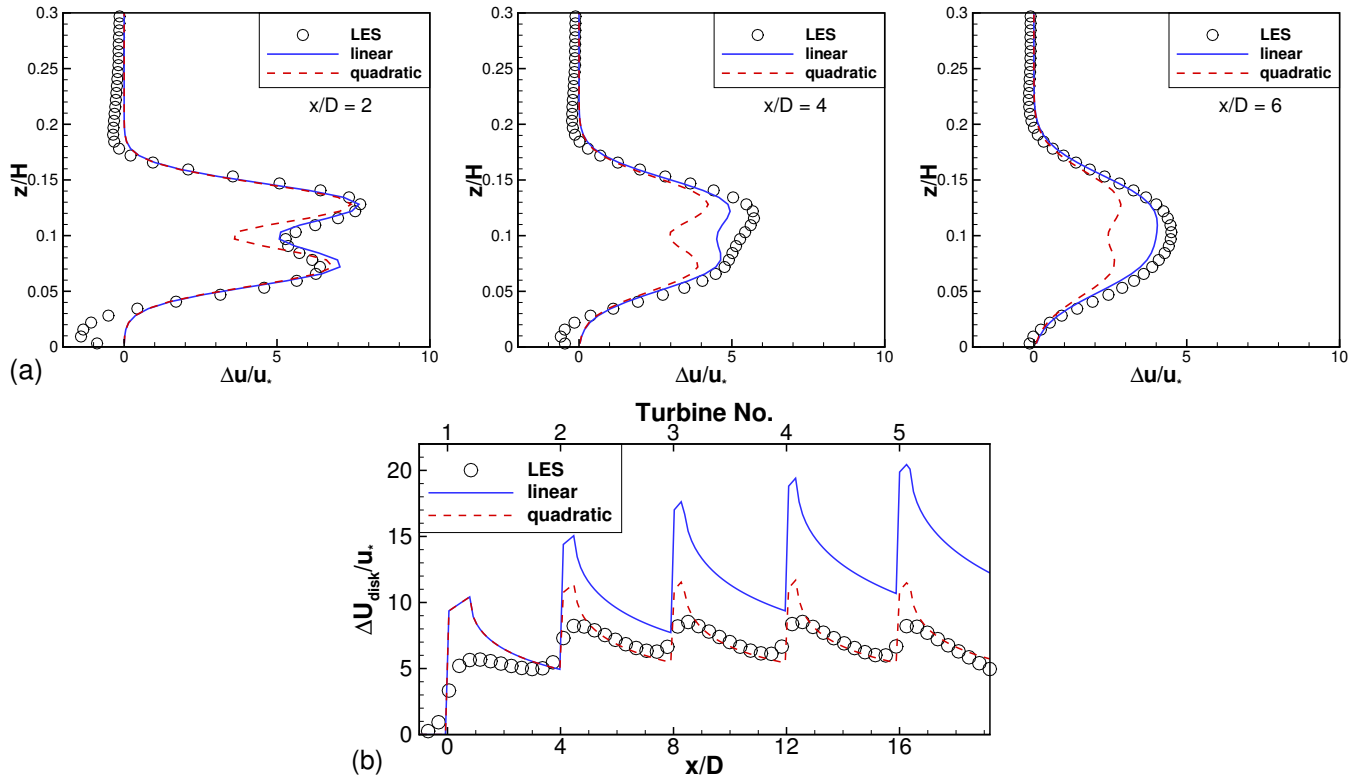


Figure A1. Evaluation of linear and quadratic wake merging methods for (a) isolated turbine with $(s/d, C_T') = (0.1, 4/3)$ and (b) wind farm with $(s/d, C_T', S_X) = (0.1, 4/3, 4D)$. Model parameter $\sigma_0/D = 0.28$, and k_* values are the same as those for Figures 5 and 13(c) for panels (a) and (b) respectively.

435 should also be studied in the future. Finally, developing better analytical models for both, 1-rotor and multi-rotor, configurations continues to be a persistent challenge in wind energy research, and will be pursued in future work.

Appendix A: Hybrid Linear-Quadratic Wake Superposition Methodology

A brief justification for following the hybrid linear-quadratic methodology of wake merging is provided in this appendix.

440 Figure A1(a) shows LES results and model predictions for the mean velocity deficit profiles for an isolated $s/d = 0.1$ turbine with $C_T' = 4/3$. Following the notation introduced in eq. (3), $N_{xt} = 1$ and $N_r(1) = 4$ for this case. The choices evaluated here are

$$(\Delta \bar{u}_{lin})_1 = \left[\sum_{j=1}^{N_r(1)} (\Delta \bar{u}_j(x, y, z))^p \right]^{1/p},$$

with $p = 1$ and 2 corresponding to linear and quadratic merging, respectively. It is clear that linear merging gives better agreement with LES results compared to quadratic merging. Thus, for wakes originating at the same x location (i.e. ‘adjacent’ wakes), linear merging is preferred.

Figure A1(b) compares LES results and model predictions for the $s/d=0.1$, $C'_T = 4/3$ and $S_X = 4D$ wind farm. Here, linear superposition of adjacent wakes is assumed, and superposition of these combined wakes originating at different x locations is examined. The choices evaluated here are

$$\Delta \bar{u}_{tot}(x, y, z) = \left[\sum_{i=1}^{N_{xt}} (\Delta \bar{u}_{lin})_i^p \right]^{1/p},$$

with, once again, $p = 1$ and 2 corresponding to linear and quadratic merging. For this case, $N_{xt} = 5$ and $N_r = 4$ for all x_t . Figure A1(b) shows that linear merging ($p = 1$) leads to a continuous increase of the velocity deficits, which is unphysical. Quadratic merging leads to velocity deficits that saturate a few turbines into the wind farm, and is in better qualitative and quantitative agreement with the LES results. Thus, quadratic merging is preferred for wakes originating at different x locations.

Thus, a hybrid linear-quadratic merging strategy is seen to give best results. It should be noted that this is an empirical choice, and a physics-based/first-principles approach for wake superposition is a topic of active research.

Appendix B: Potential Power of Multi-Rotor Wind Turbines

Finding an appropriate single-rotor turbine, which can be considered as a reference against which a multi-rotor turbine can be compared, is not straightforward. This is because the lower and upper pair of rotors in the 4-rotor configuration are subjected to different wind speeds and turbulence levels as compared to each other and to the single rotor in the 1-rotor configuration.

In this work, we consider a single-rotor turbine with the same total frontal area, same thrust coefficient and same mean hub height as a multi-rotor turbine to be a reference. To test the appropriateness of this assumption, the potential power, computed as $P_{pot} = (\pi D^2/8) C_P U_{0,disk}^3$, is shown in Table B1. Here, $U_{0,disk}$ is obtained by averaging the logarithmic inflow profile (shown in Fig. 2a) over the rotor disks. The potential power normalized by that of the 1-rotor turbine, P_{pot}/P_{pot}^{1-Rot} , is also shown in Table B1. A representative value of $C_P = 0.5625$ is used, but this precise number does not matter when we compare the normalized potential powers. The normalized potential powers are seen to be almost equal to 1 for all the tip spacings, and slightly reduce as the tip spacing increases. This indicates that the net effect of shear and the chosen dimensions of the turbines is such that the effect of the reduced wind speed seen by the lower two rotors dominates the effect of the larger wind speed seen by the upper two rotors. This effect is not very strong, being only 2.4% for $s/d = 0.5$. For $s/d = 1$, the effect is larger, at 5.5%. The same conclusion is reached if we use the hub height velocities instead of the disk-averaged velocities in computing P_{pot} .

For the present study, the chosen 1-rotor configuration may be considered to be appropriate as a reference, since its potential power varies by less than 2.4% for the majority of the multi-rotor configurations.

Table B1. Potential power and potential power normalized by 1-rotor potential power for isolated turbines with varying tip spacings.

s/d	1-Rot	0	0.05	0.1	0.2	0.25	0.5	1.0
P_{pot}	11.21	11.17	11.15	11.13	11.09	11.07	10.95	10.59
P_{pot}/P_{pot}^{1-Rot}	1.000	0.996	0.995	0.993	0.989	0.987	0.976	0.945

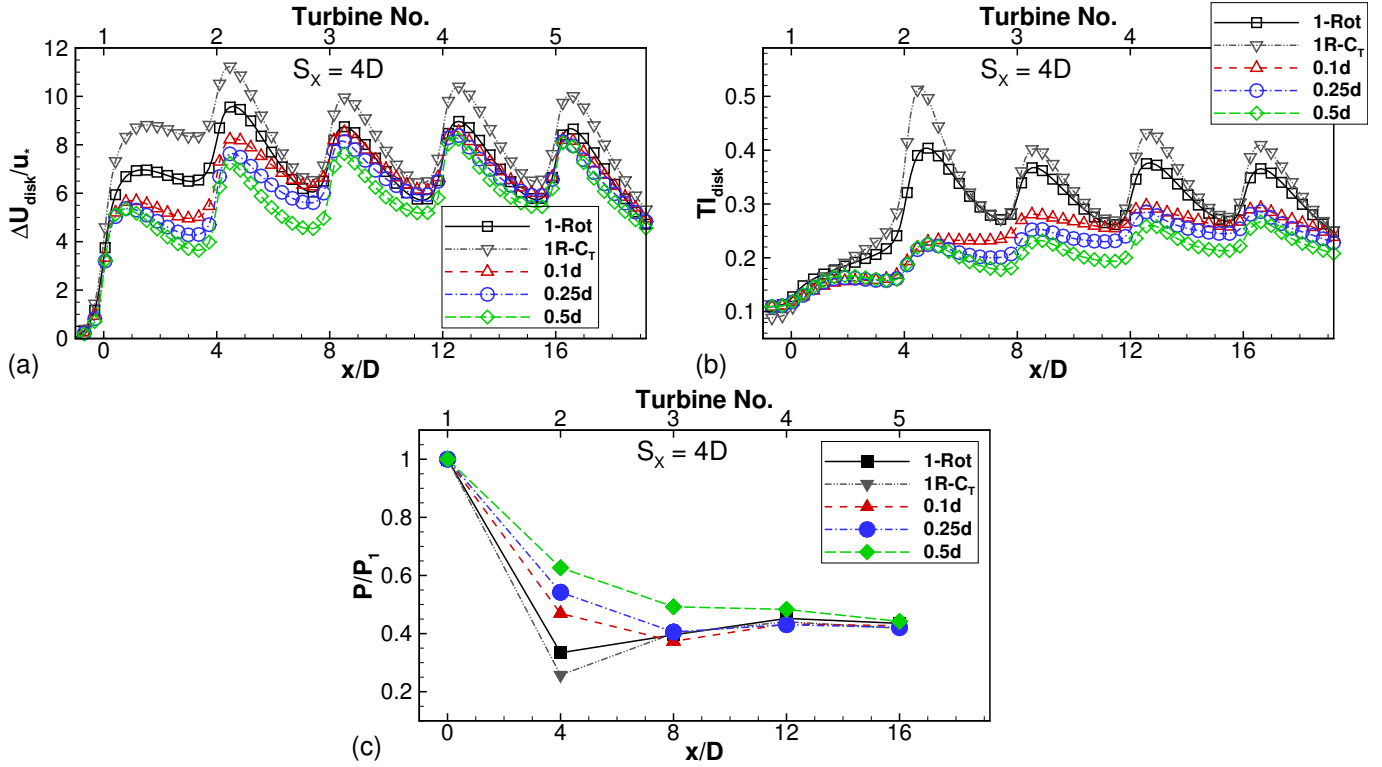


Figure C1. Adding results of ‘ C_T -matched’ run to Figures 9(a-c). Disk-averaged (a) velocity deficits, and (b) turbulence intensity, and (c) relative power for wind farms with axial spacing $S_x = 4D$. $C_T' = 1.61$ for simulation labeled 1R- C_T and $C_T' = 4/3$ for all other simulations.

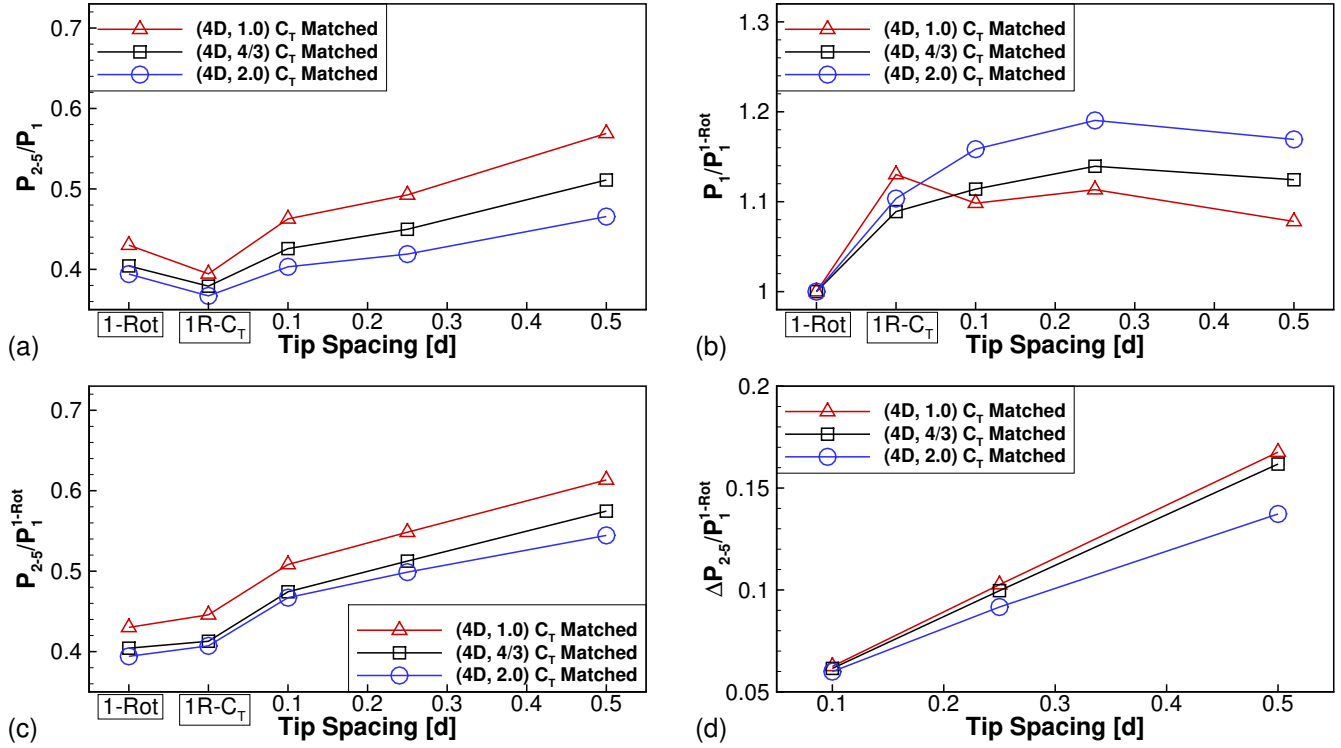


Figure C2. Adding results of ‘ C_T -matched’ runs to Fig. 11. Effect of tip spacing and thrust coefficient on (a) power of turbines 2 through 5 normalized by power of front turbine, (b) power of front turbine and (c) power of turbines 2 through 5 normalized by power of front turbine of corresponding 1-rotor wind farm. (d) Benefit of 4-rotor farms over corresponding C_T -matched 1-rotor wind farm. Labels indicate (S_X, C'_T) pairs. $C'_T = 1.14, 1.61$ and 2.47 for the runs labeled $1R - C_T$, corresponding to $C'_T = 1, 4/3$ and 2 respectively.

Appendix C: C_T -Matched 1-Rotor Wind Farms

Single-rotor and multi-rotor turbines with the same rotor area, same mean hub height and same thrust coefficient have been considered to be equivalent in the main body of this paper. This equivalence was based on the ‘local’ thrust coefficient, C'_T .
 475 Assuming validity of the inviscid actuator-disk theory, imposing a local thrust coefficient implies imposing an induction factor, a , and a thrust coefficient, C_T . These quantities are related by

$$C'_T = \frac{C_T}{(1-a)^2}, \quad a^2 - a + \frac{C_T}{4} = 0. \quad (C1)$$

The classical actuator-disk theory, however, is not valid for the turbine disks subjected to the sheared, turbulent boundary layer inflow in this study. Consequently, given a value of C'_T , the implied values for a and C_T are different from those predicted by
 480 eq. (C1). Furthermore, since the single rotor in a 1-rotor turbine and the four individual rotors in a 4-rotor turbine are subjected to different values of shear and turbulence intensity, the implied values of a and C_T are different for the 1-rotor and 4-rotor

turbines. As seen in Fig. 11(b), the power of the front turbine in 1-rotor and 4-rotor wind farms is different although identical C'_T values are used for all rotors.

In this appendix, three additional 1-rotor wind farm simulations are reported with $S_X = 4D$ and with C'_T adjusted such
485 that the resulting C_T is closer to those of the corresponding 4-rotor turbines. Through a trial-and-error approach, $C'_T = 1.14$,
1.61 and 2.47 were found to yield C_T values that are within 1.5% of those of the 4-rotor wind farms with $C'_T = 1$, $4/3$ and 2,
respectively. These simulations are denoted as ' C_T -matched' runs, and are labeled as $1R - C_T$ in Figures C1 and C2 here.

Figure C1 is a reproduction of Fig. 9(a-c) appended with the additional 1-rotor wind farm simulation with $C'_T = 1.61$. The
disk-averaged velocity deficit and turbulence intensity profiles are larger than for the 1-rotor wind farm, particularly at $x/D = 4$
490 (turbine 2). The resulting power degradation (Fig. C1c) is more severe at turbine 2, and almost identical to the 1-rotor wind
farm for further downstream turbines.

Figure C2 is a reproduction of Fig. 11 appended with results from all three ' C_T -matched' runs. Focusing on the black line
with squares in Fig. C2(b), it is seen that the power of the front turbine in the additional 1-rotor wind farm simulation (labeled
' $1R-C_T$ ') is much closer to the powers of the front turbines in the three 4-rotor wind farms, than the front-turbine power in the
495 1-rotor simulation. In particular, the front-turbine power of the 4-rotor wind farm with $s/d = 0.25$ exceeds the front-turbine
power of the ' C_T -matched' wind farm by only 4.4%, while it exceeds the front-turbine power of the 1-rotor wind farm by
almost 14%. Similarly, the front-turbine powers of the ' $1R-C_T$ ' runs are much closer to those of the corresponding 4-rotor
wind farms, than the front-turbine powers of the corresponding 1-rotor wind farm. Figures C2(a), (c) and (d) show the same
qualitative behavior as Figures 11 (a), (c) and (d). In particular, the benefits of 4-rotor wind farms over the corresponding C_T -
500 matched 1-rotor wind farms are seen in Fig. C2(d). This figure is derived from Fig. C2(c) by subtracting corresponding ' $1R-C_T$ '
data point values from each of the 4-rotor data points. Although the numerical values are slightly different from Fig. 11(d), it is
clear that the qualitative conclusions do not change, viz. the benefits of 4-rotor wind farms increase with increasing tip spacing
and decreasing thrust coefficient.

In summary, this appendix ensures that the qualitative conclusions regarding the benefits of the 4-rotor wind farms remain
505 unchanged, regardless of whether '1-Rot' (C'_T -matched) or ' $1R-C_T$ ' (C_T -matched) 1-rotor wind farms are used for reference.

Code and data availability. The LES code used for these simulations is available on GitHub at <https://github.com/FPAL-Stanford-University/PadeOps>.
Data can be made available upon request from the corresponding author.

Author contributions. All authors jointly designed the numerical experiments and interpreted the results. NSG and ASG wrote the code and
performed the simulations. NSG prepared the manuscript with contributions from all authors.

510 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements. Computational resources on TACC's Stampede2 cluster via NSF XSEDE Research Allocation TG-ATM170028 and on Stanford HPC's Certainty cluster are gratefully acknowledged.

References

- Abkar, M. and Porté-Agel, F.: Influence of atmospheric stability on wind-turbine wakes: A large-eddy simulation study, *Physics of fluids*, 27, 035 104, 2015.
- Andersen, S. J. and Ramos-Garcia, N.: Dynamic Analysis of the Multi-Rotor: Performance and Wake, in: *Wind Energy Science Conference*, 17-20 June, 2019, Cork, Ireland, <https://doi.org/https://doi.org/10.5281/zenodo.3357790>, 2019.
- Archer, C., Mirzaeisefat, S., and Lee, S.: Quantifying the sensitivity of wind farm performance to array layout options using large-eddy simulation, *Geophysical Research Letters*, 40, 4963–4970, 2013.
- 520 Bastankhah, M. and Porté-Agel, F.: A new analytical model for wind-turbine wakes, *Renewable Energy*, 70, 116–23, 2014.
- Bastankhah, M. and Porté-Agel, F.: Experimental and theoretical study of wind turbine wakes in yawed conditions, *Journal of Fluid Mechanics*, 806, 506–541, 2016.
- Calaf, M., Meneveau, C., and Meyers, J.: Large eddy simulation study of fully developed wind-turbine array boundary layers, *Physics of Fluids*, 22, 015 110, 2010.
- 525 Chasapogiannis, P., Prospathopoulos, J. M., Voutsinas, S. G., and Chaviaropoulos, T. K.: Analysis of the aerodynamic performance of the multi-rotor concept, *Journal of Physics: Conference Series*, 524, 012 084, 2014.
- Ghaisas, N., Ghate, A., and Lele, S. K.: Farm efficiency of wind farms: Evaluation using large-eddy simulation, in: *10th International Symposium on Turbulence and Shear Flow Phenomena*, 2017.
- Ghaisas, N. S. and Archer, C. L.: Geometry-Based Models for Studying the Effects of Wind Farm Layout, *Journal of Atmospheric and Oceanic Technology*, 33, 481–501, 2016.
- 530 Ghaisas, N. S., Ghate, A. S., and Lele, S. K.: Large-eddy simulation study of multi-rotor wind turbines, *Journal of Physics: Conference Series*, 1037, 072 021, 2018.
- Ghate, A. and Lele, S.: Subfilter-scale enrichment of planetary boundary layer large eddy simulation using discrete Fourier-Gabor modes, *Journal of Fluid Mechanics*, 819, 494–539, 2017.
- 535 Ghate, A., Ghaisas, N. S., Towne, A. S., and Lele, S. K.: Interaction of small-scale Homogeneous Isotropic Turbulence with an Actuator Disk, AIAA-2018-0753, in: *36th Wind Energy Symposium*, AIAA Scitech Forum, 0753, 2018.
- Jamieson, P. and Branney, M.: Multi-Rotors; A Solution to 20 MW and Beyond?, *Energy Procedia*, 24, 52–59, 2012.
- Jamieson, P. and Branney, M.: Structural Considerations of a 20MW Multi-Rotor Wind Energy System, *Journal of Physics: Conference Series*, 555, 012 013, 2014.
- 540 Meyers, J. and Meneveau, C.: Optimal turbine spacing in fully developed wind farm boundary layers, *Wind Energy*, 15, 305–317, 2012.
- Niayifar, A. and Porté-Agel, F.: Analytical modeling of Wind Farms: A New Approach for Power Prediction, *Energies*, 9, 741, 2016.
- Nishino, T. and Wilden, R. H. J.: Effects of 3D channel blockage and turbulent wake mixing on the limit of power extraction by tidal turbines, *International Journal of Heat and Fluid Flow*, 37, 123–135, 2012.
- Nordström, J., Nordin, N., and Henningson, D.: The fringe region technique and the Fourier method used in the direct numerical simulation of spatially evolving viscous flows, *SIAM Journal on Scientific Computing*, 20, 1365–1393, 1999.
- 545 Rozema, W., Bae, H. J., Moin, P., and Verstappen, R.: Minimum-dissipation models for large-eddy simulation, *Physics of Fluids*, 27, 085 107, 2015.
- Stevens, R., Gayme, D., and Meneveau, C.: Large eddy simulation studies of the effects of alignment and wind farm length, *Journal of Renewable and Sustainable Energy*, 6, 023 105, 2014a.

- 550 Stevens, R., Gayme, D., and Meneveau, C.: Coupled wake boundary layer model of wind-farms, *Journal of Renewable and Sustainable Energy*, 7, 023 115, 2015.
- Stevens, R., Gayme, D., and Meneveau, C.: Generalized coupled wake boundary layer model: applications and comparisons with field and LES data for two wind farms, *Wind Energy*, 19, 2023–2040, 2016.
- Stevens, R. J., Graham, J., and Meneveau, C.: A concurrent precursor inflow method for large eddy simulations and applications to finite
555 length wind farms, *Renewable energy*, 68, 46–50, 2014b.
- van der Laan, M. P. and Abkar, M.: Improved energy production of multi-rotor wind farms, *Journal of Physics: Conference Series*, 1256, 012011, 2019.
- van der Laan, M. P., Andersen, S. J., Garcia, N. R., Angelou, N., Pirrung, G. R., Ott, S., Sjöholm, M., Sørensen, K. H., Vianna Neto, J. X., Kelly, M., Mikkelsen, T. K., and Larsen, G. C.: Power curve and wake analyses of the Vestas multi-rotor demonstrator, *Wind Energy
560 Science*, 4, 251–271, 2019.
- Vasel-Be-Hagh, A. and Archer, C. L.: Wind farm hub height optimization, *Applied Energy*, 195, 905–921, 2017.
- Xie, S., Archer, C. L., Ghaisas, N., and Meneveau, C.: Benefits of collocating vertical-axis and horizontal-axis wind turbines in large wind farms, *Wind Energy*, 20, 45–62, 2017.
- Yang, X., Kang, S., and Sotiropoulos, F.: Computational study and modeling of turbine spacing effects in infinite aligned wind farms, *Physics
565 of Fluids*, 24, 115 107, 2012.
- Zhang, M., Arendshorst, M. G., and Stevens, R. J. A. M.: Large eddy simulations of the effect of vertical staggering in large wind farms, *Wind Energy*, 22, 189–204, 2019.