

Reviewer 1

Black bold marks reviewers comments, blue text marks authors' answers to comments

The manuscript introduces a new method to perform detailed simulations of the Fluid Structure interaction of wind turbines in an atmospheric flow. The work is novel and relevant for Wind Energy Sciences readers. The manuscript is well very written and easy to read. The used simulation method is very involved and builds upon previous work by the authors. Overall, I believe the authors provide a good summary of the developed simulation method and refer to their previous work when appropriate. As the authors write modeling choices are unavoidable and appropriate validations for the case under consideration are presented. I believe the simulations are performed carefully. After reading the manuscript I have several comments / questions, see below, which I would like the authors to comment on.

The authors would like to thank the reviewer for the great comments and suggestions. The points made are very good and will be considered in the revised manuscript. Please see answers at the comments below, and see the attached revised version of the manuscript with marked changes of the text.

- The last part of the introduction, starting at “However, it is expected” is somewhat speculative as this is not actually shown in the manuscript and should be removed.

The sentence has been removed from the abstract.

- Line 87 (and other places): "The study is a continuation of (Grinderslev et al.)". This reference is not available to the referee and hence it can not be checked how this work is related to what is presented there. A short paragraph describing the connection between both works could be beneficial.

This is unfortunate, as the paper is still awaiting publication in another journal. The major connection is that the mentioned reference also considers FSI on the NM80 rotor in a similar flow scenario along with two other flow scenarios. The main difference is the turbulence modelling which in (Grinderslev et al., 2021) is based on URANS, so without any modelling of turbulent fluctuations, meaning only ensemble averaged effects are considered. The novelty of the present paper lies in the turbulence modelling and the combination of all the aspects of: overset grids, FSI coupling and high fidelity turbulence modelling.

The following was added/changed in the text

“The study is a continuation of Grinderslev et al. (2021), where FSI of the NM80 rotor was studied in various flow scenarios with sheared and yawed, however laminar, inflow using URANS turbulence modelling. The flow scenario studied here resembles one of these studied laminar scenarios, however with turbulent inflow through the novel hybrid turbulence model and an adjusted grid setup.”

- Figure 1: Can you include a scale (meters in the graph). Also where is the blend factor F_h defined?

A scale of the blade length has been added to give a better impression on the spatial scale.

“Definition” has been removed from the caption, as the figure more visualizes the blending regions. Further, the text before has been clarified, to explain that the majority of the blending happens in the range $8\text{m} \pm 2\text{m}$ from the surface. The definition of the blend factor is described in Eq. 8.

- Line 271: in line 316 it is mentioned that no tower and nacelle are considered, so I am unsure how to interpret the statements here.

The reason is that the tower, shaft, hub and nacelle are present in the HAWC2 structural model to assemble the rotor however not in the CFD setup. For this reason, they are considered rigid and take no part in the simulations.

The sentence was rewritten:

*“As only the rotor is modelled in CFD, only blade flexibility is considered as well. **This means that tower, nacelle, shaft and hub are not active parts of the HAWC2 simulations.**”*

- Line 272: "for the initialization" ==> arguably this is part of the simulation method part (section 2.4)

This is true. The sentence has been removed, as a corresponding sentence is present in the simulation method part.

- Line 290: directions of U,V,W should be defined.

U velocity is horizontal and perpendicular to the mean flow direction, V is vertical and perpendicular to the mean flow direction and W is the mean flow direction .

This has been added to the text.

- Line.321: Can you provide a reference or additional explanation on this.

This is purely a measure to simplify and speed up the holecutting process for the overset grid method. Instead of doing holecutting routines for every timestep as the rotor moves, the manually cut holes in the disc mesh are moving along with the rotor mesh. This means that the receiver and donor cell ID's do not change during the simulations, as to why the search between these two grids is only necessary once.

A benefit from this is that one can force any deformation in the rotor mesh to happen within the mesh located inside the manually cut holes. By this, the donor cells of the rotor mesh will not deform nor move relatively, which removes the need of re-searching for receiver/donor cells and re-calculating interpolations coefficients. It is purely a matter of speeding up simulations.

The disc and background mesh, however, need updates for each time steps as the disc moves and the background is static. As the geometry here is much simpler, the holes in the background mesh is easily calculated through a simple analytical cylindrical shape hole, which is predefined and thereby fast and efficient.

The text has been updated with more sentences to explain it more clearly. For instance the following was added:

“In the present setup the holes are 17m wide in the rotor axis direction, where the main deformation is present, located with the undeformed rotor in the center. Displacements are propagated to the volume mesh, such that points within the inner 15% of the grid curve length normal to the surface are moved as solid body motion to ensure no change of quality of the inner cells resolving the high gradient flow. Further out, from 15% to 40% the volume blend factor is linearly decaying from 1 to 0, such that points from 40% grid curve length and out are unchanged to avoid changes to donor cells.”

Note that communication tables and hole-cutting still need update between disc mesh and background mesh as the latter is static.”

- Line 328/329: "The disc and rotor grids are similar to the setup used in (Grinderslev et al.), however in this study the background grid has changed to be suitable for LES." ==> Can you please clarify what is meant by making the grid suitable for LES?

The background grid in this study is rectangular with rectangular cells, which have low stretching in the focus area (area leading up to and behind the rotor). In the mentioned previous study, a semi-cylindrical background mesh was used, where cells were less uniform due to the circular shape. This was of low importance for the URANS turbulence, however, as the Deardorff LES model is directly sensitive to mesh cell sizes, the semi-cylindrical mesh was deemed unfit for use in this study.

A comment has been added to the text saying

“...suitable for LES simulations by using rectangular cells with low cell stretching in the area of focus”

- Figure 4: the blue grid seems to extend further above the blades than below. Is there a reason for this, or my mistake in interpreting the figure? Is the "bending" of the blue region on effect of the bending of the blades? Just as figure 1 can you include a scale?

This is an effect of the figure looking at the rotor from the side, making the grid of the lower blades look shorter, as the blades are not positioned vertically. If you look closer to the right figure, one can see that the mesh is identical for the three blades.

The reason for the bending shapes is indeed the effect of the pre-bending of the blade. The mesh is “grown” directly from the surface mesh using the hyperbolic Hypgrid3D mesher, and no desired outer shape was defined.

A scale was added, by displaying the hub height distance on the left figure.

- **Figure 6:** panel a yellow line is for 77 meters and in panel b for 93 meters. Please check.


This is a mistake. The right label is 93m, and the figure has been corrected.

- **Figure 10:** please include a color scale.

The color scale on the lower figure to the right has been emphasized by adding a white background to the color bar.

- **Figure 12:** This figure shows a snapshot, which shows that the instantaneous realization is different in the region up to 150 meters, i.e. the region where the turbine is roughly located. Did you check whether the turbulence intensity is affected by changing the model?

As shown below, there is a slight change when moving far down the domain, but in this case the significance is not high. This figure has been added to the paper.

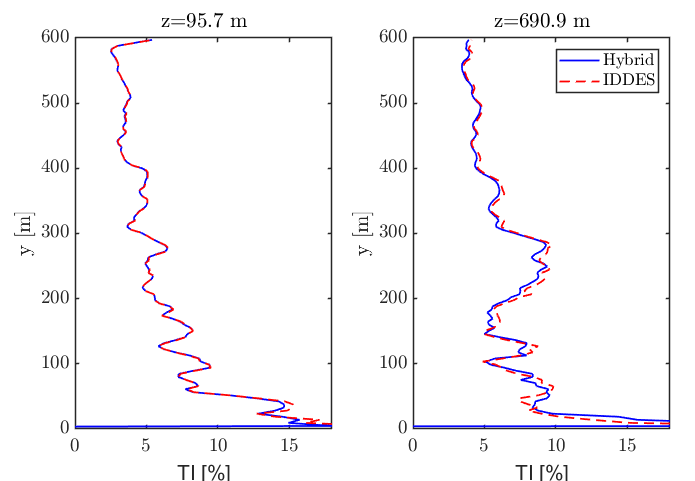

- **Figure 14:** Do the crosses represent instantaneous realizations?

Yes they do indeed. This information has been added to the caption of the figure.

- **Figure 16:** Do you know up to what degree omitting the tower and nacelle could influence the simulation result?

We have not tested this ourselves, but studies by e.g. (Guma et al. 2020), suggest that the influence is quite small for this rotor and very local to the part of the azimuth when the blade passes the tower (160-200 deg). In the study by Guma et. al, the authors compared a full turbine configuration with a rotor only configuration. The effect was mainly seen in the fatigue damage equivalent loading (DEL), but the section forces were in general similar.

The omission of the tower mainly influences the inboard sections of the blade. This is seen in Figure 16, top row, showing the forces at 33% blade length. The CFD results are nearly flat, while the measurements drop a bit when passing the tower. For the sections further outboard, the CFD results show similar trends as the measurements, as a result of the sheared inflow being dominant.

For larger and more flexible rotors, as considered in (Santo et al. 2020) the effect might be more significant, as the force dip from the tower shadow will make the blade deformation fluctuate more. However, the load effect still is quite small in the study (Santo et al. 2020).

The nacelle is deemed to be of low interest as well, as the loads around the most inner part of the blades are low.

The following was added to the document when introducing the CFD mesh:

*“In the present setup, only the rotor is considered, omitting the tower, hub and nacelle, with a total of three overlapping mesh groups, see Figure 4. **The omission of these elements is expected have a minor effect, supported by the study (Guma et al.,(2021)) studying the same rotor represented both as a rotor only and as a full turbine.**”*

The comment on Figure 16 has been clarified also.

*“As seen, the forces agree well between the two simulations and the measurements with main differences being the lack of tower shadow at the inner sections, **resulting in a drop of loading in measurements not seen in simulations (see Figure 16 top row)**”*

- Line 429: Here it is concluded that the domain may be too short. However, I could not find the corresponding discussion in the main text on which this conclusion is based.

The domain is not deemed too short for the purpose of the study conducted here, however it is too short to clarify large differences in the resulting flow behavior between the two turbulence models. This is mainly based on the flow starting to vary between the IDDES and hybrid changing in the back part of the domain as depicted in figures 11 and 12. For longer domains, for instance when considering more than one rotor, this effect would likely build up.

In the text commenting on figures 11 and 12 (line 375) the following was added:

While both turbulence models perform close to identically for the present single turbine study, it could be speculated that this would not be the case when considering larger domains, for instance when studying multiple turbines at once.

In that case, the differences in turbulence and wall modelling will likely result in different flow fields, due to the longer distances covered. Considering temperature effects on the flow might likewise reveal differences between the turbulence models in terms of temperature flux, along with the Deardorff model considering the stability in the mixing length scale, which is not the case in the IDDES model.

- Chapter 5: Some comments, for example why IDDES would be likely be insufficient for some cases, would benefit from some additional explanation.

The reason for the assumption is mainly that IDDES is based and calibrated for separated flows only, whereas the LES model is calibrated to ABL flows. This is for instance evident in the case of stable stratifications, where the length scale is altered in the Deardorff LES model, based on the temperature gradient. This is not handled in IDDES.

There are differences in how the two models consider temperature as well in the energy equations, as there is no buoyancy term in the original k-omega model by Menter. In Ellipsys3D the buoyancy is considered through $\tau_{\theta w,LES}$ and $\tau_{\theta w,DES}$ which are modelled with different weights of the turbulent viscosity.

The following comments were added to the text:

“Here, the IDDES model will probably be insufficient to capture the effects, as the model is calibrated for aerodynamics mainly and not ABL flows. The Deardorff LES model, however, is calibrated for such flows and the mixing length scale depends on the stratification, as it is reduced for stable cases. The two models also model temperature effects differently as the flux, $\tau_{\theta w}$, is based on different weights of the turbulent viscosity.”

Reviewer 2

Black bold marks reviewers comments, blue text marks authors' answers to comments

General comments. The manuscript presents high fidelity rotor-resolved numerical simulations under neutral atmospheric conditions. A new hybrid turbulence model between is presented and results are compared to the use of IDDES only. Simulations are performed for both rigid and flexible blades. The work is very interesting and highly relevant to the field. The manuscript is well-written and rather complete. The referee thinks the paper can be accepted for publication after minor revisions, see below

The authors would like to thank the reviewer for revising the manuscript and providing very useful comments and corrections which will be considered in the revised manuscript. Answers to comments and revision to text are written below in connection to the reviewer comments. See also the attached revised version of the manuscript with marked changes of the text.

Specific comments:

- Neutral conditions are considered here. The authors mention the fact that stratifications should also be done as future work and is likely to impact on the outcome of the turbulence model. The manuscript would benefit from more explanations about this, including the challenges of modelling stable and unstable conditions with the presented CFD model.

The presented hybrid model, will in its nature act as the general Deardorff LES model for stratified flows, assuming that the IDDES region is small and only present near the considered object.

The Deardorff model is calibrated for stratified flows, and has a reduction to the mixing length scale when in stable conditions. This is one of the reasons that it is assumed to perform better than the original IDDES, as this model is calibrated for separated flows and has no specific corrections depending on stratification.

The following was added to the text of chapter 5:

“Here, the IDDES model will probably be insufficient to capture the effects, as the model is calibrated for aerodynamics mainly and not ABL flows. The Deardorff LES model, however, is calibrated for such flows and the mixing length scale depends on the stratification, as it is reduced for stable cases. The two models also model temperature effects differently as the flux, $\tau\theta_w$, is based on different weights of the turbulent viscosity.”

- Some information on the model settings are missing for the reader to fully reproduce these simulations (or at least not obviously presented). Please make sure all the input parameters (e.g. of the turbulence model, blade structural parameters) are specified in the text, in an appendix if needed. The overall Reynolds number could also be mentioned in the text.

As the considered turbine design is not publicly available, the structural model can unfortunately not be provided. However, it is referenced from (Bak et al., 2013), for those who are allowed access, (an NDA might need to be signed).

The authors believe that the turbulence modeling is described comprehensively in section 2.2, with explanations of the new model proposed, and with references to the background models used.

Physics, time steps, convective schemes used and velocity/pressure algorithm for CFD simulations are all described in section 2.3.1.

The Reynolds number has been found to $\approx 6M$ in the majority of the blade, based on the rotational speed and the hub height velocity. This has been added to the section 2.3.1:

“The rotation speed of the rotor is constant to 16.2rpm resulting in an effective Reynolds number of $\approx 6M$ along the majority of the blade for the studied flow case.”

Grid setups including boundary conditions are described in section 2.5.

- L260: In this study, the LES length scale is fixed to the background mesh so that it doesn't change with mesh refinement. Can you comment on the impact that this has on the cut-off of scales, e.g. in the turbulent kinetic energy spectrum?

In the present case, where mesh is refined in a small region only, the effect of fixing the LES length scale to the background grid has little effect. The turbulence in the incoming flow, which is based on the background grid length scale, will not have time to dissolve into smaller scales in the little distance before going to the IDDES region, where the length scale is based on the actual grid size.

More importantly, is likely the distance behind the rotor, where small scale separated flow is present. In this study, it has been assumed that the distance of the IDDES region is sufficiently long for resolving these small scales of the flow and the background grid resolution is low enough for resolving the wake further away. This could be an interesting parameter study, as a longer IDDES region (and longer rotor and/or disc mesh) would enable the IDDES model in a larger region. In this study, the background grid is still quite fine and the fine background cells are present until 6D behind the rotor.

In the preparation of the present study, and for previous tests of the model alternative strategies were tested as well.

It has for instance been attempted to increase the size of the IDDES region, such that all overset grid refinements were within the IDDES region.

By this, the IDDES length scale was used, but as this is only present in the dissipation term of the IDDES model (and not also directly in the viscosity term as the Deardorff) the sudden jump of viscosity is avoided. Using this alternative method gave the same results as the strategy used here limiting the LES length scale. It was chosen to go for the background grid limiter, as this allows as large a portion of the ABL LES model in the flow, which for other stratifications might have an impact. However, if the background grid is of coarser resolution in a study, this approach might not be ideal.

The following was added to the text:

“The length scale limit of the LES region, caps the frequency range of the resolved turbulent kinetic energy to the background grid resolution.

Close to the rotor, however, the small scale detached flow is still captured through the IDDES model. For studies, with long distances from refinement to object or larger resolution differences between background and overlapping sub-grids, this strategy would likely not be optimal due to the capping of resolved frequencies being based on an unnecessarily large grid size.”

- Tower and nacelle are omitted from the CFD results but they will impact on the near wake. Please comment on this.

Based on a study by Guma et al. (Guma et al., 2020) (<https://wes.copernicus.org/articles/6/93/2021/wes-6-93-2021.html>) looking at the same rotor, the influence is low on the sectional loads and displacements. However, there is an effect in fatigue loads as the drop in forces when passing the tower is omitted.

In the present study effects in loading is mainly seen inboard on the blades (see the azimuthal loading at 33%), which have a drop in forces when passing the tower in measurements not seen in simulations. Further out, the shear is dominant in the force variation.

The following was added to the document when introducing the CFD mesh:

*“In the present setup, only the rotor is considered, omitting the tower, hub and nacelle, with a total of three overlapping mesh groups, see Figure 4. **The omission of these elements is expected to show little effect, based on the study of Guma et al., studying the same rotor represented as a rotor only and a full turbine.**”*

The comment on Figure 16 has been clarified also.

*“As seen, the forces agree well between the two simulations and the measurements with main differences being the lack of tower shadow at the inner sections, **resulting in a drop of loading in measurements not seen in simulations (see Figure 16 top row)**”*

- L326: Can you specify more precisely at what distance the hole of the disc mesh should be from the surface?

The distance and smearing of deformation to the volume grid is something, which is tuned for the specific setup, as it is naturally dependent on the degree of deformation.

The smearing blend was done linearly in the range of 15-40% of the length of the grid line of the rotor grid normal to the surface. This means that within the first 15% of the grid line length from the surface, the entire deformation is propagated, while between 15% to 40% the blend factor linearly goes from 1 to 0, such that after 40% no deformation is added to the mesh points. This made sure that the blend factor was 0 in the location of the hole of the background grid such that donor cells were not altered.

The manually cut holes are approximately 17m wide (along the rotor axis), with the un-deformed rotor placed around the center, leaving around 8.5m for deformation of the rotor mesh.

The following was added to the text:

“In the present setup the holes are 17m wide in the rotor axis direction, where the main deformation is present, located with the undeformed rotor in the center. Displacements are propagated to the volume mesh, such that points within the inner 15% of the grid curve length normal to the surface are moved as solid body motion to ensure no change of quality of the inner cells resolving the high gradient flow. Further out, from 15% to 40% the volume blend factor is linearly decaying from 1 to 0, such that points from 40% grid curve length and out are unchanged to avoid changes to donor cells.

Note that communication tables and hole-cutting still need update between disc mesh and background mesh as the latter is static.”

- L340: 1000sec are considered for the post-processing, Can you add also the corresponding time period in rotor revolutions?

1000 seconds correspond to ≈ 270 revolutions. However, note that the 1000 seconds were only used for the postprocessing of the precursor simulation (i.e. for spectras and statistics). For the successor FSI simulations a total of 60 revolutions were simulated, meaning that only part of the sampled flow was used. The longer period of the precursor was to ensure a sufficient sample size, as well as it was not known in advance how many seconds the successor simulations would take to converge.

The sentence was clarified:

“A total of 9750 seconds were simulated for the precursor simulation, of which the final 1000 seconds (equivalent to ≈ 270 rotor revolutions) were sampled for statistical post processing, in a period where the developed flow profile sufficiently matched the desired profile.”

- Adding details of the computational cost (resources used) would be useful.

The following was added to the text:

Sec 3.1: *“The full precursor simulation was conducted on 1728 AMD EPYC 2.9GHz processors on the computer cluster of DTU, and lasted ≈ 45 hours.”*

Sec 3.2: *“For the initial phase 1, simulations were conducted on 1189 AMD EPYC 2.9GHz processors, while coupled simulations (phases 3 and 4) were conducted on 793 Intel Xeon 2.8 GHz processors. The initialization simulations took in the order of ≈ 26 wall clock hours, while the coupled phases lasted for ≈ 180 wall clock hours per simulation.”*

Minor corrections:

These have been corrected

- L122: word "for" is duplicated

- L170: equal -> equal to

Wind turbines in atmospheric flow - FSI simulations with hybrid LES-IDDES turbulence modelling

Christian Grinderslev¹, Niels Nørmark Sørensen¹, Sergio González Horcas¹, Niels Troldborg¹, and Frederik Zahle¹

¹Department of Wind Energy, Technical University of Denmark, Risø Campus, 4000, Roskilde ,

Correspondence: Christian Grinderslev (cgrinde@dtu.dk)

Abstract. In order to design future large wind turbines, knowledge is needed about the impact of aero-elasticity on the rotor loads and performance, and about the physics of the atmospheric flow surrounding the turbines. The objective of the present work is to study both effects by means of high fidelity rotor-resolved numerical simulations. In particular, unsteady computational fluid dynamics (CFD) simulations of a 2.3MW wind turbine are conducted, this rotor being the largest design with relevant experimental data available to the authors. Turbulence is modeled with two different approaches. On one hand, the well established improved delayed detached eddy simulation (IDDES) model is employed. An additional set of simulations relies on a novel hybrid turbulence model, developed within the framework of the present work. It consists ~~on the blending of a~~ of a blend of a large eddy simulation (LES) model for atmospheric flow by Deardorff ~~with~~ and an IDDES model for the separated flow near the rotor geometry.

10 In the same way, the assessment of the influence of the blade flexibility is performed by comparing two different sets of computations. A first group accounts for a structural multi body dynamic (MBD) model of the blades. The MBD solver was coupled to the CFD solver during run time with a staggered fluid structure interaction (FSI) scheme. The second set of simulations uses the original rotor geometry, without accounting for any structural deflection.

The results of the present work show no significant difference between the IDDES and the hybrid turbulence model.
15 ~~However, it is expected that future simulations of more complex stratification and longer domains will benefit from the developed hybrid model.~~ In a similar manner, and due to the fact that the considered rotor was relatively stiff, the loading variation introduced by the blade flexibility was found to be negligible when compared to the influence of inflow turbulence. The simulation method validated here is considered highly relevant for future turbine designs, where the impact of blade elasticity will be significant and the detailed structure of the atmospheric inflow will be important.

20 1 Introduction

As future wind turbines will have unprecedented long and flexible blades, the necessity of understanding the effects of aero-elasticity on the rotor performance and on its structural integrity increases. Along with this, large wind turbines interact with a larger range-part of the atmospheric boundary layer, often exceeding the height of the atmospheric surface layer (ABL). This also needs consideration in the design phase, as the rotor blades consequently experience a large variation of flow through each

25 revolution, and flow cases which were not relevant to consider for past designs, might occur. This needed knowledge can be obtained through high fidelity methods, such as fluid-structure interaction (FSI) simulations, which model the coupled effects of both flow and structure. These simulations can further be used to develop and improve lower fidelity engineering models used by wind turbine designers in industry.

30 FSI of wind turbines in atmospheric turbulent flow, is not a widely studied topic, due to the computational costs of such simulations, especially when geometrically resolved wind turbines are modelled. Instead, a more efficient manner often chosen is the use of actuator lines/discs (Sørensen and Shen, 2002; Sørensen et al., 2015). Here, the rotor is represented through body forces smeared in the CFD grid, reducing the need of grid refinement significantly. An example of actuator line based FSI in turbulent flow is the work by [Lee et al. \(2013\)](#), where, simulations of two aligned 5MW wind turbines in a turbulent [domain-inflow](#) modelled by LES were conducted. The structural response of the turbines was found 35 through the FAST aero-elastic code (Jonkman and Buhl, 2005) to study the fatigue loading. It was found that especially the surface roughness and the rotor shadow effect had large influence on the fatigue loading. As actuator lines merely represent the turbines through smeared forces, blade surface boundary layers and resulting generated wake turbulence is not modelled. Likewise, the resulting shedding of vortices at the tips and roots are not highly resolved and improperly modelled. The far wake response is, however, sufficiently accurate when the inflow to the turbine has a high turbulence intensity (Troldborg et al., 40 2015).

Looking at rotor resolved CFD/FSI, using LES is still too computationally expensive for many practical applications. Instead, compromises are needed for the turbulence models. In the works by Santo et al., FSI for wind turbines, structurally represented through finite element shells, were studied for steady ABL flows (Santo et al., 2020a,b) using unsteady Reynolds averaged Navier-Stokes (URANS), with the $k - \epsilon$ model. In [Santo et al. \(2020a\)](#), the effects of wind shear, 45 yaw-error, tilt and tower shadow were all investigated, finding for instance that the introduction of yaw lead to a decrease in blade deflection but a large increase in yaw-moment on the hub. In [Santo et al. \(2020b\)](#), wind gusts were introduced by acceleration of the flow near the rotor top position. One conclusion found was that for the used setup and turbulence model, a flow separation occurred when the velocity rapidly increased due to the gust, limiting the load increase avoiding any extreme deflections. To consider turbulent fluctuating flow, a popular alternative to LES are the synthetic turbulence generators such as the method by [Mann \(1998\)](#). These methods efficiently create boxes of turbulent fluctuations, that can be used to create inflow for CFD simulations or inserted internally in the domain by additional body forces (Troldborg et al., 2014). Along with this, a hybrid turbulence model like detached eddy simulation (DES) can be used to resolve the turbulence in the grid. This model combines the URANS approach for attached flow regions with LES in the separated regions. The use of synthetic turbulence is efficient as the modelling of turbulent fluctuations is fast, and the DES models need less grid 50 resolution near the rotor than LES. The turbulence will, however, not be in balance with the CFD simulation shear as shown in [Troldborg et al. \(2014\)](#), and thereby the turbulence will change as it convects through the domain. Another drawback of this method is that the modelled turbulence is neutrally stratified and therefore it cannot naturally handle atmospheric stability. Further, a potential problem of the synthetic turbulence methods is the assumption of homogeneous and Gaussian turbulence. Even though previous work (Berg et al., 2016) have shown that the latter assumption does not significantly

60 affect the loads on a wind turbine under normal conditions one could easily come across cases where these assumptions does not hold. In [\(Li et al., 2015\)](#) [Li et al. \(2015\)](#) synthetic turbulence was used to study the geometrically resolved NREL 5MW reference turbine in sheared and turbulent inflow including flexibility of the rotor. The FSI framework was based on a CFD solver coupled with a multi-body dynamics (MBD) structural solver and turbulence was imposed at the inlet using the Mann turbulence box as input. The main conclusions of the study was that realistic atmospheric flow including shear and turbulence is
65 important when designing large scale wind turbines in terms of loading. Additionally, the study concluded that, for the specific turbine and flow cases, inclusion of blade flexibility does not impact highly the wake behaviour, whereas inflow turbulence have high impacts on wake diffusion. [Guma et al. \(2021\)](#) [Guma et al. \(2021\)](#) recently published a study looking into the aero-elastic response of the NM80 rotor, also studied in the present article, in turbulent inflow. Here, synthetic Mann box turbulence and the delayed detached eddy simulation (DDES) turbulence model were used to create and resolve turbulent
70 structures in the wind flow. The fluctuating forces occurring on the blades were used to calculate the fatigue damage on the blades by means of the so-called damage equivalent loading (DEL). It is found that for low inflow velocities, the DEL is mainly influenced by the turbulent inflow rather than the inclusion of flexibility, at least for the considered relatively stiff rotor.

An alternative more complex method to simulate geometrically resolved turbines in the ABL flow was proposed by [Vijayakumar et al. \(2015\)](#) [Vijayakumar \(2015\)](#). Here, a hybrid turbulence model was developed, which combines spectral
75 ABL LES simulations by [Moeng \(1984\)](#) [Moeng \(1984\)](#) with more feasible URANS based $k - \omega$ SAS (Egorov et al., 2010) simulations close to the rotor. By this [combination](#), a large decrease [in the necessary number](#) of grid cells is [needed \(however still large\) achieved](#), as the URANS based turbulence models the effect of all the turbulent scales. The model was [studied on applied to](#) a single wind turbine blade in [\(Vijayakumar et al.\)](#) [Vijayakumar et al.](#), however, using pure CFD without a structural coupling.

80 In general, considering presently available high-performance computing capabilities, compromises are needed when doing high fidelity aero-elastic modelling of wind turbines in atmospheric flow using FSI. This being either by reducing the rotor representation by actuator lines to allow LES simulations, or instead simplifying the turbulence modelling.

The objective of the present study is to move one step up the ladder of complexity by investigating rotor aerodynamics and aero-elasticity in turbulent LES inflow, using a novel turbulence model. The model is inspired by the one of Vijayakumar,
85 combining the ABL turbulent flow modelling of the Deardorff LES model with the IDDES engineering model near the rotor. ~~The study will be done through~~ [This study considers](#) blade resolved FSI simulations of the 2.3 MW NM80 wind turbine rotor including blade flexibility using a FSI coupling framework combining the computational fluid dynamics (CFD) code EllipSys3D (Michelsen, 1992, 1994; Sørensen, 1995) and the structural solver from the aero-elastic code HAWC2 (Larsen and Hansen, 2007). For the specific rotor, measurements of inflow and blade loading are available for [validation of comparison](#)
90 [with the computed](#) results. The study is a continuation of [\(Grinderslev et al., 2021\)](#) [Grinderslev et al. \(2021\)](#), where FSI of the NM80 rotor was studied in [various flow scenarios with](#) sheared and yawed, however laminar, inflow ~~using URANS turbulence modelling~~. [The flow scenario studied here resembles one of these studied laminar scenarios, however with turbulent inflow through the novel hybrid turbulence model and an adjusted grid setup.](#)

2 Methodology

95 In this section, the computational solvers are presented along with the simulation strategies such as FSI framework and precursor simulations. Further, the ~~hybrid turbulence model~~ [participating turbulence models](#) will be introduced ~~by first introducing the participating turbulence models, to prepare for the discussion of the hybrid model.~~ Finally, the computational grids used in the study are described along with the chosen simulation parameters.

2.1 Numerical methods

100 2.1.1 Flow solver

To solve the fluid flow, the DTU inhouse CFD code EllipSys3D (Michelsen, 1992, 1994; Sørensen, 1995) is used. The code solves the incompressible Navier-Stokes equations in structured curvilinear coordinates using the finite volume method with a collocated grid arrangement. The code is parallel and highly scalable using the message passing interface (MPI) and multi-block decomposition, the multi-grid method and grid sequencing. EllipSys3D has multiple convective schemes implemented, 105 such as central difference (CDS), second order upwind (SUDS) and quadratic upstream interpolation for convective kinematics (QUICK). For solution of the pressure correction equation, various algorithms are implemented such as PISO, SIMPLE, SIMPLER and variations hereof. Rhie-Chow interpolation is used to avoid odd/even pressure decoupling. Overset capabilities, including grid hole-cutting are implemented internally in the code (Zahle et al., 2009).

Several turbulence models are implemented such as two equation Reynolds Averaged Navier Stokes (RANS) models, $k - \epsilon$ 110 and $k - \omega$ among others, hybrid models like detached eddy simulations (DES), delayed DES (DDES), improved DDES (IDDES) and multiple large eddy simulations (LES) models. In addition to these, a hybrid version of the LES and the IDDES model will be presented in this paper.

For FSI simulations, the deformation of grids is handled through a moving mesh method with a ~~volume blend factor, which propagates the surface displacement along~~ [blend factor. The surface displacement is propagated along the](#) grid lines normal 115 to the surface ~~blended to the original volume proportionally to the~~, [with a blend factor gradually diminishing to zero with increasing distance to the blade surface. The blending can be either linear in the](#) distance to the blade surface [or based on a tanh function.](#) This ensures that mesh points in the vicinity of the blade surface are displaced as a solid body movement along with the blade, while points further away only move a fraction of the displacement, ~~using a blending function.~~ When using the overset grid method, the deformation is only transferred to the volume grid blocks containing the solid surface.

120 The code has been used extensively for ~~for~~ a range of test cases and was validated in e.g the Mexico project (Bechmann et al., 2011; Sørensen et al., 2016) and for the Phase VI NREL rotor (Sørensen and Schreck, 2014; Sørensen et al., 2002). Recently, the code was validated in ~~(Grinderslev et al., 2020b)~~ [Grinderslev et al. \(2020b\)](#) for the specific case of the present NM80 rotor in atmospheric laminar flow conditions by comparison with the CFD code Nalu-Wind (Sprague et al., 2019) and measurements from the DanAero experiments. Further, the FSI framework was used in ~~(Grinderslev et al., 2021)~~ [Grinderslev et al. \(2021\)](#) to 125 simulate the coupled effects of the DanAero inspired laminar wind flow and the structural response.

2.1.2 Aero-elastic solver

HAWC2 (Larsen and Hansen, 2007) is an aero-elastic code [developed at DTU](#) used for calculating blade element momentum (BEM) aerodynamics and structural responses of wind turbines. The structural part of the code is based on the multi-body dynamics (MBD) formulation, accounting for non-linear effects of large deflections. Each structural component, i.e. a blade or the tower, can be represented by a number of bodies assembled by linear Euler or Timochenko beam elements. Sub-bodies are connected with constraint equations considering non-linearities.

HAWC2 has a built-in aerodynamics module, that calculates aerodynamic forces using BEM theory. As is common in BEM implementations, prediction of airfoil aerodynamic performance is based on pre-computed look-up tables of lift, drag and moment, which is needed to calculate forces along the blade. Multiple correction schemes are implemented to improve the BEM aerodynamics such as tip loss corrections, dynamic stall models, tower shadow effect and much more, see [\(Madsen et al., 2019\)](#) [Madsen et al. \(2019\)](#).

HAWC2 is widely used by industry, and has been verified and validated in various studies (Pavese et al., 2015; Madsen et al., 2019), considering the structural and aerodynamics aspects of the code respectively.

2.1.3 FSI-framework

The two codes EllipSys3D and HAWC2 are coupled, in a partitioned manner, through the Python framework, referred to as the DTU coupling, originally created by [Heinz \(Heinz et al., 2016a\)](#) [Heinz et al. \(2016a\)](#) and further developed by [G. Horeas and R. Garcia \(Horeas et al., 2019; García Ramos et al., 2020\)](#) [Horcas et al. \(2019\)](#) and [García Ramos et al. \(2020\)](#). Through the use of the coupling framework, the BEM aerodynamics module of HAWC2 is replaced by an interface to the EllipSys3D CFD code.

Using predicted displacements of nodes from HAWC2, the CFD mesh is deformed, and a new flow-field is found through EllipSys3D. The loads predicted by the CFD solver are then applied to the HAWC2 structural model and a new deformation is found. All communication between EllipSys3D and HAWC2 happens through the DTU coupling framework. In [\(Heinz et al., 2016a\)](#) [Heinz et al. \(2016a\)](#), a loosely coupled approach was found to be sufficient for wind energy related cases, due to the high mass ratio between the turbine structure and air, and is therefore used.

Studies involving the application of the FSI framework, for both operational and standstill configurations, include (Heinz et al., 2016a,b; Horcas et al., 2019, 2020). The framework has been validated with experiments through simulations of a pull-release test of a wind turbine blade in the large scale test facility of DTU, see (Grinderslev et al., 2020a). The process of the framework between the main iterations can be described through the following steps:

- The displacements of the present time step are predicted by HAWC2 with second order accuracy, using kinematics from the previous time step.
- Displacements are sent to EllipSys3D and the surface mesh is deformed while displacements are propagated into the volume mesh using a volume blend method.

- The Navier-Stokes equations are solved to calculate the flow field for the new time step through under-relaxed sub-iterations in EllipSys3D.
- 160 – Forces are computed and integrated on the CFD mesh surface and sent to HAWC2.
- Forces are interpolated to the aerodynamic sections of the HAWC2 model and actual deformations are calculated.
- Unless the solution has reached the total simulation time, the simulation is advanced to the next time step and the procedure is repeated.

2.2 Turbulence modelling

165 A hybrid turbulence model has been developed to consider the dominant turbulence scales from the atmospheric boundary layer (ABL) down to the blade boundary layer (BBL), within the same simulation. To do this, the Deardorff one-equation LES turbulence model for ABL flows (Deardorff, 1972) is blended with the IDDES turbulence model (Shur et al., 2008), which itself is a blend between URANS modelling in the BBL and LES in the separation region outside the BBL. The blending of the two models happens through the energy equation, which is solved for in both methods. In the Deardorff model, the transport
170 equation of sub grid scale (SGS) energy e is solved, whereas the transport equation for total turbulent kinetic energy k is solved in the IDDES method. These energy expressions are blended through their respective terms of diffusion, convection, production, buoyancy and dissipation using a smooth tanh blending function. By this, e of the Deardorff model coming towards the rotor is transformed into equivalent k of the IDDES, and vice versa in the wake region. In the following, the two models will be introduced, followed by a description of the blending for the hybrid model used in this study.

175 2.2.1 Deardorff large eddy simulation model

In the Deardorff LES turbulence model (Deardorff, 1972, 1980), the turbulent eddy viscosity μ_t is calculated through the expression:

$$\mu_t = C_k \rho l_{LES} \sqrt{e} \quad (1)$$

Here, C_k is a constant of 0.1, ρ is the air density and l_{LES} is a mixing length scale, which for neutral stratification is set equal
180 to Δ_{LES} , being the grid size, here defined as $\Delta_{LES} = (dx \cdot dy \cdot dz)^{1/3}$, dx , dy and dz being the grid spacing in the respective directions.

The SGS energy, e , is found by solving the following transport equation :

$$\frac{D\rho e}{Dt} = -\tau_{ij} S_{ij} + \frac{g}{\theta_0} \tau_{\theta w, LES} - C_\epsilon \rho \frac{e^{3/2}}{l_{LES}} + \frac{\partial}{\partial x_j} \left((\mu + 2\mu_t) \frac{\partial e}{\partial x_j} \right) \quad (2)$$

where g , t and μ refer to the gravity, time and molecular viscosity respectively. C_ϵ is equal to 0.93, the buoyancy SGS fluxes
185 $\tau_{\theta i, LES} = -\mu_\theta \frac{\partial \theta}{\partial x_i}$, with variable temperature θ and the eddy heat diffusivity being: $\mu_\theta = \left(1 + \frac{2l_{LES}}{\Delta_{LES}} \right) \mu_t$. θ_0 is the surface reference temperature. The SGS stress tensor τ_{ij} is defined as; $\tau_{ij} = -2\mu_t S_{ij}$ using the strain rate $S_{ij} = 1/2 \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right)$, with u being the velocity vector.

2.2.2 SST based detached eddy simulation models

For the $k - \omega$ SST based DES turbulence models, μ_t is found through the standard $k - \omega$ SST (Menter, 1993) approach, which is then altered in the dissipation term depending on the chosen DES model.

$$\mu_t = \rho \frac{a_1 k}{\max(a_1 \omega, \Omega F_2)}, \quad \text{with } a_1 = 0.31 \quad (3)$$

Here, k is a total turbulent kinetic energy, ω the specific dissipation rate, Ω the shear-strain rate, and F_2 a limiting blending function. k and ω are found through the following two transport equations:

For k :

$$195 \quad \frac{D\rho k}{Dt} = -\tau_{ij} S_{ij} + \frac{g}{\theta_0} \tau_{\theta\omega, DES} - \rho \frac{k^{3/2}}{\tilde{l}} + \frac{\partial}{\partial x_j} \left[(\mu + \mu_t \sigma_k) \frac{\partial k}{\partial x_j} \right] \quad (4)$$

For ω :

$$\frac{D\rho\omega}{Dt} = \frac{\gamma}{\nu_t} \tau_{ij} \frac{\partial u_i}{\partial x_j} - \rho \beta \omega^2 + \frac{\partial}{\partial x_j} \left[(\mu + \mu_t \sigma_\omega) \frac{\partial \omega}{\partial x_j} \right] + 2(1 - F_1) \rho \sigma_{\omega 2} \frac{1}{\omega} \frac{\partial k}{\partial x_i} \frac{\partial \omega}{\partial x_i} \quad (5)$$

Here F_1 is a blending function, to shift between the standard $k - \omega$ model ($F_1 = 1$) near the surface to the $k - \epsilon$ model ($F_1 = 0$) within the boundary layer and further out, while σ_k , σ_ω , β and γ are parameters which themselves depend on F_1 . Finally β^* and $\sigma_{\omega 2}$ are constants. ν_t is the kinematic turbulent viscosity $\nu_t = \mu_t / \rho$. All constants and parameters as well as blending functions F_1 and F_2 can be found in the original work by Menter (Menter, 1993). In the original work by Menter, the buoyancy term is not considered. In the EllipSys3D version of the $k - \omega$ SST, it is however considered as the second term of the right hand side of Eq. (4), and the flux is found as: $\tau_{\theta i, DES} = -\mu_t \frac{\partial \theta}{\partial x_i}$

The length scale which appears in the k -equation serves to switch from URANS to LES mode and is defined as:

$$205 \quad \tilde{l} = \min(l_{k-\omega}, l_{DES}), \quad (6)$$

where $l_{k-\omega} = \sqrt{k} / (\beta^* \omega)$ and l_{DES} is the length scale in the LES region. In the standard DES model (Spalart et al., 1997; Travin et al., 2004), $l_{DES} = C_{DES} \Delta_{DES}$, where $\Delta_{DES} = \max(dx, dy, dz)$ and C_{DES} is a F_1 dependent parameter.

DES is known to be sensitive to sudden changes of grid refinements as grid induced separation (GIS) can be introduced. Here, the modelled turbulent viscosity will drop instantly without the additional turbulence being resolved. It is also known to have a mismatch between the URANS and LES region, if used as a wall modelled LES model. These issues are addressed in delayed DES (DDES) (Menter et al., 2003; Spalart et al., 2006), improved DDES (IDDES) (Shur et al., 2008) and simplified improved DES (SIDDES) (Gritskevich et al., 2012), by using more advanced expressions for the length scale \tilde{l} .

2.2.3 Hybrid ABL - BBL model

In order to simulate the effect of turbulence in both ABL and BBL scales, a hybrid method is suggested where the Deardorff ABL LES model is blended together with the BBL DES models to avoid the need of excessive grid resolution in the BBL otherwise needed by LES. The blending is established through a blending function F_h which is zero in the ABL region and

one in the DES region and then defining a hybrid turbulence kinetic energy $\tilde{k} = F_h k + (1 - F_h)e$. Using these definitions the energy equations Eq. (2) and (4) are combined to give the following transport equation for \tilde{k}

$$\begin{aligned} \frac{D\rho\tilde{k}}{Dt} = & -\tau_{ij}S_{ij} + \frac{g}{\theta_0}(F_h\tau_{\theta w,DES} + (1 - F_h)\tau_{\theta w,LES}) - \rho\tilde{k}^{3/2}\left(\frac{F_h}{\tilde{l}} - C_\epsilon\frac{1 - F_h}{l_{LES}}\right) \\ & + \frac{\partial}{\partial x_j}\left[(\mu + \mu_t(\sigma_k F_h + 2(1 - F_h)))\frac{\partial\tilde{k}}{\partial x_j}\right] \end{aligned} \quad (7)$$

220 The blending function F_h is defined as follows:

$$F_h = 0.5 - 0.5 \cdot \left(\tanh\left(\left(d_w - R\right) \cdot \frac{2}{\delta_{blend}}\right) \right) \quad (8)$$

Here, d_w is the wall normal distance, R is the wall distance to the location where $F_h=0.5$ and δ_{blend} is the transition distance between $F_h=0.12$ and $F_h=0.88$, where the blend is most rapid.

To allow the present method to work together with the $k - \omega$ model, an expression for ω is needed in the LES region.
225 This expression is made through the standard $k - \omega$ turbulent viscosity expression, to ensure consistency through the blending regimes.

$$\mu_t = C_k \rho l_{LES} \sqrt{\tilde{k}} = \rho \frac{\tilde{k}}{\omega_{LES}} \Rightarrow \omega_{LES} = \frac{\sqrt{\tilde{k}}}{C_k l_{LES}} \quad (9)$$

Here, it is assumed that the blending from DES to LES happens in the region where $F_2 = 0$, such that the viscosity limiter is inactive. A blended expression $\tilde{\omega}$ is then found for the entire domain.

$$230 \quad \tilde{\omega} = \omega F_h + \omega_{LES}(1 - F_h) \quad (10)$$

This allows the calculation of the turbulent viscosity similar to Eq. (3):

$$\mu_t = \rho \frac{a_1 \tilde{k}}{\max(a_1 \tilde{\omega}, F_2 \Omega)} \quad (11)$$

It is noted, that in the Deardorff part of the model, the turbulent viscosity, μ_t , is linearly proportional to the length scale, l_{LES} , through ω_{LES} , see Eq. (9). This needs to be considered if sudden changes are made to the grid resolution, as this will lead
235 to a proportionally equal change to μ_t . This could for instance be the case with overset grids, as used in the present study, where sudden changes of grid resolutions are happening over the interface. This should in theory be fine, as the resolved turbulence adapts to the grid, but as seen with the known GIS issues of the original DES model, the change in resolved turbulence, due to grid refinement, does not happen instantaneously. In the present study, this is handled by limiting the LES length scale Δ_{LES} to the grid size of the background grid, see Section 2.3.1.

240 2.2.4 Turbulent inflow simulations

In this study, the turbulent flow of the atmospheric boundary layer is modelled through a LES precursor simulation using the Deardorff model. Here, a neutrally stratified wind profile is simulated and sampled for use as input in the successor simulation including the rotor.

In the successor simulation the hybrid LES/IDDES model is used. LES is used for turbulence modelling in the majority of
245 the domain, except for the region close to the rotor. In this area, the IDDES model is utilized instead, which ~~requires less grid
resolution~~ removes the LES grid requirement near the rotor surface ~~than LES~~.

The precursor conditions are approximating measurements from the DanAero field experiment (Bak et al., 2010), where
a met mast located ≈ 2.5 diameters from the considered rotor measured the wind field using cup-anemometers at five points
vertically ~~at~~ 17m, 28.5m, 41m, 57m (hub height), 77m and 93m. The data-set from these cup-anemometers is used to fit
250 a corresponding neutral log-law wind profile to generate inputs for the Schumann-Grötzbach wall model (Schumann, 1975;
Grötzbach, 1987) used in the simulation.

$$U = u_* / \kappa \cdot \ln(z/z_0) \quad (12)$$

where U is the wind speed, u_* is the friction velocity, κ the Von Karman constant (≈ 0.4), z the vertical coordinate and finally
 z_0 the roughness length. As a neutral stratification flow is modelled for simplicity, no temperature is modelled in the present
255 study.

2.3 Simulation setups

2.3.1 EllipSys3D model

Air is described with density of 1.22 kg m^{-3} and a dynamic viscosity of $1.769 \cdot 10^{-5} \text{ kg m}^{-1} \text{ s}^{-1}$. The convective terms
are calculated through a blend of the fourth order central difference (CDS4) scheme in the LES area and the upwind QUICK
260 scheme in the URANS part as described ~~in (Strelets, 2001)~~ by Strelets (2001). An improved version of the the SIMPLEC
algorithm (Shen et al., 2003) is used to couple the velocity and pressure. No transition model is applied, such that the blade
boundary layer is assumed fully turbulent. A time increment corresponding to 0.125° rotation per time step is used for all
simulations corresponding to $1.29 \cdot 10^{-3}$ seconds per time step. The rotation speed of the rotor is constant to 16.2rpm resulting
in an effective Reynolds number of $\approx 6\text{M}$ along the majority of the blade for the studied flow case.

265 2.3.2 ~~Turbulence blending~~

Turbulence blending

To enable the hybrid turbulence modelling, a blending region must be defined. As mentioned in Section 2.2.3, a sudden grid
refinement will create a sudden length scale change, and thereby, if in the Deardorff LES region, a sudden change of turbulent
270 viscosity. In the present setup with overset grids, it is therefore chosen to avoid the viscosity "jump" by keeping the LES length
scale Δ_{LES} to the background grid value. By this, the refinement does not change the dissipation length scale nor the viscosity.
Near the rotor however, an IDDES ~~zone-region~~ is prescribed depending on the wall distance. ~~The blending happens~~ In this
region, the refined mesh impacts the turbulent dissipation through Δ_{DES} , as usual.

275 The length scale limit of the LES region, caps the frequency range of the resolved turbulent kinetic energy to the background grid resolution. Close to the rotor, however, the small scale detached flow is still captured through the IDDES model. For studies, with long distances from refinement to object or larger resolution differences between background and overlapping sub-grids, this strategy would likely not be optimal due to the capping of resolved frequencies being based on an unnecessarily large grid size.

280 In the present setup the blending between LES and IDDES happens with midpoint ($F_b = 0.5$) 8m from the surface with the majority of the blend happening over a 4m distance $\pm 2m$ distance from this point to ensure a smooth transfer from LES to IDDES, see Figure 1. ~~In the IDDES region, the refined mesh impacts the turbulent dissipation through Δ_{DES} , as usual. By this, the small scale detached flow is still captured close to the rotor.~~

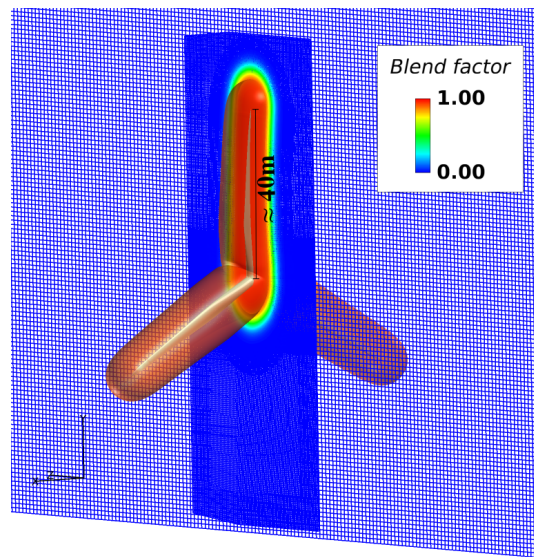


Figure 1. Blend factor, F_b , ~~definition~~. Red: IDDES region, Blue: Deardorff LES region. Isosurface of blend factor $F_b=0.9$ ($\approx 6m$ normal from surface)

2.3.3 HAWC2 model

285 The structural model used for the NM80 turbine has been created and validated internally at DTU Wind Energy as part of the original DanAero project (Bak et al., 2013). This model was also used in a former study of FSI on the same rotor (Grinderslev et al., 2021) comparing URANS FSI with BEM based aero-elastic simulations for complex laminar flow scenarios. The blade has a prebend into the wind of $\approx 1.5m$ at the tip. Each blade is structurally discretized into 22 bodies each consisting of one Timochenko beam element. As only the rotor is modelled in CFD, only blade flexibility is considered as well. This means that tower ~~and shaft are considered rigid in the structural model and no tower shadow is considered,~~ nacelle, shaft and hub are not active parts of the HAWC2 simulations. A total of 60 aerodynamic sections are distributed per blade, which are used for both BEM and CFD loads. ~~For the initialization of the FSI simulation, BEM calculations are run in the aero-elastic code to reach~~

290

~~the time of the initialized CFD simulation which is run alone to obtain an initial flow field before enabling the coupling. For this~~ For BEM aerodynamics, airfoil data is used, obtained during the original DanAero project through wind tunnel tests and corrected for 3D effects, see (Bak et al., 2006) and (Bak et al., 2011). From (Grinderslev et al., 2021), it is known that the airfoil data does not capture well the 3D effects, and predicts an earlier stall than seen in CFD or experiments. In this case, however, the BEM calculations are used for initialization only to get good ~~guesses on estimate of the~~ initial bending, and for that reason no further corrections to the airfoil data have been conducted. Dynamic stall corrections (Hansen et al., 2004), and tip corrections (Glauert, 1935) are applied during the initializing BEM calculation. No controller is used, as a constant rotation speed of 16.2 rpm and pitch setting of -4.75° (decreasing the angle of attack) is set. For simplicity, the yaw and tilt is omitted in the simulation setup. For the DanAero campaign used for comparison, a tilt of 5° and average yaw error of 6.01° were present, however.

2.4 Simulation method

2.4.1 Precursor simulation

For the precursor simulation, as a first step, the turbulent flow is developed by recycling the flow using periodic boundary conditions. This resembles the flow moving over a very long distance, building up the boundary layer and producing the turbulence through shear production. In order to ensure a mean profile close to the desired measured wind velocity profile, the SG wall model is used. This forces the surface shear stress of the first adjacent cells to the ground to fit the log-law. The flow is driven trough a constant pressure gradient calibrated to obtain the desired friction velocity and resulting velocity profile with a roughness length z_0 of 0.73m.

Initially, the grid sequencing scheme of EllipSys3D is utilized on three grid levels to speed up the simulation and reach a fully turbulent domain quickly. When the flow is fully turbulent and the mean flow profiles match the desired flow, planes consisting of velocity components, U (horizontal perpendicular to mean flow direction), V (vertical and perpendicular to mean flow direction), W (mean flow direction), pressure, P , and SGS kinetic energy e are sampled. The plane is centered in the cross flow directions of $1000\text{m} \times 600\text{m}$ with 4m cell distances, see Figure 2.

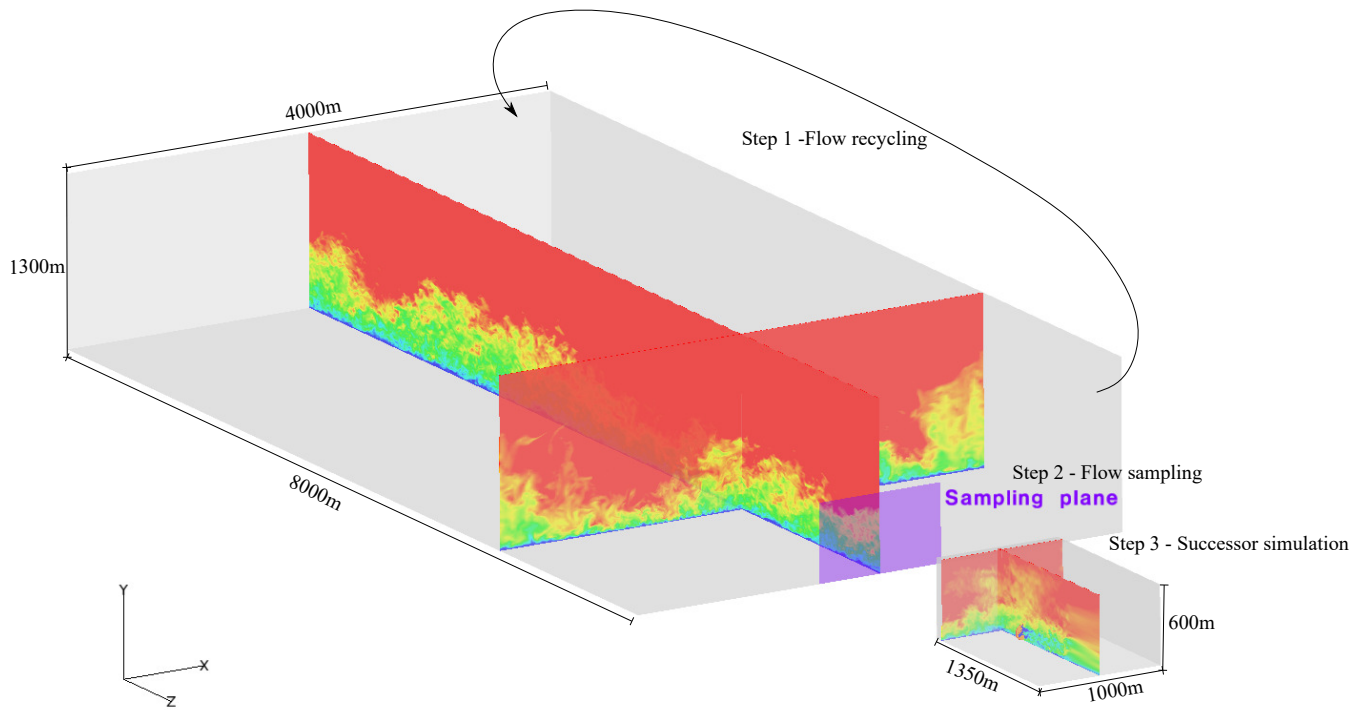


Figure 2. Concept of precursor to successor simulations along with domain sizes of conducted precursor and successor simulations. [Colored contours showing flow velocity \$W\$.](#)

315 2.4.2 FSI simulation

The FSI successor simulation process is divided into phases depicted in Figure 3.

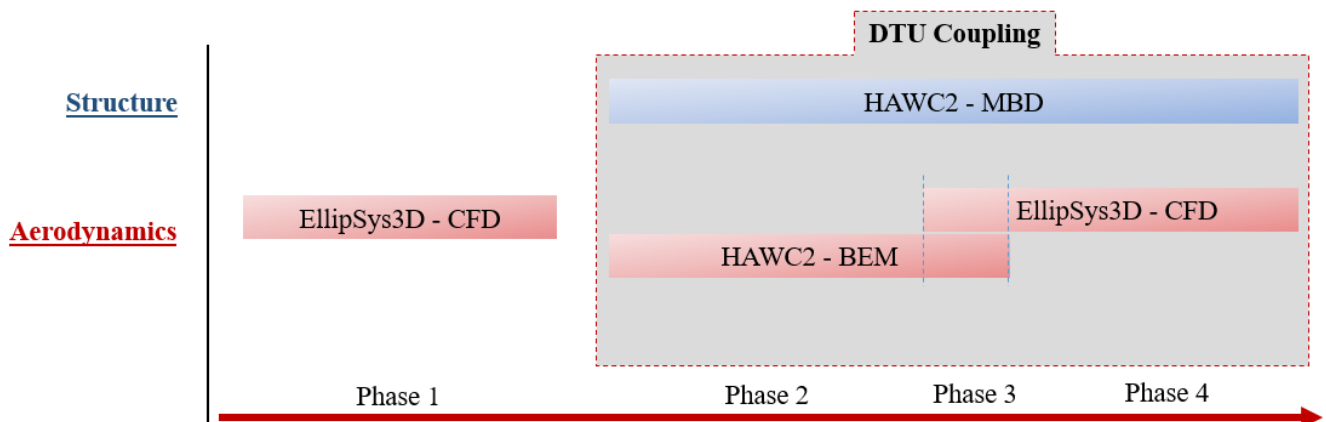


Figure 3. Process diagram of conducted simulations

In the first phase, simulations without coupling to the structural solver are run to develop the flow and fill the domain with the sampled turbulent flow. In this phase, the grid sequencing scheme of EllipSys3D is used exploring coarser grids to minimize the simulation cost during spin-up.

When passing to the FSI framework, phase 2, HAWC2 is run for the same amount of revolutions using BEM aerodynamics corresponding to the mean flow profile to ensure compatibility in time between the solvers when coupling, and obtaining a good guess of initial blade deformations. In phase 3 the coupling of EllipSys3D and HAWC2 is initiated with a smooth linear blending of forces over two revolutions to switch from BEM to CFD loading. This ~~avoids~~ is done to avoid any large force jumps in the HAWC2 solver, ~~such that no undesired vibrations are introduced to~~ to suppress undesired vibrations in the system. In the final phase 4, pure CFD loads are used for calculation of structural response and a full 2-way coupling is simulated for the desired amount of revolutions.

2.5 Computational grids

2.5.1 Precursor simulation

The precursor domain is $4000 \times 1300 \times 8000$ meters (width \times height \times length) discretized $576 \times 256 \times 1920$ cells divided in 8640 blocks of 32^3 cells. A total of ≈ 283 M cells are present in the precursor. The grid cells vary in size in the cross flow directions to obtain higher resolution in the sampling area. In the sampling area, the cells are cubic with 4m cell sides, while cells are slowly stretched towards the boundary sides and top. Periodic boundaries are prescribed on the vertical sides while a symmetry condition is used on the top boundary and the Schumann-Grötzbach (Schumann, 1975; Grötzbach, 1987) (SG) wall model is used for ensuring the Monin-Obukhov similarity law in the first cells adjacent to the wall by dictating the wall shear stress.

2.5.2 Successor simulation

For the rotor simulations, an overset grid method is utilized (Zahle et al., 2009), as this allows for a stationary background grid including the ground, while a rotating grid can be used for the rotor. Flow information is then communicated by interpolation between the grids through donor and receiver cells within the overlapping region of the meshes.

In the present setup, only the rotor is considered, omitting the tower, hub and nacelle, with a total of three overlapping mesh groups, see Figure 4. The omission of these elements is expected have a minor effect, supported by the study (Guma et al., 2021) studying the same rotor represented both as a rotor only and as a full turbine. Near the rotor, an O-O type mesh is grown from the blade surface, extruding ≈ 15 m, discretized ~~over~~ with 128 cells from the surface using the ~~mesh-tool~~ grid generator HypGrid (Sørensen, 1998). The first cell adjacent to the rotor surface has a height of $1 \cdot 10^{-6}$ m to ensure a y^+ of less than 1. Each blade is represented through 128 grid points spanwise and 256 chordwise. The blade tip and grid around a blade section are presented in Figure 5. The rotor diameter, D , is ≈ 80 m.

Around the rotor mesh, a ~~eylindrie~~ cylindrical disc mesh is constructed with pre-cut holes around the blades. This mesh rotates along with the rotor mesh, speeding up the hole-cutting algorithm, as the holes move along with the rotor. Thereby, the

need of searching for hole, fringe and donor cells between rotor and disc mesh for each time step is avoided, as the relations between the two meshes remain the same.

~~To simplify the overset search of donor and receiver cells and speed up computations, all~~ All deformation from the rotor will
350 ~~be is~~ propagated to the rotor mesh in such a way, that only cells that ~~are lie~~ inside the hole region of the overlapping disc mesh
deform. This is done to avoid deformation of the donor cells, keeping the interpolation coefficients between fringe and donor
cells unaltered. Through this simplification, there is no need for updating communication tables for donor and receiver cells
between the rotor and disc mesh ~~, as the two as these also~~ rotate together. This choice, however, necessitates the hole of the
disc mesh to be far enough from the surface to leave room for the deformation of mesh cells without impairing the cell quality.
355 In the present setup the holes are 17m wide in the rotor axis direction, where the main deformation is present, located with the
undeformed rotor in the center. Displacements are propagated to the volume mesh, such that points within the inner 15% of of
the grid curve length normal to the surface are moved as solid body motion to ensure no change of quality of the inner cells
resolving the high gradient flow. Further out, from 15% to 40% the volume blend factor is linearly decaying from 1 to 0, such
that points from 40% grid curve length and out are unchanged to avoid changes to donor cells. Note that communication tables
and hole-cutting still need update between disc mesh and background mesh as the latter is static. The disc and rotor grids are
360 similar to the setup used in (Grinderslev et al., 2021), however in this study the background grid has changed to be suitable for
LES simulations by using rectangular cells with low cell stretching in the area of focus.

The background domain is a box of 1000 (12.5D) \times 600 (7.5D) \times 1350 (16.9D) meters (width \times height \times length) using
352 \times 256 \times 640 cells adding up to \approx 58M cells. A concentration of cells is present in the cross flow directions around the rotor
365 area down to 1m side lengths, see Figure 4 (right). Cells in the flow direction are kept constant of \approx 1.4m from inlet to the rotor
and 6D behind it, before stretching towards the outlet. Boundary conditions are velocity inlet, outlet assuming fully developed
flow, and symmetry conditions (slip walls) on sides and top boundaries. The ground has a no-slip wall condition, but with
the SG wall model as in the precursor simulation. The rotor is placed \approx 4.38D from the inlet, \approx 6.25D from sides and top and
 \approx 12.5D from the outlet.

370 A total of 78M cells are used for the combined setup.

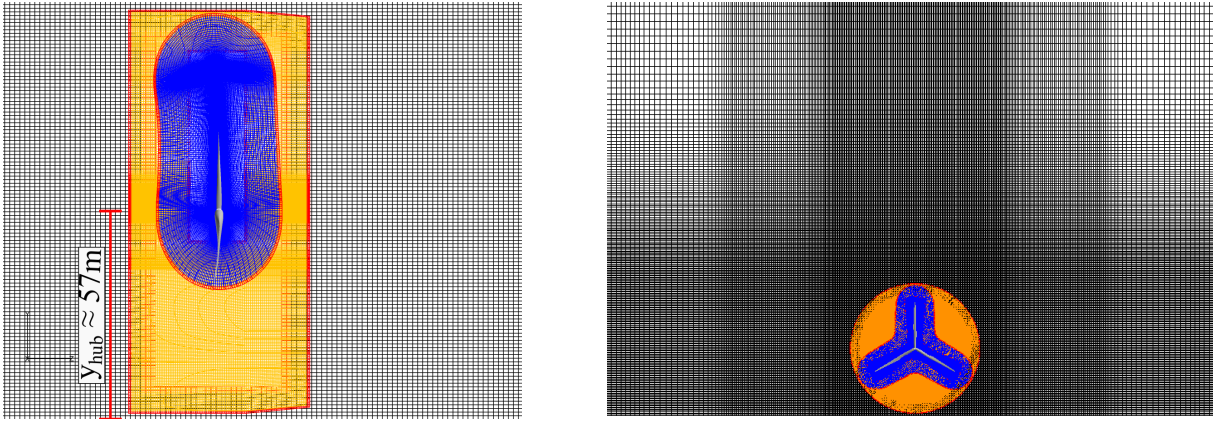


Figure 4. Grids used for simulations. Left: side view, right: front view. Red cells show receiver cells of overlapping grids. Blue: rotor grid, orange: disc grid, black: background grid. Entire background grid is not shown.

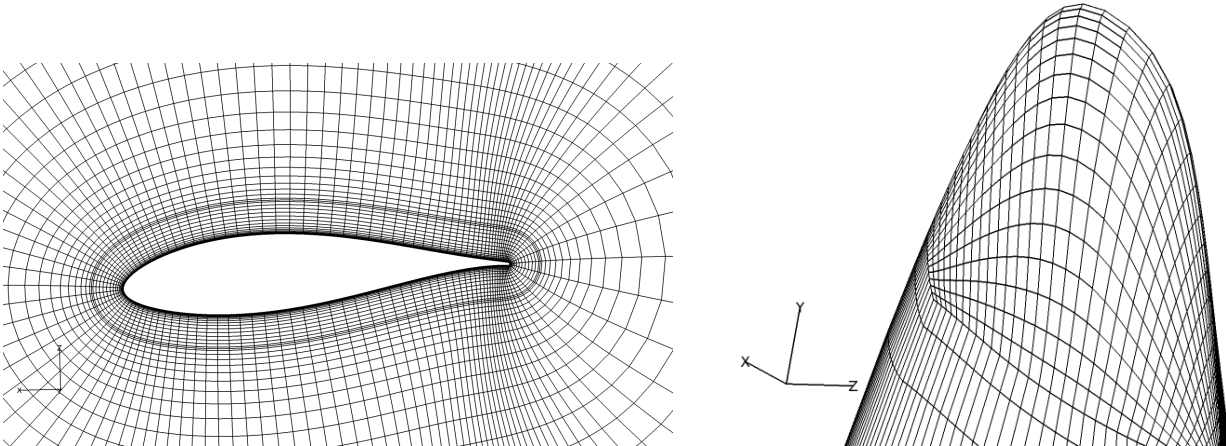


Figure 5. Near rotor mesh at 25m span and surface discretization at tip. Only every second line shown

3 Results

3.1 Precursor simulation

A total of 9750 seconds were simulated for the precursor simulation, of which the final 1000 seconds ~~were sampled~~ (equivalent to ≈ 270 rotor revolutions) were sampled for statistical post processing, in a period where the developed flow profile sufficiently matched the desired profile. The precursor was run in three grid levels with varying time steps. First, the coarse period ($\delta z = \delta y = \delta x \approx 16\text{m}$, $\Delta t = 1.0$ sec), a medium period ($\delta z = \delta y = \delta x \approx 8\text{m}$, $\Delta t = 0.5$ sec) and finally a fine period ($\delta z = \delta y = \delta x \approx 4\text{m}$, $\Delta t = 0.25$ sec) ~~of which the~~ The full precursor simulation was conducted on 1728 AMD EPYC 2.9GHz processors on the computer cluster of DTU, and lasted ≈ 45 wall clock hours. The sampling was conducted in the fine phase only as depicted in

Figure 6 along with the spectra at three different altitudes. As seen, the turbulence is well resolved with a long-decent inertial
 380 subrange following the Kolmogorov spectrum law with a decaying slope of $-5/3$.

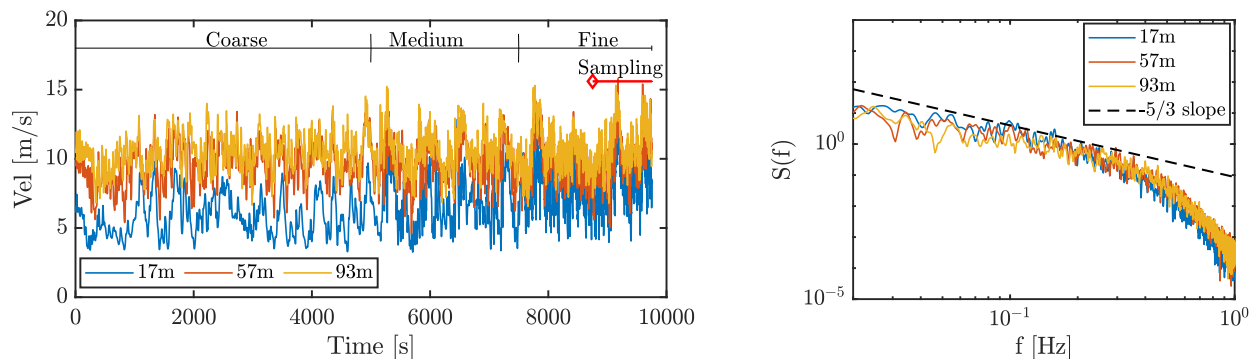


Figure 6. Left: Time series of wind speed, W , at three altitudes approximately matching the rotor bottom, center and top altitudes. Right: spectra of wind speed time series (fine resolution period only) using the Welsh estimate

From the sampling plane, depicted in Figure 2, the wind speed profiles of W were extracted and horizontally and temporally averaged $\pm 1D$ from the rotor position in the cross plane direction as depicted in Figure 7 (left). As seen, the relative difference of the averaged profile and the DanAero log-law fit match well with a maximum of 8% at $\approx 14m$, which corresponds to only $\approx 0.5m/s$ at the specific altitude. One difference to note, however, is the larger standard deviation, and thereby turbulence
 385 intensity, of the sampled flow, with fluctuations that supersede the DanAero measurements. The complexity of fitting both mean profile and turbulence intensity between measurements and LES simulations is high. In this specific case, the assumption of neutral stratification in the simulation, while no knowledge about stratification being available from the measurements, likely plays a role in the capabilities to match results. This was the best match obtained after multiple calibration attempts, considering both mean profile and turbulence intensity.

390 Figure 8 depicts the resulting resolved and SGS flow shear stresses and resolved friction velocity, u^* .

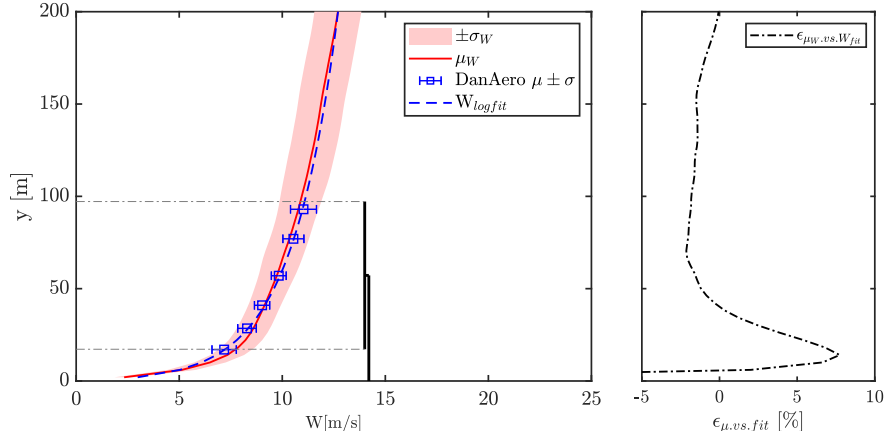


Figure 7. Left: Horizontal and temporal average profile $\mu_W \pm 1 \sigma$ (solid red and red patch), DanAero measurements and fitted log-law (blue errorbars and dashed). Horizontal averaging based on flow from $\pm 1D$ from the rotor center on the sampled flow plane. Right: Relative error between log-law fit and μ_W profile

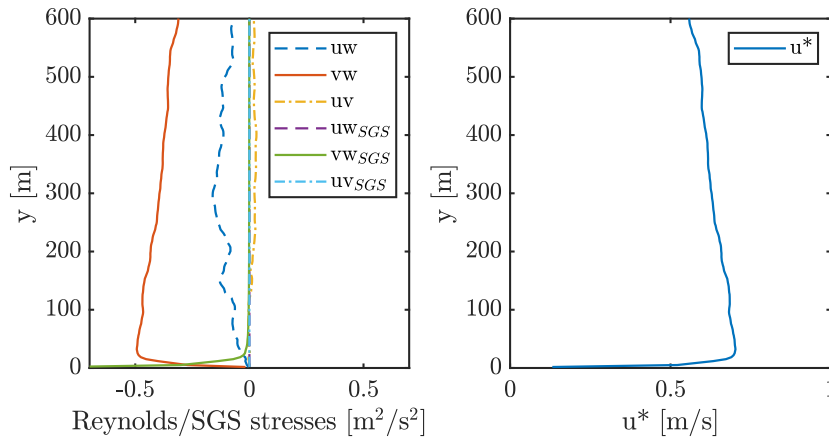


Figure 8. Left: Horizontal averages of resolved and SGS shear stresses at 9250 sec. Right: Resulting resolved friction velocity $(u^*)^2 = \sqrt{vw^2 + uv^2}$

3.2 Successor simulation

In the following, the results of the successor simulations are presented. First, the new turbulence model is compared to the same setup using only the IDDES turbulence model [assuming a elastically stiff configuration](#). Further, results from simulations using the hybrid model with and without flexibility of the blades are presented to study the effect of the blade elasticity. [For the](#)
 395 [initial phase 1 \(see Figure 3\), simulations were conducted on 1189 AMD EPYC 2.9GHz processors, while coupled simulations](#)

(phases 3 and 4 in Figure 3) were conducted on 793 Intel Xeon 2.8GHz processors. The initialization simulations took in the order of ≈ 26 wall clock hours, while the coupled simulations lasted for ≈ 180 wall clock hours per simulation.

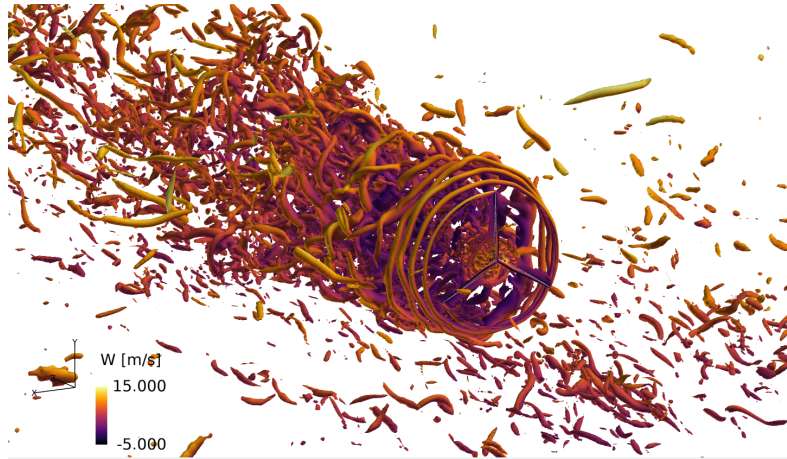


Figure 9. Isobars of Q -criterion=0.4 colored with value of flow velocity W

Figure 9, shows the Q -criterion=0.4 (Hunt et al., 1988) of the flow, visualizing the turbulent structures up- and especially downwind of the rotor. As seen, the tip vortices in the wake are quickly broken up into smaller structures by the surrounding
400 turbulent flow. This is also visible in Figure 10 showing the ~~velocity field~~ flow velocity W at multiple downstream positions.

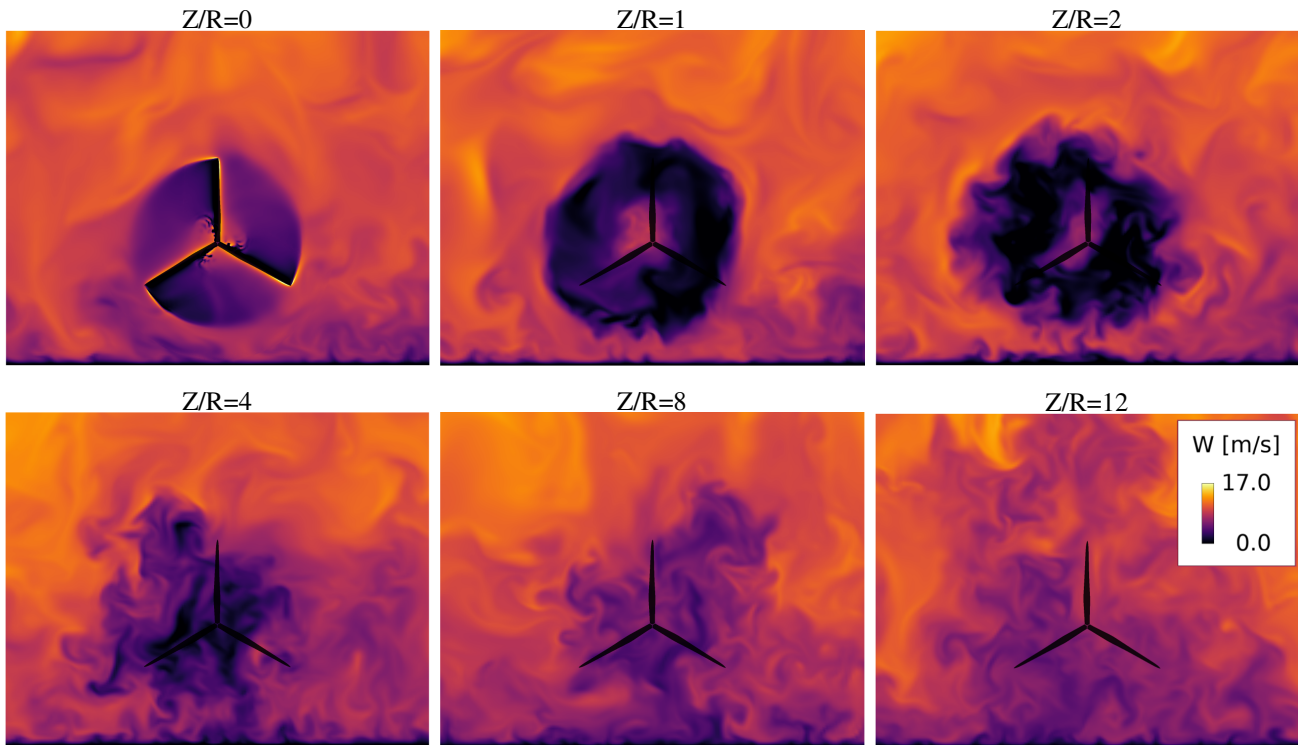


Figure 10. Velocity fields W downstream of rotor.

3.2.1 Impact of turbulence model

To study the impact of the presented turbulence model on the flow, simulations with the hybrid LES/IDDES blending enabled along with pure IDDES simulations are conducted. In the pure IDDES simulation, a slip wall condition is used on the terrain surface, contrary to the log-law used for the LES/IDDES hybrid model. Simulations with and without the rotor present were simulated. In the empty setup, the hybrid model acts as a pure Deardorff LES model, as no blending region is defined. For all simulations, inflow is interpolated from the LES precursor planes to ensure identical inlet conditions. In the simulations comparing turbulence models, only the CFD code has been used, meaning that no flexibility of the blades is considered.

Firstly, the empty setups are presented in Figure 11 showing the velocity component W at the center planes a vertical plane aligned with the flow direction intersecting the rotor center, for the simulations with Deardorff and IDDES turbulence modelling at the same time instance. From the planes, two instantaneous profiles are extracted (dashed lines) instantaneous velocity profiles and turbulence intensity (TI) profiles are extracted along the dashed lines, which are shown in Figure 12. Both simulations show very comparable results. As seen, the velocity and TI profiles, extracted 96m from the inlet, are practically identical, while a small discrepancy is seen further downstream in the domain as a result of changing the turbulence and wall models. While both turbulence models perform close to identically for the present single turbine study, it could be speculated that this would not be the case when considering larger domains, for instance when studying multiple turbines at once. In that case, the differences

in turbulence and wall modelling will likely result in different flow fields, due to the longer distances covered. Considering temperature effects on the flow might likewise reveal differences between the turbulence models. This, in terms of temperature flux differences, along with the Deardorff model considering the stability in the mixing length scale, which is not the case in the IDDES model.

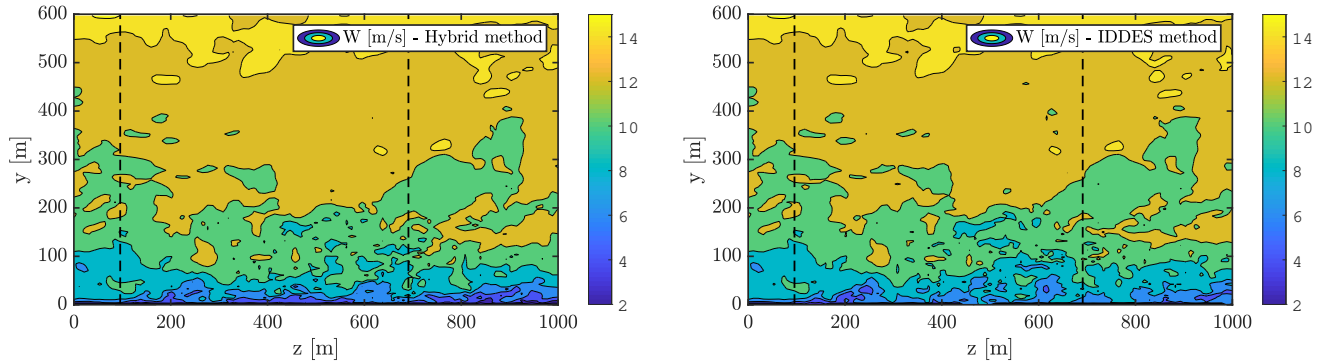


Figure 11. Instantaneous sections of flow field (velocity W component) for hybrid (left) and IDDES (right) simulations. Black dashed lines indicate the locations of the profiles presented in Figure 12

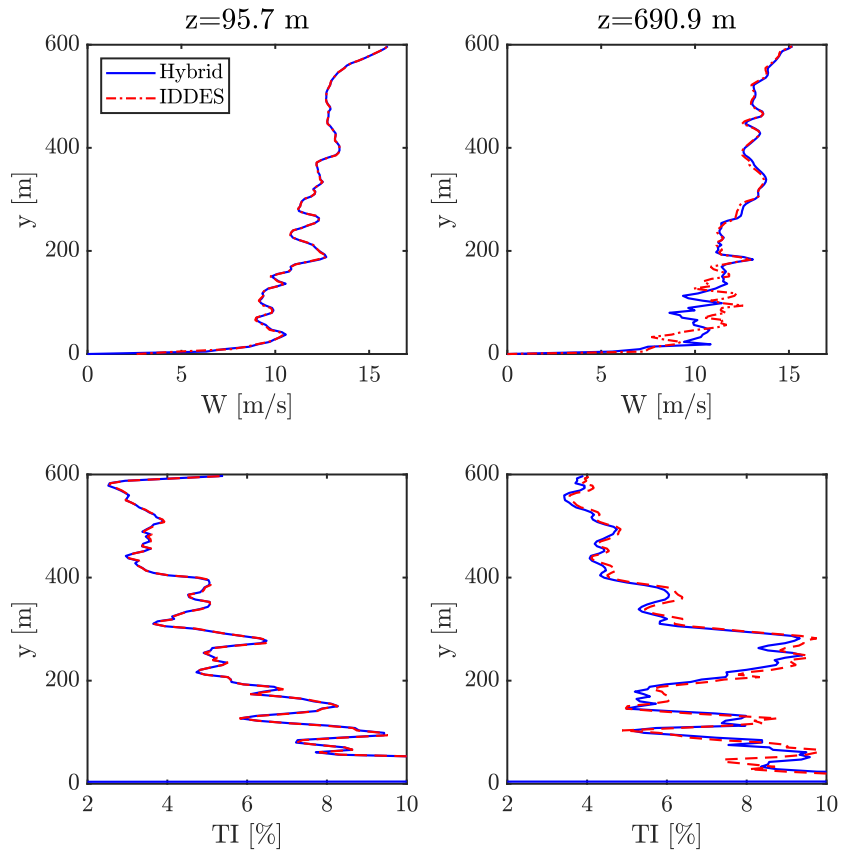


Figure 12. Instantaneous velocity-sampled profiles at time=129.6 seconds. Top row: flow velocity W , bottom: turbulence intensity (TI). Samples extracted from planes close to the inlet (96m from inlet) and far downstream (691m from inlet) at time=129.6 seconds, see dashed lines of Figure 11.

Stiff simulations covering 35 rotor revolutions were also conducted with the two turbulence models, including the rotor in the simulations. Mean and standard deviations of azimuthal forces of the final 15 revolutions at two blade sections, near mid and near tip, are presented in Figure 13. Only slight differences are seen in both mean and standard deviations between the two models, aligning well with what is seen in the empty domain simulations. As the incoming flow is not altered significantly by
 425 the choice of turbulence model, and the turbulence model near the blade is IDDES in both simulations, the forces are expected to be similar as well.

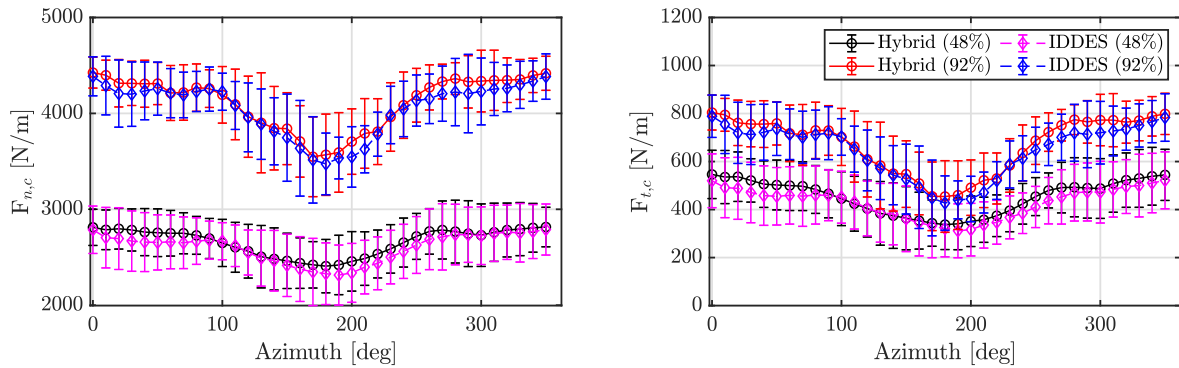


Figure 13. Normal and tangential forces at 48% and 92% blade length using hybrid or IDDES turbulence model. Temporal means and standard deviations based on the final 15 revolutions

3.2.2 Impact of flexibility

To study the effect of the rotor flexibility, FSI simulations of flexible and stiff setups were performed. First, 35 revolutions were simulated through pure CFD, as presented before, followed by 25 revolutions with the FSI coupling enabled, see Figure 3 for the FSI simulation process.

The following results are obtained using the hybrid turbulence model only, but similar results would be expected for pure IDDES simulations, based on the aforementioned findings. The effect of including the blade flexibility is assessed through the resulting blade displacements, torsion and the rotor loading.

Figure 14 depicts the tip displacement flap- and edgewise along with the resulting blade torsion at 60.1% and 95.3% blade length. The tip displacement in flapwise direction is $\approx 6\%$ of the blade length with fluctuations up to $\approx 1\%$ due to the turbulent flow. Edgewise displacements are low and dominated by gravity, seen in the more regular pattern and low standard deviation.

Blade torsion is quite low as well, with less than 0.5° near the tip, increasing the angle of attack.

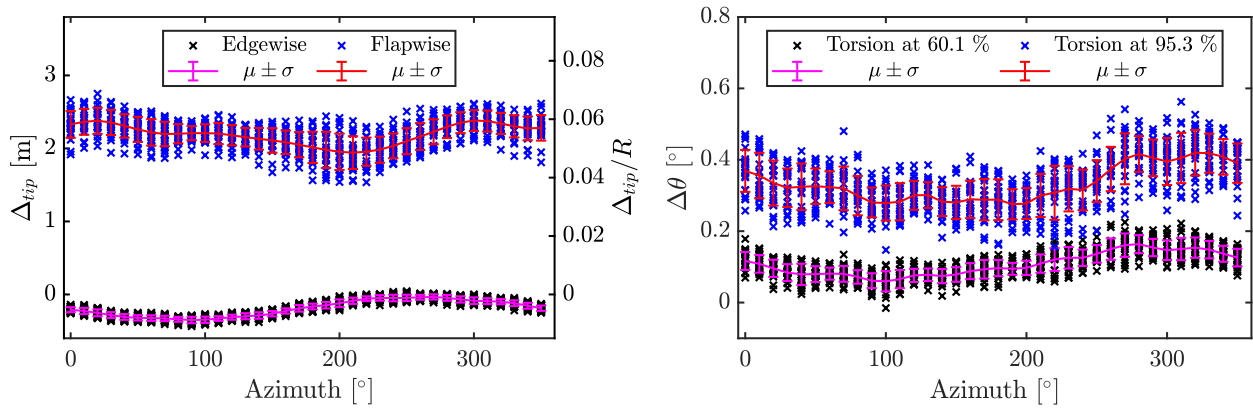


Figure 14. Right: Tip displacements flap- and edgewise. Left: Blade torsional deformation at 60.1% and 95.3% blade length. Crosses represent instantaneous realizations

In Figure 15, the integrated rotor thrust and torque are depicted, showing that in general only slight differences are seen by including flexibility. This is seen, with an increase in thrust of 1-5% while no significant change is seen in torque, other than a slight decrease in fluctuation amplitudes when including flexibility. As seen, the turbulent inflow results in a much higher thrust/torque variation than The large and small scale fluctuations of the signals further indicate that the turbulent inflow has a higher impact on torque and thrust than the change seen from considering flexibility. This is seen in both large time scales with the low frequency fluctuations, along with small scale fluctuations within the individual revolutions.

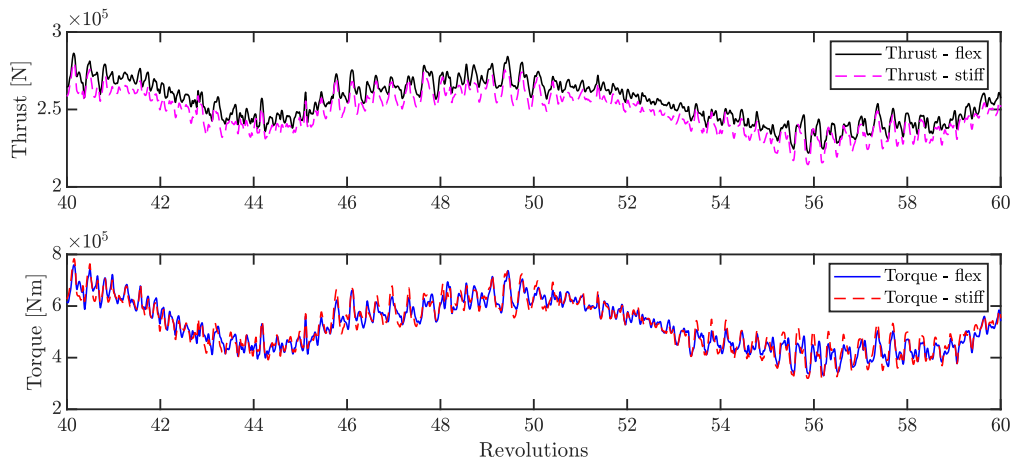


Figure 15. Integrated thrust and torque for stiff and flexible configurations

445 As mentioned, some differences are present in the simulation setup compared to the DanAero field experiment, being the omission of yaw, tilt and tower along with the higher turbulence intensity of the generated flow.

Despite this disclaimer, the resulting forces at four sections of the blade are depicted in Figure 16, showing the mean azimuthal pressure forces normal and tangential to chord for both flexible and stiff simulations along with the DanAero measurements. As seen, the forces agree well between the two simulations and the measurements with main differences being the
450 lack of tower shadow at the inner sections, resulting in a drop of loading in the measurements not seen in the simulations (see Figure 16 top row). The standard deviation of the forces is seen to be higher in simulations than for measurements, which is expected as the turbulence intensity of the sampled flow is higher than measurements as seen in Figure 7.

The impact of including flexibility is quite small, and general observations are that normal and tangential forces respectively slightly increase and decrease when considering the flexibility of the rotor. This is expected for the NM80 rotor, which is quite
455 stiff compared to modern wind turbines. The standard deviations of the forces due to turbulence, are much higher than the difference between mean forces of stiff and flexible simulations. This shows that including turbulent inflow is more important than including flexibility, at least in the present rotor/flow case. In the simulations including the flexibility the standard deviations of the normal forces are up to 10% of the mean near the tip and 15% near the root. For tangential forces this is even higher with 24% near the tip and 38% near the root.

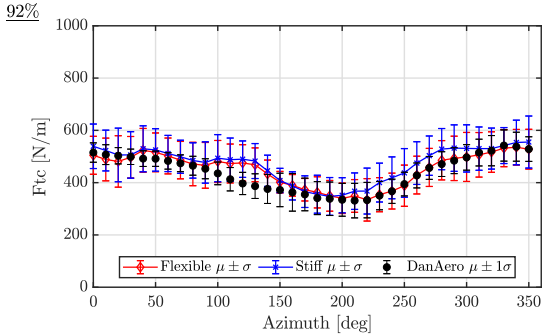
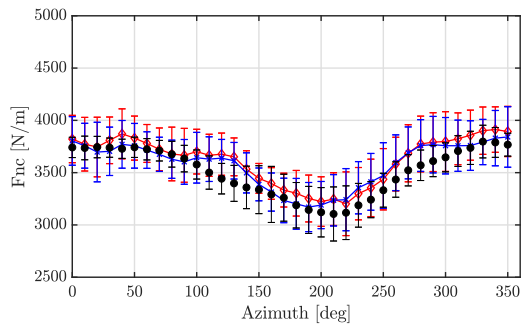
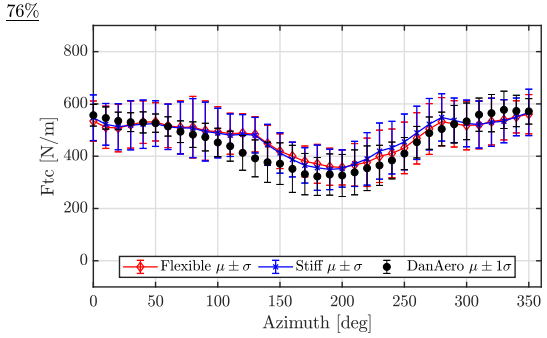
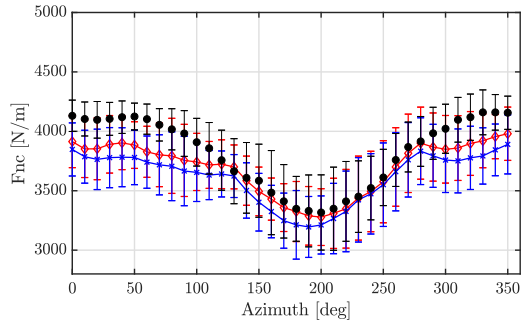
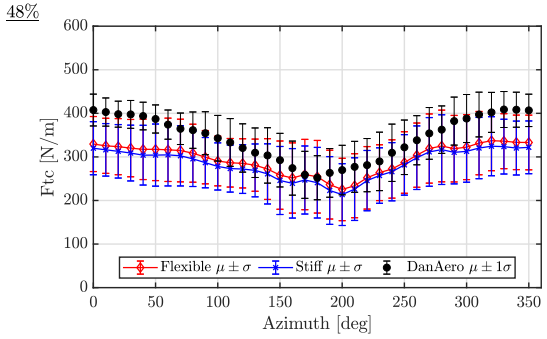
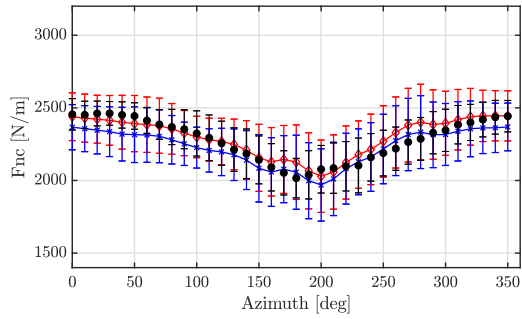
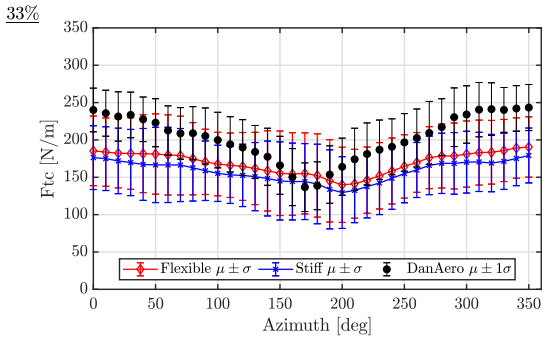
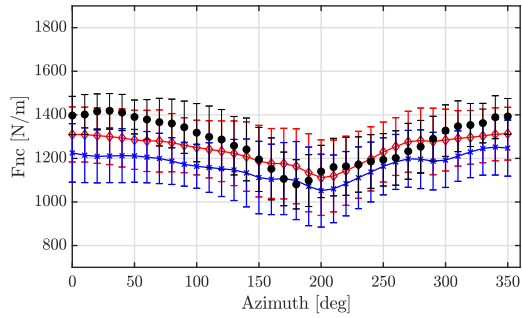


Figure 16. Normal and tangential forces for stiff and flexible simulations along with DanAero measurements. Sections at 33%, 48%, 76%, 92% blade length respectively

460 Spectral analysis of the resulting normal and tangential force signals at the 76% blade length section are presented in Figure 17 (left) showing the power spectral densities (PSD) using the Welch estimate. As seen, both stiff and flexible simulations result in similar PSDs, with the main difference being the peak at the first edgewise frequency seen in the flexible signal. The majority of energy is found in the rotation frequency, 1P, and its harmonics. This is also the case when looking at the PSD of the tip displacement in flap and edgewise direction. Here, it is again the rotation frequency and its harmonics that dominate, 465 along with a peak of the first edgewise mode.

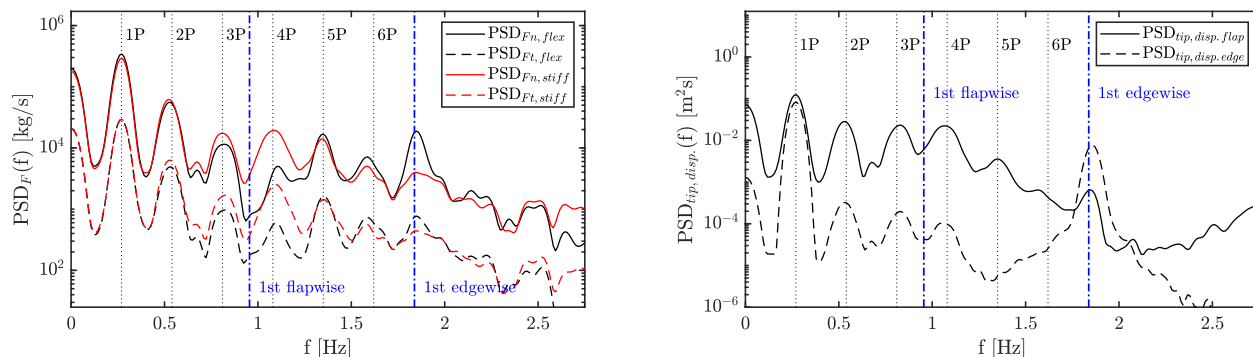


Figure 17. Left: PSD of normal and tangential forces at 78% blade length for both stiff and flexible simulations. Right: PSD of tip displacement in flap and edgewise direction

4 Conclusions

This study investigates the phenomenon of aero-elasticity of wind turbines placed in atmospheric flow conditions, by means of high fidelity numerical methods. Fluid-structure interaction (FSI) simulations of a 2.3MW wind turbine rotor have been conducted using a novel turbulence model, blending the Deardorff large eddy simulation (LES) model for atmospheric flows with the improved delayed detached eddy simulation (IDDES) model for the separated flow near the rotor boundary. Precursor 470 simulations were conducted on a large domain in order to assure sampling of realistic turbulent atmospheric boundary layer (ABL) flow, matching well with the DanAero measurements, for the successor simulations.

As a first study, the hybrid model was compared to the pure IDDES turbulence model, by CFD successor simulations of the turbulent ABL inflow with and without the rotor present. In empty simulations, this corresponded to a comparison between 475 pure Deardorff LES and pure IDDES, while for rotor simulations the hybrid model used both Deardorff LES for the domain flow and IDDES for the near rotor flow. It was found that there was no significant difference in the flow nor rotor loading between the two methods, likely due to the short domain considered and assumptions omitting Coriolis force and temperature effects.

Secondly, FSI simulations have been conducted by coupling the CFD simulations to a structural solver. It was found that 480 for the specific rotor, which is relatively stiff compared to modern turbines, only small impact was found by considering the

flexibility of the blades. A general increase of $\approx 1-5\%$ in total thrust was found, while the power producing torque was close to identical for stiff and flexible simulations.

Inflow turbulence on the other hand has a large influence on the rotor loading, with standard deviations as high as 15% of the mean for normal forces and even higher tangentially. This emphasizes the importance of correct modelling of inflow
485 turbulence.

5 Future studies

As it was shown in the present study, the developed hybrid turbulence model resulted in practically identical loading of the rotor as the IDDES model alone. Relevant future studies would be to investigate when this is not the case. This could for instance be simulations including stable/unstable stratification and/or Coriolis force. Here, the IDDES model will probably
490 be insufficient to capture the effects, as the model is calibrated for aerodynamics mainly and not ABL flows. The Deardorff LES model, however, is calibrated for such flows and the mixing length scale depends on the stratification, as it is reduced for stable cases. The two models also model temperature effects differently as the flux, $\tau_{\theta,w}$, is based on different weights of the turbulent viscosity. Longer domains with multiple rotors could also be relevant, as there is time and distance for the two turbulence models to develop the flow differently, which is indicated by the results of the present study.

495 A relevant future study would likewise be to compare the method to more efficient BEM based aerodynamics solvers with the precursor turbulence as input. Here, the CFD-based results could, if needed, be used to correct airfoil polars and calibrate the many correction models needed by BEM solvers to consider e.g. tip loss effects, dynamic inflow and dynamic stall.

In terms of FSI, it would be natural to investigate more recent/future turbine designs, which are larger and much more flexible than the considered NM80 rotor. These rotors are in higher risk of instability phenomena, and operate in a larger part
500 of the atmospheric boundary layer.

Code and data availability. The codes used to conduct the presented simulations are licensed and not publicly available. The structural model of the NM80 rotor is likewise not publicly available. However, result data can be shared upon request

Author contributions. CG conducted all simulations, including grid generation, and implemented the presented turbulence model in the CFD code. Additionally CG did the analysis of the results and has been the main writer of the paper. NNS assisted with expertise in the code
505 development and CFD setup, along with planning the study and analysis. SGH has supported in especially FSI setup along with planning and analysis. NT supported the development and implementation of the turbulence model. FZ assisted in the overset grid setup, and did development on the CFD code to accelerate simulations. Further, all authors contributed in writing and editing this paper.

Competing interests. The authors declare that there have been no conflicts of interest during this study

Acknowledgements. This study was funded by DTU Wind Energy, through the PhD project "Fluid-structure Interaction of Wind Turbines in
510 Atmospheric Flow". The DanAero projects, from which experimental data was obtained, were funded partly by the Danish Energy Authorities, (EFP2007. Journal nr.: 33033-0074 and EUDP 2009-II. Journal nr. 64009-0258) and partly by eigenfunding from the project partners.

References

- Bak, C., Johansen, J., and Andersen, P.: Three-dimensional corrections of airfoil characteristics based on pressure distributions (paper and poster), in: Proceedings (online), European Wind Energy Association (EWEA), 2006 European Wind Energy Conference and Exhibition, EWEC 2006 ; Conference date: 27-02-2006 Through 02-03-2006, 2006.
- Bak, C., Madsen, H., Paulsen, U. S., Gaunaa, M., Sørensen, N., Fuglsang, P., Romblad, J., Olsen, N., Enevoldsen, P., Laursen, J., and Jensen, L.: DAN-AERO MW: Detailed aerodynamic measurements on a full scale MW wind turbine, European Wind Energy Conference and Exhibition 2010, Ewec 2010, 2, 792–836, 2010.
- Bak, C., Troldborg, N., and Madsen, H.: DAN-AERO MW: Measured airfoil characteristics for a MW rotor in atmospheric conditions, in: Scientific Proceedings, pp. 171–175, European Wind Energy Association (EWEA), <http://www.ewec2011.info/>, eWEA Annual Event 2011 ; Conference date: 14-03-2011 Through 17-03-2011, 2011.
- Bak, C., Madsen, H., Troldborg, N., and Wedel-Heinen, J.: DANAERO MW: Data for the NM80 turbine at Tjæreborg Enge for aeroelastic evaluation, Tech. rep., Technical University of Denmark, 2013.
- Bechmann, A., Sørensen, N., and Zahle, F.: CFD simulations of the MEXICO rotor, *Wind Energy*, 14, 677–689, 2011.
- Berg, J., Natarajan, A., Mann, J., and Patton, E.: Gaussian vs non-Gaussian turbulence: impact on wind turbine loads, *Wind Energy*, 19, 1975–1989, <https://doi.org/10.1002/we.1963>, this project is sponsored by the Danish Energy Technology Development and Demonstration EUDP Project 64011-0352: Demonstration of a basis for tall wind turbine design. Partial support from the Danish Council for Strategic Research grant no. 09-067216 is also acknowledged, 2016.
- Deardorff, J. W.: Numerical Investigation of Neutral and Unstable Planetary Boundary Layers, 29, 91–115, [https://doi.org/10.1175/1520-0469\(1972\)029<0091:nionau>2.0.co;2](https://doi.org/10.1175/1520-0469(1972)029<0091:nionau>2.0.co;2), 1972.
- Deardorff, J. W.: Stratocumulus-capped mixed layers derived from a three-dimensional model, *Boundary-layer Meteorology*, 18, 495–527, 495–527, <https://doi.org/10.1007/BF00119502>, 1980.
- Egorov, Y., Menter, F. R., Lechner, R., and Cokljat, D.: The scale-adaptive simulation method for unsteady turbulent flow predictions. part 2: Application to complex flows, *Flow, Turbulence and Combustion*, 85, 139–165, <https://doi.org/10.1007/s10494-010-9265-4>, 2010.
- García Ramos, N., Sessarego, M., and Horcas, S. G.: Aero-hydro-servo-elastic coupling of a multi-body finite-element solver and a multi-fidelity vortex method, *Wind Energy*, Accepted for publication, pp. 1–21, <https://doi.org/10.1002/we.2584>, 2020.
- Glauert, H.: Airplane Propellers, Division L, in: *Aerodynamic Theory* 4, Springer, Berlin, Heidelberg, https://doi.org/https://doi.org/10.1007/978-3-642-91487-4_3, 1935.
- Grinderslev, C., Belloni, F., Horcas, S., and Sørensen, N.: Investigations of aerodynamic drag forces during structural blade testing using high-fidelity fluid–structure interaction, *Wind Energy Science*, 5, 543–560, <https://doi.org/10.5194/wes-5-543-2020>, <https://wes.copernicus.org/articles/5/543/2020/>, 2020a.
- Grinderslev, C., Vijayakumar, G., Ananthan, S., Sørensen, N., Zahle, F., and Sprague, M.: Validation of blade-resolved computational fluid dynamics for a MW-scale turbine rotor in atmospheric flow, *Journal of Physics: Conference Series*, 1618, 052049, <https://doi.org/10.1088/1742-6596/1618/5/052049>, 2020b.
- Grinderslev, C., Horcas, S., and Sørensen, N.: Fluid-structure interaction simulations of a wind turbine rotor in complex flows, validated through field experiments, *Wind Energy*, (accepted), 2021.
- Gritskevich, M. S., Garbaruk, A. V., Schütze, J., and Menter, F. R.: Development of DDES and IDDES formulations for the $k-\omega$ shear stress transport model, *Flow, Turbulence and Combustion*, 88, 431–449, <https://doi.org/10.1007/s10494-011-9378-4>, 2012.

- Grötzbach, G.: Direct numerical and large eddy simulation of turbulent channel flows, *Encyclopedia of fluid mechanics*, 6, 1337–1391, 1987.
- 550 Guma, G., Bangga, G., Lutz, T., and Krämer, E.: Aeroelastic analysis of wind turbines under turbulent inflow conditions, *Wind Energy Science*, 6, 93–110, <https://doi.org/10.5194/wes-6-93-2021>, <https://wes.copernicus.org/articles/6/93/2021/>, 2021.
- Hansen, M., Gaunaa, M., and Madsen, H.: A Beddoes-Leishman type dynamic stall model in state-space and indicial formulations, Tech. rep., Risø National Laboratory, 2004.
- Heinz, J., Sørensen, N., and Zahle, F.: Fluid-structure interaction computations for geometrically resolved rotor simulations using CFD, *Wind Energy*, 19, 2205–2221, 2016a.
- 555 Heinz, J., Sørensen, N., Zahle, F., and Skrzypinski, W.: Vortex-induced vibrations on a modern wind turbine blade, *Wind Energy*, 19, 2041–2051, <https://doi.org/10.1002/we.1967>, 2016b.
- Horcas, S., Madsen, M., Sørensen, N., and Zahle, F.: Suppressing Vortex Induced Vibrations of Wind Turbine Blades with Flaps, in: *Recent Advances in CFD for Wind and Tidal Offshore Turbines*, edited by Ferrer, Esteban, M. A., pp. 11–24, Springer, 2019.
- 560 Horcas, S., Barlas, T., Zahle, F., and Sørensen, N.: Vortex induced vibrations of wind turbine blades: Influence of the tip geometry, *Physics of Fluids*, 32, 065 104, <https://doi.org/10.1063/5.0004005>, <https://doi.org/10.1063/5.0004005>, 2020.
- Hunt, J. C. R., Wray, A. A., and Moin, P.: Eddies, streams, and convergence zones in turbulent flows, *Studying Turbulence Using Numerical Simulation Databases*, pp. p 193–208, 1988.
- Jonkman, J. M. and Buhl, M. L. J.: FAST User’s Guide, Tech. rep., National Renewable Energy Laboratory, National Renewable Energy Laboratory Golden, Colorado, 2005.
- 565 Larsen, T. and Hansen, A.: How 2 HAWC2, the user’s manual, Tech. rep., Risø National Laboratory, 2007.
- Lee, S., Churchfield, M. J., Moriarty, P. J., Jonkman, J., and Michalakes, J.: A numerical study of atmospheric and wake turbulence impacts on wind turbine fatigue loadings, *Journal of Solar Energy Engineering, Transactions of the ASME*, 135, 1–10, <https://doi.org/10.1115/1.4023319>, 2013.
- 570 Li, Y., Castro, A. M., Sinokrot, T., Prescott, W., and Carrica, P. M.: Coupled multi-body dynamics and CFD for wind turbine simulation including explicit wind turbulence, *Renewable Energy*, 76, 338–361, <https://doi.org/10.1016/j.renene.2014.11.014>, 2015.
- Madsen, H., Larsen, T., Pirrung, G., Li, A., and Zahle, F.: Implementation of the Blade Element Momentum Model on a Polar Grid and its Aeroelastic Load Impact, *Wind Energy Science Discussions*, 2019, 1–43, <https://doi.org/10.5194/wes-2019-53>, <https://www.wind-energ-sci-discuss.net/wes-2019-53/>, 2019.
- 575 Mann, J.: Wind field simulation, *Probabilistic Engineering Mechanics*, 13, 269 – 282, [https://doi.org/https://doi.org/10.1016/S0266-8920\(97\)00036-2](https://doi.org/https://doi.org/10.1016/S0266-8920(97)00036-2), <http://www.sciencedirect.com/science/article/pii/S0266892097000362>, 1998.
- Menter, F.: Zonal Two Equation Kappa-Omega Turbulence Models for Aerodynamic Flows, 1993.
- Menter, F., Kuntz, M., and Langtry, R.: Ten years of industrial experience with the SST turbulence model, *Heat and Mass Transfer*, 4, 2003.
- Michelsen, J.: Basis3D - A Platform for Development of Multiblock PDE Solvers., Tech. rep., Risø National Laboratory, 1992.
- 580 Michelsen, J.: Block Structured Multigrid Solution of 2D and 3D Elliptic PDE’s., Tech. rep., Technical University of Denmark, 1994.
- Moeng, C.: A LARGE-EDDY-SIMULATION MODEL FOR THE STUDY OF PLANETARY BOUNDARY-LAYER TURBULENCE, *Journal of the Atmospheric Sciences*, 41, 2052–2062, 1984.
- Pavese, C., Wang, Q., Kim, T., Jonkman, J., and Sprague, M.: HAWC2 and BeamDyn: Comparison Between Beam Structural Models for Aero-Servo-Elastic Frameworks, in: *Proceedings of the EWEA Annual Event and Exhibition 2015*, European Wind Energy Association (EWEA), paper for poster presentation; EWEA Annual Conference and Exhibition 2015 ; Conference date: 17-11-2015 Through 20-11-2015, 2015.
- 585

- Santo, G., Peeters, M., Van Paepegem, W., and Degroote, J.: Effect of rotor–tower interaction, tilt angle, and yaw misalignment on the aeroelasticity of a large horizontal axis wind turbine with composite blades, *Wind Energy*, 23, 1578–1595, <https://doi.org/10.1002/we.2501>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/we.2501>, 2020a.
- 590 Santo, G., Peeters, M., Van Paepegem, W., and Degroote, J.: Fluid–Structure Interaction Simulations of a Wind Gust Impacting on the Blades of a Large Horizontal Axis Wind Turbine, *Energies*, 13, <https://doi.org/10.3390/en13030509>, <https://www.mdpi.com/1996-1073/13/3/509>, 2020b.
- Schumann, U.: Subgrid scale model for finite difference simulations of turbulent flows in plane channels and annuli, *Journal of Computational Physics*, 18, 376–404, <https://elib.dlr.de/53585/>, 1975.
- 595 Shen, W., Michelsen, J., Sørensen, N., and Sørensen, J.: An improved SIMPLEC method on collocated grids for steady and unsteady flow computations, *Numerical Heat Transfer Part B: Fundamentals*, 43, 221–239, 2003.
- Shur, M. L., Spalart, P. R., Strelets, M. K., and Travin, A. K.: A hybrid RANS-LES approach with delayed-DES and wall-modelled LES capabilities, *International Journal of Heat and Fluid Flow*, 29, 1638–1649, <https://doi.org/10.1016/j.ijheatfluidflow.2008.07.001>, <http://dx.doi.org/10.1016/j.ijheatfluidflow.2008.07.001>, 2008.
- 600 Sørensen, N. and Schreck, S.: Transitional DDES computations of the NREL Phase-VI rotor in axial flow conditions, *Journal of Physics: Conference Series*, 555, 012 096, 2014.
- Sørensen, N., Zahle, F., Boorsma, K., and Schepers, G.: CFD computations of the second round of MEXICO rotor measurements, *Journal of Physics: Conference Series*, 753, 022 054, 2016.
- Spalart, P., Jou, W., Strelets, M., and Allmaras, S.: Comments on the Feasibility of LES for Wings, and on a Hybrid RANS/LES Approach, 605 1997.
- Spalart, P. R., Deck, S., Shur, M. L., Squires, K. D., Strelets, M. K., and Travin, A.: A new version of detached-eddy simulation, resistant to ambiguous grid densities, *Theoretical and Computational Fluid Dynamics*, 20, 181–195, <https://doi.org/10.1007/s00162-006-0015-0>, 2006.
- Sprague, M., Ananthan, S., Vijayakumar, G., and Robinson, M.: ExaWind: A multi-fidelity modeling and simulation environment for wind 610 energy, in: *Proceedings of NAWEA WindTech*, 2019.
- Strelets, M.: Detached eddy simulation of massively separated flows, 39th Aerospace Sciences Meeting and Exhibit, 2001.
- Sørensen, J. N. and Shen, W. Z.: Numerical Modeling of Wind Turbine Wakes , *Journal of Fluids Engineering*, 124, 393–399, <https://doi.org/10.1115/1.1471361>, <https://doi.org/10.1115/1.1471361>, 2002.
- Sørensen, J. N., Mikkelsen, R. F., Henningson, D. S., Ivanell, S., Sarmast, S., and Andersen, S. J.: Simulation of wind turbine wakes using 615 the actuator line technique, *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 373, 20140 071, <https://doi.org/10.1098/rsta.2014.0071>, <https://royalsocietypublishing.org/doi/abs/10.1098/rsta.2014.0071>, 2015.
- Sørensen, N.: General purpose flow solver applied to flow over hills., Ph.D. thesis, 1995.
- Sørensen, N.: HypGrid2D. A 2-d mesh generator, Tech. rep., Risø National Laboratory, 1998.
- Sørensen, N. N., Michelsen, J. A., and Schreck, S.: Navier–Stokes predictions of the NREL phase VI rotor in the NASA Ames 80 ft × 120 ft 620 wind tunnel, *Wind Energy*, 5, 151–169, <https://doi.org/https://doi.org/10.1002/we.64>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/we.64>, 2002.
- Travin, A., Shur, M., Strelets, M., and Spalart, P. R.: Physical and numerical upgrades in the Detached-Eddy Simulation of complex turbulent flows, *Fluid Mechanics and Its Applications*, 65, 239–254, 2004.

- Troldborg, N., Sørensen, J., Mikkelsen, R., and Sørensen, N.: A simple atmospheric boundary layer model applied to large eddy simulations of wind turbine wakes, *Wind Energy*, 17, 657–669, 2014.
- 625 Troldborg, N., Zahle, F., Réthoré, P., and Sørensen, N.: Comparison of wind turbine wake properties in non-sheared inflow predicted by different computational fluid dynamics rotor models, *Wind Energy*, 18, 1239–1250, <https://doi.org/10.1002/we.1757>, 2015.
- Vijayakumar, G.: Non-steady dynamics of atmospheric turbulence interaction with wind turbine loadings through blade-boundary-layer-resolved CFD, 2015.
- 630 Vijayakumar, G., J., B., Lavelly, A., Jayaraman, B., and Craven, B.: Interaction of Atmospheric Turbulence with Blade Boundary Layer Dynamics on a 5MW Wind Turbine using Blade-boundary-layer-resolved CFD with hybrid URANS-LES, <https://doi.org/10.2514/6.2016-0521>, <https://arc.aiaa.org/doi/abs/10.2514/6.2016-0521>.
- Zahle, F., Sørensen, N., and Johansen, J.: Wind Turbine Rotor-Tower Interaction Using an Incompressible Overset Grid Method, *Wind Energy*, 12, 594–619, <https://doi.org/10.1002/we.327>, 2009.