

We would like to sincerely thank the reviewer for their constructive review and valuable comments which helped us provide an improved presentation of our work. Please find below answers to the reviewer's comments .

General Comment Manuscript focuses on the CFD-based analysis of a flatback airfoil with various trailing edge treatments and comparison of the numerically obtained results using RANS,URANS, and DES with wind-tunnel measured results. The manuscript addresses the important topic of design and analysis of unconventional airfoils for wind turbine rotors. It is well written although the ratio of number of illustrations to number of lines of text is high and this negatively impacts the readability of the manuscript.

Thank you for the kind comment, regarding figures, we believe all illustrations are useful and serve their purpose in the manuscript. The vortex dynamics discussion figures have been given independently in an Appendix. The readability of the manuscript should be improved when the paper adopts the journal format.

Comment 1. One issue is the focus on 2D airfoils where it is important to note that on 3D blades, the flow unsteadiness and particularly the Von Karman vortex shedding encountered in 2D may well be mitigated by spanwise pressure gradients and geometry changes. This brings up the question if the trailing edge treatment studied in this manuscript are effective and/or are needed on a wind turbine blade? Especially in the inboard region of the blade, where the flatback airfoils are being applied, spanwise pressure gradients and geometry changes are significant causing the flow to be very three dimensional.

The reviewer is correct. The following sentence has been added in the revised manuscript to highlight the limitations of this study.

"It is noted that the study is limited to extruded airfoil with no twist or profile change and extension of any findings to 3D rotating blades would require further validation. "

Comment 2 Line 104. These trailing edge treatments may affect the high angle of attack characteristics including maximum lift coefficient and stall angle. By limiting the analysis to an angle of attack of zero degrees, the impact of these treatments on this important part of the operating envelope of airfoils is not assessed. Based on this, I would be careful recommending any of the trailing-edge treatments.

The reviewer rightly mentions the very limited AoA range of this study. Indeed, the higher AoA are of significant interest both for the numerical approach and for the actual results and analysis. However, for this work we decided to limit the scope to a single AoA so that there is a focus (a) on the different numerical schemes and (b) on the analysis of the wake structures. Indeed, even at 0deg, the 3D unsteady bluff body wake flow is challenging for CFD methods and rich in flow dynamics.

Preliminary simulations at high AoA, beyond Cl_{max} , show that the von Karman-like wake is mixed with Stall Cell like structures, increasing the complexity and level of difficulty well beyond the scope of the present submission. We believe the single AoA data are sufficient to achieve the objectives of this study, which are (a) to examine which numerical approach is most suitable to study the flow in question and (b) to provide insight into the effect of the various flow control devices on the airfoil wake.

Comment 3. Line 188. Concern is that because of the deflection, the flap configuration is not constant in the spanwise direction and that this spanwise variation, not captured in the numerical simulations, causes the discrepancies between experiment and CFD.

The reviewer is correct. This is exactly why we mentioned it. Given the good agreement between the predictions and the experiments, it is concluded that the effect of this deflection does alter the findings of this study.

Comment 4 Line 273. Delta-criterion is used for the streamwise vorticity. However, in the corresponding figures, Omega_x is listed. In Fig. 13, Delta is listed in caption but Omega_x in the figure. Consistently use Omega_x or, if this causes any issues, more clearly explain the Delta-criterion.

Omega_x stands for streamwise vorticity. The Δ isosurfaces are coloured with streamwise vorticity. In Fig 13 and 14 two types of isosurfaces are overlaid, Δ and spanwise vorticity. The former are coloured by streamwise vorticity and the latter by spanwise vorticity. This is why both are mentioned and shown in the legend. The word *overlaid* has been added to the captions to clarify this.

Technical Comments

1. Line 118. 0.62 h. Should this be 0.62 h_{TE} ?

Yes, this has been corrected in the manuscript.

2. Line 120. Forces non-dimensionalized using the chord of the baseline airfoil? Want to be precise because in line 118 the chord of the flap is mentioned.

This has been clarified and the sentence below has been added to the manuscript:

"In the remaining of this article all quantities are non-dimensionalized using the baseline airfoil chord and the free stream velocity, as reference values, unless otherwise stated. "

3. Line 121. "misalignment of the model has been aligned of the model has been allowed for". Please reword.

This sentence now reads:

"A constant misalignment of the model has been allowed for in the results. "

4. Lines 137&138. Please reword.

This has been corrected. The sentence now reads:

"The error bars are based on the standard deviation values. For completeness the relevant values are also given in Table 2 and Table 3, in the Appendix. "

5. Line 200. Fig. 6 is very unclear. As is this figure is less than useful.

The figure has been replaced, given below for convenience

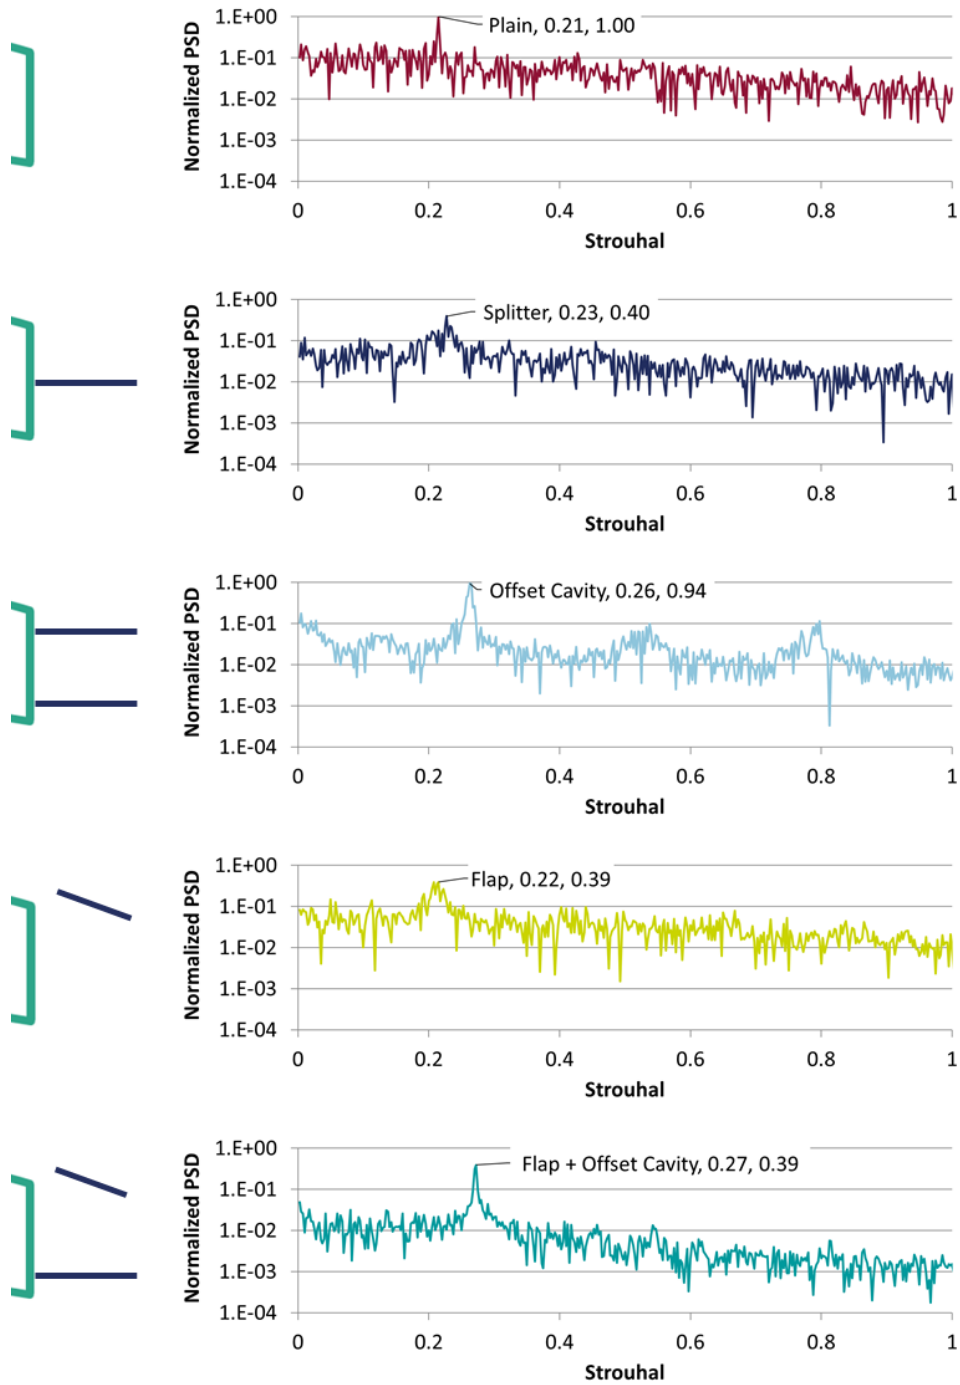


Figure 1: Normalized Power Spectral Density of the velocity time series for the Plain airfoil and all the TE device cases from Fine IDDES simulations. The vertical velocity is considered at $(x, y) = (1.57c, 0)$ see also Figure 2. Strouhal number is defined based on the trailing edge thickness, $St = fh_{TE}/V_{\infty}$

We would like to sincerely thank the reviewer for their constructive review and valuable comments which helped us provide an improved version of our work. Please find below answers to the reviewer's comments.

Comment 1. It is not clear how the trailing edge devices were included in the CFD model. Was the grid modified to wrap around the new geometry? Or is there an immersed boundary technique applied? The authors should strongly consider showing at least one example of a mesh for one of the device configurations.

The grid was modified to wrap around the TE device. A relevant figure (Figure 1, also given below for reference) has been added to show this.

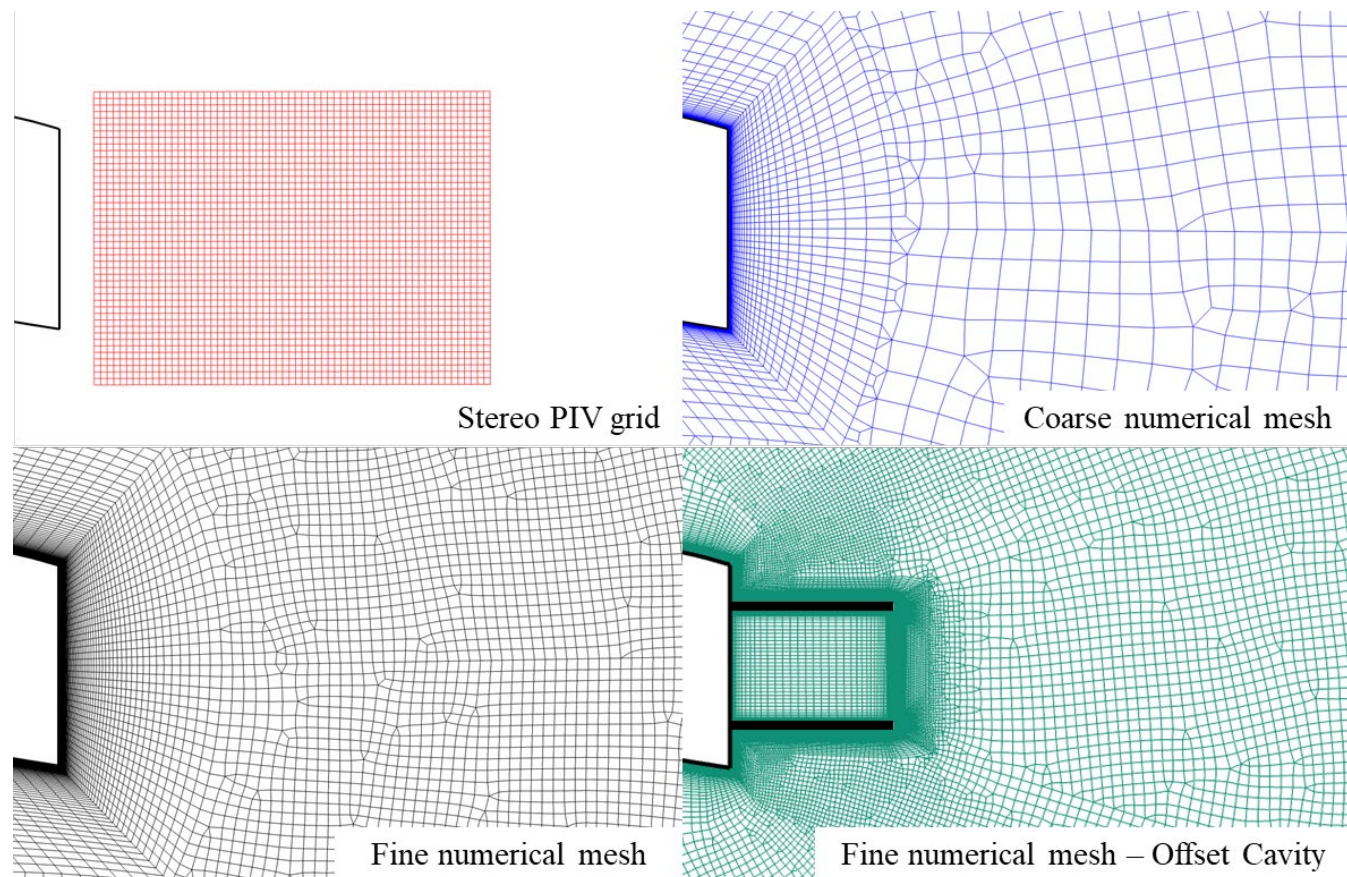


Figure 1. Details of the Stereo PIV grid and the numerical meshes. Top Left: Stereo PIV measurement grid; Top Right: Coarse numerical mesh (5M cells); Bottom Left: Fine numerical mesh (25M Cells); Bottom Right: Fine numerical mesh for the Offset Cavity case (25M Cells).

Comment 2. IDDES is named as the hybrid RANS/LES turbulence model, but then this is abbreviated to DDES. This creates confusion as to which model was actually used and how it was applied. IDDES is capable of modeling the outer part of attached turbulent boundary layers in LES mode, while in DDES the attached boundary layers are always modeled in RANS mode. IDDES and DES have different model equations. Please clearly state which model implementation was used and, if IDDES, whether the attached TBL regions were quasi-steady RANS regions or LES (I strongly suspect the former, given the stated grid resolution).

Changed DDES to IDDES in the text and graphs. Indeed, as the reviewer states the boundary layer regions were RANS regions. This has been added to the text.

"The IDDES model considers a RANS zone in the boundary layer region and switches to LES in the wake."

Comment3. At $Re_c=1.5e6$, one might expect boundary layer transition to play a key role in predictions of lift and drag, and possibly the wake region. How was transition handled?

All experimental data are free transition data. Only free transition data are available from the device cases from the experimental study. For the plain airfoil the effect of fixing transition was minimal, as drag is dominated by base drag and maximum lift angle does not change. The reason for this is the reduced adverse pressure gradient of the flatback airfoil.

In order to clarify this, for the experimental case the following sentence has been added to the revised manuscript.

"Only free transition experimental results were available for these cases. "

Regarding the numerical predictions the flow was considered fully turbulent to exclude transition model uncertainties from the comparison (especially if the transition point fluctuates due to the unsteadiness of the flow). However, we plan to add transition modelling in future work. This sentence has been added to the text:

"All the simulations consider the flow fully turbulent to exclude possible uncertainties related to transition modelling."

Comment 4. It would be very illuminating to perform at least one simulation at the experimental aspect ratio, to study any end effects, if present. Absent this, quantifying the span-wise correlation length of velocity fluctuations in the wake would give confidence that the span-wise extent of the domain is long enough to at least approximate the large-aspect ratio case. Another way to explore this issue would be to see if spanwise periodic BC's give different results?

The reviewer correctly states that quantifying the correlation length of the velocity fluctuations is important. To that end we added a figure showing the Pearson correlation coefficient for the CI time signals and added the relevant discussion in section 3.2 *Wake development*. We chose the CI signal instead of the wake fluctuations due to the limited spanwise points in the wake that the velocity was recorded. The text and figure are given below for convenience.

In order to quantify the spanwise correlation of the flow for each device, the Pearson correlation coefficient (r) of the CI time signal at different spanwise locations is presented in Figure 15. Values of 1, -1 indicate strong correlation between the signals (positive and negative, respectively) while value of 0 suggests no correlation. The correlation coefficient is calculated with respect to the midsection (located at $z/b = 0$ in Figure 15). It is evident that the TE devices significantly alter the spanwise correlation of the flow. When the plain

configuration is examined a correlation length of $\lambda = 0.5b$, where b is the wing span, or $\lambda = 5h_{TE}$ is identified, in agreement with (Metzinger et al., 2018). For the flap case, the correlation length remains large with $\lambda = 5.9h_{TE}$. It is noted that in the flap case the lower vortex is shed uncontrolled and this could explain the strong coherence in the wake. The Splitter and Offset Cavity cases have the correlation length drops to $\lambda = 2.5h_{TE}$ and $\lambda = 2.7h_{TE}$, respectively. The weakest spanwise coherence is observed for the Flap + Offset Cavity with $\lambda = 0.7h_{TE}$. The preceding analysis is also in agreement the isosurfaces shown in Figure 14. Indeed, as the figure suggests, the spanwise correlation length of the vorticity isosurfaces in the flap and offset cavity configuration is much smaller when compared to the flap one. Finally, it is noted here that using the wake velocity fluctuations for the preceding analysis yields similar results, however, the CI was employed since it was already available at all spanwise stations.

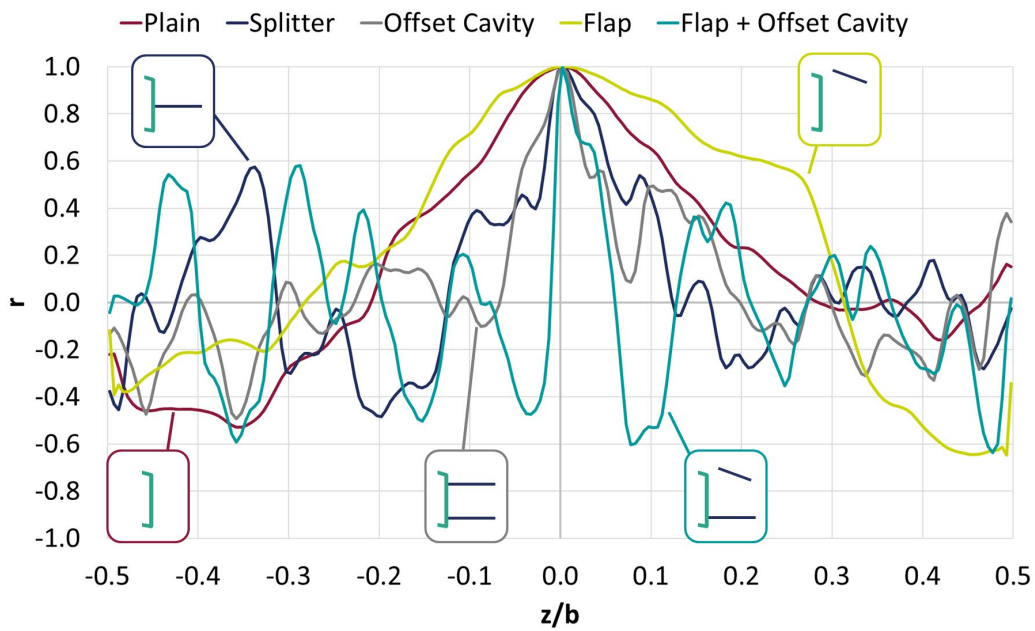


Figure 15. Pearson correlation coefficient of the lift coefficient (Cl) time-series with respect with the midsection (placed at $z/b=0$) for the various configurations. High positive values indicate strong positive correlation and highly negative values suggest a strong negative correlation.

Comment 5. I had difficulty reconciling the high experimental wake fluctuation amplitude with the modest experimental Reynolds stress field for the flap-only case

The experimental data were analyzed in the reference given at the end of the reply to this comment. Figure 22 from that reference (also given below for convenience) shows that while the peak amplitude for the dominant frequency for the Flap case is higher than the plain airfoil for example, the amplitude of all other frequencies are lower. This would justify a high experimental wake fluctuation amplitude (shown in fig. 7, right, of our revised submission) and the modest Re stress field (shown in fig. 11 of the revised submission). In other words, fig. 7 only concerns the dominant frequency, while the Re stress contour contains information from all frequencies.

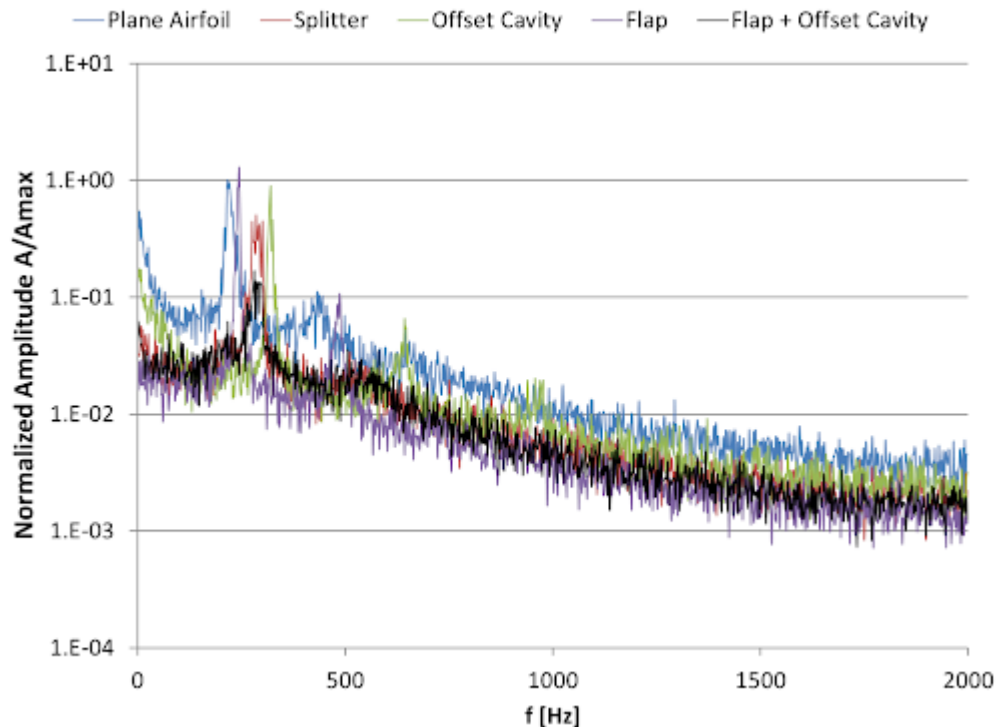


Figure 22. Frequency spectrum from the hot wire measurements for the examined TE devices and the plane airfoil.

Since this discussion is focused only on the experimental side of this investigation it was decided not to include it in the present submission.

Manolesos, M., Voutsinas, S.G., 2016. Experimental Study of Drag-Reduction Devices on a Flatback Airfoil. *AIAA J.* 54, 3382–3396. <https://doi.org/10.2514/1.J054901>

Technical Comments:

1. Sentence on "misalignment" on the bottom of page four is unclear.

This has been corrected. The sentence now reads:

"A constant misalignment of the model has been allowed for in the results."

2. Are there any experimental measurement uncertainties available to improve the validation exercise?

The following paragraph has been added to the manuscript.

"A detailed uncertainty analysis can be found in (Manolesos and Voutsinas, 2016), but a short overview is given here for completeness. The 95% confidence interval for the lift and drag values are 1% and 4%, respectively. For the hot wire frequency spectrum, the frequency step was 1.95Hz, while for the Stereo PIV measurements, the minimum resolvable velocity is 1.5% . Any velocities lower than this should not be trusted. "

3. The term "loads" is used to describe mean aerodynamic loads, which may make sense to the wind energy practitioner. However, loads can also be unsteady so consider using the term "mean loads".

The term 'loads' has been replaced with 'forces'.

The flow past a flatback airfoil with flow control devices: Benchmarking numerical simulations against wind tunnel data

George Papadakis¹, Marinos Manolesos²

¹School of Naval Architecture & Marine Engineering, National Technical University of Athens, Athens, Greece

²College of Engineering, Swansea University, Swansea, UK

Correspondence to: George Papadakis (papis@fluid.mech.ntua.gr)

Abstract. As wind turbines grow larger, the use of flatback airfoils has become standard practice for the root region of the blades. Flatback profiles provide higher lift and reduced sensitivity to soiling at significantly higher drag values. A number of flow control devices has been proposed to improve the performance of flatback profiles. In the present study, the flow past a flatback airfoil at a chord Reynolds number of 1.5×10^6 with and without trailing edge flow control devices is considered. Two different numerical approaches are applied, Unsteady Reynolds Averaged Navier Stokes (RANS) simulations and Detached Eddy Simulations (DES). The computational predictions are compared against wind tunnel measurements to assess the suitability of each method. The effect of each flow control device on the flow is examined based on the DES results on the finer mesh. Results agree well with the experimental findings and show that a newly proposed flap device outperforms traditional solutions for flatback airfoils. In terms of numerical modelling, the more expensive DES approach is more suitable if the wake frequencies are of interest, but the simplest 2D RANS simulations can provide acceptable load predictions.

1 Introduction

Wind turbine blade design is dominated by structural and transportation requirements in the root region, which results in compromised aerodynamic design. This leads to the use of thicker airfoils with a blunt Trailing Edge (TE), i.e. flatback (FB) airfoils, in the inner part of the blade. This design option becomes more and more popular as wind turbines grow larger and rotor diameters go beyond 200m.

FB airfoils provide a number of aerodynamic, structural and aeroelastic benefits compared to traditional airfoils of the same thickness. Aerodynamically, they provide higher lift values due to the reduced adverse pressure gradient over the aft part of the suction side. Additionally, their performance is insensitive to surface roughness compared to traditional airfoils of similar thickness (Baker et al., 2006). Structurally, they have larger cross-sectional area and can lead to significant blade weight reduction (Griffith and Richards, 2014). Blades that utilize FB profiles also have improved aeroelastic behaviour, as the blunt TE offers increased flapwise stiffness.

The performance of FB profiles can be further improved by means of various TE add-ons, which alter the unsteady bluff-body wake that forms downstream of the blunt TE. TE devices extend the vortex formation length at the wake of the blunt TE (Manolesos et al., 2016) and lead to increased base pressure and Strouhal number of the flow fluctuations in the wake. At the same time the amplitude of the flow fluctuations is reduced, reducing the danger for vortex induced vibrations for wind turbine blades and also reducing noise (Barone and Berg, 2009).

The numerical study of the flow past FB airfoils is particularly challenging due to its unsteady and three-dimensional (3D) nature, which includes impingement, separation and vortex shedding. Prediction of force coefficients and wake characteristics depend heavily on the fidelity of the numerical approach, the mesh resolution and the size of the domain (Calafell et al., 2012; Lehmkuhl et al., 2014; Stone et al., 2009). It is generally agreed that two-dimensional and Reynolds Averaged Navier Stokes (RANS) non-physically damp the flow (Stone et al., 2006) and that higher fidelity approaches might be more suitable (Standish and Van Dam, 2003), especially if the flow frequencies in the wake are of interest. There has been a number of investigations at high Re numbers (Calafell et al., 2012; Kim et al., 2014; Lehmkuhl et al., 2014; Standish and Van Dam, 2003; Stone et al., 2009; Xu et al., 2014). However, most deal with 2D or low aspect ratio simulations and not with TE devices for flow control. The highest fidelity simulations to date remain that of (Hossain et al., 2013), who performed DNS on a FX77-W-500 airfoil, albeit at a very low Re number of $Re = 3900$.

As far as bluff body drag reduction is concerned, it has been an active area of research for decades (Choi et al., 2008; Tanner, 1975; Viswanath, 1996). The most commonly applied technique to reduce base drag is the alteration of the TE shape, either by means of afterbodies or by 3D shaping of the TE. The common aim is to increase base pressure by modifying the vortex shedding in the wake. Studies on flatback airfoils (Baker and van Dam, 2008; Kahn et al., 2008; Krentel and Nitsche, 2013; Mayda et al., 2008; Nash, 1965) have highlighted a splitter plate or a pair of them, forming a cavity at the TE, as an extremely simple and effective method.

The present investigation deals with the flow past a 30% thick wind turbine airfoil with a 10% thick blunt TE (Boorsma et al., 2015) at a Reynolds number of $Re = 1.5 \times 10^6$. The corresponding Reynolds number based on the blunt TE thickness is $Re_{TE} = 1.5 \times 10^5$. It is the continuation of an experimental survey that examined a number of TE devices to improve the performance of the profile (Manolesos and Voutsinas, 2016). The latter work was a proof-of-concept study for a FB airfoil Flap device, which proved to perform better than traditional devices.

60

The objective of the present study is (a) to examine which numerical approach is most suitable to study the flow in question and (b) to provide insight into the effect of the various flow control devices on the airfoil wake. It is noted that the study is limited to extruded airfoil with no twist or profile change and extension of any findings to 3D rotating blades would require

further validation. The next section presents the methodology followed in this study. Subsequently, the results are presented and discussed, while the final section concludes the findings of this investigation.

2 Methodology

2.1 Numerical set-up

All simulations were performed using MaPFlow (Papadakis and Voutsinas, 2019), the CFD solver developed at NTUA's Aerodynamics Laboratory. In the present case, the Eulerian module of MaPFlow was used, which is a compressible, cell centred CFD Solver that can use both structured and unstructured grids. Turbulence closures implemented on MaPFlow include the one-equation Spalart Allmaras (SA) turbulence model (Spalart and Allmaras, 1992) well as the two-equation turbulence model of Menter, $k-\omega$ SST, (Menter, 1993). The Improved Delayed Detached Eddy Simulation (IDDES) approach implemented in MaPFlow follows the suggestions of (Shur et al., 2008). The IDDES model considers a RANS zone in the boundary layer region and switches to LES in the wake.

The IDDES model definition for the local length scale Δ used in the current work is :

$$\Delta = \min[\max(C_w d_w, C_w h_{max}, h_{wn}), h_{max}] \quad (1)$$

where C_w is an empirical constant, h_{wn} is the mesh step in the wall normal direction and $h_{max} = \max(\Delta x, \Delta y, \Delta z)$. For C_w , the value of 0.15 is chosen.

Switch from RANS to IDDES brand is accomplished by altering the distance from the wall used in the original model according to:

$$l_{IDES} = l_{RANS} - f_d \max(0, l_{RANS} - l_{LES}) \quad (2)$$

l_{RANS} is the distance from the wall (original SA model) and $l_{LES} = C_{DES} \Psi \Delta$ where C_{DES} is an empirical constant and Ψ a low Reynolds number correction (for details see (Shur et al., 2008))

In the present study 2D and 3D simulations using the Unsteady RANS approach with the SA turbulence model and the ~~DDDES~~ IDDES method were performed. For the 3D results two grids of different spatial resolution were generated. The grids were hybrid, structured close to the airfoil and unstructured far from it. Figure 1 shows the Coarse and the Fine grids along with the grid used in the Stereo PIV measurements for comparison. The coarser grid consisted of 5M cells, while the finer contained 25M cells. The Fine 25M cells grid for the Offset Cavity case is also shown for reference. The computational domain extended for one chord length in the spanwise direction, i.e. much wider than the spanwise coherence in the wake, which has been found to be ~ 5 TE heights (Metzinger et al., 2018). The reason for this is that the present study will be extended to higher AoA,

where Stall Cells appear on flatback airfoils (Manolesos et al., 2013; Manolesos and Voutsinas, 2016, 2014). For the accurate computation of these large structures high AR computational domains are necessary. Symmetry conditions were applied at the side boundaries of the computational domain. For the coarser grid, 60 nodes were used in the spanwise direction while 200 were defined for the finer grid. The grids were refined in all directions to ensure that the computational cell aspect ratio in the wake remained close to unity. Regarding the farfield boundary, it was located 100 chords away from the wing to minimize the influence of the external boundary conditions on the simulations (Sørensen et al., 2016). The same computational mesh was used for both URANS and DES simulations to exclude grid related differences. For the 2D URANS simulations, a slice of the Coarse grid was used, which had 88k cells. All simulations were performed at an angle of attack (AoA) $\alpha = 0^\circ$. All the simulations consider the flow fully turbulent to exclude possible uncertainties related to transition modelling.

100


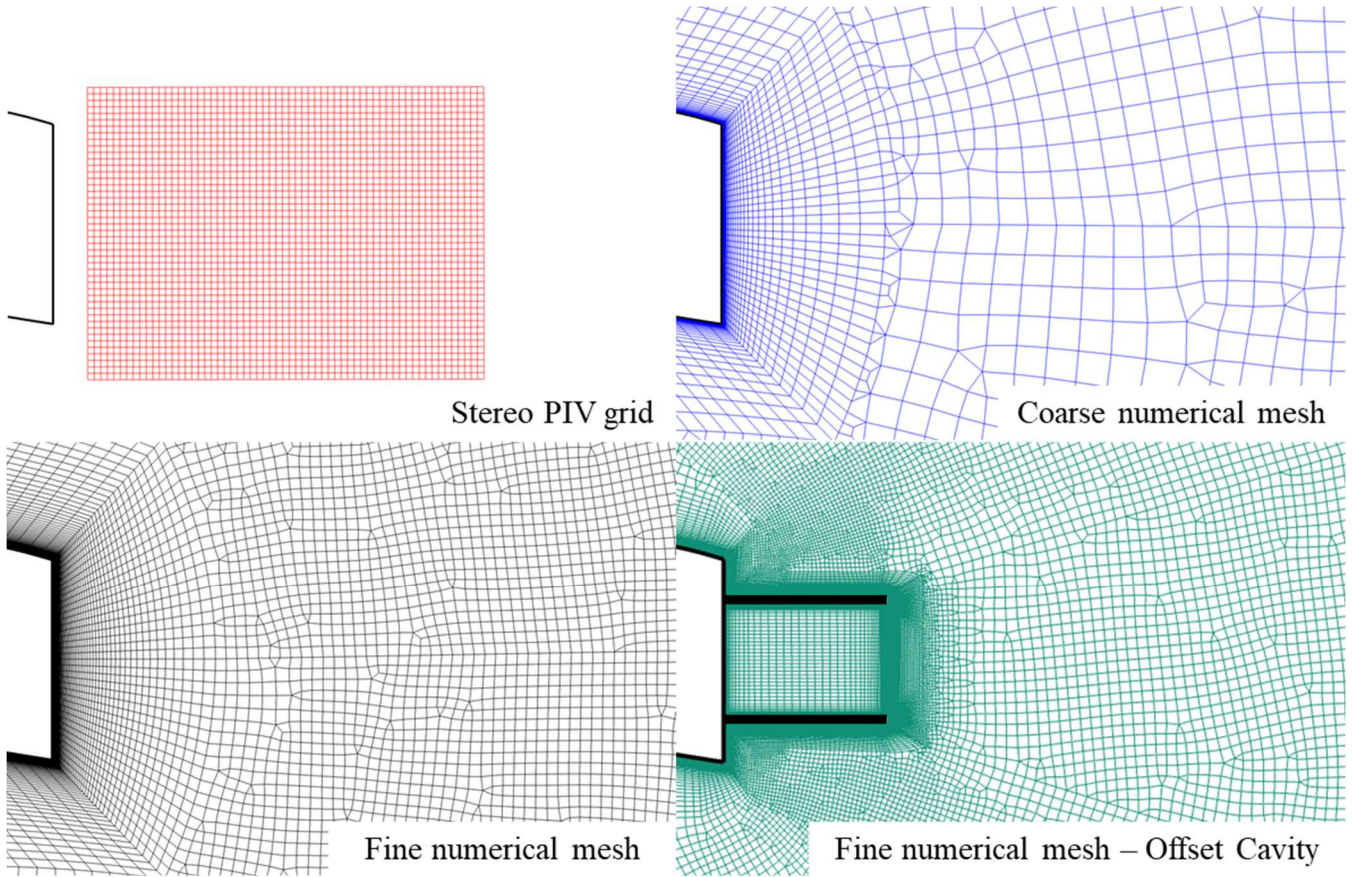


Figure 1. Details of the Stereo PIV grid and the numerical meshes. Top Left: Stereo PIV measurement grid; Top Right: Coarse numerical mesh (5M cells); Bottom Left: Fine numerical mesh (25M Cells); Bottom Right: Fine numerical mesh for the Offset Cavity case (25M Cells).

105 2.2 Experimental set-up

The numerical results are compared against Stereo Particle Image Velocimetry (PIV), force coefficient and hot wire measurements in the wake of the airfoils. In the experiments, the wing model had a chord of $c = 0.5\text{m}$ and an Aspect Ratio of $AR = 2$. Figure 2 presents a schematic of the measurement set up, where the Stereo PIV measurement plane is shown along with the location of the hot wire probe in the wake of the airfoil. Extensive details of the wind tunnel tests can be found in
110 (Manolesos and Voutsinas, 2016).

All cases concern a 30% thick FB airfoil with a 10.6% thick TE (LI30-FB10 (Boorsma et al., 2015), Figure 2), which was tested at $Re_c = 1.5 \times 10^6$. The four best performing devices tested by (Manolesos and Voutsinas, 2016) are considered in the present investigation, as shown in Figure 3. Only free transition experimental results were available for these cases. The Splitter and the Offset Cavity are traditional devices studied by a number of researchers, e.g. (Kahn et al., 2008; Viswanath, 1996). The Flap and the Flap + Offset Cavity were proposed in a proof of concept study (Manolesos and Voutsinas, 2016). The TE thickness was $h_{TE} = 53\text{mm}$, while the Splitter and Offset Cavity lengths were $0.81h_{TE}$. The Offset Cavity plates were located $0.19h_{TE}$ off the TE edges. The Flap had a chord of ~~$0.62h_{TE}$~~ $0.62h$ and was located at 20° with respect to the airfoil chord. Its TE was at $0.75h_{TE}$ downstream of the airfoil TE.
115

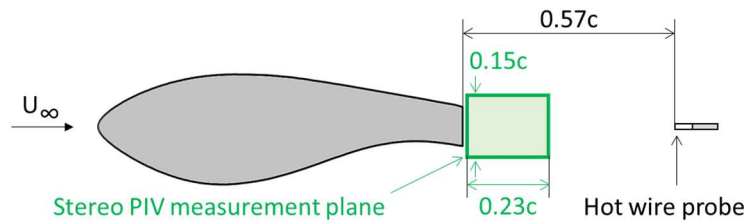

120 **Figure 2: Schematic of the experimental set-up, showing the flatback airfoil under investigation, LI30-FB10, the location of the hot wire probe in the wake and size of the Stereo PIV measurement plane.**

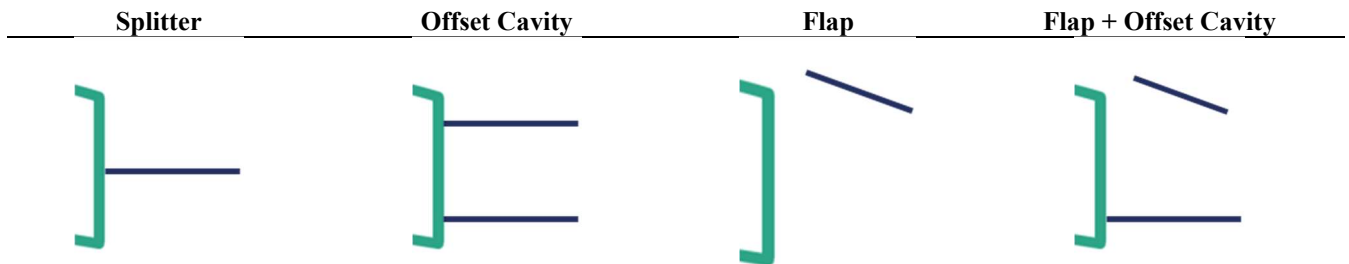


Figure 3. Close up detail of the blunt trailing edge with the four devices considered in this study.

A detailed uncertainty analysis can be found in (Manolesos and Voutsinas, 2016), but a short overview is given here for completeness. The 95% confidence interval for the lift and drag values are 1% and 4%, respectively. For the hot wire frequency spectrum, the frequency step was 1.95Hz, while for the Stereo PIV measurements, the minimum resolvable velocity is 1.5% V_∞ . Any velocities lower than this should not be trusted. A constant misalignment of the model has been allowed for in the
125

results. In the remaining of this article all quantities are non-dimensionalized using the chord and the free stream velocity, V_∞ , as reference values, unless otherwise stated.

130 3 Results and Discussion

Given the large amount of numerical and experimental data only a selection is presented in this report. First, the numerical predictions are compared against the measurement data in terms of force coefficients, wake frequencies and amplitudes. Then the time-averaged Stereo PIV data are compared against the simulation results. The Coarse and Fine URANS and ~~DDDES~~ IDDES results are included in these comparisons to assess which method is the most suitable for the analysis of the flow under investigation. The 2D URANS data are also included for reference. Finally, the most suitable method, ~~DDDES~~ IDDES on the Fine mesh, is used to examine the flow mechanisms introduced by the flow control devices at the TE of the wing.

3.1 Comparison with experimental data

3.1.1 Force coefficients

Figure 4 compares the lift and drag coefficient predictions with the relevant experimental values, while the glide ratio (L/D) comparison is given in Figure 5. The error bars are based on the standard deviation values. For completeness the relevant values are also given in Table 2 and Table 3, in the Appendix. In terms of mean values, the agreement is good in qualitative terms and all methods capture the trends for lift, drag and Lift to Drag ratio (L/D). In quantitative terms predictions are significantly better for lift than for drag, in agreement with previous studies (Stone et al., 2009; Xu et al., 2014). As far as comparative performance is concerned, all simulations, even the lowest fidelity 2D RANS, agree with the experiments and suggest that the airfoil with the Flap would produce the highest lift and the highest Lift to Drag ratio, see Figure 5.

With regards to load variation (denoted by the error bars for the Lift (Cl) and Drag (Cd) coefficients in Figure 4) , only the highest fidelity method, ~~DDDES~~ IDDES on the Fine mesh, predicts unsteady forces for all cases with or without the TE devices. There are no experimental data for the load variation, but Stereo PIV and hot wire velocity measurements indicated significant flow variation in the wake, so it is expected that ~~loads-forces~~ on the wing should vary as well.

With regards to the different methods, URANS predictions are significantly affected by the change from 2D to 3D. 2D simulations overpredict drag, as they restrict a naturally three-dimensional flow to be two-dimensional (Metzinger et al., 2018; Xu et al., 2014). This leads to very high load fluctuations especially for the Plain airfoil case. As the wake analysis in the following section indicates, the shed vorticity remains coherent and thus the induced ~~forces~~ loads are overpredicted. On the contrary, URANS simulations, 2D or 3D, do not predict any load fluctuations for the cases with the TE devices. It appears that URANS artificially damps the flow, regardless of the dimensions or the spatial resolution when TE devices are employed.

Mesh resolution appears to play an important role for ~~DD~~ES ~~ID~~DES, more so than for URANS. URANS predictions remain practically unchanged moving from the Coarse to the Fine mesh, especially for the TE device cases. ~~DD~~ES ~~ID~~DES predicts higher drag values with the Fine mesh, and more importantly, the Fine-~~DD~~ES ~~ID~~DES simulation is the only one that predicts unsteady ~~loads~~forces for all cases. Regarding URANS, unsteady ~~loads~~forces are only predicted for the Plain airfoil case. The 2D URANS predict significantly higher ~~loads~~forces, a result of confining an inherently 3D flow in two dimensions.

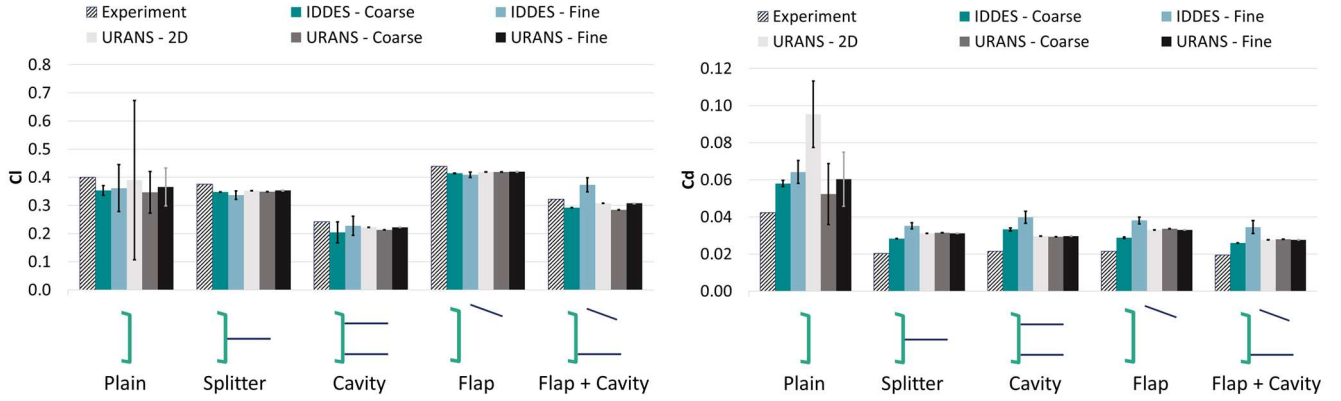


Figure 4: Lift (left) and drag coefficient (right) values for the Plain airfoil and the airfoil with different TE devices. Comparison between Experiments, ~~DD~~ES ~~ID~~DES and URANS simulations. Error bars in the numerical predictions are equal to the standard deviation of the force coefficient.

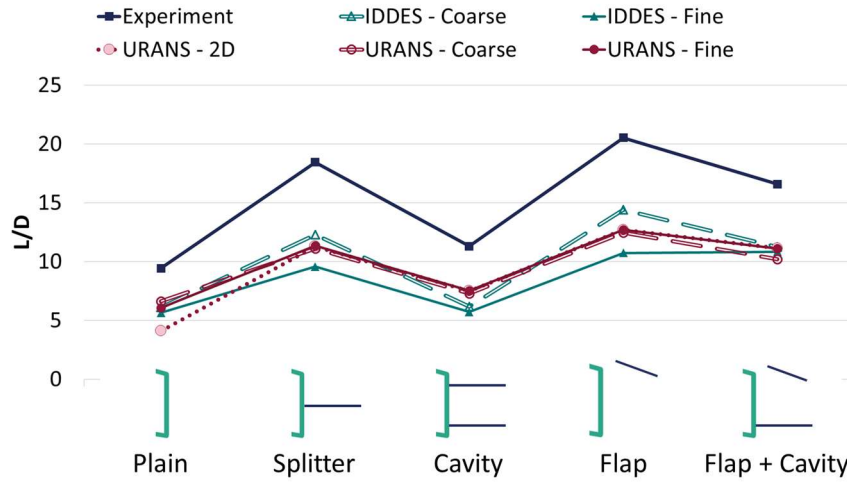


Figure 5: Lift to Drag ratio for the Plain airfoil and the airfoil with different TE devices. Comparison between Experiments, ~~DD~~ES ~~ID~~DES and URANS simulations.

3.1.2 Wake frequencies

Figure 7, left, presents the Strouhal number values, comparing Experiments, ~~DD~~ES ~~ID~~DES and URANS simulations. The St number is calculated based on the TE thickness and the main frequency, f , according to the equation below:

$$St = fh_{TE}/V_{\infty} \quad (3)$$

175 In the wind tunnel data, frequency, f , is the main frequency in the velocity spectrum from the wake hot wire measurements (see also Figure 2). Similarly, for all simulations the velocity timeseries at the location of the hot wire probe was examined and the dominant frequency from the vertical velocity spectrum was taken. Figure 7, right, shows the normalised peak amplitude of that frequency, A_{norm} , according to Equation (4)


$$A_{norm} = \frac{A}{A_{Plain}} \quad (4)$$

180 where A_{Plain} is the amplitude of the dominant frequency for the Plain airfoil case. Table 1 presents the relevant values (St and A_{norm}) for the experiments and the highest fidelity simulation, Fine-~~DDES~~ IDDES. The Power Spectral Density (PSD) for the Fine-~~DDES~~ IDDES cases is given in Figure 6.


185 In case of the Plain airfoil, all St predictions are close to the experimental results, but lower, in agreement with (Stone et al., 2009). Increasing the mesh size from 5M to 25M leads to improved-~~DDES~~ IDDES predictions for all cases. For RANS, the wake frequency is practically insensitive to mesh resolution or dimensions (2D or 3D). The results show that URANS fail to predict the wake unsteadiness in the case of the TE devices or provide erroneous predictions (URANS – Fine, Splitter).

190 A closer look at the comparison between the Experiment and the Fine-~~DDES~~ IDDES simulation results (Figure 7, right and Table 1) reveals that-~~DDES~~ IDDES can qualitatively predict both the frequency and the normalized peak amplitude, suggesting that the main flow mechanisms are correctly captured by the selected approach. The largest difference is observed for the Flap and Flap + Offset Cavity cases. At this point the reason for this discrepancy remains unclear. It is noted however, that during the experiments the Flap, which was manufactured out of a 2 mm thick aluminium sheet, was slightly deflected under the aerodynamic load. It was not possible to quantify the deflection or its effect at the time. Interestingly, ~~DDES~~ IDDES predictions regarding the velocity's fluctuation frequency are in fair agreement with the experimental data for all configurations even when 195 the coarser grid is employed.

According to (Manolesos and Voutsinas, 2016), the wake contains structures of smaller size and higher frequency, when the TE devices are used. The velocity spectrum from the-~~DDES~~ IDDES simulations (Figure 6) agrees with this observation except for the Flap case, where the St number is the same as for the Plain airfoil case. It is conceivable that this is because the vortex 200 shed from the lower edge of the blunt TE is unaffected by the presence of the Flap, as discussed in Section 3.2.

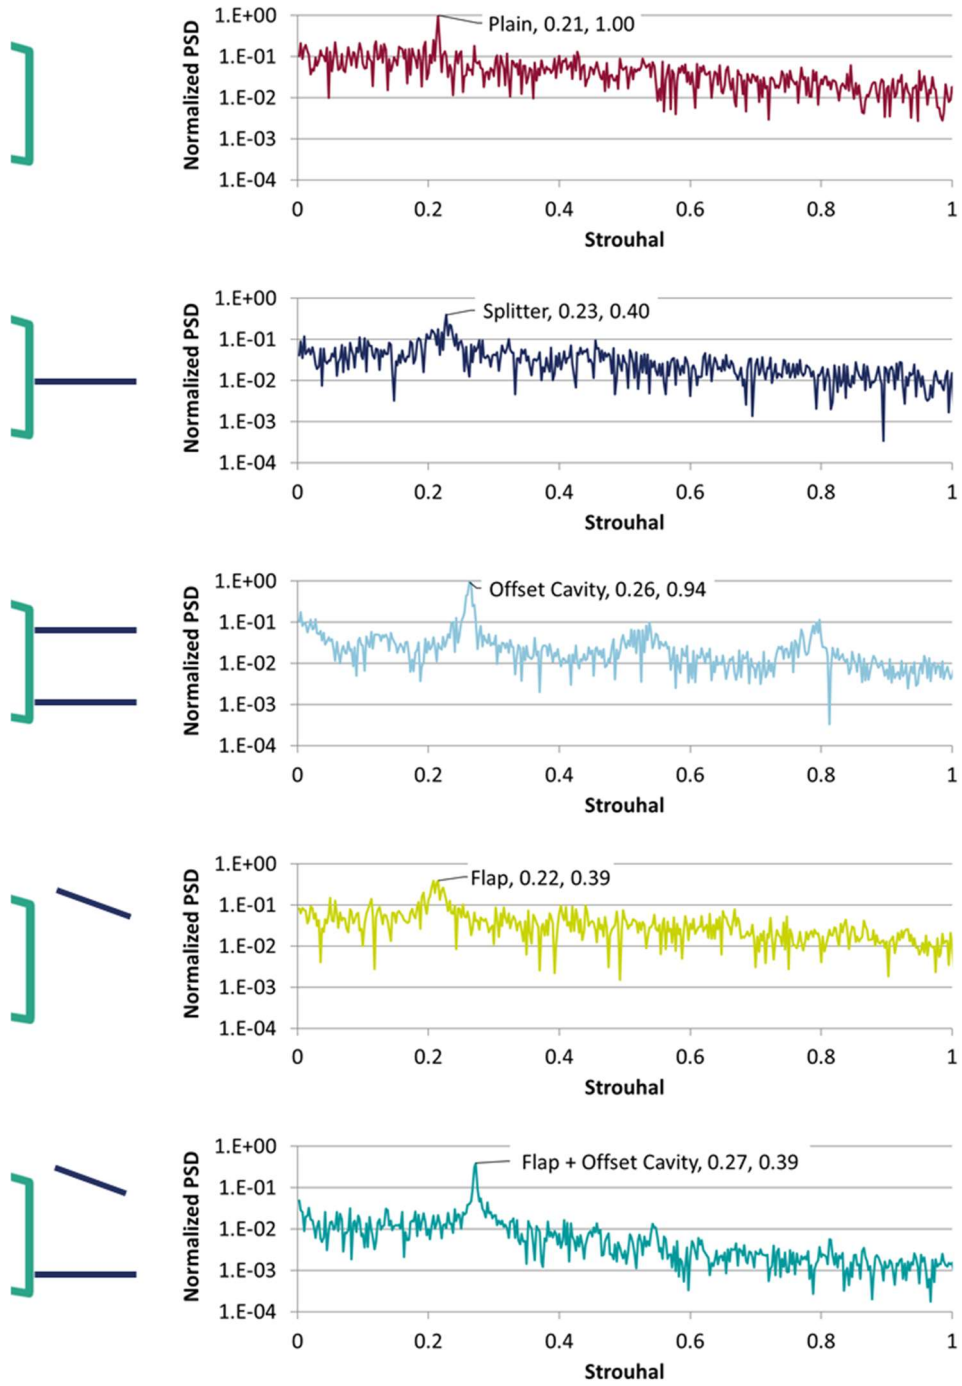

205 **Figure 6: Normalized Power Spectral Density of the velocity time series for the Plain airfoil and all the TE device cases from Fine ~~DES~~ IDDES simulations. The vertical velocity is considered at $(x, y) = (1.57c, 0)$ see also Figure 2. Strouhal number is defined based on the trailing edge thickness, $St = fh_{TE}/V_{\infty}$**

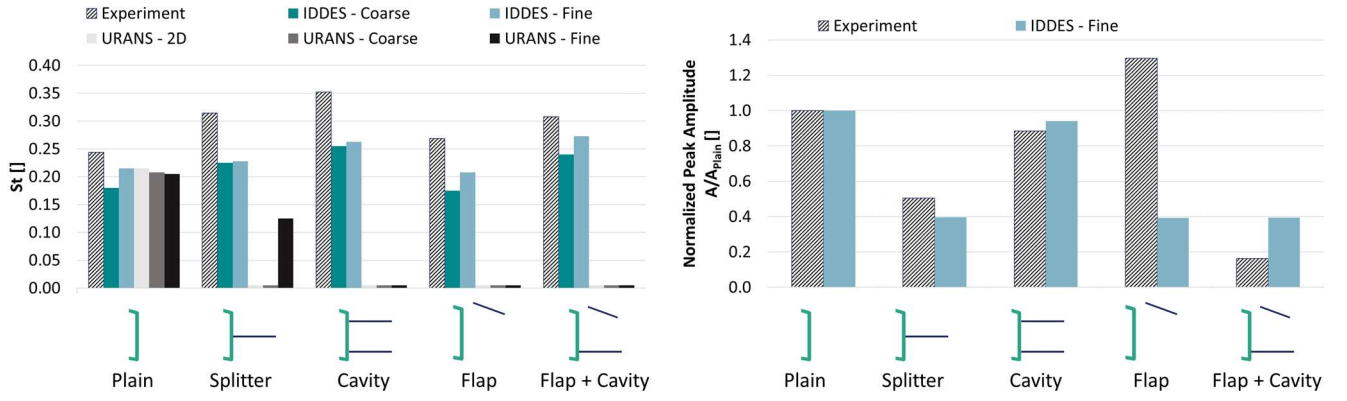

210 **Figure 7: Left: Strouhal number ($St = fh_{TE}/V_{\infty}$) values for the Plain airfoil and the airfoil with different TE devices. Comparison between Experiments, ~~DDES~~ IDDES and URANS simulations. Right: Normalized peak amplitude of the frequency spectrum Comparison between Experiments and Fine ~~DDES~~ IDDES simulations.**

	Strouhal number		Normalized Peak Amplitude	
	Experiment	DDES	Experiment	DDES
Clean Airfoil	0.24	0.21	1.00	1
Splitter	0.31	0.23	0.50	0.40
Offset Cavity	0.35	0.26	0.88	0.94
Flap	0.27	0.21	1.30	0.39
Flap + Offset Cavity	0.31	0.27	0.16	0.39

Table 1: Strouhal number ($St = fh_{TE}/V_{\infty}$) and normalized peak amplitude of the frequency spectrum for the Plain airfoil and the airfoil with different TE devices. Comparison between Experiments and ~~DDES~~ IDDES

215 3.1.3 Wake velocity and turbulence quantities

In this section the time-averaged velocity magnitude as measured on the Stereo PIV plane is compared with the numerical predictions on the Fine mesh. In the interest of brevity only the $\overline{v'v'}/V_{\infty}^2$ normal Reynolds stress is presented from the turbulence quantities, but it is noted that the same conclusions can be reached by examining the other quantities. Figures from Figure 8 to Figure 12 present the relevant contours for all the examined cases.

220 In the Plain airfoil case (Figure 8), where both URANS and ~~DDES~~ IDDES predict significant vortex shedding, the velocity contours are very similar, with the ~~DDES~~ IDDES prediction closer to the wind tunnel data. In all cases, the mean velocity wake becomes initially thinner (as highlighted by the black arrows in Figure 8) before expanding further downstream. This is linked to the roll up of the two shear layers into discrete vortices which are shed in the wake. The recirculation region compares well between experiments and simulations, with numerical prediction of the recirculation length being similar to the measured one.

225

Contrary to mean velocity contours, the Reynolds stress predictions, differ to some extent, with the URANS predicted values being smaller than the ~~DDES~~ IDDES and the experimental ones. Again, there is a very good agreement between the latter two.

230 The ~~DDES~~ IDDES velocity fluctuation peaks appear at the same locations as in the experiments, which means that that the vortex formation length (Tombazis and Bearman, 1997; Williamson, 1996) is also predicted correctly.


In all other cases (Splitter, Offset Cavity, Flap, Flap + Offset Cavity) the URANS simulations do not predict vortex shedding. As a result, the recirculation region is significantly longer than in the wind tunnel tests and Reynolds stress values are close to

235 zero everywhere. Additionally, the lack of mixing in the wake means that low velocities are maintained in the wake further downstream. This is not in agreement with the experimental measurements or the ~~DDES~~ IDDES predictions, where vortex shedding is observed along with significant Re stress values and quicker wake recovery.

Figure 12 reveals a disagreement between the ~~DDES~~ IDDES Re stress predictions and the wind tunnel measurements for the

240 Flap + Offset Cavity case. The Stereo PIV data, in agreement with the hot wire measurements, suggest that the flow variations are significantly smaller for this case than all other cases. ~~DDES~~ IDDES do predict reduced fluctuations compared to the Plain airfoil case, but not to the extent suggested by the measurements. This is also confirmed by the PSD graph shown in Figure 6, where the energy contained in all frequencies of the Flap + Offset Cavity case are lower than all other cases. However, the recirculation region and vortex formation length remain larger in the ~~DDES~~ IDDES simulations than in the wind tunnel tests.

245 In general, the ~~DDES~~ IDDES predictions are satisfactory but the wake appears to be ‘wider’, or more diffused, than in the experiments. This could imply that numerical diffusion is significant even with the 25M cells mesh and that possible improvements can be expected by further increase of the spatial resolution.

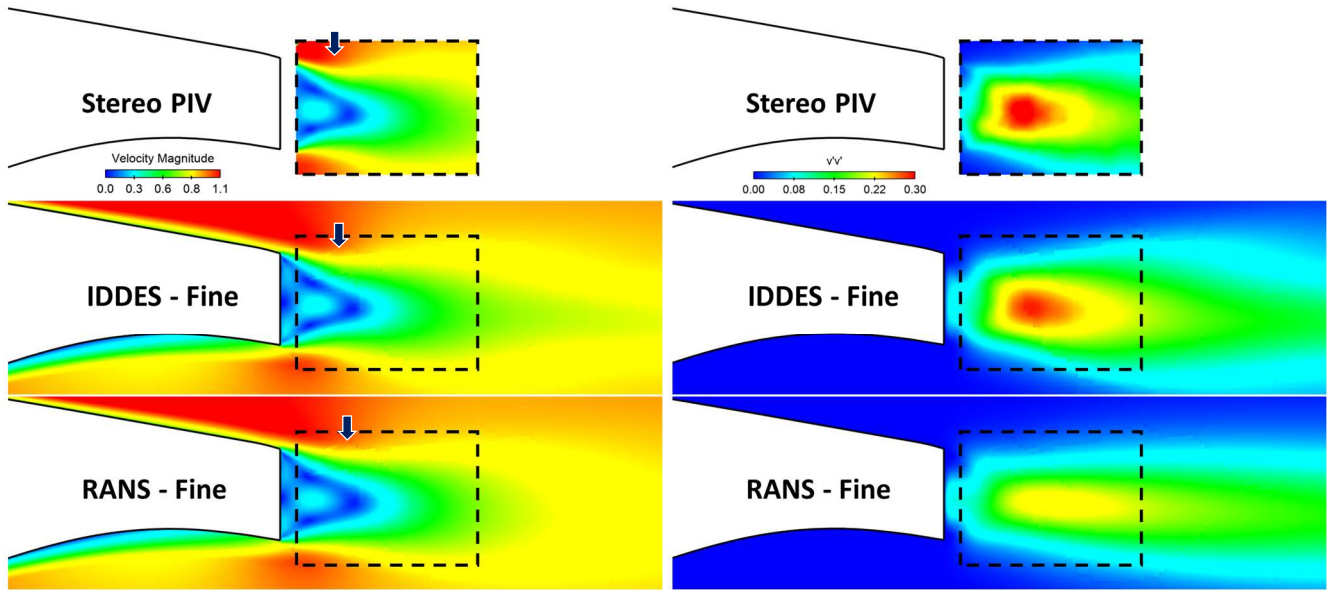

250

Figure 8: Plain airfoil case. Normalized velocity magnitude contours, V/V_∞ , (left) and $\overline{v'v'}/V_\infty^2$ normal Reynolds stress contours (right). Comparison between Stereo PIV, RANS and ~~DDDES~~ IDDES results. The Fine mesh (25M cells) was used in the calculations.

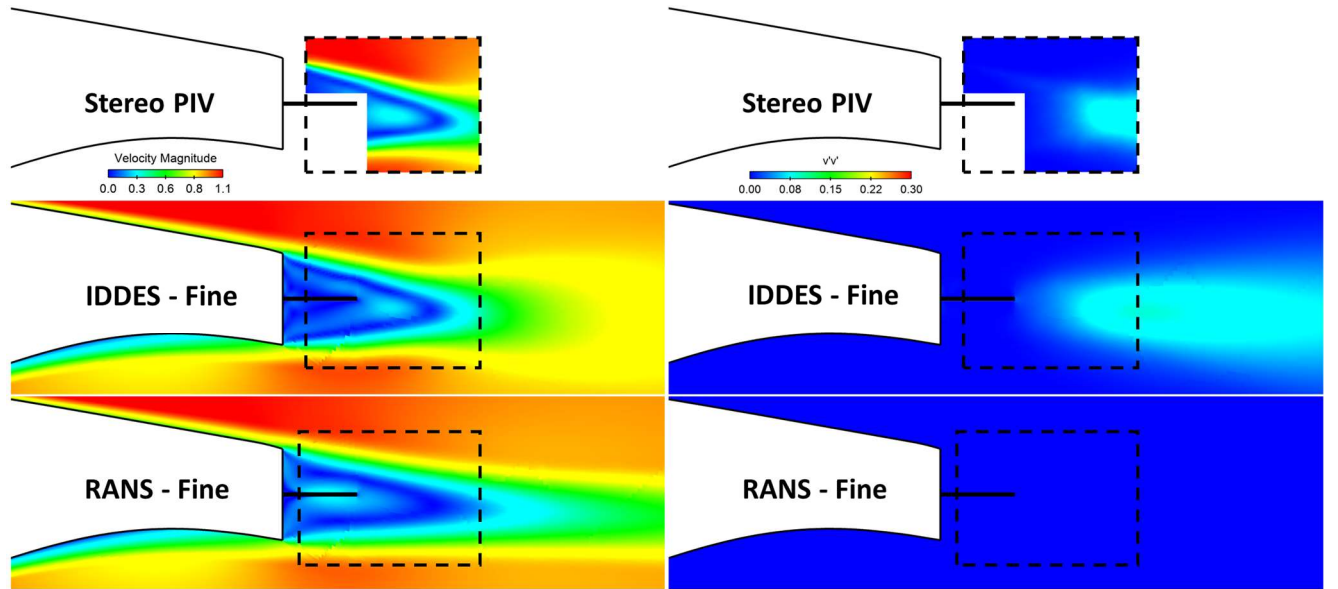


Figure 9: Splitter case. Normalized velocity magnitude contours, V/V_∞ , (left) and $\overline{v'v'}/V_\infty^2$ normal Reynolds stress contours (right). Comparison between Stereo PIV, RANS and ~~DDDES~~ IDDES results. The Fine mesh (25M cells) was used in the calculations.

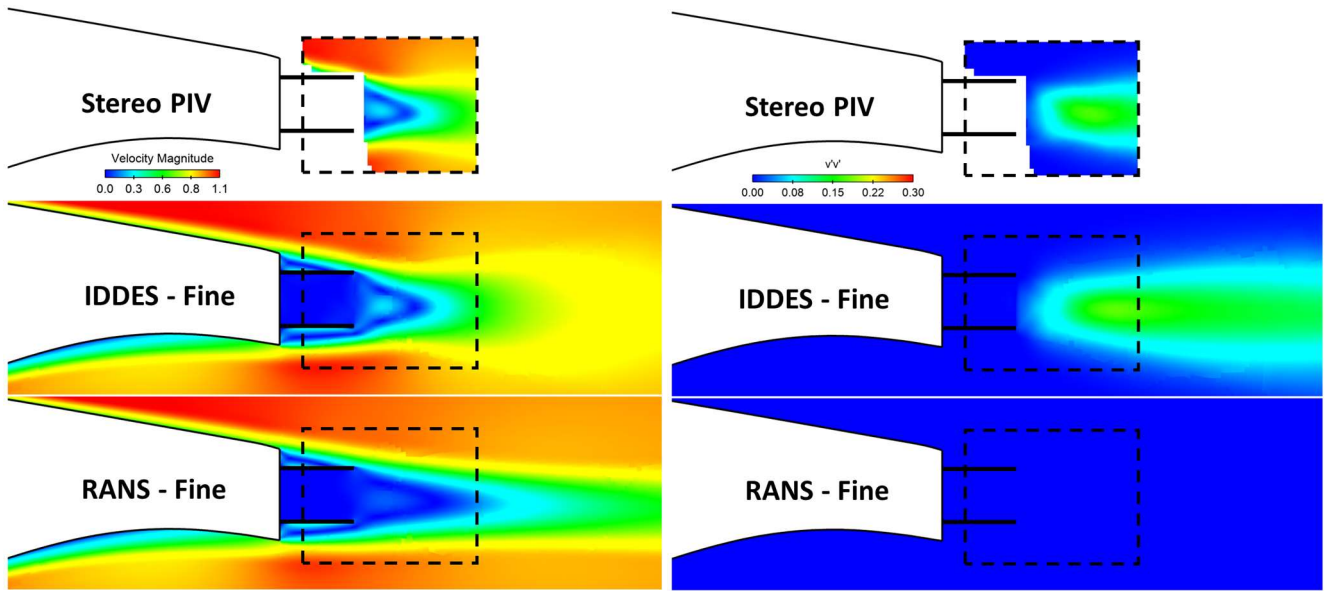


Figure 10: Offset Cavity case. Normalized velocity magnitude contours, V/V_∞ , (left) and $\overline{v'v'}/V_\infty^2$ normal Reynolds stress contours (right). Comparison between Stereo PIV, RANS and ~~IDDES~~ IDDES results. The Fine mesh (25M cells) was used in the calculations.

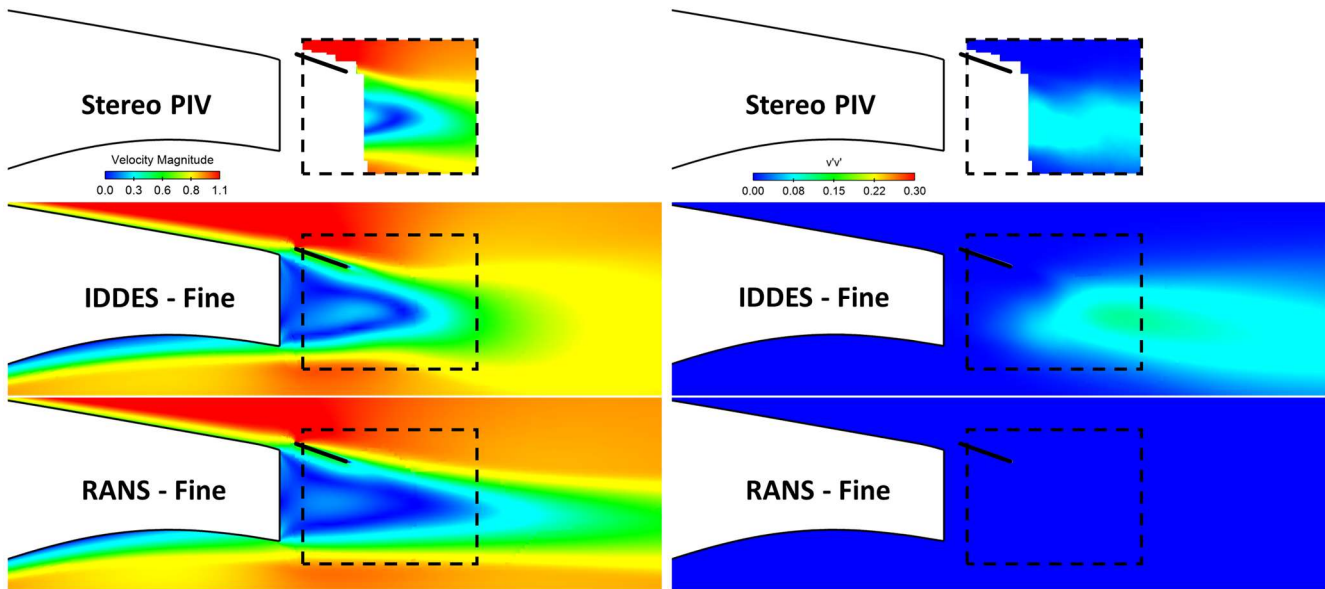


Figure 11: Flap case. Normalized velocity magnitude contours, V/V_∞ , (left) and $\overline{v'v'}/V_\infty^2$ normal Reynolds stress contours (right). Comparison between Stereo PIV, RANS and ~~IDDES~~ IDDES results. The Fine mesh (25M cells) was used in the calculations.

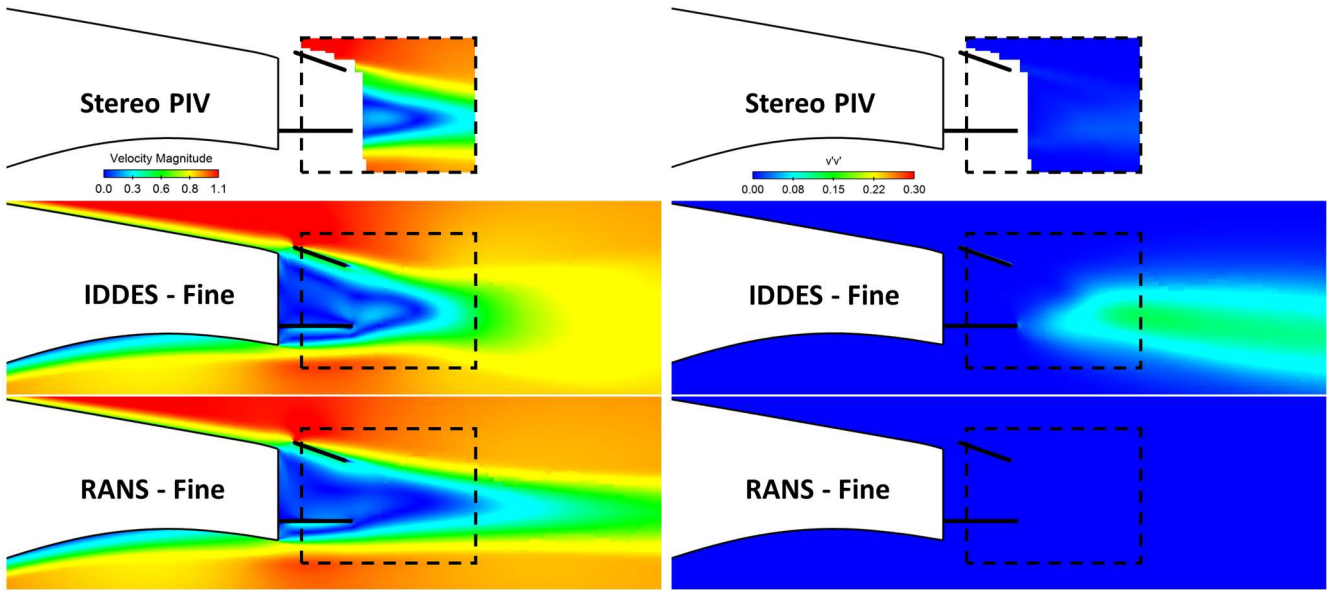


Figure 12: Flap + Offset Cavity case. Normalized velocity magnitude contours, V/V_∞ , (left) and $\overline{v'v'}/V_\infty^2$ normal Reynolds stress contours (right). Comparison between Stereo PIV, RANS and ~~DDDES~~ IDDES results. The Fine mesh (25M cells) was used in the calculations.

3.2 Wake development

The analysis so far has shown that the predictions of the highest fidelity numerical approach, ~~DDDES~~ IDDES on the Fine mesh, are closer to the experimental data in terms of load values, wake velocities and frequencies and turbulence quantities. Consequently, the analysis of the wake development and the effect the TE devices have on the vortex shedding mechanism will be based on the Fine ~~DDDES~~ IDDES results. For completeness, the comparison between the URANS and ~~DDDES~~ IDDES Fine mesh predictions is also discussed.

Figure 13 shows a comparison between the URANS and ~~DDDES~~ IDDES on the Fine mesh for the plain airfoil case. Instantaneous vortical structures are visualised as isosurfaces of the Δ -criterion (Chong et al., 1990), coloured by streamwise vorticity. These are superimposed on isosurfaces of spanwise vorticity. The values for Δ and ω_z have been chosen so that the two surfaces overlap, where they both exist simultaneously. This method of visualisation was selected so that both the streamwise and the spanwise vortex strength and complexity is visualised.

The artificial smoothing of the flow is apparent in the case of URANS. The spanwise vortices are only mildly three-dimensional and do not give rise to streamwise braids. In the URANS predictions, a typical von Kármán vortex street is formed by opposite sign vortices arranged in an alternating fashion. However, these vortices have limited three-dimensionality and resemble wake structures of significantly lower Re number (Bai and Alam, 2018). In the present case, the Reynolds number based on TE thickness is $Re_{TE} = 1.5 \times 10^5$, orders of magnitude higher than the critical Re number for bluff body wake flows

285 (Williamson, 1996), and significant three-dimensionality is expected. The vortices in the URANS case are also very quickly damped in the wake, despite the fact that the same 25M cells grid is used by both methods.

On the other hand, ~~DDDES~~ IDDES results reveal the inherently strong three-dimensional character of the flow. According to ~~DDDES~~ IDDES predictions, the spanwise vortices shed alternately from the top and bottom trailing edges of the wing give
 290 rise to smaller streamwise hairpin vortices. These vortices play a central role in transfer of vorticity out of the core of the main vortex (Mittal and Balachandar, 1995) and appear as soon as the vortices are shed in the wake. The latter is not surprising given the high Re number and the turbulent boundary layer over the airfoil.

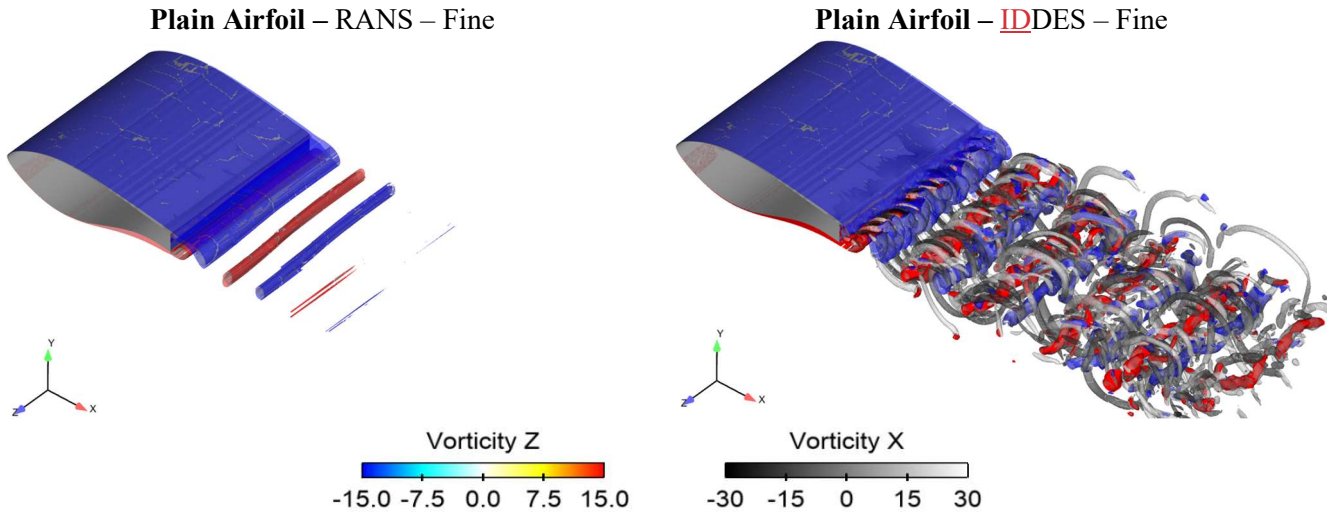


Figure 13: Instantaneous isosurfaces of $\Delta = 10^5$ coloured by streamwise vorticity (ω_x) and overlaid instantaneous isosurfaces of spanwise vorticity ($\omega_z = \pm 15$).

295 Figure 14 offers the same instantaneous wake visualisation as Figure 13 for the cases with the different TE devices, as predicted by ~~DDDES~~ IDDES on the Fine mesh. Significant differences are observed between the various cases. Perhaps the most complicated structures appear in the Splitter case, where oblique shedding is observed along with vortex dislocations (Tombazis and Bearman, 1997). Still, the wake remains smaller and less three-dimensional than the plain airfoil case (Figure 13, right). In the Offset Cavity case, the streamwise braids appear less dense and maintain their regularity further downstream
 300 in the wake, compared to the Plain case. The spanwise vortices are also smaller in size and seem to break down sooner than in the uncontrolled case.

As discussed in more detail in Section 3.3, in the Flap case, the flap only affects the formation of the top vortex, while the lower vortex is shed uncontrolled. The wake hence appears more irregular than in the Offset Cavity case, but the spanwise von
 305 Kàrmàn vortices and the streamwise vortices are clearly identifiable. The wake is significantly more regular in the Flap +

Offset Cavity case, where the lower vortex formation is affected by the presence of the cavity plate. The spanwise vortices appear very well structured and the streamwise braids are not as pronounced.

Based on the analysis above it can be concluded that the TE devices all affect the formation of the von Kàrmàn vortices, which are present in all cases. All controlled cases have a smaller and less turbulent wake, in agreement with the previous section and with (Manolesos and Voutsinas, 2016). In general, the stronger the spanwise vortex, the stronger its three-dimensional character. Comparing the cases of Splitter and Offset Cavity, it appears that the distance of the control plate plays a significant role in the vortex formation and strength. Finally, the comparison between the Flap and the Flap + Offset Cavity cases suggests that controlling only one side of the vortex street is not sufficient to create a well-structured and less turbulent wake.

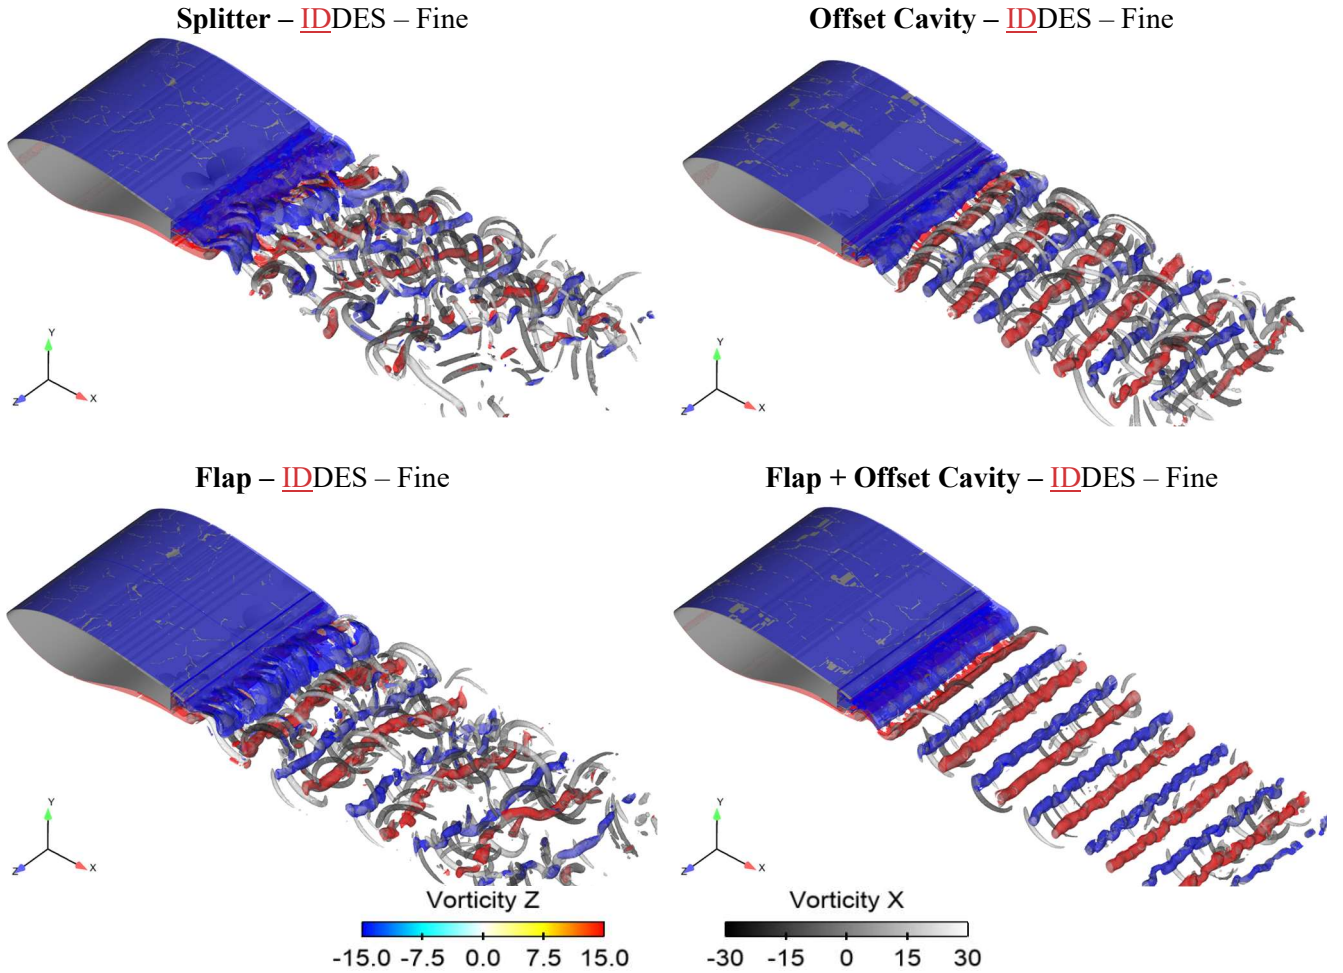


Figure 14: Instantaneous isosurfaces of $\Delta = 10^5$ coloured by streamwise vorticity and overlaid instantaneous isosurfaces of spanwise vorticity ($\omega_z = \pm 15$). ~~IDDES~~ IDDES results on the Fine mesh.

In order to quantify the spanwise correlation of the flow for each device, the Pearson correlation coefficient (r) of the Cl time signal at different spanwise locations is presented in Figure 15. Values of 1, -1 indicate strong correlation between the signals (positive and negative, respectively) while value of 0 suggests no correlation. The correlation coefficient is calculated with respect to the midsection (located at $z/b = 0$ in Figure 15). It is evident that the TE devices significantly alter the spanwise correlation of the flow. When the plain configuration is examined a correlation length of $\lambda = 0.5b$, where b is the wing span, or $\lambda = 5h_{TE}$ is identified, in agreement with (Metzinger et al., 2018). For the flap case, the correlation length remains large with $\lambda = 5.9h_{TE}$. It is noted that in the flap case the lower vortex is shed uncontrolled and this could explain the strong coherence in the wake. The Splitter and Offset Cavity cases have the correlation length drops to $\lambda = 2.5h_{TE}$ and $\lambda = 2.7h_{TE}$, respectively. The weakest spanwise coherence is observed for the Flap + Offset Cavity with $\lambda = 0.7h_{TE}$. The preceding analysis is also in agreement the isosurfaces shown in Figure 14. Indeed, as the figure suggests, the spanwise correlation length of the vorticity isosurfaces in the flap and offset cavity configuration is much smaller when compared to the flap one. Finally, it is noted here that using the wake velocity fluctuations for the preceding analysis yields similar results, however, the Cl was employed since it was already available at all spanwise stations.

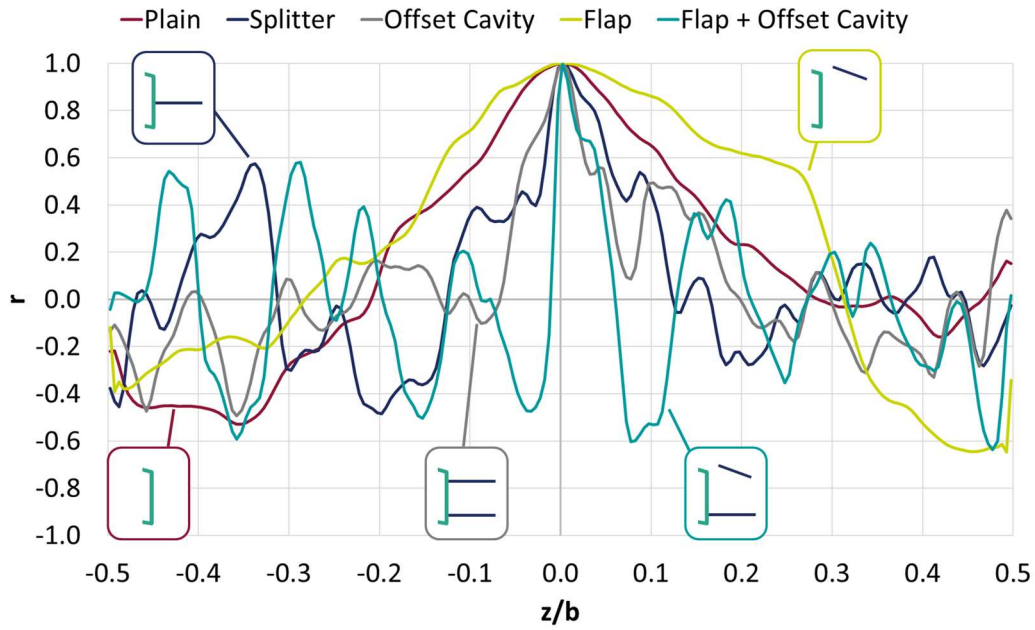


Figure 15. Pearson correlation coefficient of the lift coefficient (Cl) time-series with respect with the midsection (placed at $z/b=0$) for the various configurations. High positive values indicate strong positive correlation and highly negative values suggest a strong negative correlation.

3.3 Vortex formation

In the following, the mechanics of vortex shedding from the blunt TE, with and without the TE devices, are described. This analysis is only concerned with the spanwise vortices and their shedding from the wing TE or the devices TE. Naturally, this is a highly three-dimensional flow and any description dealing only with spanwise concentrated vortices is bound to be

incomplete. Still, the spanwise vortex shedding mechanism is the one that dominates the wake flow and is also the one that subsequently gives rise to the three-dimensional features. Further, it is the modification of this mechanism, i.e. the modification of the roll up of the two shear layers into discrete vortices, that leads to the load changes for the airfoil and different St numbers in the wake. In this sense, it is considered of high importance to describe the flow in the airfoil wake. The description is based on the most accurate predictions, ~~DDES~~ IDDES on a Fine mesh, which are in good agreement with the experimental results.

Figures from Figure 16 to Figure 20 present instantaneous isosurfaces of the Q criterion (Hunt et al., 1988) of all the examined cases. The shedding period (T) for each case has been split in six parts and seven snapshots are shown. The isosurfaces are not coloured by any other quantity to avoid confusion, given the complexity of the structures. Red arrows indicate the location of the main spanwise vortices, as interpreted from the analysis of the results. It is highlighted that the analysis was supported by flow animations (Papadakis and Manolesos, 2020), which cannot be included in the present document, but were fundamental in understanding the flow mechanisms. It is noted that in order to offer the reader a broader view of the results, a different vortex identification criterion was selected in this case, compared to Figure 13 for example. The selection of the criterion does not affect the conclusions of the study.

Starting with the Plain airfoil case (Figure 16) and following the descriptions of (Gerrard, 1966; Tombazis and Bearman, 1997; Williamson, 1996) it is observed that the top vortex is fed with vorticity from the airfoil top boundary layer and grows in size and strength. During this period the vortex remains attached to the top side of the blunt trailing edge until eventually it grows strong enough to draw the opposing shear across the wake. Then, opposite-sign vorticity is entrained between the top shear layer and the top vortex, which is when the feeding of vorticity ceases and the vortex is shed in the wake. In a similar manner, the lower spanwise vortex is fed with vorticity from the airfoil lower boundary layer and is cut off when it draws vorticity of opposite sign between itself and the feeding shear layer.

This ‘feeding’ mechanism is present in all cases, but the presence of the flow control devices alters when and where the vortex is shed in the wake. In the Splitter case, Figure 17, it appears that there is constantly a vortical structure at both edges of the blunt TE. In an alternating manner these structures grow and shed a vortex across the splitter plate. It is noted that when the vortices leave the wing TE, they are much smaller in size and strength compared to the Plain airfoil case. Furthermore, these vortices are not immediately shed in the wake but grow further at each side of the Splitter plate, feeding from the adjacent shear layer (top or bottom), before they are eventually convected downstream. This mechanism has a higher frequency than the Plain airfoil one (see also Figure 7) and explains the longer formation length and smaller wake thickness, observed in the experiments and simulations (see also Figure 9).

In the Offset Cavity case, Figure 18, the top vortex begins to form when the lower one is about to be shed into the wake. In that instant, they are both at the edges of the cavity plates. Then the top vortex grows, feeding from the top shear layer, while there is also a stationary vortical structure adjacent to the wing TE, between the top cavity plate and the wing TE. A similar structure exists at the bottom edge, between the wing and the lower plate. This structure is not stationary. As the top vortex grows, the lower structure is fed from the wing lower boundary layer and is elongated under the cavity lower plate. When the top vortex grows strong enough to be shed in the wake, the lower elongated vortical structure is split into the lower vortex and a vortical structure remaining close to the wing lower TE. The lower vortex will shortly stand at the lower plate TE, before also being shed. The different behaviour of the vortical upper and lower structures is due to the different flow direction as it leaves the airfoil upper and lower side and it is directed into the wake and on the cavity plates. In the top side, the flow is directed towards the plate, while in the lower side it is directed away from it.

Figure 19 presents the Flap + Offset Cavity case. The mechanics are similar to the Offset Cavity case, with two notable differences. Firstly, the top vortex now forms in at the TE edge of the flap, connected to its boundary layer and, secondly, the lower elongated vortical structure is split after the top vortex is shed in the wake. The wake in general appears considerably better structured and regular, compared to all the other cases. The Flap changes the symmetrical wake pattern and reduces the St number with regards to the Offset Cavity case.

Finally, Figure 20 shows the vortical structures for the Flap case. Here, the top vortex is located at the TE of the Flap, and begins to form when the lower vortex, already shed from the lower TE of the wing, passes below it. The top vortex then remains almost stationary, growing in strength and size before it is eventually shed in the wake. In the meantime, a new lower vortex has been formed at the lower TE of the wing. The new vortex feeds from the wing lower boundary layer and is shed in the wake only after the top vortex has been convected. The lower vortex then travels under the flap, generating the top vortex as it passes below the flap TE. The wake is markedly more turbulent and less well-structured than the Flap + Offset Cavity case. It is conceivable that this is because the lower vortex is stronger and more three-dimensional than in the Flap + Offset Cavity case, where its formation was affected by the presence of the lower cavity plate.

4 Conclusions

A computational investigation of the flow past a flatback airfoil with and without TE control devices has been presented and the results have been compared with Wind Tunnel measurements. Both URANS and ~~DD~~DES ~~IDDES~~ modelling has been considered on two grids of different density, a Coarse with 5M cells and a Fine with 25M cells. Computations are compared with measurements in terms of ~~loads~~forces, wake frequencies and Stereo PIV measurements. Overall, if wake structure and frequencies are of interest, then the highest fidelity simulation, ~~DD~~DES ~~IDDES~~ on a Fine mesh, should be preferred, as it provides the best agreement with experimental data in all cases and parameters. If, on the other hand, only the effect of the TE

devices on the ~~loadsforces~~ is of interest, then even the 2D URANS simulations can provide acceptable results. The simplest computational method, in agreement with the experiments and all other numerical predictions, suggest that the Flap device outperforms all other examined flow control solutions in terms of Lift and Lift to Drag ratio.

405 In more detail, 2D URANS predictions give a qualitatively correct estimation of the TE device relative performance. The load variation for the Plain airfoil case, however, appears overestimated. There is fair comparison between the 3D URANS simulations and the experimental data in terms of ~~loadsforces~~ and flow quantities for the Plain airfoil case, especially on the Fine mesh. For the cases with the TE devices, the 3D URANS ~~loadsforces~~ predictions are in agreement with the measurements in terms of mean values, however, vorticity shedding is under-predicted or completely absent from the simulations. This is
410 evident in the predicted St number being close to zero for the Flap, Cavity and Flap + Offset Cavity configurations. It is noted that increasing the mesh size from 5M to 25M cells lead to similar results and no vorticity shedding.

On the contrary, ~~DDES IDDES~~ simulations are in better agreement with the experimental data for all cases. The agreement is fair for both the unsteady characteristics as well as the predicted ~~loadsforces~~. ~~DDES IDDES~~ modelling captures the unsteady
415 character of the wake on both grids. ~~LoadsForces~~, however, appear to be unsteady only on the fine grid case on most cases. Naturally, refining the grid leads to a better comparison with the experimental data especially when comparing to Stereo PIV measurements and St numbers.

Finally, using the most accurate predictions, ~~DDES IDDES~~ on the Fine mesh, the effect of the TE devices on the vortex
420 formation and shedding has been analysed. In the Plain airfoil case, the growth of the vortices as they receive vorticity from the airfoil boundary layers is apparent, followed by the shedding of the vortices in the wake in an alternating manner. All TE devices affect the shedding mechanism. In the Splitter case the vortices are formed on the airfoil upper and lower TE and they are smaller in size compared to the Plain airfoil case when they are shed in the wake. In the Offset Cavity case, the top vortex forms at the TE of the upper cavity plate, while the lower comes off an elongated vortical structure between the lower cavity
425 plate and the airfoil TE. In the Flap case the top vortex forms at the TE of the flap and is fed by its boundary layer. In the Flap + Offset Cavity case, the wake is better structured and less three-dimensional than all other cases, with the top vortex forming at the TE of the flap and the lower splitting off the lower elongated vortical structure, as in the Offset Cavity case.

Acknowledgements

Computational resources were provided by HPC Wales, which is gratefully acknowledged.

430 M Manolesos would like to acknowledge the contribution of the Supergen Early Career Researcher Fund Award by the Supergen Offshore Renewable Energy Hub, EPSRC.

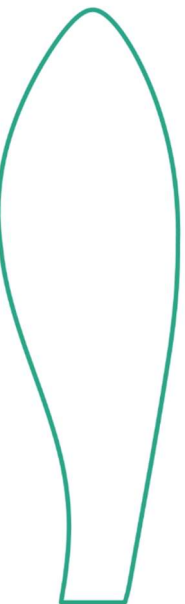


Figure 16: Snapshots of Q isosurfaces from the Plain airfoil case, **DBES**, **IDDES**, Fine mesh results. Each period of the vortex shedding mechanism is split in six parts and a total of seven snapshots is shown. For each snapshot, two visualizations are shown. A 3D view of $Q = 1.5$ isosurfaces on the left and a side view of $Q = 100$ isosurfaces on the right. Superimposed red arrows indicate interpreted spanwise vortices.

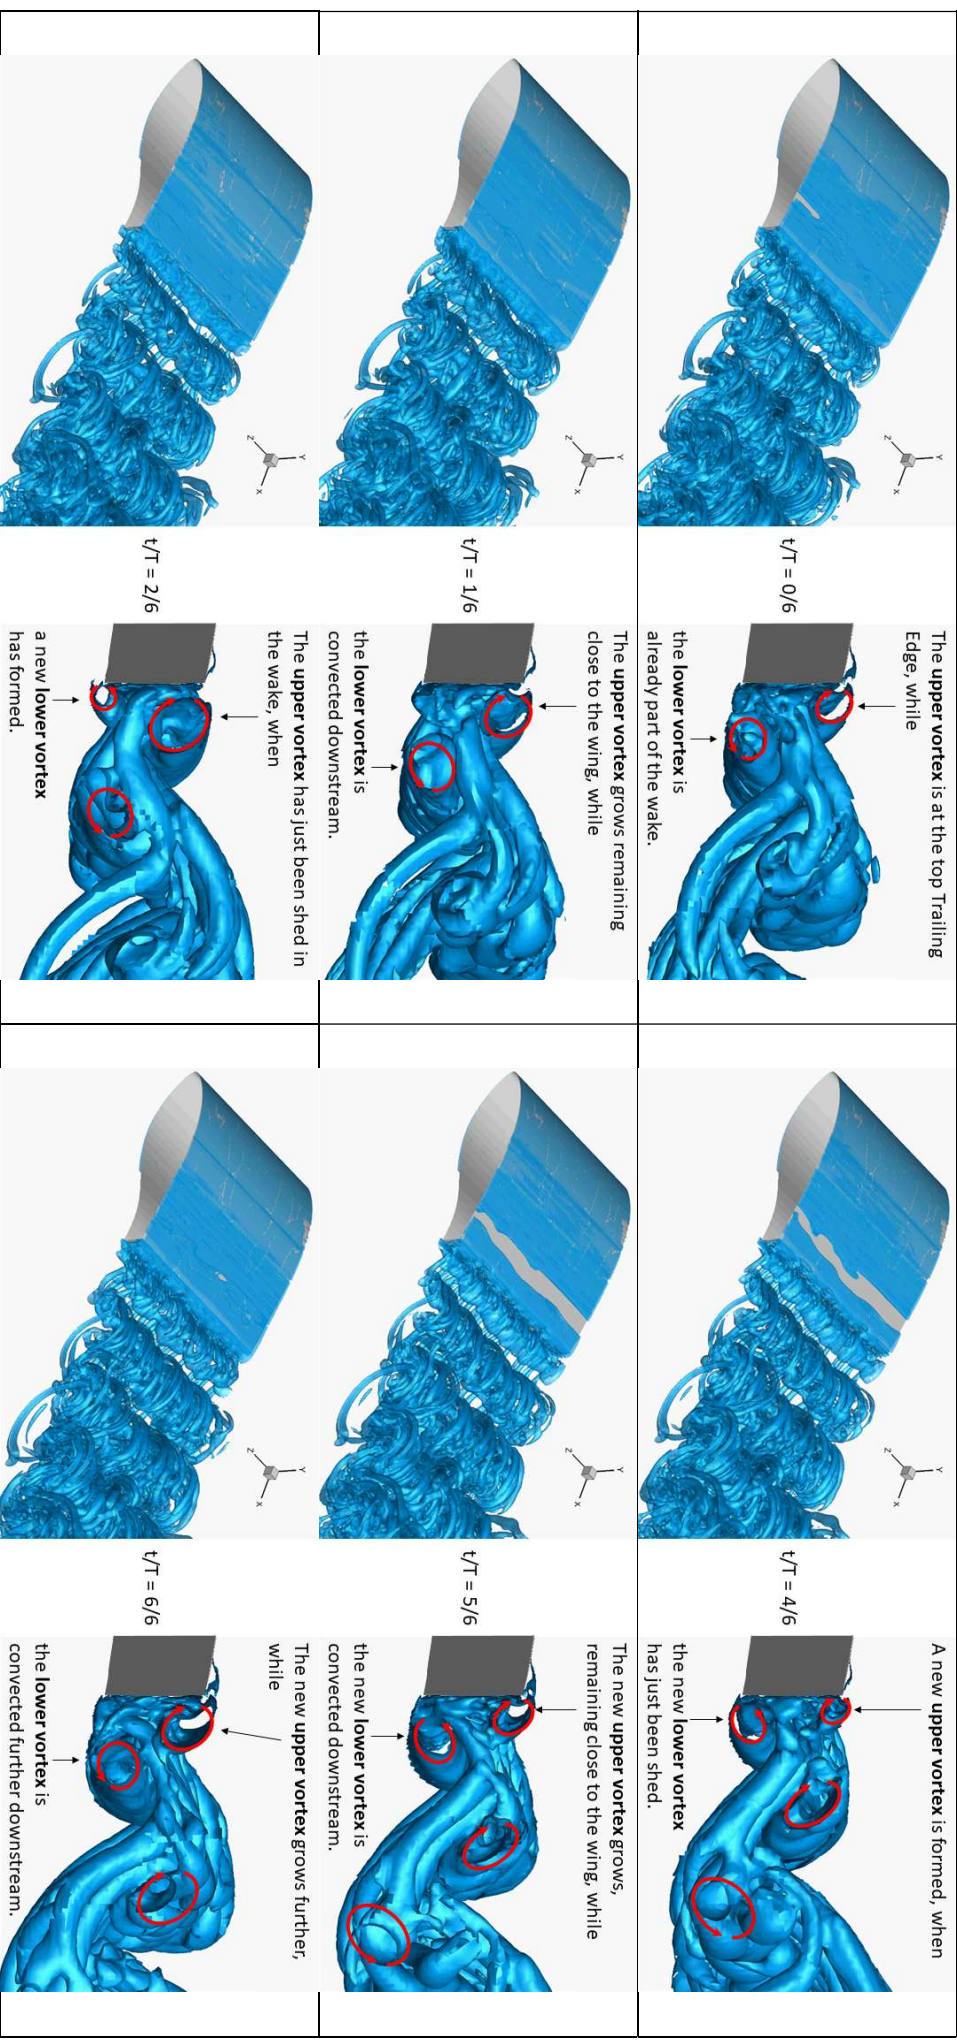




Figure 17: Snapshots of Q isosurfaces from the Splitter case, ~~DBES~~ **IDDES**, Fine mesh results. Each period of the vortex shedding mechanism is split in six parts and a total of seven snapshots is shown. For each snapshot, two visualizations are shown. A 3D view of $Q = 1.5$ isosurfaces on the left and a side view of $Q = 100$ isosurfaces on the right. Superimposed red arrows indicate interpreted spanwise vortices.

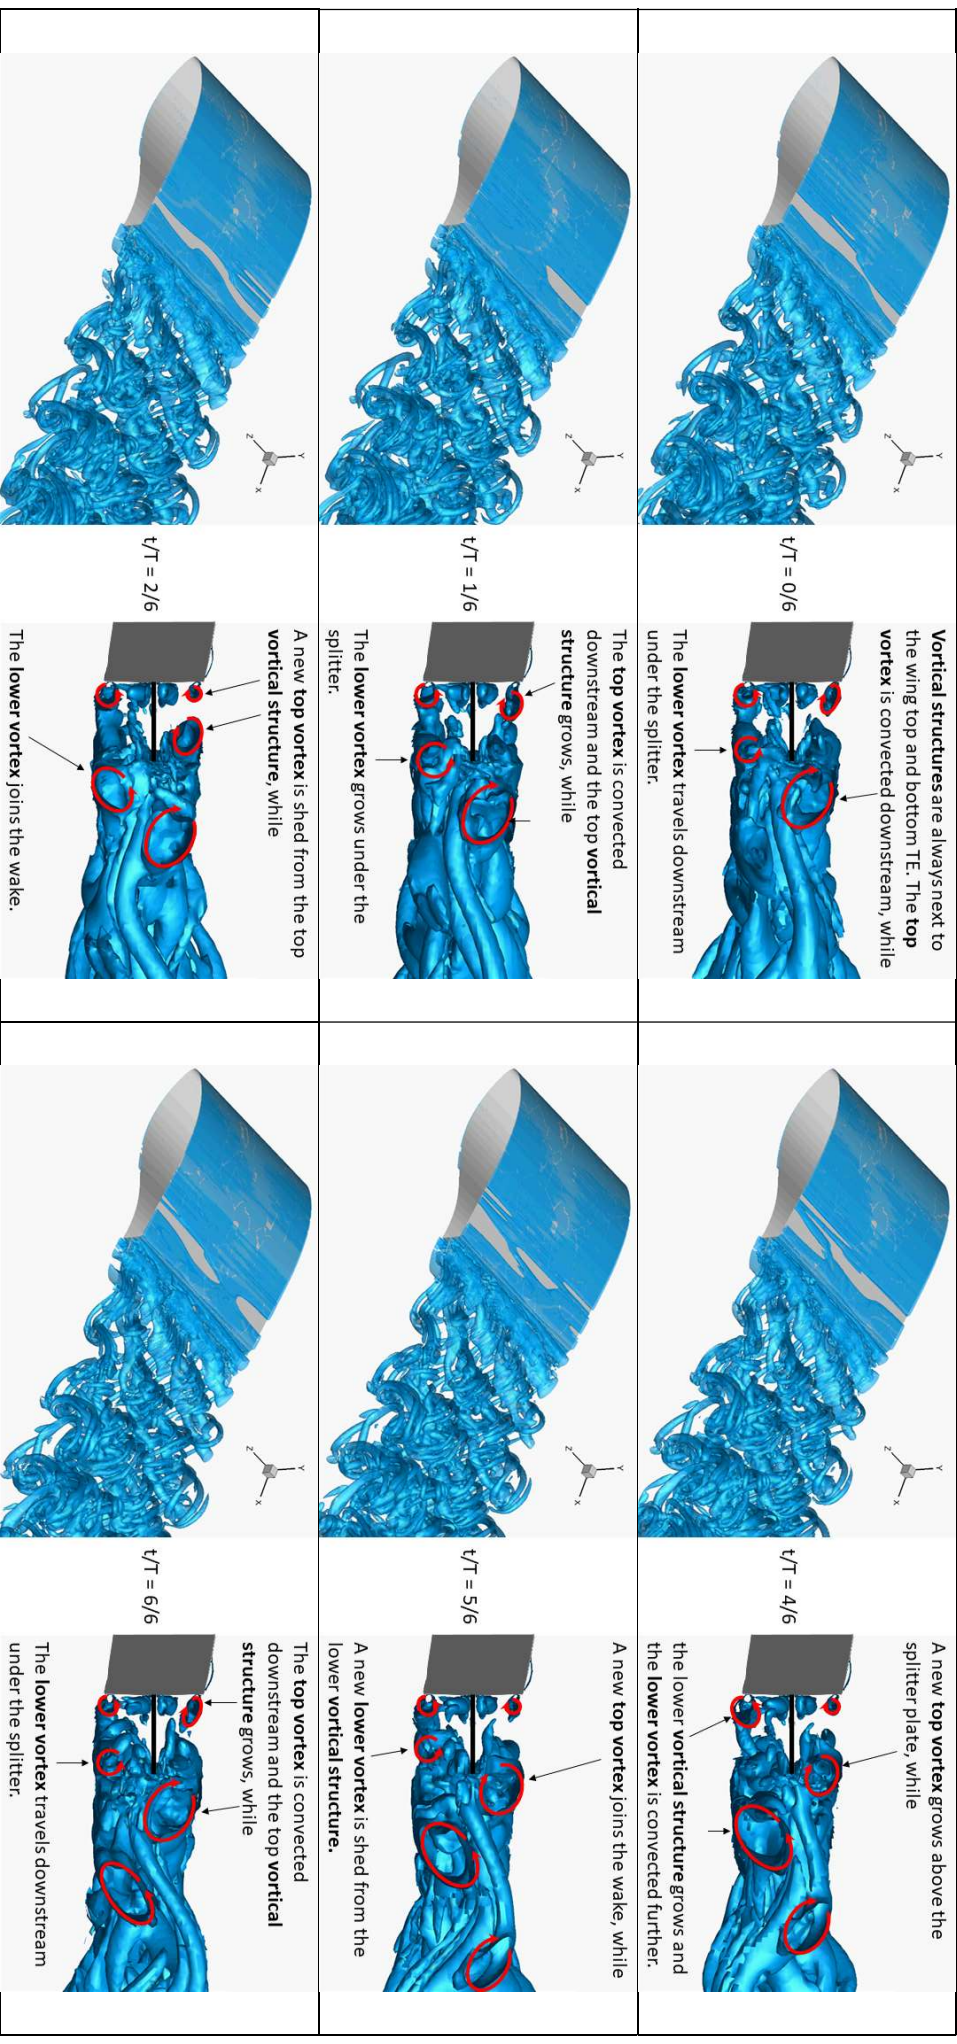




Figure 18: Snapshots of Q isosurfaces from the Offset Cavity case, ~~DBES~~ IDDES, Fine mesh results. Each period of the vortex shedding mechanism is split in six parts and a total of seven snapshots is shown. For each snapshot, two visualizations are shown. A 3D view of $Q = 1.5$ isosurfaces on the left and a side view of $Q = 100$ isosurfaces on the right. Superimposed red arrows indicate interpreted spanwise vortices.

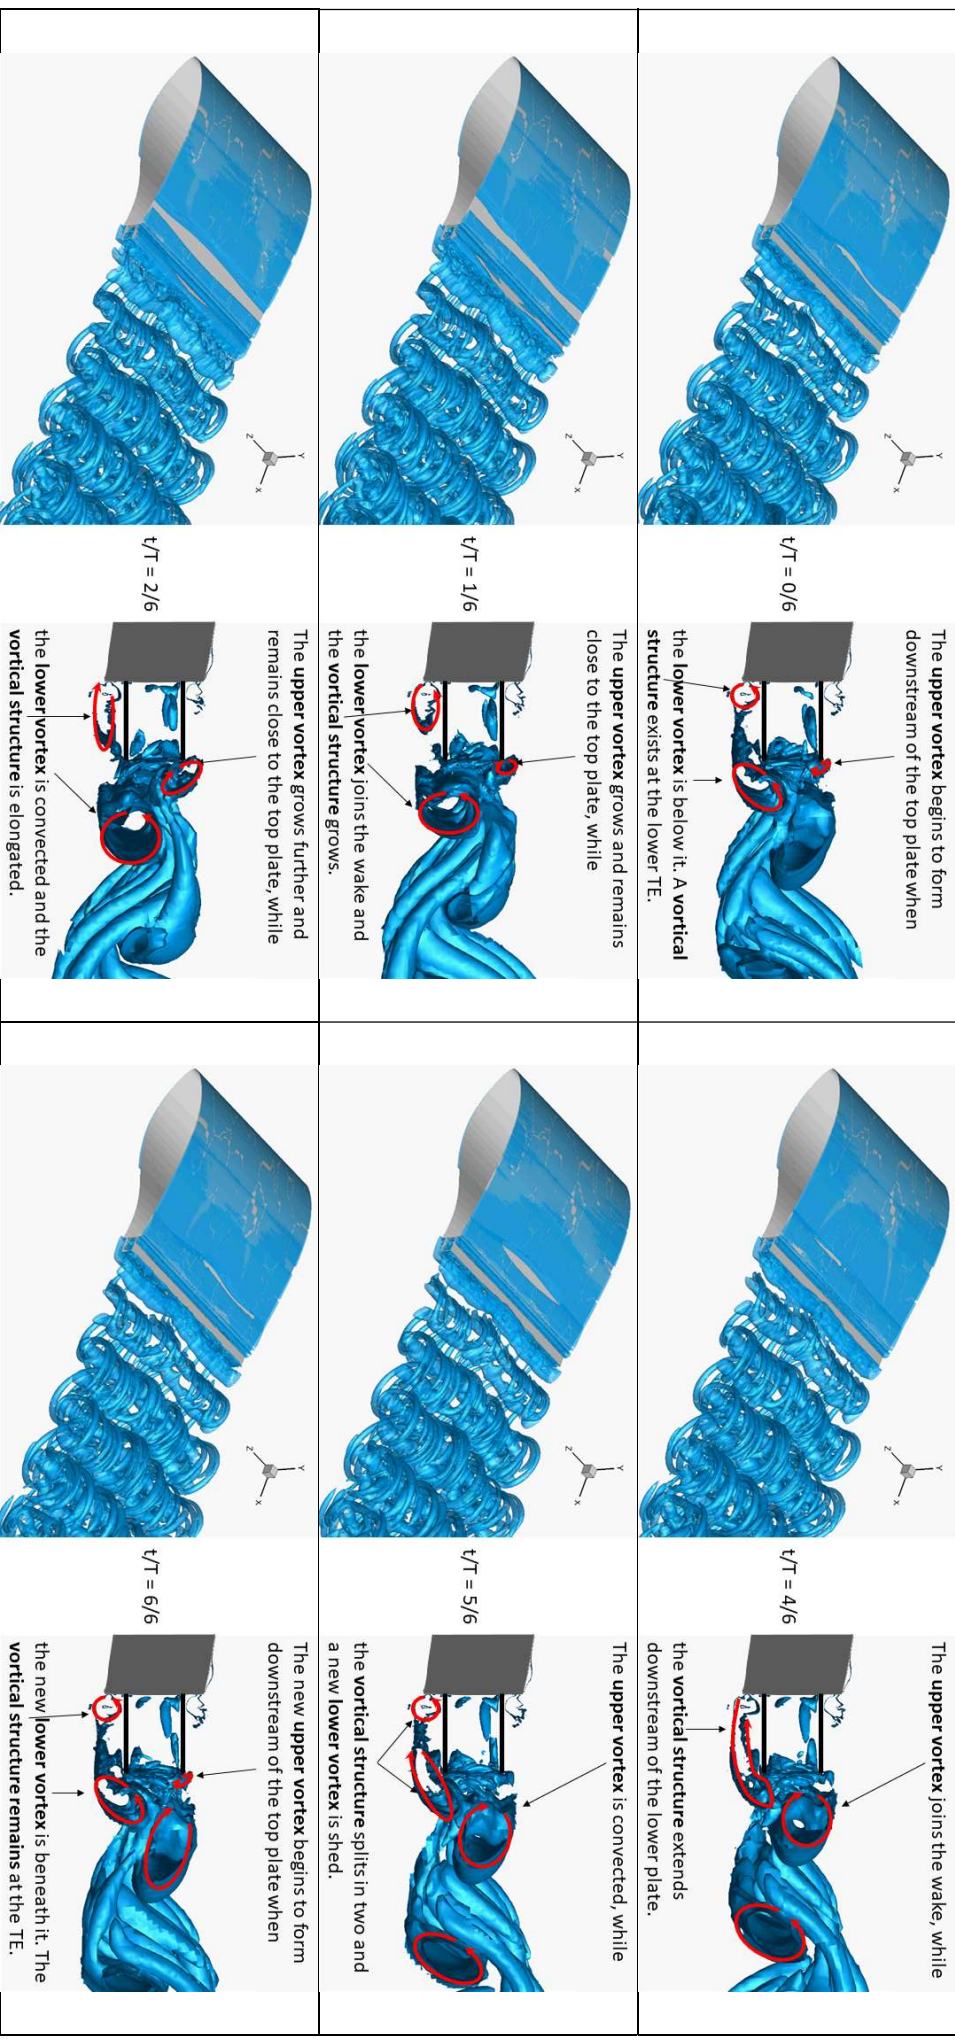




Figure 19: Snapshots of Q isosurfaces from the Flap + Offset case, ~~DBES~~ IDDES, Fine mesh results. Each period of the vortex shedding mechanism is split in six parts and a total of seven snapshots is shown. For each snapshot, two visualizations are shown. A 3D view of $Q = 1.5$ isosurfaces on the left and a side view of $Q = 100$ isosurfaces on the right. Superimposed red arrows indicate interpreted spanwise vortices.

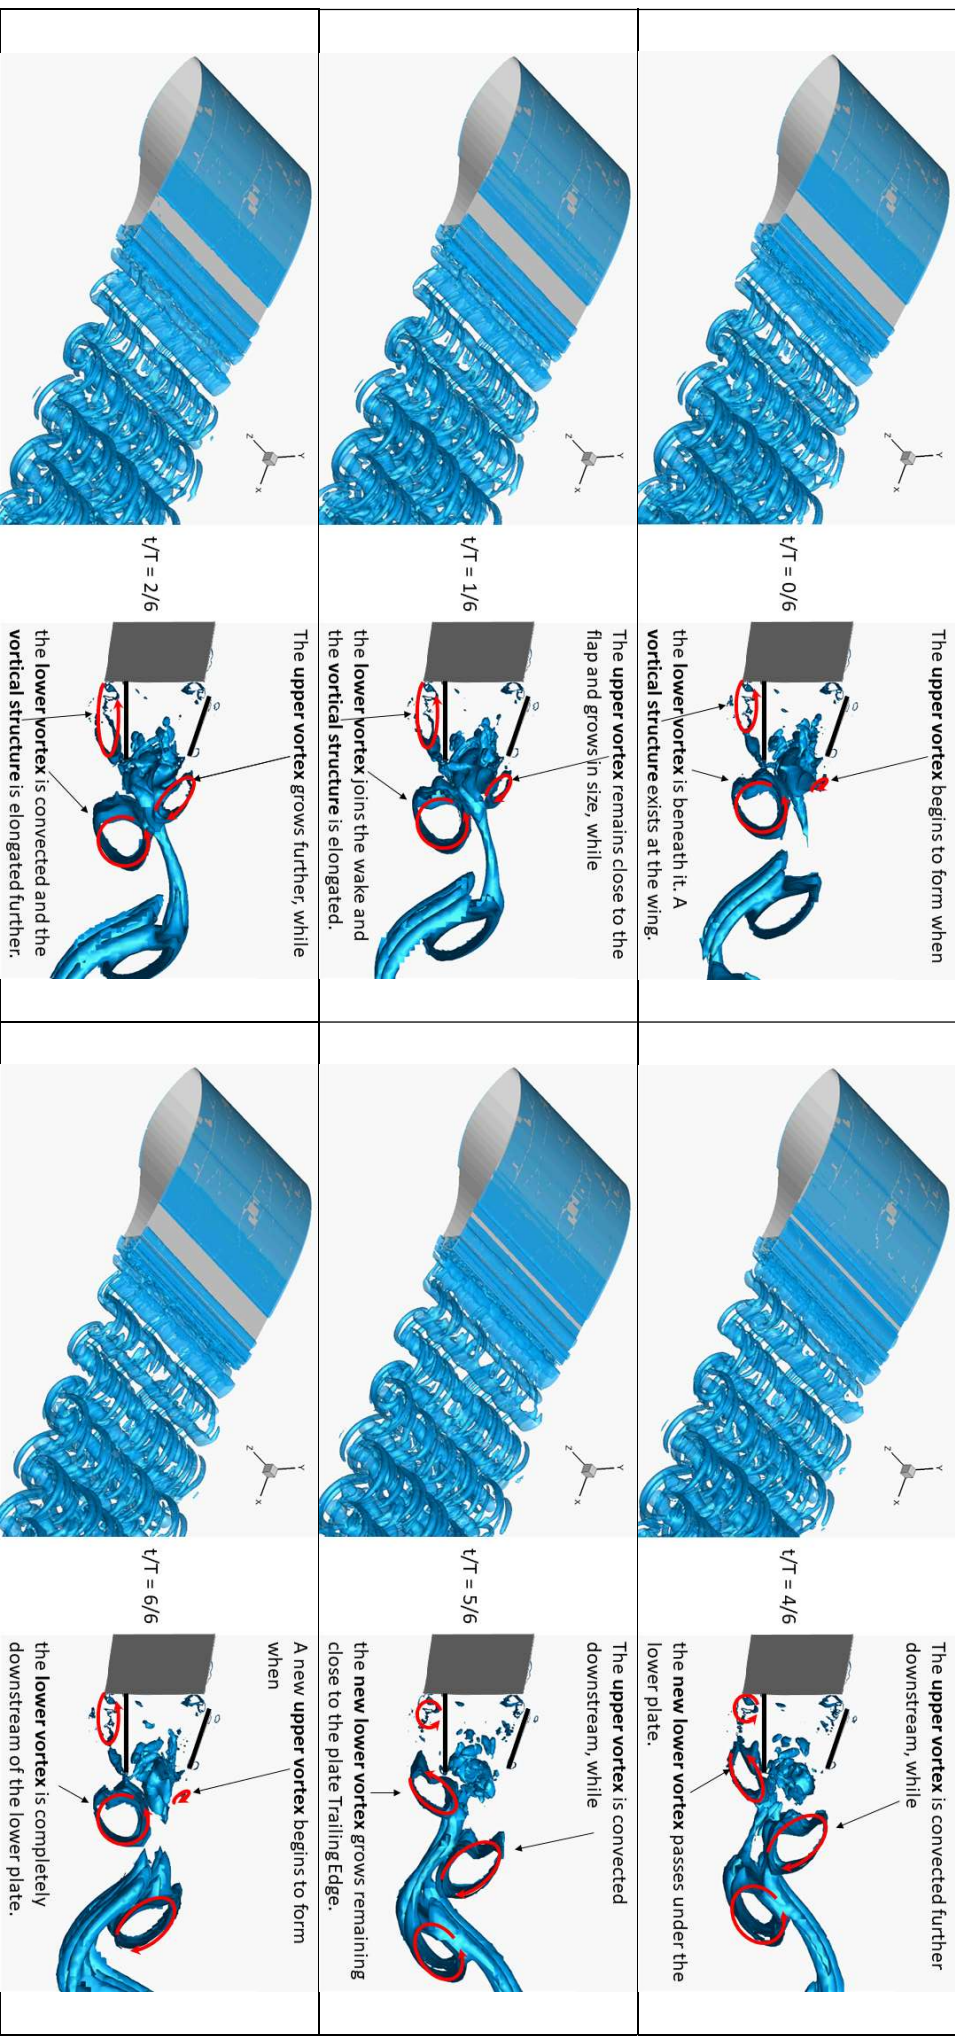




Figure 20: Snapshots of Q isosurfaces from the Flap case, **DBES**, **IDDES**, Fine mesh results. Each period of the vortex shedding mechanism is split in six parts and a total of 7 snapshots is shown. For each snapshot, two visualizations are shown. A 3D view of $Q = 1.5$ isosurfaces on the left and a side view of $Q = 100$ isosurfaces on the right. Superimposed red arrows indicate interpreted spanwise vortices.

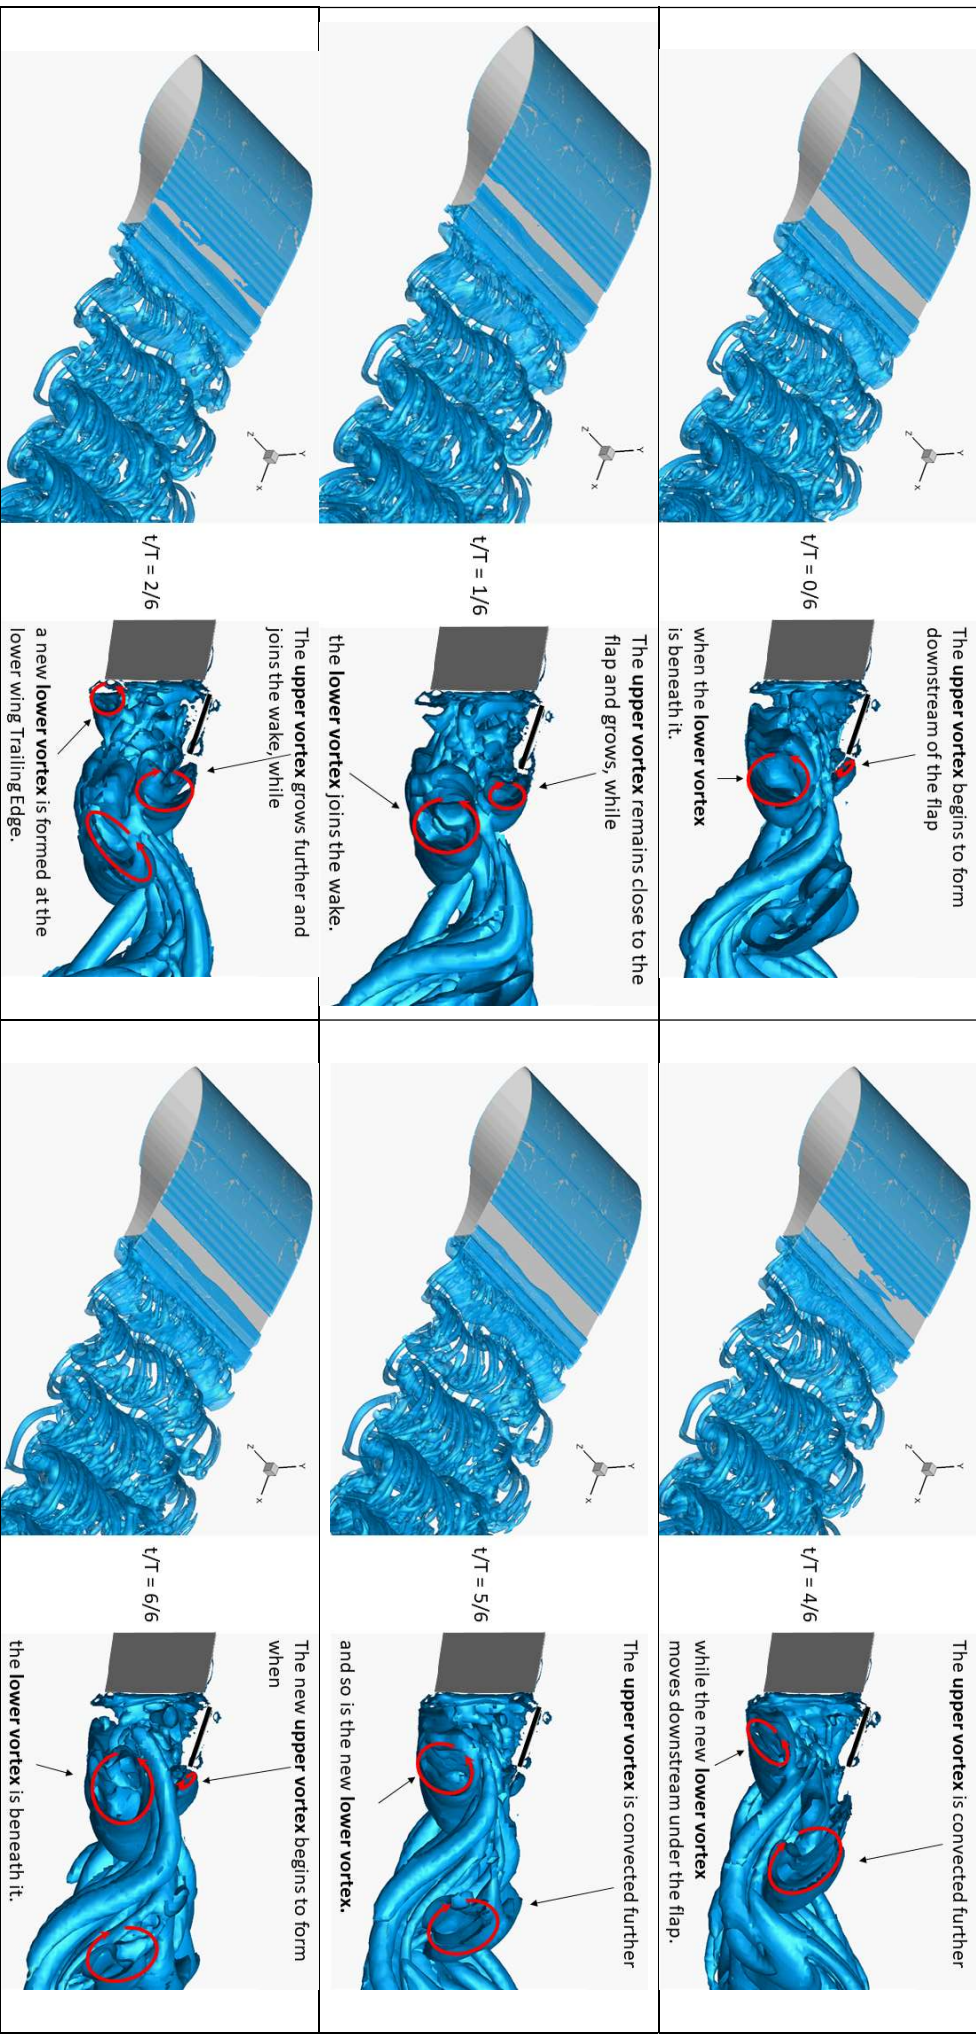


Table 2: Mean and standard deviation (σ) values for lift and drag coefficients. Comparison between Experiments and ~~DDFS~~ IDDES results on the Coarse and Fine mesh.

Experiment			IDDES Coarse				IDDES Fine			
	Cl	Cd	Cl	Cd	Cl	Cd				
	mean	mean	mean	σ	mean	σ				
Clean Airfoil	0.399	0.042	0.353	0.017	0.058	0.002				
Splitter	0.376	0.020	0.348	0.000	0.028	0.000				
Offset Cavity	0.242	0.021	0.205	0.037	0.033	0.001				
Flap	0.439	0.021	0.414	0.001	0.029	0.000				
Flap + Offset Cavity	0.322	0.019	0.292	0.000	0.026	0.000				

Table 3: Mean and standard deviation (σ) values for lift and drag coefficients. Comparison between 2D URANS and URANS on the Coarse and Fine mesh.

URANS 2D			URANS Coarse			URANS Fine						
CI	Cd		CI	Cd		CI	Cd					
mean	σ		mean	σ		mean	σ					
Clean Airfoil	0.390	0.283	0.095	0.018	0.347	0.073	0.052	0.016	0.366	0.067	0.060	0.015
Splitter	0.352	0.001	0.031	0.000	0.349	0.000	0.031	0.000	0.353	0.001	0.031	0.000
Offset Cavity	0.222	0.000	0.030	0.000	0.213	0.000	0.029	0.000	0.223	0.000	0.030	0.000
Flap	0.419	0.000	0.033	0.000	0.419	0.000	0.034	0.000	0.419	0.001	0.033	0.000
Flap + Offset Cavity	0.308	0.001	0.028	0.000	0.285	0.000	0.028	0.000	0.307	0.000	0.028	0.000

445 References

- Bai, H., Alam, M.M., 2018. Dependence of square cylinder wake on Reynolds number. *Phys. Fluids* 30. <https://doi.org/10.1063/1.4996945>
- Baker, J.P., Mayda, E.A., Van Dam, C.P., 2006. Experimental analysis of thick blunt trailing-edge wind turbine airfoils. *J. Sol. Energy Eng.* 128, 422–431.
- 450 Baker, J.P., van Dam, C.P., 2008. Drag reduction of blunt trailing-edge airfoils. *Int. Colloq. Bluff Bodies Aerodyn. Appl.* 6.
- Barone, M.F., Berg, D., 2009. Aerodynamic and aeroacoustic properties of a flatback airfoil: an update, 2009 - 271, in: 47th AIAA Aerospace Sciences Meeting Including The New Horizons Forum and Aerospace Exposition. Orlando, Florida. <https://doi.org/https://doi.org/10.2514/6.2009-271>
- Boorsma, K., Muñoz, A., Méndez, B., Gómez, S., Irisarri, A., Munduate, X., Sieros, Chaviaropoulos, P., Voutsinas, S.G.,
455 Prospathopoulos, J., Manolesos, M., Shen, W.Z., Zhu, W., Madsen, H., 2015. New airfoils for high rotational speed wind turbines, INNWIND.EU D2.12 Deliverable.
- Calafell, J., Lehmkuhl, O., Rodriguez, I., Oliva, A., 2012. On the Large-Eddy Simulation modelling of wind turbine dedicated airfoils at high Reynolds numbers. *ICHMT Digit. Libr. ONLINE* 2012-Septe, 1419–1430. <https://doi.org/10.1615/ICHMT.2012.ProcSevIntSympTurbHeatTransfPal.1460>
- 460 Choi, H., Jeon, W.-P., Kim, J., 2008. Control of flow over a bluff body. *Annu. Rev. Fluid Mech.* 40, 113–139.
- Chong, M.S., Perry, A.E., Cantwell, B.J., 1990. A general classification of three-dimensional flow fields. *Phys. Fluids A* 2, 765–777. <https://doi.org/10.1063/1.857730>
- Gerrard, J.H., 1966. The mechanics of the formation region of vortices behind bluff bodies. *J. Fluid Mech.* 25, 401–413. <https://doi.org/10.1017/S0022112066001721>
- 465 Griffith, D.T., Richards, P.W., 2014. The snl100-03 blade: Design studies with flatback airfoils for the sandia 100-meter blade, SANDIA Report, SAND2014-18129.
- Hossain, M., Stoevesandt, B., J Peinke, M., 2013. Higher Order DNS on an Airfoil Fx77-W500 Using Spectral/hp Method. *Glob. J. Sci. Front. Res.* 13.
- Hunt, J.C.R., Wray, A.A., Moin, P., 1988. Eddies, streams, and convergence zones in turbulent flows, in: *Studying Turbulence Using Numerical Simulation Databases*, 2. pp. 193–208.
- 470 Kahn, D.L., van Dam, C.P., Berg, D.E., 2008. Trailing edge modifications for flatback airfoils, SANDIA Report, SAND2008-1781. Sandia National Laboratories.
- Kim, T., Jeon, M., Lee, S., Shin, H., 2014. Numerical simulation of flatback airfoil aerodynamic noise. *Renew. Energy* 65, 192–201. <https://doi.org/10.1016/j.renene.2013.08.036>
- 475 Krentel, D., Nitsche, W., 2013. Investigation of the near and far wake of a bluff airfoil model with trailing edge modifications using time-resolved particle image velocimetry. *Exp. Fluids* 54, 1551. <https://doi.org/10.1007/s00348-013-1551-1>

- Lehmkuhl, O., Calafell, J., Rodríguez, I., Oliva, A., 2014. Large-Eddy Simulations of Wind Turbine Dedicated Airfoils at High Reynolds Numbers, in: Hölling, M., Peinke, J., Ivanell, S. (Eds.), *Wind Energy-Impact of Turbulence*. Springer, Berlin, Heidelberg, pp. 147–152. https://doi.org/10.1007/978-3-642-54696-9_22
- 480 Manolesos, M., Papadakis, G., Voutsinas, S., 2016. Study of Drag Reduction Devices on a Flatback Airfoil, in: *34th Wind Energy Symposium*. American Institute of Aeronautics and Astronautics, Reston, Virginia. <https://doi.org/10.2514/6.2016-0517>
- Manolesos, M., Papadakis, G., Voutsinas, S.G., 2013. Experimental and computational analysis of stall cells on rectangular wings. *Wind Energy* 17. <https://doi.org/10.1002/we.1609>
- 485 Manolesos, M., Voutsinas, S.G., 2016. Experimental Study of Drag-Reduction Devices on a Flatback Airfoil. *AIAA J.* 54, 3382–3396. <https://doi.org/10.2514/1.J054901>
- Manolesos, M., Voutsinas, S.G., 2014. Study of a stall cell using stereo particle image velocimetry. *Phys. Fluids* 26. <https://doi.org/10.1063/1.4869726>
- Mayda, E.A., van Dam, C.P., Chao, D.D., Berg, D.E., Baker, J.P., van Dam, C.P., Gilbert, B.L., 2008. Flatback airfoil wind
490 tunnel experiment, Sandia Report, SAND2008-2008. Sandia National Laboratories, Albuquerque, NM, USA.
- Menter, F.R., 1993. Zonal two equation k- ω turbulence model for aerodynamic flows. *AIAA Pap.* <https://doi.org/10.2514/6.1993-2906>
- Metzinger, C.N., Chow, R., Baker, J.P., Cooperman, A.M., van Dam, C.P., 2018. Experimental and Computational Investigation of Blunt Trailing-Edge Airfoils with Splitter Plates. *AIAA J.* 56, 3229–3239.
495 <https://doi.org/10.2514/1.J056098>
- Mittal, R., Balachandar, S., 1995. Generation of streamwise vortical structures in bluff body wakes. *Phys. Rev. Lett.* 75, 1300–1303. <https://doi.org/10.1103/PhysRevLett.75.1300>
- Nash, J.F., 1965. A discussion of two-dimensional turbulent base flows, Reports and Memoranda No. 3468. Aeronautical Research Council, London.
- 500 Papadakis, G., Manolesos, M., 2020. The flow past a flatback airfoil with flow control devices: Benchmarking numerical simulations against wind tunnel data - Animations. <https://doi.org/10.5281/ZENODO.3662124>
- Papadakis, G., Voutsinas, S.G., 2019. A strongly coupled Eulerian Lagrangian method verified in 2D external compressible flows. *Comput. Fluids* 195. <https://doi.org/10.1016/j.compfluid.2019.104325>
- Shur, M.L., Spalart, P.R., Strelets, M.K., Travin, A.K., 2008. A hybrid RANS-LES approach with delayed-DES and wall-
505 modelled LES capabilities. *Int. J. Heat Fluid Flow* 29, 1638–1649. <https://doi.org/10.1016/j.ijheatfluidflow.2008.07.001>
- Sørensen, N.N., Méndez, B., Muñoz, A., Sieros, G., Jost, E., Lutz, T., Papadakis, G., Voutsinas, S., Barakos, G.N., Colonia, S., Baldacchino, D., Baptista, C., Ferreira, C., 2016. CFD code comparison for 2D airfoil flows, in: *Journal of Physics: Conference Series*. Institute of Physics Publishing. <https://doi.org/10.1088/1742-6596/753/8/082019>
- Spalart, P., Allmaras, S., 1992. A one-equation turbulence model for aerodynamic flows, in: *30th Aerospace Sciences Meeting and Exhibit*. American Institute of Aeronautics and Astronautics, Reno, NV, pp. 5–21. <https://doi.org/10.2514/6.1992->
510

- Standish, K.J., Van Dam, C.P., 2003. Aerodynamic analysis of blunt trailing edge airfoils. *J. Sol. Energy Eng.* 125, 479–487.
- Stone, C., Barone, M., Smith, M., Lynch, E., 2009. A Computational Study of the Aerodynamics and Aeroacoustics of a Flatback Airfoil Using Hybrid RANS-LES, in: 47th AIAA Aerospace Sciences Meeting Including The New Horizons Forum and Aerospace Exposition. American Institute of Aeronautics and Astronautics, Reston, Virginia. <https://doi.org/10.2514/6.2009-273>
- Stone, C., Tebo, S., Duque, E.P.N., 2006. Computational Fluid Dynamics of Flatback Airfoils for Wind Turbine Applications, in: 44th AIAA Aerospace Sciences Meeting and Exhibit. American Institute of Aeronautics and Astronautics, Reston, Virginia. <https://doi.org/10.2514/6.2006-194>
- Tanner, M., 1975. Reduction of base drag. *Prog. Aerosp. Sci.* 16, 369–384.
- Tombazis, N., Bearman, P.W., 1997. A study of three-dimensional aspects of vortex shedding from a bluff body with a mild geometric disturbance. *J. Fluid Mech.* 330, 85–112. <https://doi.org/10.1017/S0022112096003631>
- Viswanath, P.R., 1996. Flow management techniques for base and afterbody drag reduction. *Prog. Aerosp. Sci.* 32, 79–129.
- Williamson, C.H.K., 1996. Vortex dynamics in the cylinder wake. *Annu. Rev. Fluid Mech.* 28, 477–539. <https://doi.org/10.1146/annurev.fl.28.010196.002401>
- Xu, H., Shen, W., Zhu, W., Yang, H., Liu, C., 2014. Aerodynamic Analysis of Trailing Edge Enlarged Wind Turbine Airfoils, in: *Journal of Physics: Conference Series*. IOP Publishing, p. 12010.

530 **5 Code availability**

Code available upon request

6 Data availability

All data available upon request.

7 Video supplement

535 **8 Supplement link (will be included by Copernicus)**

9 Team list

Dr George Papadakis

School of Naval Architecture & Marine Engineering, National Technical University of Athens, Athens, Greece

540

Dr Marinos Manolesos

College of Engineering, Swansea University, Bay Campus, Fabian Way, SA1 8EN, Swansea, UK

10 Author contribution

545 Dr George Papadakis performed the numerical calculations. For the analysis and investigations of the numerical and experimental results the contribution of the authors was equal. Both authors contributed equally to manuscript authorship.