

Response to the Reviews

We would like to thank the reviewers and the editor for their comments and improvement suggestions. We have tried to address all the concerns of the reviewers and think that the paper is improved with the suggestions. The comments of the reviewer are marked with *italic blue*.

Moreover, the modified parts of the text are highlighted with a **turquoise** color in the original manuscript.

Response to the RC 1:

Page 3

1) *line 4: how does it benefit?*

Solving laminar-turbulent transition with e^N method coupled with RANS provides the capability to discriminate the laminar and turbulent regions and it gives good agreements with experiments for high Reynolds number flows.


The sentence in the manuscript is improved as:

“The current analysis involves a coupling of the **Se^NS** transition model with the RANS solver considering its accuracy for high Reynolds number flows in wind turbine applications”

2) *Lines 20/21: “Moreover, determining the relevant ...” If you are able to answer this question, please state.*

For the field experiments, the high-frequency microphones close to the leading edge (in laminar boundary layer) are used to identify the frequency range for inflow turbulence. When we compare the PSD of the microphones in the laminar boundary layer between wind tunnel and rotor measurements, we see an increasing difference in the spectra from about 300 Hz and down to low frequencies, e.g. 30 Hz (see figure below ¹). Above 300 Hz the spectra are quite similar. When we then compare the field experiments with the wind tunnel results, we see a big difference in the transition positions. Therefore, we try to link these differences in transition to the differences in inflow turbulence represented by the integral of the spectra of the microphones in the laminar boundary layers is between 100 to 300 Hz. For the T-S wave frequency identification we have a previous study (Özçakmak, ÖS, Sørensen, NN, Madsen, HA, Sørensen, JN. Laminar-turbulent transition detection on airfoils by high-frequency microphone measurements. *Wind Energy*. 2019; 22: 1356– 1370. <https://doi.org/10.1002/we.2361>) for a wind tunnel case for various Reynolds numbers and AOA values, however, we haven’t analyzed T-S wave frequencies in field experiments since it is unsteady, but this can be an important future work.

¹ Madsen, H. A., Özçakmak, Ö. S., Bak, C., Troldborg, N., Sørensen, N. N., and Sørensen, J. N.: Transition characteristics measured on a 2MW 80m diameter wind turbine rotor in comparison with transition data from wind tunnel measurements, <https://doi.org/10.2514/6.2019-0801>, <https://arc.aiaa.org/doi/abs/10.2514/6.2019-0801>, 2019a.

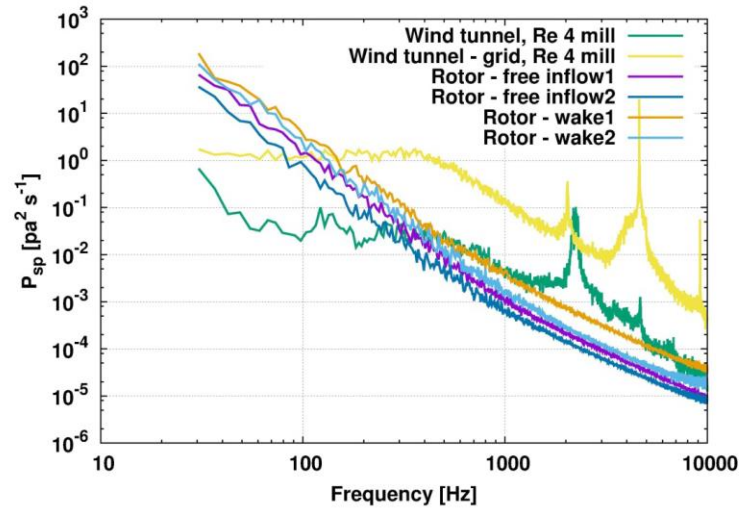

3) *Line 28: are you able to quantify these differences?*

In the literature, L/D ratio for fully turbulent and transitional flow on the same airfoil are compared. For example a paper from : ‘Chaviaropoulos, P. K., Sieros, G., Prospathopoulos, J. M., Diakakis, K., & Voutsinas, S. G. Design and CFD-based Performance Verification of a Family of Low-Lift Airfoils.’, shows how can L/D ratio differ for 18% thick airfoil for a transitional and fully turbulent case that are used in design conditions.


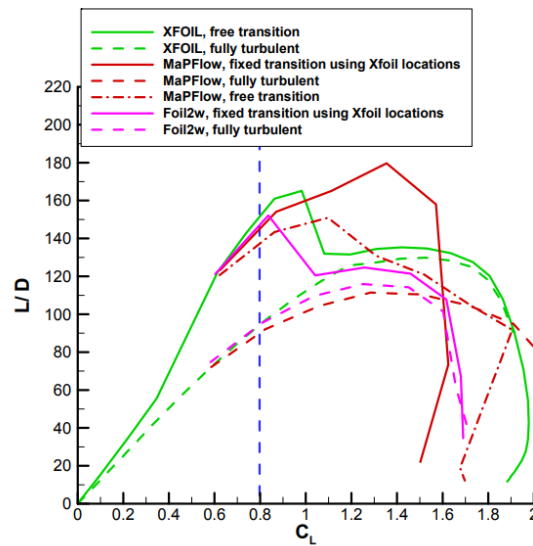


Figure 7: Performance (L/D) of the 18% Low Lift 10-90 airfoil for transitional and fully turbulent flow conditions. Comparison among MaPFlow (CFD solver), Foil2w (viscous-inviscid interaction solver) and XFOIL calculations. Fixed transition locations were taken from XFOIL using the e^N model with $N=4$

Moreover the low-speed shaft torque (LSSTQ) is also compared in a previous study for transitional and turbulent simulations and with measurements as seen below (Sørensen, N.N. (2009), CFD modelling of laminar-turbulent transition for airfoils and rotors using the γ – model. Wind Energ., 12: 715-733. doi:[10.1002/we.325](https://doi.org/10.1002/we.325)):

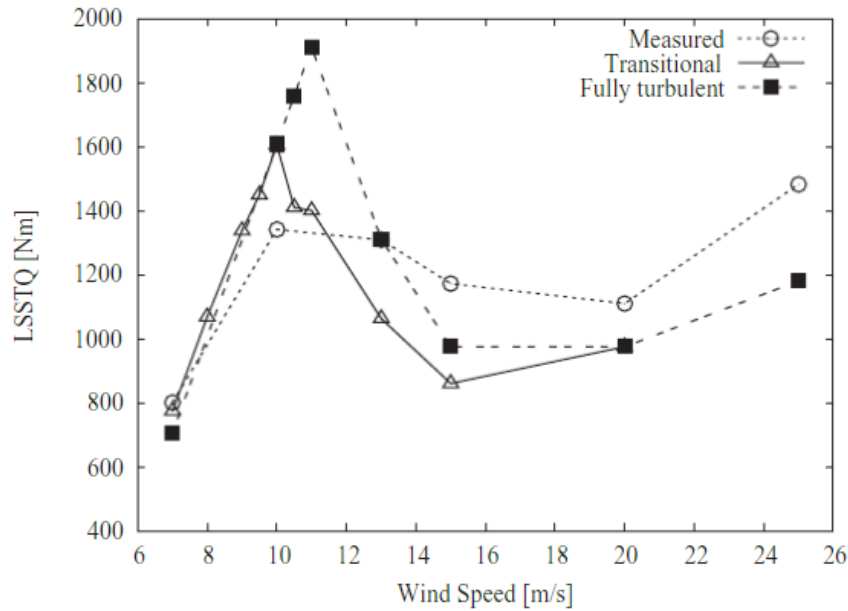

The low-speed shaft torque of the NREL Phase VI rotor for fully turbulent and transitional conditions all compared to measured values


A modification in the manuscript is done as follows:

“The difference between the design conditions for rotor and airfoils and the real operating conditions leads to inaccurate predictions of the loads and the performance as observed in previous studies \citep{nielscorrel} \citep{chaviaropoulosdesign}.”

Page 5

4) Line 6 ff: Please explain, why you used this specific approach and its accuracy

Since the pitot tube was not working to measure the angle of attack at a specific blade section, we have chosen to use computations to find a correlation between the measured force and the angle of attack. We have observed a good correlation between computed and measured blade forces by the blade element momentum theory for attached flow. Referring to a Figure from IEA Task 29 Phase III (Boorsma K et al. Final report of IEA Wind Task 29 Mexnext (Phase 3), ECN-E--18-003 - January 2018.):

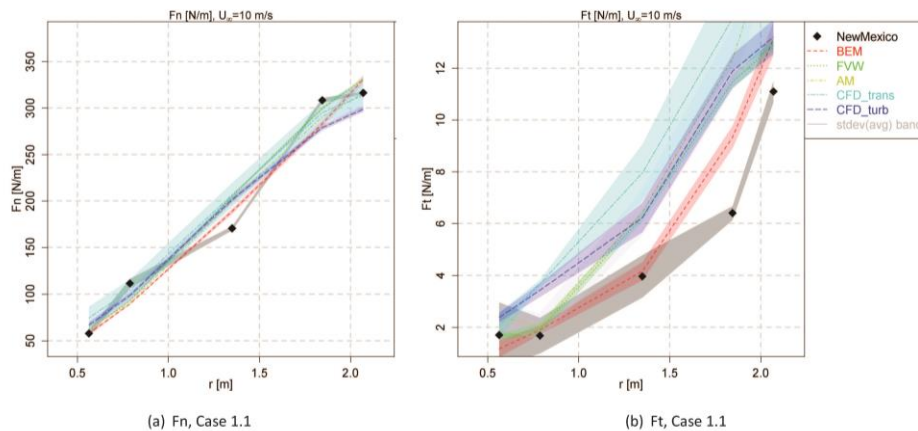


It can be seen that a good correlation between all models for FN on the outboard part of the blade, (e.g. from radius 1.5 to 1.8m for e.g. 10m/s where the operational conditions are similar as in NM80 case). As the rotational speed for the NM80 case is constant in the case considered we have thus a direct link to AoA using a BEM model as in HAWC2 – blade element theory: $F_n = \frac{1}{2} \rho * V_{rel}^2 * C_l(\alpha) * c$. Therefore, we have used the HAWC2 simulations to generate a correlation between AOA and the normal force and then this correlation is used with the measured forces to find the angle of attack. Based also on the many comparisons in the IEA Task 29 Phase II work we estimate the uncertainty on the AoA derivation to maximum +/- 1 deg.

Moreover; a sentence is added to the manuscript: “A previous study has shown a good correlation between measured and computed normal forces \citep{boorsma2018final}.”

- 5) *Line 25: “identical” is impossible. Please state the accuracy (within xx micro-meters RMS or comparable)*

The theoretical airfoil and the measured contour on the wind turbine blade is presented in an early work as follows:

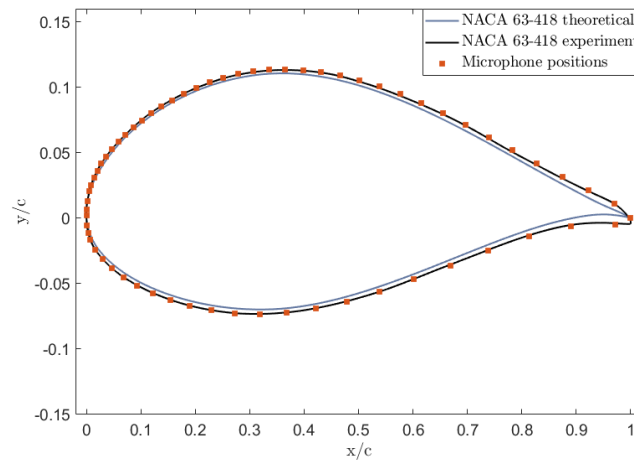

As it can be seen there is a slight difference in the manufactured one. Then, this manufactured contour is used to manufacture an airfoil for the wind tunnel experiments.

The manufacturing error is in few mms. However, it wasn't possible to reach this information since the experiments have been performed 10 years ago.

The sentence in the manuscript is modified as follows:

“The 2-D results shown in this paper originates from the wind tunnel experiments of the DAN-AERO project conducted in the LM wind tunnel with a reproduction of the actual blade section of the wind turbine deviating from the theoretical airfoil, details of which are explained in a previous study \citep{ozcakmakwj}.”

Page 6

- 6) *Line 5: please state an equation how you calculated PSD from time series*

This is done by short-time Fourier analysis. It is added to the text as giving a reference to the original paper for equations:

“For each time segment, the power spectral density (PSD) is \textcolor{csgr}{calculated} by the short-time Fourier transformation analysis \citep{welch1967use}.”

- 7) *Eq (1): “PSD” is not a suitable symbol. Use S or comparable.*

PSD is changed as $P_{s,p}$ as power spectral density of pressure fluctuations.

Page 7:

- 8) *Line 4: “transition locations” It seems that several different and not entirely equal definition of a “transition location” is used. Typically, you have a quantity which you relate to transition with a minimum (end of laminar part) and a following maximum (start of fully developed turbulent state). A lot of people take the maximum of slop in between as the “transition point”. The authors should state if the use this terminology throughout the paper, and if it would not more consistent to talk about a “transition region”.*

We define the transition position as the highest derivative of the RMS of the pressure fluctuations (L_p levels). The specific paragraph that says ‘transition locations’ as plural is because during a single revolution the transition location is detected at different chordwise positions due to angle of attack and inflow turbulence changes (turbine going in and out of the wake). The exact definition can be find in Page 6- Lines 14-16.

Page 8:

- 9) *First paragraph: please explain why you did nor made a mesh refinement study. 14 M cells seems to be very coarse.*

The problem is solved in 3 different grid levels in each case. As the convergence criteria is reached and the number of iterations are completed for the outer iterations, the solution is calculated in the next (finer grid level).

Moreover, the current investigation does not require a wake resolution. The error between the finest and a coarser mesh (with one-half number of cells in all directions) is within few percent's. Similar mesh is also used in a previous study: Madsen, M. H. A., Zahle, F., Sørensen, N. N., & Martins, J. R. (2019). Multipoint high-fidelity CFD-based aerodynamic shape optimization of a 10 MW wind turbine. *Wind Energy Science*, 4(2), 163-192.)

The text is added in the manuscript as: The mesh refinement study shows that the difference between the moment and forces for the finest and a coarser mesh (having one-half of the number of cells of the finest grid in all directions) is within a few percent as demonstrated in a previous study \citep{madsen2019multipoint}.

- 10) *Line 8: it may be helpful, to state the bypass model used already here.*

We would like to thank for the suggestion, we have applied it.

- 11) *Eq. please explain what the z_i and z_j are menaing*

They are several upstream and downstream locations from the rotor plane. Text added to the manuscript as follows:

“In order to calculate the induced axial velocity, V_{ind} , at the rotor plane, annular averaging of the axial velocity at several upstream and downstream locations (z_i and z_j) at a given radial location (in this case, the same blade section as in the microphone experiments) is performed.”

Page 9

- 12) Line 9 "should be know ..." do you mean: are calculated to determine?

We have meant that they 'are needed as an input to determine....' Corrected like this in the text.

- 13) Eqs 6 and 7: $C_f \rightarrow c_f$?

Corrected.

- 14) Eq 8: $t_w \rightarrow \tau_w$?

Corrected.

Page 10

- 15) Line 9/10: Please explain why you think that Mack's empirical relation is valid in these cases?

Mack's empirical relation is used an estimate in this case, it is also used inside EllipSys . Moreover, several N numbers are simulated in order to simulate range of occurrences.

Page 11:

- 16) Lines 2/3: please state an equation, how TI enters here

It enters as in 'Equation 12' indicated as T_u and it is defined in the text as the turbulence intensity at the transition onset. (Line 13 -14 - page 11)

Following text is modified as :

"[\cite{abu1980natural}](#) suggested that for the attached flows, transition onset can be obtained by correlating Re_{θ} to the free stream turbulence intensity as in Equation [\ref{rettu}](#)."

- 17) Line 4. "0" is probably not possible (as it gives an $N \rightarrow \infty$). Please state the minimum N corresponding to $TI = 2\%$. In addition, a clear definition of TI (and the frequency range include) would be helpful before using this quantity.

The sentence is corrected in the manuscript as:

"..... predicts the transition for free stream turbulence levels , less than 2 % for T-S dominated transition, but for higher levels it is bypassed.."

$TI=2\%$ corresponds to N value of 0.96. The definition for T.I is given at Page 12 Lines 3-4-5.

- 18) Line 16/17: this is not clear for me. How do get an intermittency factor from N (TS-scenario)? Do you mean: the location closer/farer from the nose is used then?

The x_{tr} in Equation 10 (Chen and Thyson formulation for intermittency) is determined by the amplification value (N) value, that is how N and intermittency is connected. Furthermore, a check is performed starting from the stagnation region and the criteria (for bypass or natural transition) that happens first in the flow direction is taken.

- 19) Lines 25 (and at other places in the text): State the difference between TI and "turbulence levels" and give an equation for the last one, if possible.

The places in the text are corrected and the T.I. calculated from the relative velocity measured by a pitot tube on the blade is separated from the turbulence levels ($L_{p,i}$) which is obtained from a leading edge microphone by integrating pressure fluctuations within the integral boundaries from 100 Hz to 300 Hz.

20) Line 30 ff: see above

Corrected in the text

Page 12

21) First line: $\gamma > 0.025$. please give an explanation why this criteria is used and not $\gamma = 0.5$ (see my remarks above)

When we use $\gamma > 0.025$ for the transition criteria, considering our previous experiences, it shows a good correlation with XFOIL and a good agreement with experimental results, that is why this value is chosen.

22) Line 20 ff Please give reasons why 2 kHz is used (why are frequency lower not important ?)

For the lower frequency range 2kHz is used. Frequencies lower than 2000 Hz are eliminated where the effect of inflow turbulence is dominant. Moreover, the 2kHz-7kHz range is also decided according the spectra where we observe biggest magnitude changes between laminar and turbulent spectra to detect transition more robust:

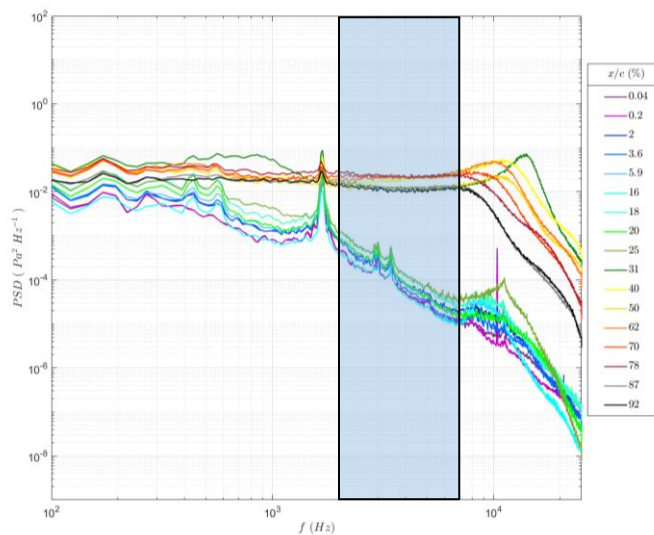


Figure 2 PSD of the pressure fluctuations at $Re= 3$ million, $AOA= 0$ deg, suction side (integrated part highlighted with blue)

We have also made a parametric study for this selection, it can be seen from the figure below with fm contours get closer forming a transition line at 2000-7000 Hz (d)

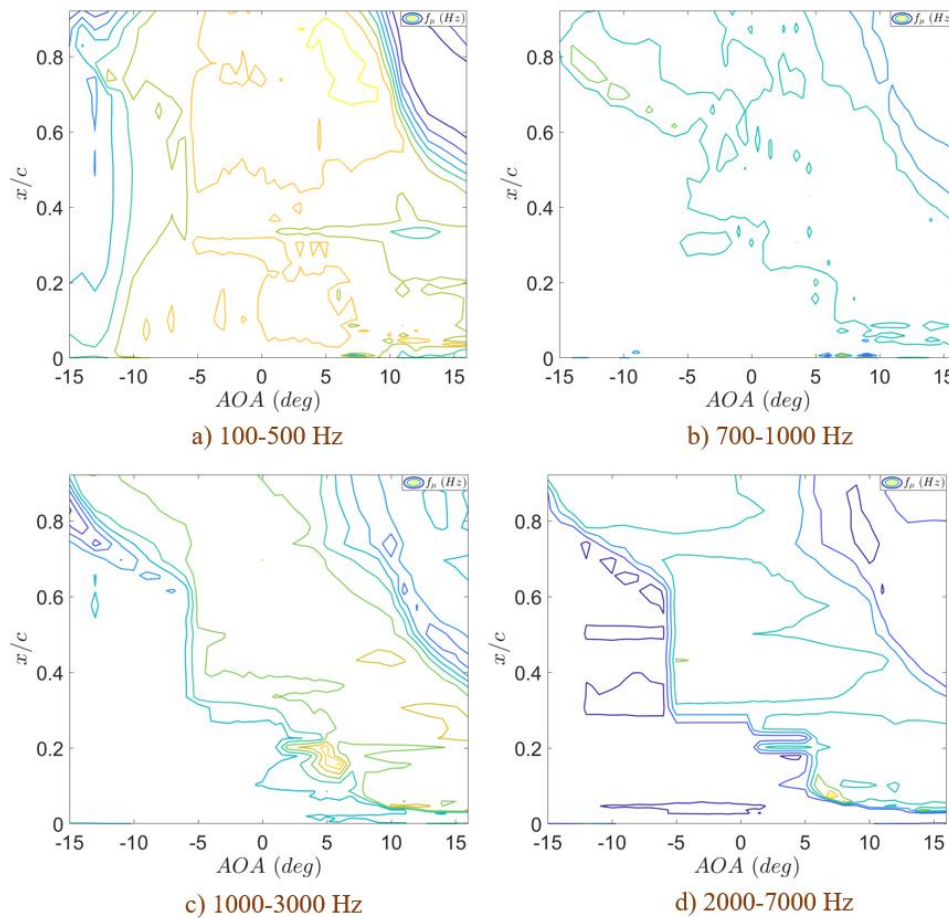


Figure 3 Fm Contours for various frequency intervals at $Re = 3$ million, suction side

23) Line 22/23: I do not understand these two sentences at all. Please reformulate. Is the sentence "Therefore, the PSD ...) simply incomplete?

Please see Figure 1 in this document. We see increasing differences in the spectra (laminar flow) from 300 Hz and down to very low frequencies. We have then chosen to use the integration of the spectra from 100-300 Hz to represent the inflow turbulence

The sentences are reformulated as:

"Several frequency intervals for PSD integration is also attempted in order to characterize the inflow turbulence from the microphone signals. It is seen in Figure \ref{fig:turbbrange}-a that when the PSD is integrated in the frequency interval from 100 Hz to 300 Hz, the microphones closer to the leading edge shows high pressure levels on this frequency range capturing the pressure response to the inflow turbulence. Therefore, this frequency range is selected for the inflow analysis."

Page 13

24) Fig 4: the L_p level are not equal (110 ... 125, left and 65 ... 115 right). Either adjust them or give reasons why this is not necessary.

We would like to thank for the comment. Since the noise levels in the wind tunnel and the ones in the field experiments are different, for a clear representation of the both cases, the pressure levels (L_p) are presented in their own scale.

25) *Right: Please indicate Reynolds Number and AOA (ranges).*

A text is added to the Figure caption in the manuscript:

".... and for the blade section from the field experiments that corresponds to the $Re=5.1$ million and AOA varying from 3 to 8.5 degrees (b)."

26) *Line 14: $L_p \rightarrow L_p$ and $X_{tr} \rightarrow (x/c)_{tr}$?*

Corrected.

Page 16:

27) *Subsection title: Locations of laminar to turbulent calculated by CFD ?*

Title changed as: Laminar-turbulent transition locations calculated by CFD

28) *Line 15: Please explain why $N=3$ was chosen*

$N=3$ is used since it is within the scale and proximity of the measurements and usually gives the most aftward transition position on the pressure side.

Page 17:

29) *Line 3: $F_X \rightarrow F_x$ and $F_Z \rightarrow F_z$?*

Corrected.

Page 18:

30) *Fig 9: To me this graph is overloaded. Obviously there two levels, so it seems to me if only the relevant CFD results related to those should be included. If possible reduce the number of data set in any case considerably.*

The Figure is simplified with explanation and color blocks.

31) *Line 9/10 and corrected*

Page 19

32) *Fig 10: Is it possible to increase line thickness with importance/degree of agreement? By the way: Fig 10 to 12: Do you mean $(x/c)_{tr}$ instead of X_{tr} ?*

The X_{tr} changed to $(x/c)_{tr}$. The figure is modified so that only degree of agreement parts are plotted and the results are grouped according to the N number of the simulations.

Page 21:

33) *Fig 12: The acceptance and understanding of this graph would be greatly enlarged, if you make the graph clearer: make the dots from CFD larger (on as a suggestion take the range $(x/c)_{tr_onset}$ "error bar". = $\gamma=0$ to $(x/c)_{ft} = \gamma = 1$ as an Try to reduce to measured point to value \pm std as well.*

We would like to thank to the reviewer for the comments. The numerical data points are enlarged and the figure caption is modified. The standard deviation from the simulations is not possible in this case. However, the standard deviation from the experiments are studied for sectional force bins , however this also did not improve the graph representation. Therefore some visual improvements are applied.

Page 22

34) *Line 11: typo "more more"*

Corrected.

Page 23:

35) *Fig 14: try to include a fitted line (+/- std) for both CFD and measurements*

The Figure is corrected by adding a fitted line to the CFD curves , by this way the representation of the plot is enhanced significantly. A text is added to the Figure caption as below:

(The EllipSys 2-D and 3-D results are presented as a fitted line of the data. Shadows around the lines show the standard deviation of the fit.).

Page 24

36) *Lines 2 to 4 (and earlier on several pages) Try to correlate TI from pure wind (measured in earth-fixed frame of reference) and “apparent” wind (measured in blade’s rotating frame of reference)*

We also would like see the suggested effect and the correlation; however the meteorological mast was not equipped with a fast-enough measurement device to characterize the turbulence at the scales that we are analyzing. Therefore, unfortunately it is not possible, but it is an important investigation for future experiments.

Page 26 ff

37) *References Add: doi :10.1088/1742-6596/1037/2/022012 Schaffarczyk et al. Comparison of 3D transitional CFD simulations for rotating wind turbine wings with measurements*

The mentioned reference is added.

Best Regards,

Response to the RC 2:

1. *Page 2, line 33: Bertolotti et al., J. Fluid Mech. (1992), vol. 242, pp. 441-474, is the first paper published on PSE, please use this instead of Herbert 1997.*

The mentioned reference is added to the manuscript.

2. *Page 2, line 34-35: It is said ‘the eN method is commonly used since it can predict the transition position accurately’. As authors mention later eN method requires calibration and cannot predict transition for a general flow condition. The correct sentence should be ‘ the eN method is commonly used since it can predict the trends in variation of transition position correctly’.*

We would like to thanks for this comment, the text is updated as : ‘the e^N method is commonly used since it can predict the trends in variation of transition position accurately’.

3. *Page 3, line 15: The dimension of x-derivative of pressure level should be ‘dB/m’ instead of ‘dB’.*

Since the derivation is performed for non-dimensional x/c, there is no meters in the units.

4. *Page 8, line 3: A reference to ‘transient computation’ is made. What is it meant with ‘transient’ here?*

The problem is solved in time. Although the parameters does not change in time, due to the high tip speed ratio of the problem, the transient calculations are used as a damping term by taking very small time steps for better convergence of the solution. 1200 steps per revolution is used in the current case as mentioned in the text.

Text is modified in the manuscript as follows:

“Due to the high tip speed ratio, in order to stabilize the simulations and enhance the convergence of the solution by small time steps, the simulations are performed by transient computations with 1200 steps per revolution.”

5. Page 9, line 5: Due to acceleration of flow, value of U varies in the wall-normal direction even outside of the boundary layer. How is the value of 'Ue' chosen at a given x/c location?

We would like to thank for the comment. It is true and in the code, the tangential u velocity is calculated and the maximum tangential velocity is searched for. Then this maximum tangential velocity value is taken as the edge velocity.

It has also included in the manuscript as : “In EllipSys3D, the edge velocity (U_e) is taken as the maximum tangential velocity.”

6. Page 9, line 10-11: How do the profiles obtained from von Karman boundary-layer equations compare to those given by CFD for cases studied here?

In EllipSys, the e^N database is constructed based on the analytical boundary layer profiles. Therefore, in the computations, the boundary layer profile which is similar to the von Karman boundary layer profiles are identified. This is done to identify the velocity profiles and then the stability of the velocity profile is known. The edge velocities are taken with few other parameters and used in the boundary layer solver in the transition model. We take the information from the CFD solver and use it in a boundary layer solver inside this CFD solver. Internal tests has shown that the CFD profiles agrees quite well with the von Karman boundary layer profiles, but it is actually based on the boundary layer solution to avoid the need for excessively high discretization.

7. Page 9, line 24-25: Authors write ‘In order to ensure that the entire stagnation line is found at each time step, Hiemenz flow across the stagnation line and Blasius flow along the stagnation line are assumed’. Please explain that further.

We use the Hiemenz flow to initiate the boundary layer solution. The location of the stagnation line is based on the several criterias such as pressure (the algorithm searches for a surface pressure (CP value of minus 1) and also check that if the velocity is at a divergence point. The algorithm looks at the stagnation pressure level, then it checks whether it is a cross flow or not. Hiemenz part is used only in order to get the initialization of the boundary layer parameters.

The text is modified in the manuscript as follows: “In order to ensure that the entire stagnation line is found at each time step, the pressure coefficient value is checked and the Navier-Stokes solution is analyzed. Along the stagnation line, Blasius flow and across the stagnation line Hiemenz flow are assumed.”

8. Page 11, line 4: It is said that eN method accurately predict transition for Tu up to 2%. One should be aware that the transition can be dominated by streak breakdown for cases with Tu_0.65%. See e.g. Suder, K., O'Brien, J. and Reshotko, E., Experimental study of bypass transition in a boundary layer. NASA TM 100913 (1988).

We would like to thank to the reviewer for the comment. A text is added to the manuscript as follows:

"It should be also noted that transition can also be dominated by other mechanisms , for instance by a streak breakdown for turbulence levels around 0.65 \%\% \citep{suder1988experimental}"

9. The pressure signals shown in figure 5a show a periodicity in x direction. Is there any physical explanation for that or it's just due to different sensitivity of microphones?

We haven't observed any peaks in the spectra that shows periodicity. The observed case mentioned by the reviewer is due to the sensitivity of the microphones.

It would be good to mark location of microphones in figure 4 and 5 and also to keep the same colorbar scaling in figures 5a and 5b.

The colorbar scaling is corrected as suggested by the reviewer in Figure 5a and 5b.

The microphone placements on the pressure side are added to the Figure 4 as suggested. An explanation text is also added in the capture as:

"The airfoil with the microphone placement on the pressure side is presented on the left."

10. Figure 9: I suggest to plot CFD data as vertical bars at the azimuthal positions corresponding to flow condition in simulation. I believe it will improve visualization of data.

We would like to thank you for the suggestion. Figure 9 is updated for better representation of the results.

11. Is there any flow conditions in present investigation at which transition is caused by flow separation?

In the EllipSys code, the separation induced transition (bubble model) is also checked simultaneously with e^N transition model. Moreover, in the current experimental results presented here, we don't observe a flow separation.

12. Mention transition-prediction parameters for results in figure 13a-c.

Independent of the N number for the natural transition model , we obtain the same pressure coefficient value . And the amount of turbulence intensity that we are analyzing for the bypass transition model (2.8 to 6.8 %) gives also the same pressure coefficient value, therefore only one line is presented.

13. Plots given in figure 14 are very difficult to read. Improve them by either dividing these plots to group of 2D relative 3D cases or using fix colors for 2D and 3D cases respectively.

Figure 14 is improved by adding fitted lines and standard deviations as shadows for the CFD results.

14. Would be possible to perform a simulation allowing for modelling variation of FST level during one rotation by introducing time dependent transition N factor. Alternatively performing simple analysis by using for example Xfoil with input data (AoA, Re and FST level) from figure 6.

We would like to thank for the suggestions. It does not seem possible for us right now to obtain these results. This is the best we can do with available sources right now, it is not obvious for us to mimic this very complex scenarios.

Best Regards,

Laminar-turbulent transition characteristics of a 3-D wind turbine rotor blade based on experiments and computations

Özge Sinem Özçakmak¹, Helge Aagaard Madsen¹, Niels Nørmark Sørensen¹, and Jens Nørkær Sørensen²

¹DTU Wind Energy, Technical University of Denmark, Aerodynamic Design, Frederiksborgvej 399, 4000 Roskilde, Denmark

²DTU Wind Energy, Fluid Mechanics, 2800 Lyngby, Denmark

Correspondence: Özge Sinem Özçakmak (ozsi@dtu.dk)

Abstract. Laminar-turbulent transition behaviour of a wind turbine blade section is investigated in this study by means of field experiments and 3-D computational fluid dynamics (CFD) rotor simulations. The power spectral density (PSD) integrals of the pressure fluctuations obtained from the high frequency microphones mounted on a blade section are analyzed to detect laminar-turbulent transition locations from the experiments. The atmospheric boundary layer (ABL) velocities and the turbulence intensities (T.I.) measured from the field experiments are used to create several inflow scenarios for the CFD simulations. Results from the natural and the bypass transition models of the in-house CFD EllipSys code are compared with the experiments. It is seen that the bypass transition model results fit well with experiments at the azimuthal positions where the turbine is under wake and high turbulence, while the results from other cases show agreement with the natural transition model. Furthermore, the influence of inflow turbulence, wake of an upstream turbine and angle of attack (AOA) on the transition behaviour is investigated through the field experiments. On the pressure side of the blade section, at high AOA values and wake conditions, variation of the transition location covers up to 44% of the chord during one revolution, while for the no wake cases and lower AOA values, variation occurs along a region that covers only 5% of the chord. The effect of the inflow turbulence on the effective angle of attack as well as its direct effect on transition is observed. Transition locations for the wind tunnel conditions and field experiments are compared together with 2-D and 3-D CFD simulations. In contrast to the suction side, significant difference in the transition locations is observed between wind tunnel and field experiments on the pressure side for the same airfoil geometry. It is seen that the natural and bypass transition models of EllipSys3D can be used for transition prediction of a wind turbine blade section for high Reynolds number flows by applying various inflow scenarios separately to cover the whole range of atmospheric occurrences.

1 Introduction

As the wind turbine technology develops and the size of modern wind turbines grows steadily, the design process becomes highly dependent on the availability of accurate aerodynamic prediction tools. The power output and the loads on the blade are effected by the aerodynamic characteristics such as lift to drag ratio. It is known that the skin friction drag of a turbulent

boundary layer is much higher than the one of a laminar boundary layer, which makes it critical to identify which part of the flow acting on the surface is laminar, transitional or turbulent.

The most common approach in current aerodynamic prediction tools is to use fully turbulent models for the entire boundary layer on blades/airfoils, ignoring the transitional process (Sørensen, 2009). This causes an incorrect prediction of the lift and drag forces and the stall angles. Moreover, it is seen that the transition on a wind turbine airfoil occurs over a substantial part, varying between 0% and 30%, of the chord (Özçakmak et al., 2019). Therefore, accurate prediction of the laminar-turbulent transition process is critical for design and prediction tools to be used in the industrial design process, particularly for the high Reynolds numbers experienced by modern wind turbines.

For many years, a large amount of experimental, numerical and theoretical studies have been devoted to laminar-turbulent transition, with the low drag laminar region being separated from the turbulent region where drag increases dramatically (Arnal et al., 1998). The transition process starts with receptivity of the disturbances like Tollmien-Schlichting (T-S) waves triggered in the laminar boundary layer, followed by a linear and nonlinear instabilities ending up with turbulent spots leading eventually to turbulent flow. In linear stability theory, it is assumed that the free stream turbulence and other disturbances are small. On the other hand, it is seen that in the existence of large external disturbances, linear disturbance growth can be bypassed, this type of transition is defined as 'bypass transition' (Morkovin, 1985). Through years, both empirical correlations (Michel (1951) and Eppler (1978)) and semi-empirical methods are developed by Dini et al. (1992) for the prediction of the boundary layer transition. Semi-empirical transition detection of incompressible 2-D boundary layers by the e^N method based on linear stability theory was introduced by Van Ingen (1956) and independently by Smith and Gamberoni (1956). Since then, different versions were developed and databases are generated for more complex problems. For instance, a database method is developed based on the stability diagrams calculated by Arnal for Hartree/Stewartson solutions of Falkner-Skan equation. Wazzan et al. (1968) and Kümmeler (1973) published improved stability calculations for attached Falkner-Skan velocity profiles. Envelope methods (Gleyzes et al., 1983) (Drela and Giles, 1987) and approximate methods (Stock and Degenhart, 1989) were developed. The effect of disturbance environment on the transition process has been studied by Morkovin (1969) and Reshotko (1969).

The transition prediction models implemented in Navier-Stokes solvers can be categorized into algebraic/integral models and transport models (Davis et al., 2005). The first category includes empirical models, approaches based on stability theory using Orr-Sommerfeld equations and simplified e^N stability models. These models requires boundary layer information that can be obtained by integration of the boundary layer quantities or using velocity profile databases to solve integral boundary layer equations. The second category includes transition models based on the solution of the transport equations, such as the $\gamma - Re_\theta$ (Langtry, 2006) (Menter et al., 2006) model, and three equation model (Walters and Leylek, 2004). Transition can be predicted within Direct Numerical simulation (DNS) or Large eddy simulations (LES) despite the fact that cost of the simulations increases rapidly with Reynolds number (Diakakis et al., 2019). PSE (Parabolized Stability Equations) that can include non-parallel and non-linear effects are also used for the stability analysis, having less resource requirements compared to DNS (Bertolotti et al., 1992) (Herbert, 1997). There are also hybrid approaches such as DES (Detached Eddy Simulation) that are used with transition models. The transition phenomenon itself is a highly non-linear problem, but with a semi-empirical extension, the e^N method is commonly used since it can predict the trends in variation of transition position accurately. For the

industrial applications, the e^N method together with empirical criteria for transition mechanisms that are not covered by this approach, such as bypass and attachment line transition, keeps its place as a practical method (Krumbein, 2009). The design process for the wings and airfoils still requires the use of laminar-turbulent transition modelling in Reynolds-averaged Navier-Stokes (RANS) solvers. The current analysis involves a coupling of the e^N transition model with the RANS solver considering its accuracy for high Reynolds number flows in wind turbine applications (Sørensen et al., 2014).

The experimental studies on laminar-turbulent transition on aerospace applications goes back a long way compared to the research conducted on wind turbines. While the inflow turbulence intensity for an airplane wing in cruise is lower than the one experienced in a wind tunnel, it is higher for a rotating machinery or wind turbine rotors (Hernandez et al., 2012). Transition analysis performed for wind tunnel experiments in controlled conditions includes measurements on wind turbine airfoils equipped with pressure taps and sensors, balance system and a wake rake (Ceyhan et al., 2017); infrared thermography (Joseph et al., 2016); rotating turbine blade equipped with pressure sensors, strain gauges, balance system and particle image velocimetry (Schepers and Snel, 2007), rotating wind turbine and wind turbine blade experiments by oil visualization, stethoscope and flush-mounted unsteady pressure sensors (Lobo et al., 2018), wind turbine airfoil with pressure sensors and high frequency microphones (Özçakmak et al., 2019).

In addition to the DAN-AERO experimental campaign (Madsen et al., 2010) (Troldborg et al., 2013), of which the current analysis is based on, there have been other field experiments on boundary layer transition on rotating wind turbine blades using microphones glued on the surface (Van Ingen and Schepers, 2012), hot film and pressure tubes (Schwab et al., 2014) (Schaffarczyk et al., 2017), microphones on the suction side in addition to the ground based thermographic cameras (Reichstein et al., 2019). All these experiments pointed to a fact that more field experiments are needed on the wind turbine blades in order to characterize the transition behaviour with inflow turbulence and rotational effects. Moreover, determining the relevant frequency ranges for the atmospheric turbulence and the occurrence of the T-S waves under real atmospheric conditions is needed in order to investigate the combined effects of the turbulent wind and the blade rotation on transition. Modern wind turbines usually operate in wind farms where the inflow is affected by the wake of the upstream turbines. They are also exposed to high free-stream atmospheric turbulence and wind shear. The differences in the transition behaviour of an airfoil section tested in a controlled 2-D wind tunnel environment and a blade tested in 3-D field experiments at real operational conditions is discussed in previous works and it is seen that full rotor blade section exhibits different transition characteristics than in the 2-D case (Madsen et al., 2019a) (Schaffarczyk et al., 2018). The difference between the design conditions for rotor and airfoils and the real operating conditions leads to inaccurate predictions of the loads and the performance as observed in previous studies from Sørensen (2009) Chaviaropoulos et al. (2015).

. The difference between the design conditions for rotor and airfoils and the real operating conditions leads to inaccurate predictions of the loads and the performance as observed in previous studies from Sørensen (2009) Chaviaropoulos et al. (2015).

In this study, the transition characteristics of the LM 38.8 blade on the NM80 2.3MW wind turbine is analysed by field experiments (DAN-AERO project), and computations with the DTU in-house CFD EllipSys code (Sørensen, 1995) (Michelsen, 1992),(Michelsen, 1994). The present experimental analysis is based on high frequency microphone measurements that enables

acquiring data at higher sampling frequencies and allows a higher resolution (with the number of microphones placed on both upper and lower surfaces) than the previous studies. This paper is focused on the analysis of the DAN-AERO 3-D transition rotor measurements in a wind farm and the validation of the transition models in the EllipSys3D CFD in-house solver using this experimental data. The atmospheric turbulence, wind shear and wake effects on transition behaviour of a wind turbine blade section is discussed. The effect of these parameters on the effective angle of attack and velocity on the blade section as well as their potential direct effect on transition is discussed. Comparison of the field experiments with the CFD simulations enlightens the transition behaviour of the wind turbine blades and enables improvement of the design and aerodynamic prediction tools.

2 Field Experiments : Set-up and Instrumentation

The main objective of the DAN-AERO project was to establish an experimental database for aerodynamic, aeroelastic and aeroacoustic issues that are significant for the design and operation of MW size wind turbines (Bak et al., 2010). The laminar-turbulent transition investigation of this campaign contains both 2-D wind tunnel tests (Madsen et al., 2010) as later analysed by (Özçakmak et al., 2018) (Özçakmak et al., 2019), and 3-D field experiments (Troldborg et al., 2013).

In this study, field experiments are analysed in order to investigate the laminar-turbulent transition characteristics of a 3-D rotor blade. The tested turbine is placed at a wind farm in Tjæreborg, Denmark, which consists of 8 turbines in 2 rows. The test turbine is a 2 MW NM-80 wind turbine with LM-38.8 blade. The rotor diameter is 80 meters. The site and the test turbine (denoted as 'NM80') is presented in Figure 1. The wake cases presented in this paper are from an upstream wind turbine that is located around 6 rotor diameters (6D) upstream of the test turbine.

The rotational speed, yaw, pitch and rotor azimuth angles are measured at the nacelle. In addition to the pressure taps placed at four different sections on the blade, 56 high-frequency microphones are installed about 1 mm below the blade surface at a section 36.9 meters from the hub (3.1 m from the tip of the blade). The same section is also equipped with a pitot tube for measuring the relative velocity. The pressure taps are placed 36.8 m from the hub (3.2 m from the tip) next to the microphones. The wind direction and wind speed information of the inflow is obtained from the anemometers and wind vanes placed at the meteorological mast (denoted as 'MM') 2.5 diameter far from the test turbine, see Figure 1. At some specific wind directions, the test turbine is in the wake of the upstream turbine, effect of which is also discussed in this study. Both wake and no-wake conditions are analyzed.

The angle of attack values of the field experiments presented in this article are derived from the measured normal force on the blade. The correlation between the normal force and the angle of attack is generated by the HAWC2 (Horizontal Axis Wind turbine simulation Code 2nd generation)(Larsen and Hansen, 2007) simulations which is based on the principle blade element momentum theory with an aero-elastic model of NM80 turbine using existing polars. A previous study of Boorsma et al. (2018) has shown a good correlation between measured and computed normal forces. The acquisition properties of the instruments on the test blade and the meteorological mast are listed at Table 1.



Figure 1. Map of the site approx. 10 km south-east of Esbjerg (© Google Maps 2007). The test turbine, NM80 is situated in a small wind farm at Tjæreborg along with 7 other wind turbines of size around 2 MW. The other turbines are circled with blue and the test turbine is marked by the red circle. The meteorology mast is shown by the 'MM' denotation in the picture.

Table 1. Instrumentation and Data Acquisition Parameters

Measurement device	Sampling rate	Acquisition time
Sensors on the turbine and MM	35 Hz	10 minutes
Pressure taps	100 Hz	9 minutes 30 seconds
High-freq. microphones	50 kHz	10 seconds

Different 10 minute series from 2 different days are used in this study with corresponding 10 second series of microphone acquisition. The turbine operated at two different pitch settings: 1.25° and 4.75° degrees. The pitch angle is defined as positive towards stall.

The blade section that is equipped with the high frequency microphones features a NACA 63-418 airfoil with a chord length of 1.24 meters. The turbine is operated at a constant rotational speed of 16.1 revolutions per minute(rpm) and at a fixed pitch setting. The Reynolds number is around 5 million for the tested blade section. The region of the atmospheric boundary layer where the turbines operate has varying levels of free stream turbulence. This contributes to large external disturbances in the boundary layer of the blades. The degree of turbulence in the wind varies greatly on short time scales. Therefore, for the inflow velocities, 10 second datasets from MM measurements are used, which corresponds to microphone acquisition times.

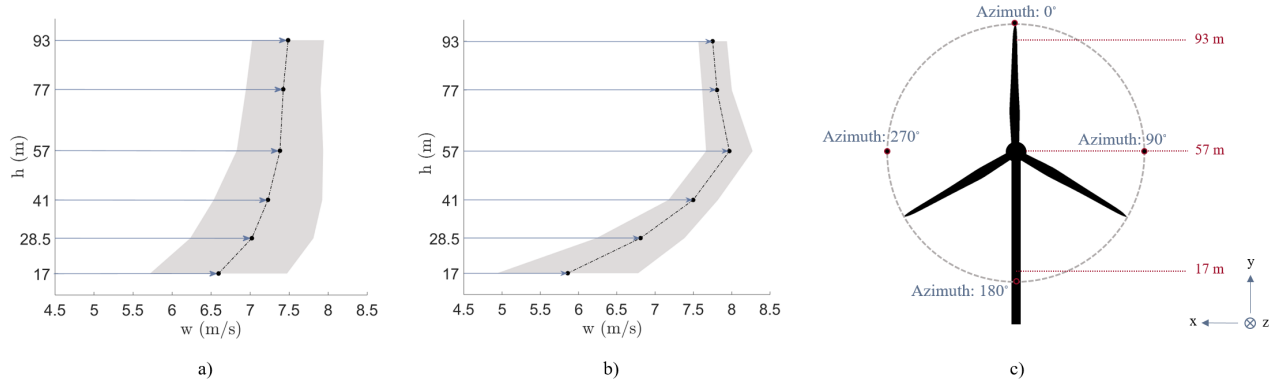


Figure 2. ABL velocity profiles: a) 10 minutes average, b) 10 seconds average corresponding to microphone acquisition time; c) Azimuthal placement and the heights of the blade cross-section at each azimuthal location

The ABL velocity profiles are averaged over 10 minutes (a) and over 10 seconds (b) corresponding to the exact time instance of the microphone dataset, presented in Figure 2 with their standard deviations as shaded areas. In 10 second average profiles, for some of the selected cases, an increase in the velocity is observed at 57 meters from the ground where the turbine hub is approximately located.

- 5 The 2-D results shown in this paper originates from the wind tunnel experiments of the DAN-AERO project conducted in the LM wind tunnel with a reproduction of the actual blade section of the wind turbine deviating from the theoretical airfoil, details of which are explained in a previous study of Özçakmak et al. (2019).

2.1 Data processing

- 10 The pressure fluctuations in time domain (10 second series), obtained from high frequency microphones placed chordwise on the blade section, are analyzed in the frequency domain by fast Fourier transform (FFT) analysis. The sampling frequency of the data is 50 kHz acquired over 10 seconds. The data is divided into smaller time segments of 0.0410 seconds. The window size of 4096 is used with a 50 % overlap. For each time segment, the power spectral density (PSD) is calculated by the short-time Fourier transformation analysis (Welch, 1967).

- 15 The PSD ($P_{s,p}$) of the pressure fluctuations obtained from the microphones are integrated in a frequency interval from $f_1=2$ kHz to $f_2=7$ kHz (see Equation 1). The integration within a certain frequency range gives the standard deviation (σ), which represents the total energy of the pressure fluctuations. A sudden chordwise increase in the pressure level (L_p) is considered as an indication of the transition location. The reference pressure P_{ref} is assigned to the value of 20μ Pa. More details on this method and the selection procedure of the frequency interval for the integration can be found in a previous work by Özçakmak et al. (2019).

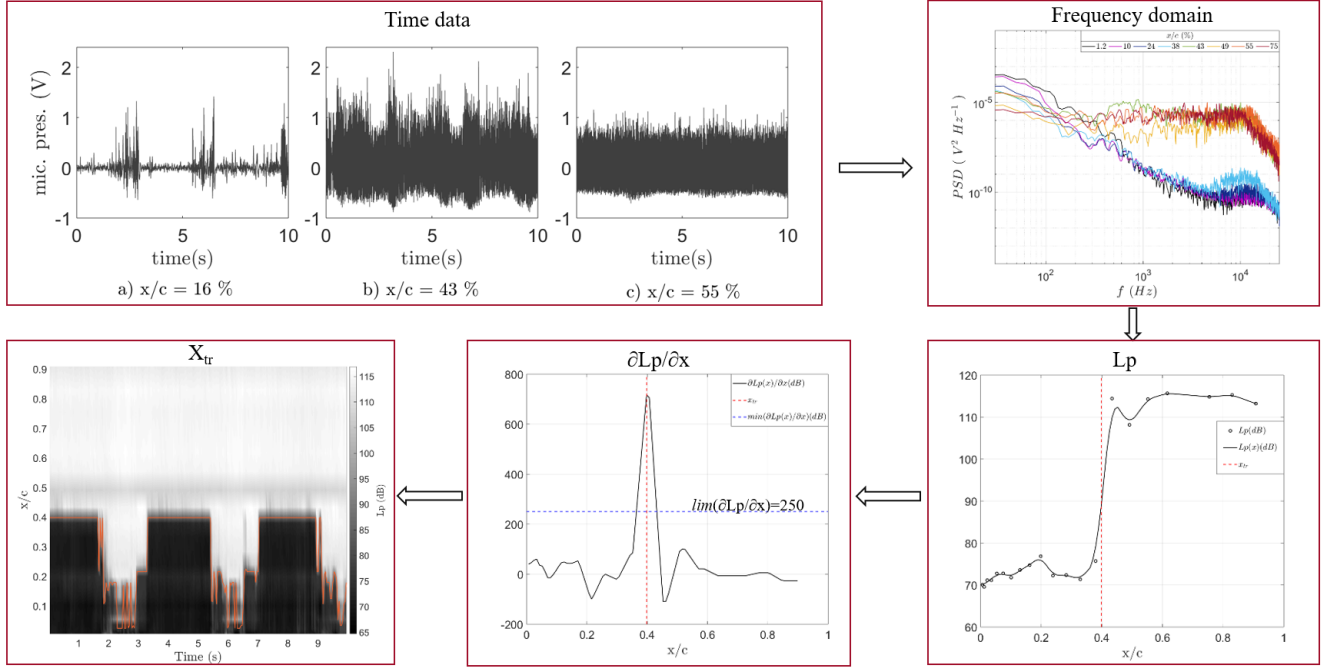


Figure 3. Transition detection methodology from the high frequency microphones

$$P_{rms}^2 = \int_{f1}^{f2} P_{s,p} df \quad , \quad L_p = 20 \cdot \log_{10} \left(\frac{P_{rms}}{P_{ref}} \right) \quad , \quad \sigma = \sqrt{P_{rms}^2} \quad (1)$$

The transition location on the upper and lower surfaces is detected by the highest chordwise derivative of the pressure level as in Equation 2. The derivatives that are above a threshold level of 250 dB are selected for transition detection.

$$x/c_{tr} = x \rightarrow \max \left(\frac{dL_p}{dx} \right) \quad (2)$$

- 5 The transition detection method is illustrated in Figure 3. The laminar, transitional and the turbulent flow in time series and in frequency domain is illustrated at the top of the figure and the chordwise increase of the integrated PSD and the derivative of L_p is illustrated at the bottom. The spectrogram analyses are also performed by dividing the data length (L) into k columns. The final detected transition locations can be seen from the spectrogram at the bottom left figure.

3 CFD Computations

EllipSys3D is an in-house CFD solver for incompressible Navier-Stokes equations in general curvilinear coordinates by a multiblock finite volume discretization, here applied in RANS mode. Rhie-Chow (Rhie, 1982) interpolation is used in order to avoid odd/even pressure decoupling. The third order QUICK (Quadratic Upstream interpolation for Convective kinematics) upwind scheme is used for the convective terms. SIMPLE(Semi-Implicit Method for Pressure-Linked Equations) algorithm is used to enforce the pressure/velocity coupling (Patankar and Spalding, 1983) (Patankar, 1980). The Message-Passing-Interface (MPI) is used to parallelize the code for executing on distributed memory machines with non-overlapping domain decomposition (Sørensen et al., 2011).

Mesh generation is done by the 3-D hyperbolic grid generation program HypGrid3D (Sørensen, 1998). The rotor geometry and the boundary layer of the blade surface is resolved by O-O mesh configuration. The grid consist of 256 cells in the chordwise direction, 128 cells in the spanwise and 128 in the normal direction, with cells size ensuring y^+ value less than 1. The mesh has around 14 million cells. The mesh refinement study shows that the difference between the moment and forces for the finest and a coarser mesh (having one-half of the number of cells of the finest grid in all directions) is within a few percent as demonstrated in a previous study of Madsen et al. (2019b). The far field boundary is located around 10D away from the rotor in all directions. Due to the high tip speed ratio, in order to stabilize the simulations and enhance the convergence of the solution by small time steps, the simulations are performed by transient computations with 1200 steps per revolution. At each time step, the momentum equations are solved and a pressure correction equation is used to satisfy the continuity constraint. This process is repeated until a convergent solution is reached, and all the terms are evaluated at the next time level when the subiterations are finished.

The turbulence is modelled by the $k - \omega$ SST eddy viscosity model (Menter, 1993). The boundary layer transition prediction on the rotating wind turbine blade section is performed by the e^N transition method based on linear stability theory and the bypass transition model.

In the CFD simulations, the e^N transition method is applied for several flow conditions representing the field experiments. The EllipSys3D rotor simulations are performed at several free stream velocities representing the ABL conditions at 3 different heights, considering both the mean and the standard deviations during the microphone acquisition time. Both the e^N natural transition model with different amplification factors (N) and the bypass transition model at the corresponding atmospheric turbulence intensity values from the field experiments are simulated.

The angle of attack from the EllipSys3D simulations on the blade section is determined from the annular averaging method by determining the local induced velocities at the blade (Hansen et al., 1997) (Johansen and Sørensen, 2004). In order to calculate the induced axial velocity, V_{ind} , at the rotor plane, annular averaging of the axial velocity at several upstream and downstream locations (z_i and z_j) at a given radial location (in this case, the same blade section as in the microphone ex-

periments) is performed. Then, V_{ind} is found by the interpolation of these averaged streamwise velocities to the rotor plane. Lagrangian polynomial interpolation is used to determine the velocity at the rotor location ($z = z_0$) as in Equation 3.

$$f(z_0) = \sum_{i=1}^N \left[f(z_i) \left(\prod_{j=1, j \neq i}^N \frac{z_0 - z_j}{z_i - z_j} \right) \right] \quad (3)$$

Having calculated V_{ind} , the effective local flow angle (α) is found from Equation 4, where ω is the angular velocity, R is the distance to the hub from the measured tested section on the blade, θ is the combined pitch twist angle.

$$\alpha = \tan^{-1} \left(\frac{V_{ind}}{\omega \cdot R} \right) - \theta \quad (4)$$

The Fieldview (2017) software is used in order to postprocess the EllipSys3D simulation results, to extract the annular averages of the axial velocity and for the flow visualization.

3.1 EllipSys3D semi-empirical e^N transition model

Transition to turbulence in EllipSys3D is governed by the semi-empirical e^N model (Drela and Giles, 1987), which is based on linear stability theory. The conventional e^N method is a semi-empirical method not considering receptivity. In the semi-empirical method, while linear stability analysis is done for the governing equations, the transition is assumed to take place when N reaches a previously correlated value from the experiments. Therefore, the empirical part comes from the N value at transition, which makes the model semi-empirical. In the e^N method, the amplification of small disturbances are calculated for several frequencies, and the spectrum of the most amplified ones is identified. The critical N factor for each type of flow is determined empirically, and the transition point is detected from this empirical value of the critical N factor.

In the EllipSys3D code, the boundary layer parameters (the displacement thickness δ^* , momentum thickness θ and the shape factor H in Equation 5) are needed as an input to determine the occurrence of transition. U_e is the velocity at the outer edge of the boundary layer which is determined from the Navier-Stokes computation, and y is the direction perpendicular to the wall/surface. The boundary layer thickness δ is defined as the location where $u = 0.99U_e$. In EllipSys3D, the edge velocity (U_e) is taken as the maximum tangential velocity.

$$\delta^* = \int_0^\infty \left(1 - \frac{u}{U_e}\right) dy, \quad \theta = \int_0^\infty \frac{u}{U_e} \left(1 - \frac{u}{U_e}\right) dy, \quad H = \frac{\delta^*}{\theta} \quad (5)$$

Although, these boundary layer parameters can be calculated by integrating the velocity profile from the Navier-Stokes equations, it is shown by Stock and Haase (1999) that it requires an excessively fine computational grid. Therefore, the boundary layer parameters are found from the von Karman boundary layer equations (Von Kármán, 1921).

The momentum integral equation (Equation 6) and the combination of the kinetic energy equation with von Karman's momentum equation (Equation 7) are solved for H and θ . U_e is determined from the Navier-Stokes computation. In each

iteration, these equations are started from the stagnation line and integrated downstream on the surface until the transition point is found.

$$\frac{C_f}{2} = \frac{1}{U_e^2} \frac{\partial}{\partial t} (U_e \delta^*) + \frac{\partial \theta}{\partial x} + (2 + H) \frac{\theta}{U_e} \frac{\partial U_e}{\partial x} + \frac{\theta}{U_e} \frac{\partial U_n}{\partial n} \quad (6)$$

$$2C_D = \theta \frac{\partial H^*}{\partial x} + H^* \left((1 - H) \frac{\theta}{U_e} \frac{\partial U_e}{\partial x} + \frac{C_f}{2} \right) \quad (7)$$

- 5 C_D is the kinetic energy dissipation coefficient ($C_D = \frac{D}{\rho U_e^3}$) and D is the dissipation per unit area. The U_n term, the velocity normal to the wall, comes from the assumption of axial symmetry. These equations are presented in terms of boundary layer parameters and the skin friction coefficient C_f , where x is the horizontal direction, τ_w is the wall shear stress, ρ is density, μ is the dynamic viscosity, θ^* is the kinetic energy thickness, and H^* is the energy thickness ratio as shown in Equation 8.

$$\tau_w = \mu \frac{\partial u}{\partial y} \quad , \quad C_f = \frac{t_w}{\frac{1}{2} \rho U_e^2} \quad , \quad \theta^* = \int_0^\infty \frac{u}{U_e} \left(1 - \frac{u^2}{U_e^2} \right) dy \quad , \quad H^* = \frac{\theta^*}{\theta} \quad (8)$$

- 10 Closures for C_f , C_d and θ^* are calculated based on Falkner-Skan velocity profiles. The stagnation line is normally found as the location where the pressure coefficient based on relative velocity is equal to 1. In order to ensure that the entire stagnation line is found at each time step, the pressure coefficient value is checked and the Navier-Stokes solution is analyzed. Along the stagnation line, Blasius flow and across the stagnation line Hiemenz flow are assumed. By this way, realistic initial values for H and θ are obtained and the stagnation line can be located between two computational cells.

- 15 The development of the imposed wave perturbations' amplitude is computed along the boundary layer based on spatial analysis. A check is carried out during the integration of the boundary layer equations to determine if the disturbances are amplified or damped. As neutral stability is passed, amplifications are determined for a range of temporal frequencies.

- The N factor is the natural logarithm of the ratio of the disturbance amplitude at a specific location to its amplitude at the neutral stability point. Integration of the N amplitude is carried out until it reaches a certain value for which transition is said to occur. This value is set according to the turbulence degree that is present in the experimental conditions for comparison with the simulations. In order to build a relation between the turbulence level and the amplification factor, Mack's expression (Mack, 1977) is used as an estimate.

Transition to turbulence is handled by the intermittency factor (γ) when solving the Navier Stokes equations. The eddy viscosity (μ_T) obtained from the turbulence model is multiplied with the intermittency factor which controls the effective viscosity ($\mu_{eff} = \mu + \gamma\mu_T$), where μ is the molecular viscosity.

$$Intermittency \begin{cases} \gamma = 0, & \text{laminar flow} \\ 0 < \gamma < 1, & \text{gradually increases to 1 after transition} \\ \gamma = 1 & \text{turbulent flow} \end{cases} \quad (9)$$

5 The intermittency factor is calculated from Equation 10. This equation is obtained by combining the statistical theory for transitional flow by Emmons (1951), and the expression that represents the production rate with Gaussian distribution using the Dirac delta function by Dhawan and Narasimha (1958) and the Chen and Thyson (1971) formulation:

$$\gamma = 1 - \exp\left\{-(x - x_{tr})^2 \left(\frac{U_{e,Tr}}{\nu}\right)^2 \hat{n}\sigma\right\} \quad (10)$$

where the subscript tr is the transition onset, ν is the kinematic viscosity, σ is here the spot propagation rate, and \hat{n} is the non-dimensional spot formation rate, $\hat{n} = n \cdot \nu^2 / U_{e,Tr}^3$ (Mayle, 1998).

The intermittency factor is calculated on the surface and then solved for the entire boundary layer and wake within the transport equation (Michelsen, 2002).

$$\frac{\partial \gamma}{\partial t} + \frac{\partial U \gamma}{\partial x} + \frac{\partial V \gamma}{\partial y} + \frac{\partial W \gamma}{\partial z} = S \quad (11)$$

where the source term, S , is obtained by evaluating the transport terms for previously determined intermittency values.

15 3.1.1 Bypass transition model

When the amplitude of the disturbances are strong, such as for high free stream turbulence or large roughness elements, the the linear stages of the transition process is bypassed. In this case, transition happens in the absence of T-S waves and the disturbances are amplified by a non-linear process.

The approaches for modelling bypass transition in industry involves low Reynolds number turbulence models, and models using experimental correlations that relates free-stream turbulence intensity to transition Reynolds number based on momentum thickness Re_{θ_t} (Reza and Amir, 2009).

The e^N method accurately predicts the transition for free stream turbulence levels , less than 2% for T-S dominated transition, but for higher levels it is bypassed (Biau et al., 2007). It should be noted that transition can also be dominated by other mechanisms; for instance by a streak breakdown for turbulence levels around 0.65% (Suder et al., 1988). The e^N method in EllipSys3D can be used together with a bypass criteria. For the bypass transition model, Suzen and Huang (2000) empirical model is used.

Abu-Ghannam and Shaw (1980) suggested that for the attached flows, transition onset can be obtained by correlating Re_θ to the free stream turbulence intensity as in Equation 12. By maintaining the strong features of this correlation in adverse pressure gradient regions, more sensitive response to the favourable pressure gradients is obtained by Suzen et al. (2002) by re-correlating the transition criterion to the free stream turbulence intensity and acceleration parameter K_t .

$$Re_{\theta_{tr}} = (120 + 150Tu^{(-2/3)})coth [4(0.3 - 10^5 K_t)] \quad (12)$$

Here, K_t is the minimum value of the acceleration parameter in the downstream direction (Michelsen, 2002), which can be expressed as $\nu/U_t^2(dU/dx)_t$ where U_t is the boundary layer velocity at onset of transition (Suzen et al., 2002). Tu is the turbulence intensity at the transition onset. Under high turbulence intensity conditions, this correlation fits well with adverse pressure gradient regions. In EllipSys3D, for the bypass transition cases, where turbulence intensity levels are high, this correlation is used and the criteria for natural and bypass transitions are checked simultaneously in the code. The higher of the two intermittency factor is used. Moreover, separation induced transition is also checked with a bubble model inside the boundary layer solver.

3.2 Numerical Set-Up

The computations are performed for three different grid levels for the 3-D simulations, and five different grid levels for the 2-D case. The grid independence is ensured and the results of the finest grid are presented.

The 3-D full rotor simulations are performed as transient calculations with 1200 steps per revolution for all grid levels. The problem is approximately axisymmetric. The CFD Simulation input parameters are listed in Table 1 for the finest grid level. The input k is the turbulent kinetic energy and ω is the specific dissipation for the turbulence model. Several free-stream velocities are simulated from 5.5 m/s to 8.5 m/s. It should be noted that, in the experiments, inflow conditions vary as a function of the blade azimuth due to the wake and wind shear. Therefore, these local inflow conditions are represented by individual CFD simulations with various wind speeds and T.I. since it is difficult to simulate spatially varying inflow conditions only by a single simulation. Moreover, at each simulation, different amplification factors ($N = 0.15, 3$ and 7) are used in the natural transition model to represent different inflow scenarios.

The turbulence is quantified by the turbulence intensity (T.I.), which is the standard deviation of the relative velocity divided by the average relative velocity over 10 minutes in this case. Ten minutes average of the velocity data obtained from the pitot tube on the blade is used in order to obtain the T.I. values. Various T.I. values of 2.8, 3.8 and 6.8 % are used as an input to the bypass transition model in the CFD computations. The transition point is selected to be the first location where $\gamma \geq 0.025$ for both of the transition models.

Table 2. CFD Simulation parameters

Parameter	Value
Density	1.23 kg/m^3
Viscosity	$1.83 \cdot 10^{-5}$ kg/ms
k T.K.E. (turbulence model)	0.1 m^2/s^2
ω (turbulence model)	$1 \cdot 10^6$ $1/s$
Rotational speed	1.7 rad/s

4 Results and Discussion

4.1 Atmospheric effects on transition

The flow on the blade is affected by many parameters in the free atmosphere compared to an airfoil in a steady flow in a wind tunnel. The atmospheric flow has a substantial effect on the performance and loading of the turbines. The shear in the atmospheric boundary layer and the inflow turbulence in combination with the rotational effects, creates a significant deviation of the aerodynamic characteristics on the blade compared to the wind tunnel flow conditions. The effective angle of attack and velocity varies as a function of azimuth position with these parameters and causes the transition position to move constantly during rotation. These multiple effects on transition are not easy to analyse separately. For instance, the large scales of the inflow turbulence affect the effective angle of attack on the blade section, but may also have a direct effect on the transition location as in the wind tunnels. Thus, analysis from the experiments in this study aims to analyse these individual effects on the transition behaviour.

The spectrogram of the chordwise pressure levels on the airfoil profile tested in the wind tunnel (Figure 4-a) and wind turbine blade section (Figure 4-b) from the field experiments, featuring the same airfoil profile are presented. The transition regions can be seen by the sudden chordwise increase of the pressure levels. Due to the low inflow turbulence in the wind tunnel (T.I.=0.1%), no time variations of the transition position is observed for the airfoil profile. On the other hand, the transition location changes significantly for the rotor blade section through one revolution for the high pitch case ($p=4.75^\circ$) (Figure 4-b), deviating from the 2-D case (Figure 4-a).

In order to analyze the causes of this variation, inflow characterization is performed. The PSD is integrated in the frequency range from 2 kHz to 7 kHz for transition detection (presented in Figure 5-b). Several frequency intervals for PSD integration is also attempted in order to characterize the inflow turbulence from the microphone signals. It is seen in Figure 5-a that when the PSD is integrated in the frequency interval from 100 Hz to 300 Hz, the microphones closer to the leading edge shows high pressure levels on this frequency range capturing the pressure response to the inflow turbulence. Therefore, this frequency range is selected for the inflow analysis. For the quantitative comparisons, a microphone located very close to the leading edge

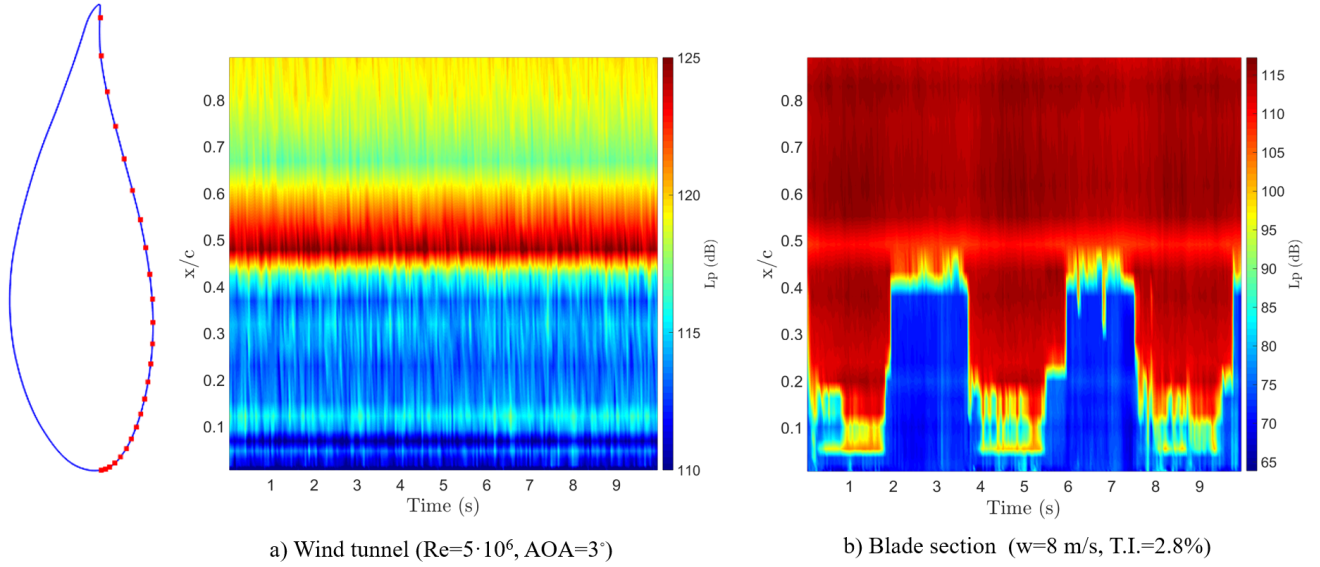


Figure 4. Chordwise pressure level (L_p) spectrogram along the pressure side for airfoil tested at the wind tunnel (a) and for the blade section from the field experiments that corresponds to the Re=5.1 million and AOA varying from 3 to 8.5 degrees (b). The microphone placement on the pressure side of the airfoil is shown on the left.

(at $x/c = 2.2\%$) on the pressure side, in the laminar boundary layer, is selected to represent the inflow turbulence ($L_{p,i}$) that the blade section is exposed to.

The inflow turbulence levels ($L_{p,i}$) from the microphone analysis, the relative velocity obtained from the pitot tube on the blade section, and the angle of attack, which is derived from the forces, are presented together with the detected transition points as a function of the azimuthal angle in Figure 6. Two different cases from the measurements are shown in Figure 6. Figure 6 - left shows a partial wake case (9% wake-affected rotor area) with a free stream velocity (U_∞) of 7.2 m/s. Figure 6 - right demonstrates a half wake case (48% of the rotor area covered with wake affected inflow) with $U_\infty=8$ m/s. Both cases have the same pitch setting and the same T.I.= 2.8% obtained from the meteorological mast. The wake shadow from the rotor view and the top view is also shown at the bottom of the figure for each case. The swept area that is influenced by the wake according to the wind direction was calculated by estimating the wake expansion depending on the velocity induction factor. Each line at V_{rel} , AOA , L_p and x/c_{tr} plots corresponds to a single revolution. For the 9% wake case, each revolution tends to have a similar behaviour, on the contrary, for the 48% wake case, there are some discrepancies observed between each rotation. For both cases, it is noticeable that the decrease in relative velocity and angle of attack and the increase of the inflow turbulence leads the transition point to move closer to the leading edge at the pressure side. The tilt, yaw and wind shear effects on AOA and V_{rel} are analyzed by HAWC2 simulations. Yaw misalignment (which is the difference between the angle measured on the nacelle and the wind direction measured from the meteorological mast at the same height) was checked for the cases presented

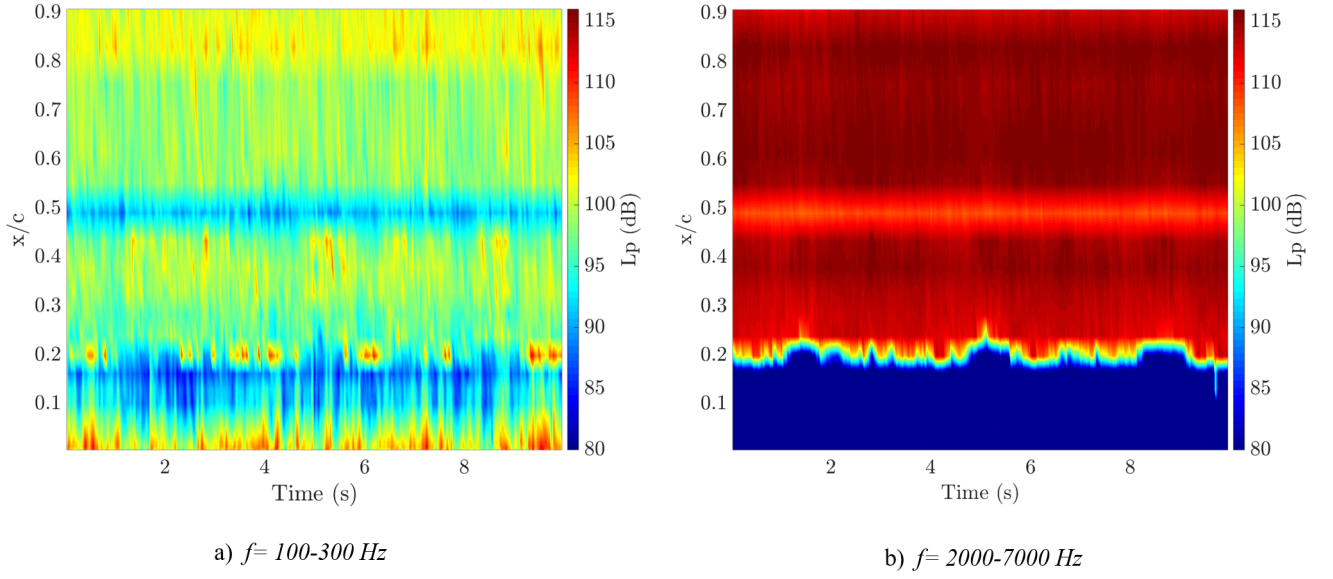


Figure 5. Spectrogram of the chordwise pressure levels obtained from frequency integration limits of a) 100-300 Hz and b) 2-7 kHz on the pressure side, for the low pitch case ($p=1.25^\circ$), $w=6.3 \text{ m/s}$, $T.I.=3.8\%$

in this paper. The mean absolute yaw error is found to be less than 5 degrees, and the effect of the maximum yaw on V_{rel} and AOA change is found to be no more than 1% by HAWC2 analysis. Moreover, the wind turbine has a 5° tilt angle that causes 1% change in V_{rel} and 0.2% change in AOA according to this analysis. Considering that the cases presented here are not under a strong shear, and comparing those variations with the experiments, it can be concluded that the azimuthal behaviour of the

5 relative velocity and the angle of attack is governed by the inflow turbulence, mainly from the wake of an upstream turbine.

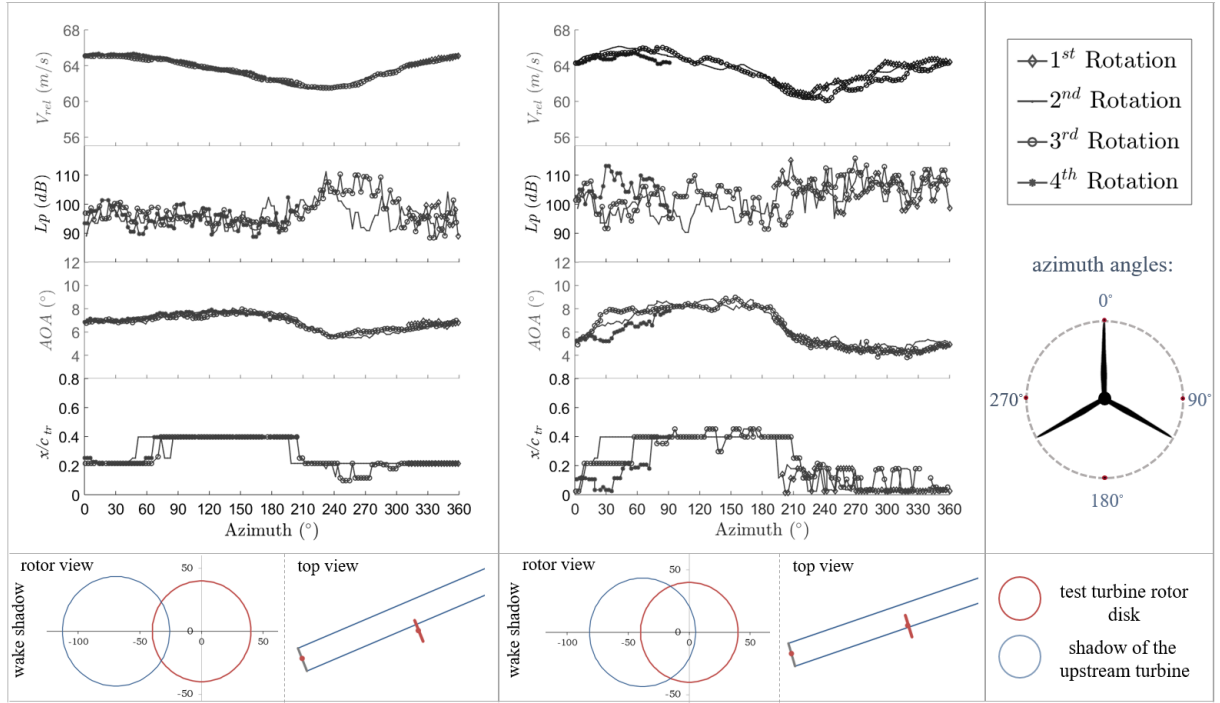


Figure 6. The relative velocity (V_{rel}), pressure levels (L_p) of the inflow turbulence, AOA, and detected transition points (x/c_{tr}) for the pressure side: (left) 9% wake shadow from an upstream turbine with $U_\infty = 7.2$ m/s; (right) 48% wake shadow with $U_\infty = 8$ m/s; (bottom) rotor view and top view of the upstream turbine and the test turbine.

In order to distinguish the effects of the AOA and inflow turbulence, the data is divided into AOA bins. A previous study of Madsen et al. (2019a) with data from the DAN-AERO experiments shows that for several angle of attack bins, there is a correlation between inflow turbulence and the transition location. Increasing the turbulence content in the range of 100-300 Hz moves the transition process closer to the leading edge at the pressure side. At the suction side, transition points are detected within the first 13% of the chord, and no correlation could be established with the inflow turbulence.

4.2 Angle of attack effect on transition

The relative velocity, turbulence levels ($L_{p,i}$), AOA and the detected transition points on the pressure side for two different pitch cases are compared in Figure 7 as a function of time. These two cases belong to different measurement sets; a low pitch case (right) with 7 m/s free stream velocity with 2.6% T.I. and a high pitch case (left) with 7.2 m/s free stream velocity with 2.8% T.I. The high pitch case is under 8.9% wake from the upstream turbine while the case with low pitch angle is under no wake conditions. Therefore, despite some slight differences, these two cases are approximately under the same inflow conditions,

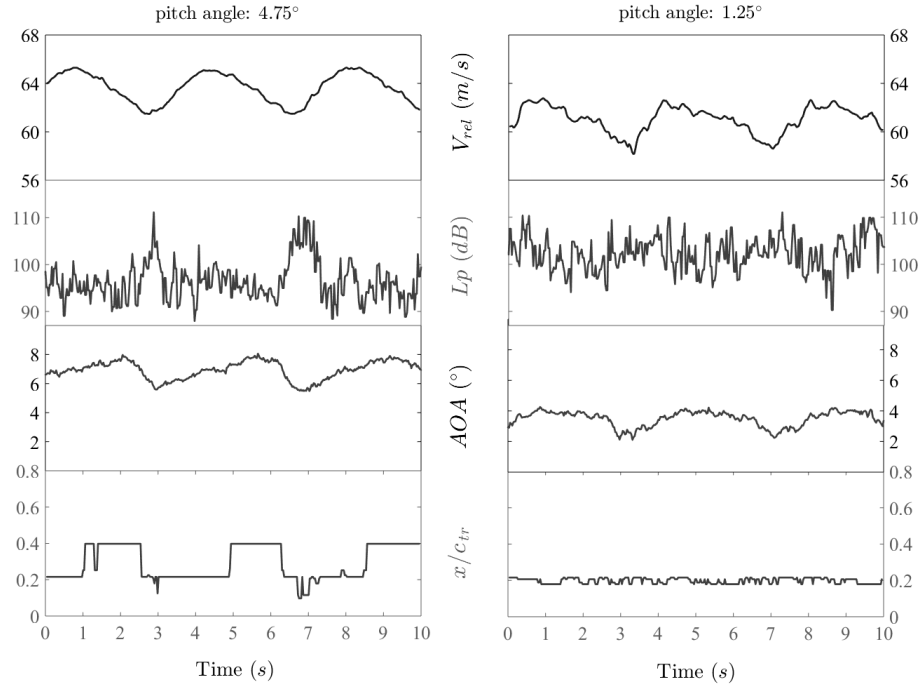


Figure 7. The relative velocity (V_{rel}), pressure levels (L_p) of the inflow turbulence, AOA, and detected transition points (x/c_{tr}) for the pressure side: (left) pitch= 4.75° , 9% wake shadow from an upstream turbine with $U_\infty=7.2$ m/s; (right) pitch= 1.25° , no wake case with $U_\infty=7$ m/s

which allows analysing the effect of the angle of attack on transition. It can be seen that the transition location on the pressure side has a higher response to the rotational changes for the high pitch case. In the low pitch case, the transition point on the pressure side is closer to the leading edge than in the high pitch angle case. For the high pitch case, the regions where the transition points move closer to the leading edge around 20% of the chord corresponds to the regions of lower angle of attack values, as seen in the low pitch case.

4.3 Laminar-turbulent transition locations calculated by CFD

The vorticity structures from the rotor coloured by the axial velocity (w) (top left); the intermittency factor (γ) around the blade section, 36.8 meters from the hub, (top right) and on the blade for the pressure and the suction sides (bottom) are presented in Figure 8. It can be seen from the vorticity iso-surfaces that the problem is approximately axisymmetric. From the intermittency factor visualization, the transition location on the upper and lower surfaces can be seen on the blade section (top right). The blue parts where γ equals to zero are showing the laminar parts in the flow and the red regions ($\gamma=1$) show the turbulent parts. The γ on the suction side (bottom) of the full blade shows that the transition point moves closer to the leading edge while going from root to tip, except the inner most part of the root. For the pressure side, less change in the transition location is observed

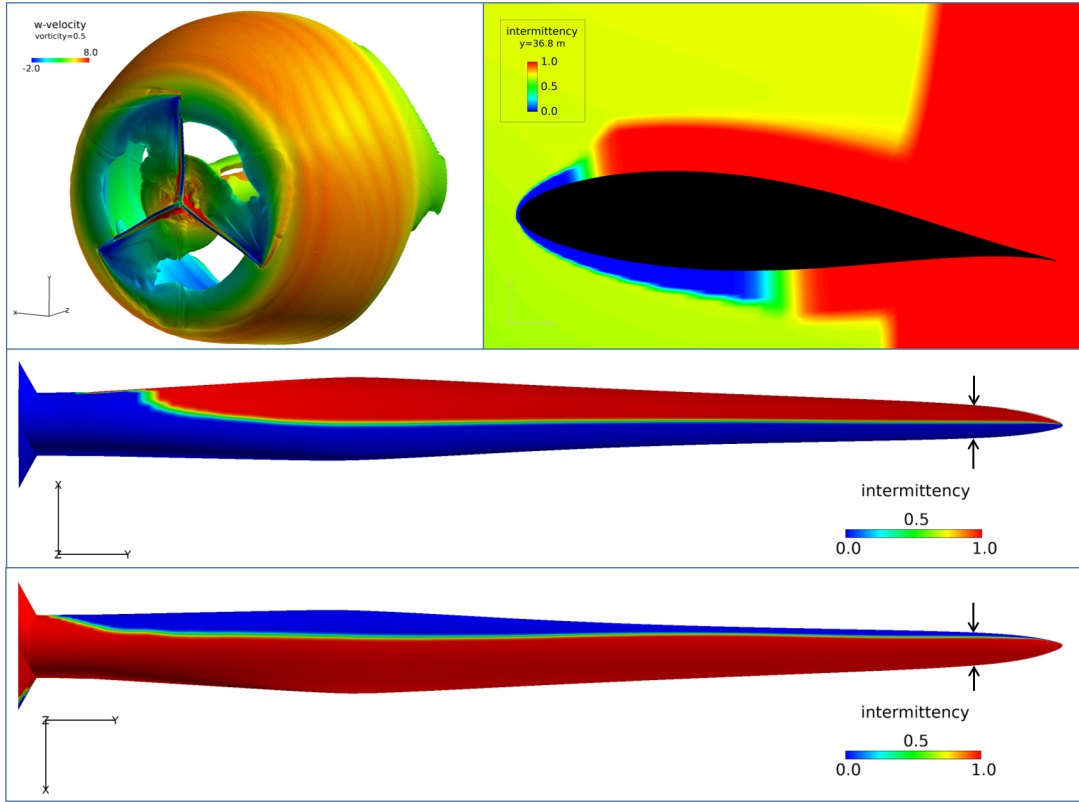


Figure 8. The vorticity iso-surfaces coloured by the axial velocity (top-left); intermittency(γ) at the blade section at $y=36.8$ m from the hub(top-right); The γ values on the pressure (middle) and suction sides (bottom) of the blade for $U_\infty=7.2$ m/s, $N=3$, $p=4.75^\circ$. (Note that the free stream flow is in $+z$ direction and the rotational speed in $-x$ direction for the blade at azimuthal angle of 0°). (The blade section that is analysed in the current study is highlighted by the arrows on the blade.).

as going from root to tip on the blade compared to the suction side. The case presented here is the blade with a pitch setting of 4.75° , a free stream velocity of 7.2 m/s and an amplification factor (N) of 3.

4.4 Comparison between CFD and Experimental Results

Since the effective angle of attack in the experiments is derived from the force measurements, in order to have a direct comparison, the experimental forces are compared with the forces obtained from the EllipSys3D simulations. The F_x and F_z forces from the simulations in global coordinates are transformed to local blade section coordinates in order to obtain the chord normal force on the blade as in the experiments. The 10 seconds data are extracted from the 10 minute measurements that correspond to the exact microphone acquisition time to represent the cross sectional force for the same case. This case is under 48% wake shadow with $U_\infty=8$ m/s. The comparison is presented in Figure 9. Several CFD simulations obtained with various N factors and inflow velocities for natural and bypass transition models are combined to capture actual azimuthal variation behaviour of

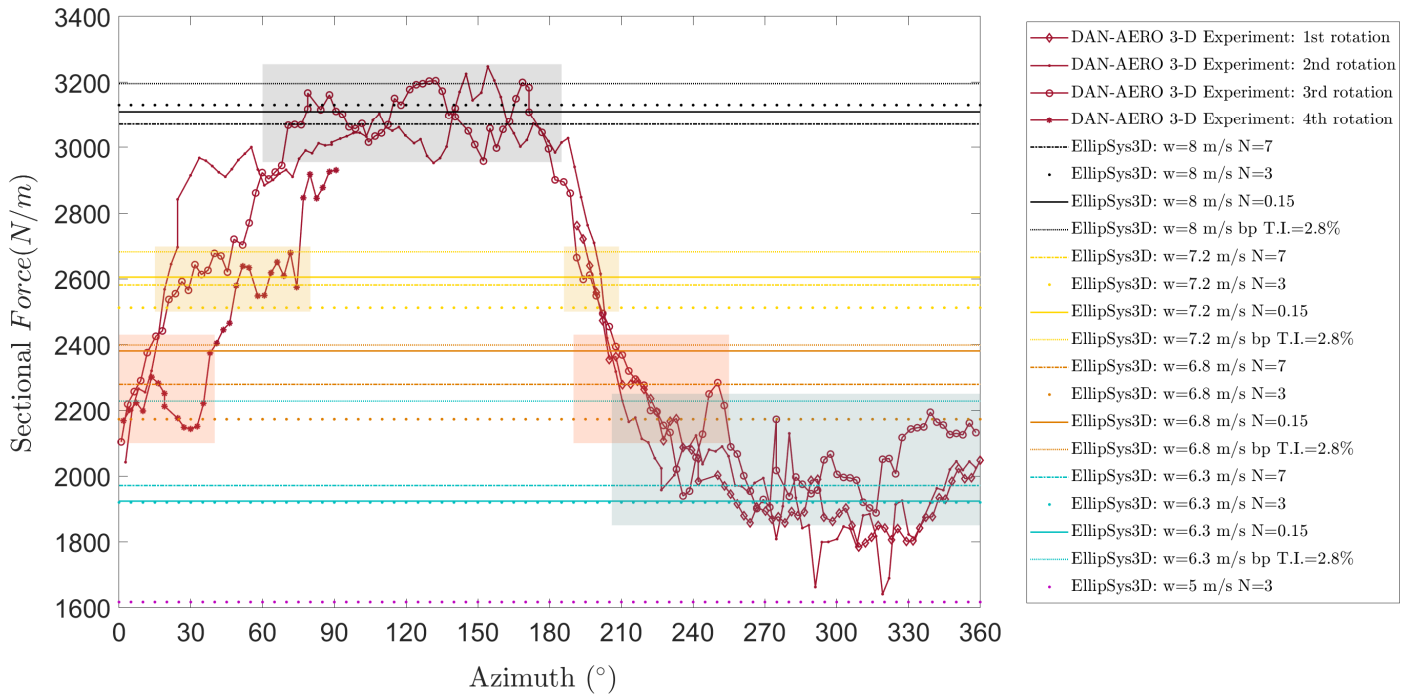


Figure 9. Sectional normal force versus azimuth angle from the DAN-AERO Experiments compared with EllipSys3D simulations with several inflow cases. (The CFD results are labelled by colors for the different freestream velocities (w); i.e. black: $w=8$ m/s, yellow: $w=7.2$ m/s, orange : $w=6.8$ m/s, turquoise: $w=6.3$ m/s, purple: $w=5$ m/s). The colour blocks shows the fitted regions from the CFD results with the experiments.

the experiments. The wake shadow falls in the azimuthal range from 200 to 340 degrees for this case from the measurements. While large scale vortices contained in the wake of the upstream turbine might mean higher turbulence intensities, there is a also a velocity reduction due to the energy extracted from the wind by the upstream turbine. Therefore, in the wake region, the experimental force shows agreement with the forces obtained from the simulations with a lower inflow velocity (the fitted region is highlighted by the turquoise block). It is also observed from the data that high wake cases introduces bigger amount of variation in the sectional force compared to low wake cases.

It is seen that the experimental force variation for 4 revolutions is comparable with the numerical results. For further validation, the transition points are also compared for the pressure and the suction sides in Figures 10 and 11 respectively. Figure 9, 10 and 11 show the results for the same measurement dataset. Three different turbulence intensity levels are shown in most of the cases to cover several ranges of turbulence intensity levels in the atmosphere.

It is seen from Figure 10 that the azimuthal angles that correspond to the wake inflow conditions match with the bypass transition results. The main flow conditions measured from the meteorological mast is $U_\infty=8$ m/s and from the pitot tube on the blade; $T.I.=2.8\%$, which corresponds to the $N=0.15$ with Mack's estimation. The regions where the transition point

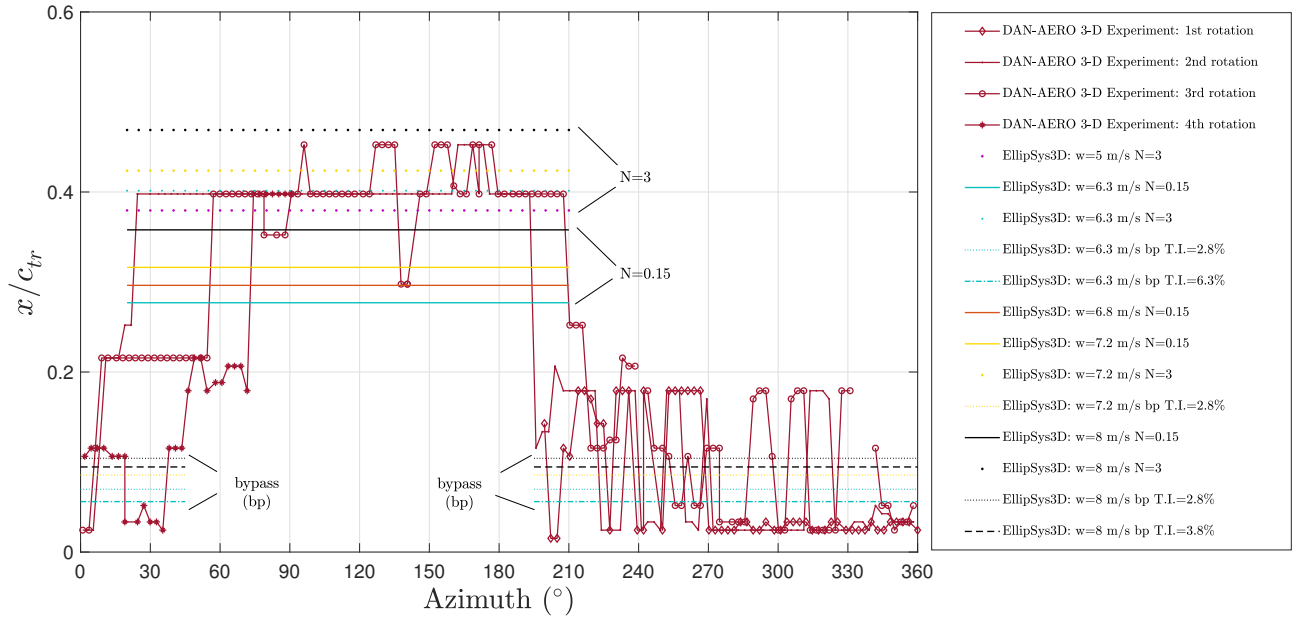


Figure 10. Experimentally detected transition points as function of azimuth angle and EllipSys3D simulations transition results for various different scenarios for the pressure side of the blade section. (The CFD results are labelled by colors for the different freestream velocities (w); i.e. black: $w=8$ m/s, yellow: $w=7.2$ m/s, orange : $w=6.8$ m/s, turquoise: $w=6.3$ m/s, purple: $w=5$ m/s)

is around 20% of the chord is due to the effect of the decreasing AOA by decreasing relative velocity in the wake region. Moreover, the regions where the transition point moves closer to the leading edge, approximately to 3%, are the indication of the direct effect of the inflow turbulence on the transition point in addition to the decreasing AOA. In those regions, the amplification of the small disturbances are bypassed. Considering the standard deviation of the measurements, EllipSys3D transition results covers most of the scenarios that the turbine is exposed to during rotation.

On the suction side, in Figure 11, the opposite behaviour of the transition point is noticeable with the angle variation. The regions where the transition point is closer to the leading edge corresponds to the high angle regions. The regions under wake at higher azimuthal angles correspond to the decreasing V_{rel} and AOA (see Figure 6-right) which moved the transition point further downstream. In this region on the suction side, although the turbulence intensity is increasing, the individual effect of the increasing AOA is more prominent than the effect of the inflow turbulence itself. However, variations between each rotation is also noticeable, which might be due to the inflow turbulence. It should be noted that although there are rotational changes in the transition point, x/c_{tr} , on suction side of the rotor blade section, the detected transition locations are considerably close to the leading edge, so the relative movement is not as prominent as in the pressure side and it is harder to reach a reliable conclusion.

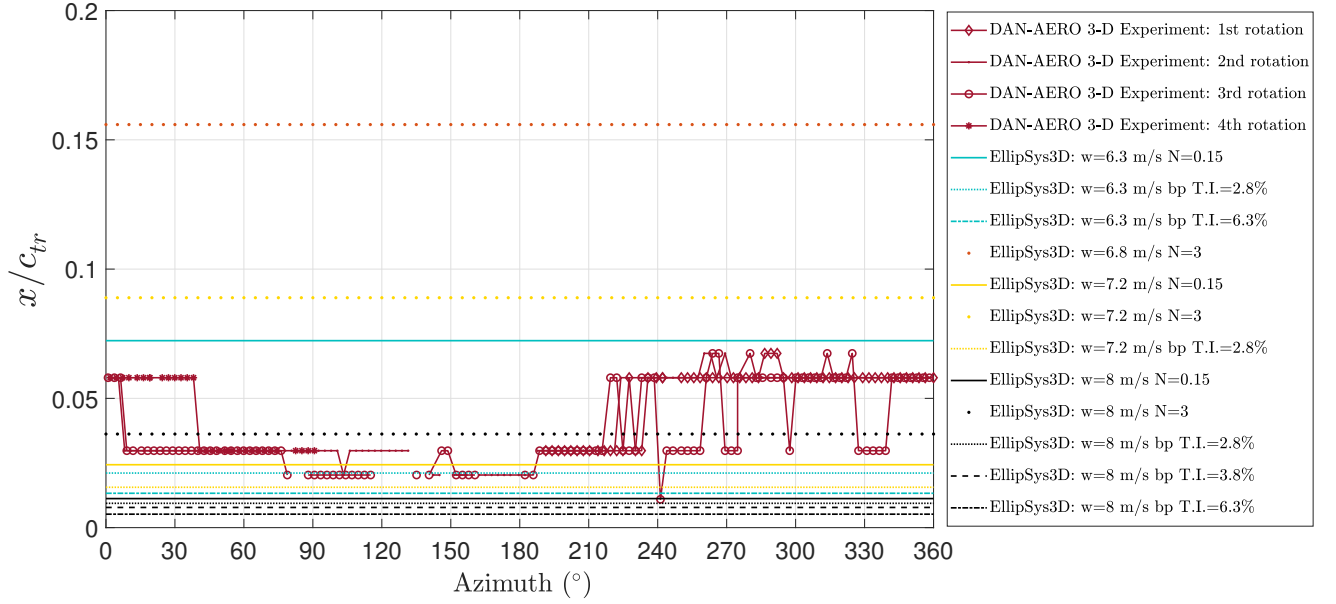


Figure 11. Experimentally detected transition points as function of azimuth angle and EllipSys3D simulations transition results for various different scenarios for the suction side of the blade section. (The CFD results are labelled by colors for the different freestream velocities (w); i.e. black: $w=8$ m/s, yellow: $w=7.2$ m/s, orange : $w=6.8$ m/s, turquoise: $w=6.3$ m/s)

The transition positions from the microphone measurements and the sectional forces derived from the pressure measurements are coupled. x/c_{tr} on the pressure side as a function of the sectional normal force is presented in Figure 12. In the same way, the EllipSys3D transition point results are presented as a function of the sectional force obtained from the simulations. Each EllipSys3D transition location-normal force point corresponds to a different simulation set-up where the input velocity and the amplification factor for the natural transition model and the turbulence intensity for the bypass transition model is varied. This comparison indicates that the simulation results are in line with the experiments although a considerable scatter is seen.

The pressure coefficient results from the pressure taps and those from the simulations are also compared. In the experiments, 4 blade sections are equipped with pressure taps and the current analysis shows the most outward section (next to the microphones) that has the highest velocity change with the azimuth compared to the other sections. The pressure coefficient is calculated as follows:

$$C_p = \frac{p - p_\infty}{\frac{1}{2}\rho(V_\infty^2 + (r\omega)^2)} \quad (13)$$

where V_∞ is the free stream velocity measured on the meteorological mast, r is the radial position of the section where the microphones are located and ω is the rotational speed of the turbine. The pressure coefficient from the experiments is obtained by azimuthal averaging of the pressure measurements from a 570 seconds time data. For comparison, C_p values obtained

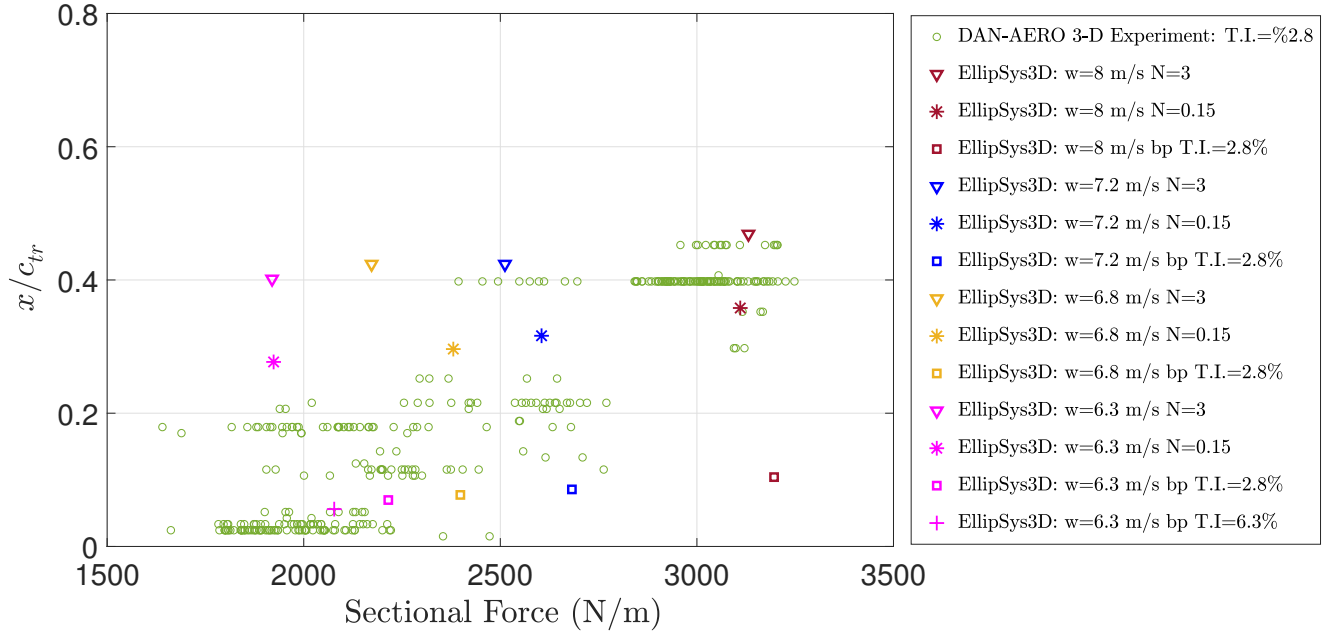


Figure 12. Experimentally detected transition points on the pressure side versus sectional normal force over four revolutions compared with the EllipSys3D simulation results.

by averaging through the full rotation is also presented in Figure 13. Moreover, both EllipSys2D and EllipSys3D results are presented and DAN-AERO experiments from the wind tunnel measurements (DAN-AERO 2-D) are also included.

The C_p value from field experiments for 0° azimuthal angle and for the full rotation is presented in Figure 13-a. The EllipSys3D result, simulated with a free stream velocity of 7.2 m/s, fits well with the 3D experimental results. At this azimuthal position, the AOA values seen in the field experiments varies from 4 to 7.5 degrees. The 2-D results presented here are for AOA= 4° and 5° , at Reynolds number of 5 million. Furthermore, the 2-D results for higher angle of attack values are also found to be still within the standard deviation of the pressure coefficient from the field experiments. Although there are some bumps on the C_p curve for the 2-D simulations and both for the 2-D and 3-D experiments on the suction side due to the manufactured geometry, there are no visible bumps in the 3D simulations since the blades were generated with theoretical airfoil sections for the 3D simulations.

The C_p values obtained from 3-D simulations and experimental C_p value at 90° azimuthal angle is presented in Figure 13-b. EllipSys3D simulations for various free stream velocities observed during the acquisition time of the pressure measurements fit well with the 3D experimental results. In Figure 13-c, EllipSys3D results for fully turbulent, natural and bypass transition are shown for 270° azimuthal position. This is the region where there is wake affected inflow in this measurement set, therefore numerical results obtained for lower freestream velocities show agreement with the 3D experimental results.

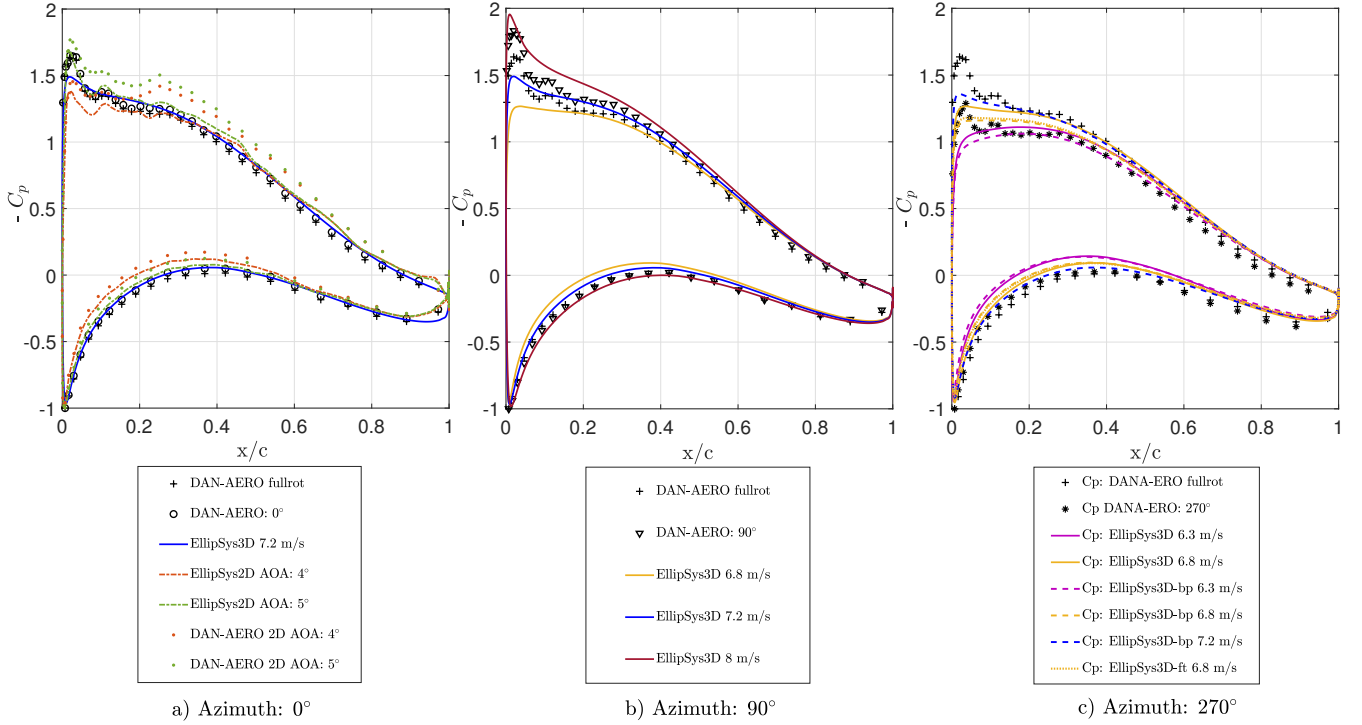


Figure 13. Pressure coefficient (C_p) comparison of the 2-D and 3-D simulation and the experimental results for azimuth angle of 0° (a), comparison of the 3-D experimental results at 90° azimuth angle with numerical results featuring several free stream velocities (b), and comparison of 3-D experimental results at 270° azimuth angle with 3-D numerical results for fully turbulent ('ft'), natural and bypass transition ('bp') models (c). For each plot, C_p value obtained by averaging through full rotation is also presented and denoted as 'fullrot'.

In order to have a wider discussion, all the selected measurements from different days in the field experiments with different pitch settings, inflow velocities and T.I. under both wake and non-wake conditions are gathered and plotted as a function of the AOA. As explained in Section 3, for the EllipSys3D results, the effective angle of attack on the blade section is determined by annular averaging of the axial velocity method in order to compare the results with 2-D simulations and experiments. Moreover, the AOA values derived from the force measurements in the 3D experiments with the detected transition points from the microphone measurements are added to this comparison. The field experiment results contain measurements from 2 different days with two pitch (p) settings of 1.25° and 4.75° and both wake and non wake conditions. This data is binned according to the pitch setting and wake shadow ranges. Transition points as a function of the AOA for both 2-D, 3-D experiments and simulations are shown in Figure 14. The airfoil tested in the wind tunnel is manufactured identical to the rotor blade section surface geometry. Therefore, possible surface irregularities are also transferred. The reason of the sudden change of the transition point from AOA= -6° to -5° on the suction side in the 2-D experiments instead of following a gradual pattern as in the EllipSys2D simulations might be due to these irregularities.

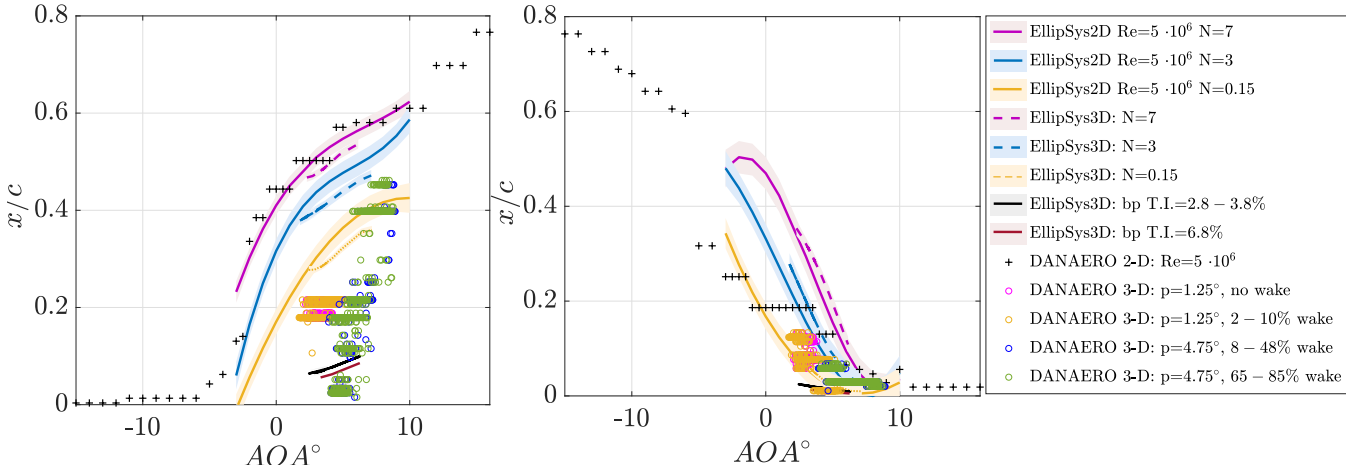


Figure 14. Detected transition points from the field and wind tunnel experiments and from the 2-D and 3-D CFD computations for the pressure side(left) and for the suction side(right). (The EllipSys 2-D and 3-D results are presented as a fitted line of the data. Shadows around the lines show the standard deviation of the fit.).

It can be seen from Figure 14-left (pressure side) that for the high AOA and high inflow turbulent cases, the transition locations are scattered around a larger percentage of the chord (from $x/c=0.016$ to $x/c=0.46$, approx. 44 % area) which creates a significant effect on the performance of the wind turbine. However, for lower AOA values under no wake conditions, the transition point does not move within more 10% along the chord during a revolution. The 2-D simulations with $N=7$ and the wind tunnel experiments show good agreement on the pressure side. It is seen that there is a significant difference on the pressure side between the 2-D wind tunnel experimental results and 3D field experiments at several inflow conditions for the same manufactured airfoil geometry. For the high pitch case ($p=4.75^\circ$), at AOA values from 4 to 9 degrees, the jump in the transition location seen in the 3D experiments is not visible either in wind tunnel results or in 2-D or 3-D simulations. These changes in the location of transition points during one revolution are represented by the simulations with different N factors for the natural transition model and different T.I. for the bypass transition model. The bypass transition model fits with the locations close to the leading edge and this shows that at several azimuthal positions, the transition is bypassed in the field experiments. The natural transition model with $N=0.15$ and $N=3$ fits to the positions where the transition locations are found to be at around 40% of the chord. By combination of the results from the simulations with bypass and natural transition models, the scattered area from the experiments are covered. For the suction side (Figure 14 - right), the results from the 3D simulations with natural and bypass transition models cover most of the results from the field experiments. For the low AOA values, and low and no wake cases, the transition location movement is within 13% along the chord in one revolution for the suction side. The more downstream transition locations, seen at low AOA values, fit with the results from the simulations with the natural transition model. This indicates that the natural transition type is also present on the suction side. Moreover, the 2-D and 3-D

experimental results show agreement in the high AOA range on the suction side and the transition locations are in very close proximity of the leading edge in most of the cases.

5 Conclusions

In this study, the analysis of the field experiments and results from the 3D CFD simulations are presented to characterize the laminar-turbulent transition behaviour of a wind turbine under real atmospheric conditions. The data from high frequency microphones placed on a wind turbine blade section are analyzed in the time and frequency domains. The transition locations are detected from the standard deviation of the pressure fluctuations, which are integrated between 2kHz and 7kHz. The inflow turbulence behaviour is obtained from one of the microphones placed nearby the leading edge by integrating the spectra from 100 to 300 Hz. The inflow velocity is obtained from meteorological mast measurements and used as an input parameter in the CFD computations. The T.I. for the simulations is obtained from the relative velocity measurement from the pitot tube placed on the blade section.

The field experiment results showed that the transition behaviour on the wind turbine blade in real operating conditions differs from the model in the wind tunnel, caused by the influence of the inflow turbulence and the wake from another turbine. These factors change the relative velocity, so the effective AOA on the blade section, and, besides, inflow turbulence is observed to have some direct effects on transition.

The effect of the wake is visible from the variation of the detected transition points at each revolution. As the wake affected rotor area increases, bigger jumps of the transition position is observed during one revolution. At the low and non-wake cases, each revolution is almost identical and the transition behaviour is mainly governed by the angle of attack changes due to the inflow velocity. The angle of attack effect on transition is analyzed by comparing results from the two different pitch settings under similar inflow conditions. It is seen that for the pressure side, at low AOA cases, the transition position is not affected by the variations during a revolution as much as in the high AOA cases. Changes in AOA is found to be highly correlated with transition locations during a revolution and the variations among different revolutions are due to the inflow turbulence.

The normal sectional forces from the experiments and simulations are compared in order to quantify the rotational changes of the force, and analyze the differences among several revolutions. Moreover, by binning the sectional forces from the experiments by the inflow velocity, the range that is covered by the simulation results obtained with various N numbers for the natural transition and T.I. for the bypass transition is identified. It is seen that the field experiments and the 3D simulations are comparable.

Furthermore, detected transition positions for the suction and pressure sides from the field experiments are compared with 3D CFD simulations. It is seen from the experiments that as the inflow fluctuations increase, the transition point moves closer to the leading edge on the pressure side of the blade section. The EllipSys3D bypass transition model pressure side predictions are in good agreement with the experimental cases in conditions of high inflow turbulence at the azimuthal positions where the turbine is under the wake of an upstream turbine. On the other hand, the experimental result from the other azimuthal positions fit to the results obtained with the natural transition model. At these positions, the freestream velocities at different height levels

of the ABL are matched with the azimuthal positions of the blade section. Comparing many datasets from different days, it is seen that for high AOA and wake cases, the movement of the transition point covers up to 44% of the chord on the pressure side in a single revolution, a value that drops to 5% at low AOA and for no wake cases. On the suction side, changes in the transition position is also observable, and the field and wind tunnel experiments agree in the high AOA range. It is seen that,

5 on the suction side, the effect of AOA is more prominent than the direct effect of the turbulence intensity, though it is not easy to reach a conclusion as the transition positions are in very close proximity to the leading edge (within $x/c = 1 - 13\%$). Therefore, at these physical conditions, the suction side is not suited to distinguish the type of the transition mechanism. It is visible from the pressure coefficient results that for azimuth angle 270° , where there is a wake from an upstream turbine for the presented case, the experiments fit with the low velocity 3D simulation results for natural and bypass transition models.

10 On the other hand, 90° azimuthal position corresponds to high AOA region in the field experiments, a suction peak increase is observed and the EllipSys3D results that are simulated for the velocities during 10 minutes acquisition time fits with the experiments. For 0° azimuth, it is seen that 2-D simulation and experimental results are within the standard deviation of 3D experiments. The pressure coefficient results also show the surface bumps on the suction side that could have been one of the factors effecting transition.

15 It is seen that the e^N semi-empirical transition model and bypass transition model in EllipSys3D can be used for high Reynolds number flows ($Re=5$ million) in real atmospheric conditions. Using both models can cover the range of transition positions that is seen in the field experiments with a relevant choice of the amplification factors and T.I. values.

Several inflow scenarios are simulated separately in EllipSys3D as it is hard to control high turbulence in the wake region and handling varying N factor and T.I. in a single simulation. Simulations with more inflow characterization can be studied in

20 the future in order to simulate the real inflow conditions from the experiments. Moreover, detailed characterization of the inflow turbulence measured on the blade with high sampling frequency instruments in field experiments is needed to separate relevant frequencies that affect boundary layer transition. By more field experiments and high resolution simulations, laminar-turbulent transition predictions can evolve, and eventually contribute to the aerodynamic prediction and the design of the wind turbine blades.

25 *Data availability.* Data is available upon request to corresponding author.

Author contributions. The literature review, the experimental data selection, processing and transition detection, the majority of the manuscript writing, mesh generation for EllipSys2D simulations, the EllipSys2D and 3-D simulations and postprocessing of the simulations and comparisons of the results from the experiments and the simulations are conducted by Özçakmak. The DAN-AERO 3-D and 2-D experimental data and the guidance for the experimental data were provided by Madsen. The CFD mesh for the EllipSys3D computations, and technical

30 and theoretical guidance in CFD computations were provided by Sørensen N. N. The corrections in the manuscript and technical advice is provided by Sørensen J. N. All authors took part in writing and editing the paper.

Competing interests. The authors declare that they have no conflict of interest.

References

- Abu-Ghannam, B. and Shaw, R.: Natural transition of boundary layers—the effects of turbulence, pressure gradient, and flow history, *Journal of Mechanical Engineering Science*, 22, 213–228, 1980.
- Arnal, D., Gasparian, G., and Salinas, H.: Recent Advances in Theoretical Methods for Laminar-Turbulent Transition Prediction, 36th AIAA Aerospace Sciences Meeting and Exhibit, <https://doi.org/10.2514/6.1998-223>, 1998.
- 5 Bak, C., Aagaard Madsen, H., Schmidt Paulsen, U., Gaunaa, M., Fuglsang, P., Romblad, J., Olesen, N., Enevoldsen, P., Laursen, J., and Jensen, L.: DAN-AERO MW: Detailed aerodynamic measurements on a full scale MW wind turbine, in: EWEC 2010 Proceedings online, European Wind Energy Association (EWEA), 2010.
- Bertolotti, F. P., Herbert, T., and Spalart, P. R.: Linear and nonlinear stability of the Blasius boundary layer, *Journal of Fluid Mechanics*, 242, 441–474, <https://doi.org/10.1017/S0022112092002453>, 1992.
- 10 Biau, D., Arnal, D., and Vermeersch, O.: A transition prediction model for boundary layers subjected to free-stream turbulence, *Aerospace science and technology*, 11, 370–375, 2007.
- Boorsma, K., Schepers, J., Gomez-Iradi, S., Herraiz, I., Lutz, T., Weihing, P., Oggiano, L., Pirrung, G., Madsen, H., Shen, W., et al.: Final report of IEA wind task 29 Mexnext (Phase 3), *Wind Energy*, 2017, 2016, 2018.
- 15 Ceyhan, O., Pires, O., Munduate, X., Sorensen, N. N., Schaffarczyk, A. P., Reichstein, T., Diakakis, K., Papadakis, G., Daniele, E., Schwarz, M., et al.: Summary of the blind test campaign to predict the high Reynolds number performance of DU00-W-210 airfoil, in: 35th Wind Energy Symposium, p. 0915, 2017.
- Chaviaropoulos, P. K., Sieros, G., Prospathopoulos, J. M., Diakakis, K., and Voutsinas, S. G.: Design and CFD-based Performance Verification of a Family of Low-Lift Airfoils, *EAWC*, 2015.
- 20 Chen, K. K. and Thyson, N. A.: Extension of Emmons’ spot theory to flows on blunt bodies, *AIAA Journal*, 9, 821–825, 1971.
- Davis, M., Reed, H., Youngren, H., Smith, B., and Bender, E.: Transition Prediction Method Review Summary for the Rapid Assessment Tool for Transition Prediction (RATTraP), US Air Force Research Lab. Technical Rept. VA-WP-TR-2005-3130, Wright–Patterson AFB, OH, 2005.
- Dhawan, S. and Narasimha, R.: Some properties of boundary layer flow during the transition from laminar to turbulent motion, *Journal of Fluid Mechanics*, 3, 418–436, 1958.
- 25 Diakakis, K., Papadakis, G., and Voutsinas, S. G.: Assessment of transition modeling for high Reynolds flows, *Aerospace Science and Technology*, 85, 416–428, 2019.
- Dini, P., Selig, M. S., and Maughmer, M. D.: Simplified Linear Stability Transition Prediction Method for Separated Boundary Layers, *AIAA journal*, 30, 1953–1961, <https://doi.org/10.2514/3.11165>, 1992.
- 30 Drela, M. and Giles, M. B.: Viscous-inviscid analysis of transonic and low Reynolds number airfoils, *AIAA journal*, 25, 1347–1355, 1987.
- Emmons, H.: The laminar-turbulent transition in a boundary layer-Part I, *Journal of the Aeronautical Sciences*, 18, 490–498, 1951.
- Eppler, R.: Practical calculation of laminar and turbulent bled-off boundary layers, 1978.
- FieldView: FieldView Reference Manual, Intelligent Light, 2017.
- Gleyzes, C. et al.: A Calculation Method of Leading Edge Separation Bubbles., *Numerical and Physical Aspects of Aerodynamic Flows II*, edited by Cebeci, T, 1983.
- 35 Hansen, M. O., Sørensen, N. N., and Michelsen, J.: Extraction of lift, drag and angle of attack from computed 3-D viscous flow around a rotating blade, in: 1997 European Wind Energy Conference, pp. 499–502, Irish Wind Energy Association, 1997.

- Herbert, T.: Parabolized stability equations, *Annual Review of Fluid Mechanics*, 29, 245–283, 1997.
- Hernandez, G. G. M., Sørensen, J. N., and Shen, W. Z.: Laminar-turbulent transition on wind turbines, 2012.
- Johansen, J. and Sørensen, N. N.: Aerofoil characteristics from 3D CFD rotor computations, *Wind Energy*, 7, 283–294, <https://doi.org/10.1002/we.127>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/we.127>, 2004.
- 5 Joseph, L. A., Borgoltz, A., and Devenport, W.: Infrared thermography for detection of laminar–turbulent transition in low-speed wind tunnel testing, *Experiments in Fluids*, 57, 77, 2016.
- Krumbein, A.: Application of Transition Prediction, in: *MEGADESIGN and MegaOpt - German Initiatives for Aerodynamic Simulation and Optimization in Aircraft Design*, edited by Kroll, N., Schwaborn, D., Becker, K., Rieger, H., and Thiele, F., pp. 107–120, Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- 10 Kümmerer, H.: Numerische Untersuchungen zur Stabilität ebener laminarer Grenzschichtströmungen, Ph.D. thesis, Verlag nicht ermittelbar, 1973.
- Langtry, R. B.: A correlation-based transition model using local variables for unstructured parallelized CFD codes, 2006.
- Larsen, T. and Hansen, A.: How 2 HAWC2, the user’s manual, Denmark. Forskningscenter Risø. Risø-R-1597, 2007.
- Lobo, B., Boorsma, K., and Schaffarczyk, A.: Investigation into Boundary Layer Transition on the MEXICO Blade, in: *Journal of Physics: Conference Series*, vol. 1037, p. 052020, IOP Publishing, 2018.
- 15 Mack, L. M.: Transition and Laminar Instability, No. NASA-CP-153203, NASA Jet Propulsion Laboratory, California, 1977.
- Madsen, H. A., Bak, C., Paulsen, U. S., Gaunaa, M., Fuglsang, P., Romblad, J., Olesen, N., P., E., Laursen, J., and L, J.: The DANAERO MW Experiments, Tech. Rep. No. Risø-R-1726(EN), Danmarks Tekniske Universitet, Risø Nationallaboratoriet for Bæredygtig Energi., 2010.
- 20 Madsen, H. A., Özçakmak, Ö. S., Bak, C., Trolborg, N., Sørensen, N. N., and Sørensen, J. N.: Transition characteristics measured on a 2MW 80m diameter wind turbine rotor in comparison with transition data from wind tunnel measurements, <https://doi.org/10.2514/6.2019-0801>, <https://arc.aiaa.org/doi/abs/10.2514/6.2019-0801>, 2019a.
- Madsen, M. H. A., Zahle, F., Sørensen, N. N., and Martins, J. R.: Multipoint high-fidelity CFD-based aerodynamic shape optimization of a 10 MW wind turbine, *Wind Energy Science*, 4, 163–192, 2019b.
- 25 Mayle, R.: A theory for predicting the turbulent-spot production rate, in: *ASME 1998 International Gas Turbine and Aeroengine Congress and Exhibition*, pp. V001T01A071–V001T01A071, American Society of Mechanical Engineers, 1998.
- Menter, F.: Zonal two equation kw turbulence models for aerodynamic flows, in: *23rd fluid dynamics, plasmadynamics, and lasers conference*, p. 2906, 1993.
- Menter, F. R., Langtry, R. B., Likki, S., Suzen, Y., Huang, P., and Völker, S.: A correlation-based transition model using local variables—part
- 30 I: model formulation, *Journal of turbomachinery*, 128, 413–422, 2006.
- Michel, R.: Etude de la Transition sur les Profils d’Aile; Etablissement d’un Critère de Determination de Point de Transition et Calcul de la Trainee de Profile Incompressible, ONERA Rep, 1, 1951.
- Michelsen, J. A.: Basis3D-a platform for development of multiblock PDE solvers, Tech. rep., Technical Report AFM 92-05, Technical University of Denmark, 1992.
- 35 Michelsen, J. A.: Block structured Multigrid solution of 2D and 3D elliptic PDE’s, Department of Fluid Mechanics, Technical University of Denmark, 1994.
- Michelsen, J. A.: Beregning af laminar-turbulentomslag i 2D og 3D, vol. Risø-R-1349(DA), pp. 37–47, 2002.

- Morkovin, M. V.: Critical evaluation of transition from laminar to turbulent shear layers with emphasis on hypersonically traveling bodies, Tech. rep., Martin Marietta Corp Baltimore Md Research Inst for Advanced Studies, 1969.
- Morkovin, M. V.: Bypass Transition to Turbulence and Research desiderata, NASA. Lewis Research Center Transition in Turbines, pp. 161–204, 1985.
- 5 Özçakmak, Ö. S., Madsen, H. A., Sørensen, N., Sørensen, J. N., Fischer, A., and Bak, C.: Inflow Turbulence and Leading Edge Roughness Effects on Laminar-Turbulent Transition on NACA 63-418 Airfoil, vol. 1037, Journal of Physics: Conference Series (Online), , IOP Publishing, <https://doi.org/10.1088/1742-6596/1037/2/022005>, 2018.
- Özçakmak, Ö. S., Sørensen, N. N., Madsen, H. A., and Sørensen, J. N.: Laminar-turbulent transition detection on airfoils by high-frequency microphone measurements, Wind Energy, 0, <https://doi.org/10.1002/we.2361>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/we.2361>,
10 2019.
- Patankar, S. V.: Numerical heat transfer and fluid flow, Hemisphere Publ, Corp., New York, 58, 1980.
- Patankar, S. V. and Spalding, D. B.: A calculation procedure for heat, mass and momentum transfer in three-dimensional parabolic flows, in: Numerical Prediction of Flow, Heat Transfer, Turbulence and Combustion, pp. 54–73, Elsevier, 1983.
- Reichstein, T., Schaffarczyk, A. P., Dollinger, C., Balaesque, N., Schüle, E., Jauch, C., and Fischer, A.: Investigation of Laminar–Turbulent
15 Transition on a Rotating Wind-Turbine Blade of Multimegawatt Class with Thermography and Microphone Array, Energies, 12, 2102, 2019.
- Reshotko, E.: Stability theory as a guide to the evaluation of transition data., AIAA Journal, 7, 1086–1091, <https://doi.org/10.2514/3.5279>, <https://doi.org/10.2514/3.5279>, 1969.
- Reza, T. Z. and Amir, K.: Prediction of boundary layer transition based on modeling of laminar fluctuations using RANS approach, Chinese
20 Journal of Aeronautics, 22, 113–120, 2009.
- Rhie, C.: A numerical study of the flow past an isolated airfoil with separation., 1982.
- Schaffarczyk, A. P., Schwab, D., and Breuer, M.: Experimental Detection of Laminar-Turbulent Transition on a Rotating Wind Turbine Blade in the Free Atmosphere, Wind Energy, 20, 211–220, <https://doi.org/10.1002/we.2001>, 2017.
- Schaffarczyk, A. P., Boisard, R., Boorsma, K., Dose, B., Lienard, C., Lutz, T., Madsen, H. Å., Rahimi, H., Reichstein, T., Schep-
25 ers, G., Sørensen, N., Stoevesandt, B., and Weihing, P.: Comparison of 3D transitional CFD simulations for rotating wind turbine wings with measurements, 1037, 022 012, <https://doi.org/10.1088/1742-6596/1037/2/022012>, <https://doi.org/10.1088%2F1742-6596%2F1037%2F2%2F022012>, 2018.
- Schepers, J. and Snel, H.: Model experiments in controlled conditions, ECN Report: ECN-E-07-042, 2007.
- Schwab, D., Ingwersen, S., Schaffarczyk, A. P., and Breuer, M.: Aerodynamic Boundary Layer Investigation on a Wind Turbine Blade under
30 Real Conditions, in: Wind Energy - Impact of Turbulence, edited by Hölling, M., Peinke, J., and Ivanell, S., pp. 203–208, Springer Berlin Heidelberg, Berlin, Heidelberg, 2014.
- Smith, A. and Gamberoni, N.: Transition, pressure gradient, and stability theory. Report no. es. 26388, douglas aircraft co, Inc., El Segundo, CA, 1956.
- Sørensen, N. N.: General Purpose Flow Solver Applied to Flow Over Hills, Ph.D. thesis, , Risø National Laboratory., 1995.
- 35 Sørensen, N. N.: CFD modelling of laminar-turbulent transition for airfoils and rotors using the γ -model, Wind Energy, 12, 715–733, <https://doi.org/10.1002/we.325>, <https://onlinelibrary.wiley.com/doi/abs/10.1002/we.325>, 2009.
- Sørensen, N. N., Bechmann, A., and Zahle, F.: 3D CFD computations of transitional flows using DES and a correlation based transition model, Wind Energy, 14, 77–90, 2011.

- Sørensen, N. N., Zahle, F., and Michelsen, J.: Prediction of airfoil performance at high Reynolds numbers., 2014.
- Sørensen, N. N.: HypGrid2D. A 2-d mesh generator, Tech. rep., Risø National Laboratory, 1998.
- Stock, H. and Degenhart, E.: A simplified $e \exp n$ method for transition prediction in two-dimensional, incompressible boundary layers, *Zeitschrift für Flugwissenschaften und Weltraumforschung*, 13, 16–30, 1989.
- 5 Stock, H. W. and Haase, W.: Feasibility Study of e Transition Prediction in Navier-Stokes Methods for Airfoils, *AIAA journal*, 37, 1187–1196, 1999.
- Suder, K. L., O'Brien, J. E., and Reshotko, E.: Experimental study of bypass transition in a boundary layer, *MST*, p. 20, 1988.
- Suzen, Y. and Huang, P.: Modeling of flow transition using an intermittency transport equation, *Journal of fluids engineering*, 122, 273–284, 2000.
- 10 Suzen, Y., Xiong, G., and Huang, P.: Predictions of transitional flows in low-pressure turbines using intermittency transport equation, *AIAA journal*, 40, 254–266, 2002.
- Troldborg, N., Bak, C., Aa, M. H., and Witold, S.: DANAERO MW: Final Report, Tech. Rep. No. 0027(EN), DTU Wind Energy, 2013.
- Van Ingen, J. and Schepers, J.: Prediction of boundary layer transition on the wind turbine blades using the eN method and a comparison with experiment, Private communication, 2012.
- 15 Van Ingen, J. L.: A Suggested Semi-Empirical Method for The Calculation of the Boundary Layer Transition Region, Tech. Rep. No. V.T.H.-74, Delft University of Technology, 1956.
- Von Kármán, T.: Über laminare und turbulente Reibung, *Z. Angew. Math. Mech.*, 1, 233–252, 1921.
- Walters, D. K. and Leylek, J. H.: A new model for boundary layer transition using a single-point RANS approach, *J. Turbomach.*, 126, 193–202, 2004.
- 20 Wazzan, A., Okamura, T., and Smith, A.: Spatial and temporal stability charts for the Falkner-Skan boundary-layer profiles, Tech. rep., McDonnell Douglas Astronautics Co-Hb Huntington beach Ca, 1968.
- Welch, P.: The use of fast Fourier transform for the estimation of power spectra: a method based on time averaging over short, modified periodograms, *IEEE Transactions on audio and electroacoustics*, 15, 70–73, 1967.