

Comparison of Free Vortex Wake and BEM Results Against Large Eddy Simulations Results for Highly Flexible Turbines Under Challenging Inflow Conditions

Kelsey Shaler¹, Ben Anderson¹, Luis A. Martínez-Tossas¹, Emmanuel Branlard¹, and Nick Johnson¹

¹National Renewable Energy Laboratory, Colorado, USA

Correspondence: Kelsey Shaler (kelsey.shaler@nrel.gov)

Abstract. Throughout wind energy development, there has been a push to increase wind turbine size due to the substantial economic benefits. However, increasing turbine size presents several challenges, both physically and computationally. Modeling large, highly flexible wind turbines requires highly accurate models to capture the complicated aeroelastic response due to large deflections and nonstraight blade geometries. Additionally, development of floating offshore wind turbines requires modeling techniques that can predict large rotor and tower motion. Free vortex wake (FVW) methods model such complex physics while remaining computationally tractable to perform key simulations necessary during the turbine design process. Recently, a FVW model—convecting Lagrangian Filaments (OLAF)—was added to the National Renewable Energy Laboratory engineering tool OpenFAST to allow for the aerodynamic modeling of highly flexible turbines along with the aero-hydro-servo-elastic response capabilities of OpenFAST. In this work, FVW and low-fidelity blade-element momentum (BEM) results are compared to high-fidelity actuator line CFD simulation results via the Simulator for Wind Farm Applications (SOWFA) method for a highly-flexible downwind turbine for varying yaw misalignment, shear exponent, and turbulence intensity (TI) conditions. Through these comparisons, it was found that for all considered quantities of interest, SOWFA, OLAF, and BEM results compare well for steady inflow conditions with no yaw misalignment. For OLAF results, this strong agreement with SOWFA results was consistent for all yaw misalignment values. The BEM results, however, deviated significantly more from SOWFA results with increasing absolute yaw misalignment. Differences between OLAF and BEM results were dominated by yaw misalignment angle, with varying shear exponent and TI leading to more subtle differences. Overall, OLAF results were more consistent than BEM results when compared to SOWFA results under challenging inflow conditions.

Copyright statement. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes.

1 Introduction

Over the years, wind energy researchers have focused on increasing wind turbine rotor size, yielding substantial reductions in wind energy costs. As rotor size increases, substantially more energy is captured through greater swept area, thus increasing turbine capacity factor while reducing specific power. Low specific power rotors, with correspondingly higher capacity factors, have been shown to lead to higher economic value (Bolinger et al. (2021)). One important consideration for such large turbines, however, is increased blade flexibility. In particular, large blade deflection likely results from large, highly flexible wind turbine blades. The dynamic and complex nature of large blade deflections leads to the violation of many assumptions used by common aerodynamic models, such as the blade element momentum (BEM) method. Such aerodynamic models are originally valid for axisymmetric rotor loads contained in a plane and for which there is little to no interaction between the turbine blades and the near wake of the turbine. When operating under normal conditions, large blade deflections may cause a swept rotor area that deviates significantly from the rotor plane and the turbine near wake to diverge from a uniform helical shape. The fact that the steady state swept area deviates from a plane increases the three-dimensional interactions between the blade elements and therefore further violates the assumptions of independence of the blade annuli. The unsteady motion of the blade resulting from the increased flexibility of modern blade designs lead to larger angle of attack fluctuations, and therefore increasing the importance of accurate and robust dynamics stall models. Further, a non-uniform near wake increases interactions between turbine blades and the local near wake, thus violating assumptions of models that do not account for the position and dynamics of the near wake. In addition to the complications from large blade deflection, there are many other complex wind turbine situations that violate simple engineering assumptions. Such situations include: accurately capturing aerodynamic loads for nonstraight blade geometries (e.g., built-in curvature or sweep); skewed flow caused by yawed inflow, turbine tilt, or strong shear; and large rotor motion due to placing a turbine atop a compliant floating offshore platform.

Large, flexible rotors and complex operating conditions necessitate higher-fidelity aerodynamic models. By definition, computational fluid dynamic (CFD) methods are able to capture the necessary physics of such problems. However, the high computational cost limits the number of simulations that can be practically performed for a given problem, which is an important consideration in load analysis for turbine design. Free vortex wake (FVW) methods model the complex physics required for such problems, while remaining less computationally expensive than CFD methods. Many FVW methods have been developed throughout the years, ranging from the early treatments by Rosenhead (1931), the formulation of vortex particle methods by Winckelmans and Leonard (1993), to the recent mixed Eulerian-Lagrangian compressible formulations of Papadakis (2014). Established FVW codes in wind energy include the vortex particle approach of GENUVP (Voutsinas (2006)) and the vortex filament approach of AWSM (van Garrel (2003)), both of which are coupled to structural solvers. The method was extended by Branlard et al. (2015) to use vortex methods in the aeroelastic modeling of wind turbines in sheared and turbulent inflow. The limitations of BEM were highlighted in previous studies that compared FVW and BEM (Hauptmann et al. (2014); Per) or FVW and large-eddy simulations (Forsting et al. (2019)). Vortex theory have been used to answer some of the shortcomings of BEM. Examples of corrections related to the independence of radial annuli, yaw, and tip-losses are discussed in Branlard

(2017). Corrections for out-of-plane deflections and coning are found in Li et al. (2022a, b). Yet, FVW are now reaching a stage where they can be used for full load case calculations (Boorsma et al. (2020)).

This work focuses on the FVW model that was recently implemented into the modeling tool OpenFAST (Shaler (2020)). cOnvecting LAgrangian Filaments (OLAF) is an FVW model used to compute the aerodynamic forces on moving two- and three-bladed horizontal-axis wind turbines. This module is incorporated into the National Renewable Energy Laboratory (NREL) physics-based engineering tool OpenFAST, which solves the aero-hydro-servo-elastic dynamics of individual wind turbines. OLAF is incorporated into the OpenFAST module *AeroDyn15* as an alternative to the traditional BEM option. Incorporating the OLAF module into OpenFAST allows for the modeling of highly flexible turbines along with the aero-hydro-servo-elastic response capabilities of OpenFAST. Following a discretization and regularization studies, the purpose of this work is to determine the accuracy of an aeroelastically coupled FVW method under conditions known to be challenging to lower-fidelity aerodynamic methods. This is done by comparing OLAF results to actuator line large-eddy simulation via SOWFA and low-fidelity BEM results for a large range of yaw misalignment, shear exponent, and turbulence intensity (TI) conditions. These comparisons provide better understanding of OLAF, BEM, and actuator-line formulation of SOWFA (Churchfield et al. (2012)) relative performance when subjected a range of inflow conditions, both simple and challenging. Combined with the discretization and regularization studies, this will aid in the selection of the most appropriate modeling tool based on the application and available resources.

2 Approach and Methods

2.1 Overview of OLAF

The OLAF module uses a lifting-line representation of the blades, which is characterized by a distribution of bound circulation. The spatial and time variation of the bound circulation results in free vorticity being emitted in the wake. OLAF solves for the turbine wake in a time-accurate manner, which allows the vortices to convect, stretch, and diffuse. The OLAF model is based on a Lagrangian approach, in which the turbine wake is discretized into Lagrangian markers. There are many methods of representing the wake with Lagrangian markers (Branlard (2017)). In this work, a hybrid lattice/filament method is used, as depicted in Figure 1. Here, the position of the Lagrangian markers is shown in terms of wake age, ζ , and azimuthal position, ψ , though in the code they are defined in terms of Cartesian coordinates. A lattice method is used in the near wake of the blade. The near wake spans over a user-specified angle. Though past

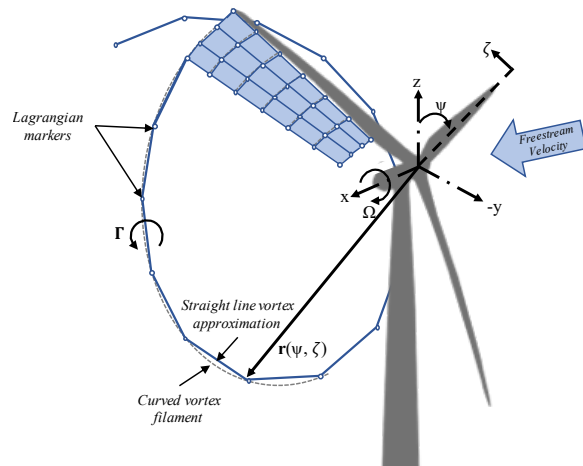


Figure 1. Evolution of near-wake lattice, blade tip vortex, and Lagrangian markers. Note that the blade root vortex is also present in the formulation, but not shown in the figure.

research has indicated that a near-wake region of 30° is sufficient (Leishman et al. (2002); Ananthan et al. (2002)), it has been shown that a larger near wake is required for high thrust and other challenging conditions. This is further investigated in this work. After the near wake region, the wake is assumed to instantaneously roll up into a tip and root vortex, which are assumed to be the most dominant features for the remainder of the wake (Leishman et al. (2002)). Each Lagrangian marker is connected to adjacent markers by straight-line vortex filaments. The wake is discretized based on the spanwise location of the blade sections and a specified time step (dt), which may be different from the time step of *AeroDyn15*. The wake is allowed to move and distort with time, thus changing the wake structure as the markers are convected downstream. To limit computational expense, the root and tip vortices are truncated after a specific distance downstream from the turbine. The wake truncation violates Helmholtz's first law and hence introduces an erroneous boundary condition. To alleviate this, the wake is "frozen" in a buffer zone between a specified buffer distance and the wake length. In this buffer zone, the markers convect at the average ambient velocity. In this way, truncation error is minimized (Leishman et al. (2002)). The buffer zone is typically chosen as the convected distance over one rotor revolution.

As part of OpenFAST, induced velocities at the lifting line/blade are transferred from OLAF to *AeroDyn15* and used to compute the effective blade angle of attack at each blade station, which is then used to compute the aerodynamic forces on the blades. The OLAF method returns the same information as the BEM method, but allows for more accurate calculations in areas where BEM assumptions are violated, such as those discussed above. Unsteady aerodynamic effects, such as dynamic stall, are accounted when using OLAF using the same models as the BEM method of *AeroDyn*, but the shed vorticity effect is removed when OLAF is used.

The governing equation of motion for a vortex filament is given by

$$\frac{d\mathbf{r}}{dt} = \mathbf{V}(\mathbf{r}, t) \quad (1)$$

where \mathbf{r} is the position vector of a Lagrangian marker and \mathbf{V} is the velocity. Vortex filament velocity is a nonlinear function of the vortex position, representing a combination of the freestream and induced velocities (Hansen (2008)). The induced velocities at each marker, caused by each straight-line filament, are computed using the Biot-Savart law, which considers the locations of the Lagrangian markers and the intensity of the vortex elements (Leishman et al. (2002)):

$$d\mathbf{v}(\mathbf{x}) = F_\nu \frac{\Gamma}{4\pi} \frac{d\mathbf{l} \times \mathbf{r}}{|\mathbf{r}|^3} \quad (2)$$

Here, Γ is the circulation strength of the filament, $d\mathbf{l}$ is an elementary length along the filament, and \mathbf{r} is the vector between a point on the filament and the control point \mathbf{x} . The regularization factor F_ν is introduced because of the singularity that occurs in the Biot-Savart law at the filament location (Vatistas et al. (1991)). Viscous effects prevent this singularity from occurring. In this work the Vatistas regularization function is used, given by:

$$F_\nu = \frac{(r/r_c)^2}{(1 + (r/r_c)^4)^{1/2}} \quad (3)$$

where r_c is the regularization parameter, or vortex core radius. OLAF uses a different regularization value for the blades and the wake. Viscosity diffuses the vortex strength with time, which is modeled by increasing the wake regularization parameter

using a "core spreading" model, given by Eq. 4.

$$120 \quad r_c(\zeta) = \sqrt{r_c(0)^2 + 4\alpha\delta\nu\zeta} \quad (4)$$

where $\alpha = 1.25643$, ν is the kinematic viscosity, ζ is the wake age, and δ is a core spread eddy viscosity parameter. Additional details and models are found in Shaler et al. Shaler et al. (2020)

The circulation along the blade span is computed using a lift coefficient-based method. This method determines the circulation within a nonlinear iterative solver that utilizes the polar data at each control point on the lifting line. The algorithm ensures
 125 that the lift obtained using the angle of attack and the polar data matches the lift obtained with the Kutta-Joukowski theorem. This method is based on the work of van Garrel (2003) and is further detailed in the OLAF User's Guide and Theory Manual (Shaler et al. (2020)).

2.2 Overview of SOWFA

The Simulator fOr Wind Farm Applications (SOWFA) is a collection of software libraries used to perform large-eddy sim-
 130 ulations of wind plant flows (Churchfield et al., 2012; Churchfield and Lee). SOWFA is built on top of the OpenFOAM framework (Weller et al., 1998). In SOWFA, the filtered Navier Stokes equations are solved using a finite-volume formulation. The spatial derivatives are computed using second order finite-difference and the time advancing is done using second order backward differentiation. The wind turbine blades and tower are modeled using body forces from actuator line model (Martínez-Tossas et al., 2015; Churchfield et al., 2015; Sørensen and Shen, 2002). Velocity sampling is done at the actuator
 135 points, to be consistent with the original formulation of the actuator line model and other studies (Sørensen and Shen, 2002; Martínez-Tossas et al., 2015, 2018).

2.3 Discretization and Regularization Study Results

Table 1. Main parameters of the BAR-DRC baseline wind turbine.

Parameter	BAR-DRC
Rotor Position (-)	downwind
Number of Blades (-)	3
Rated Generator Power (kW)	
Rotor Diameter (m)	212.0
Rated Blade Pitch (°)	~ 24
Rated Rotor Speed (rpm)	7.88
Rotor Tilt (deg)	5
Hub Height (m)	140.09
Max. Chord (m)	4.74

Discretization and regularization studies were performed using the Big Adaptive Rotor (BAR) Downwind Rail Carbon (DRC) turbine (Bortolotti et al. (2021)), described in Table 1, to determine recommended values for various OLAF input parameters. All cases were 10-minute simulations—not included initial transients—with a set rotor speed and blade pitch. The studies were performed with uniform wind speeds ranging from 4 to 12 m/s, with the ranges for each study shown in Table 2. The studies were done sequentially as presented here. Meaning, the wake discretization study was the first to be completed, from which an optimal value was determined. This value was used as the wake discretization value for all remaining studies. The near wake extent study was performed next, and this optimal value was used for the remaining studies, and so on. Output

Table 2. Discretization and convergence study ranges.

Wake Disc.	Near Wake Extent	Far Wake Extent	Wake Reg. Factor	Wing Reg. Factor	Core Spread Eddy Visc.
2.5°-15°	30°-2520°	3D-12D	0.1-5	0.1-5	100-5000

quantities of interest (QoIs) are summarized in Table 3. An overview of the results is included here; for detailed results, see the online OLAF documentation (OLA (2022)).

Table 3. Quantities of interest for discretization and regularization studies.

Quantity of Interest	Component	
Blade-root moments	OoP bending	Pitching moment
Tower-base moment	FA bending	SS bending
Axial induction	25% blade span	75% blade span
Tangential induction	25% blade span	75% blade span
Circulation	25% blade span	75% blade span
Shaft torque		

2.3.1 Wake Discretization and Length

The wake discretization and convergence studies observed how wind turbine QoIs varied with changing wake discretization, near wake extent, and far wake extent. These are all user-defined parameters for OLAF and are known to have a large effect on both wind turbine response and simulation time. The wake discretization is specified by the *AeroDyn15* time step, using

Table 4. Recommended values selected from the results of the discretization study

Parameter	Value
Wake Discretization	5°
Near Wake Extent	720°
Far Wake Extent	5D

the equation $d\psi = dt \times \Omega$. Because rotor speed is a turbine characteristic, $d\psi$ is defined using dt , which remains constant throughout the simulation. A smaller time step results in a finer wake discretization. The near wake extent is specified by the number of revolution degrees to be used in the lattice near-wake computations. Similarly, the far wake extent is determined by specifying the remaining length of the turbine wake length used in the straight-line filaments calculations. By reducing the
155 time step or increasing the wake length, the simulation accuracy is expected to improve, along with the computational expense. Accuracy is assessed by computing the percent difference of the mean QoI value at each test point relative to the finest or largest value for the discretization and wake extent studies, respectively. To balance model accuracy with computational cost, a convergence criteria of $\sim 2\%$ was selected. The recommendations and computational costs in this section are based on all QoI in Table 4. However, due to space constraints only generator power is shown. Other results can be seen in OLA (2022).

160 An optimal value was found across all wind speeds for each study, as reported in Table 4. Generator power convergence for each parameter is shown in Figure 2. The convergence is hard to observe for the wake discretization study. Results for fine wake discretization are likely to be a function of the wake regularization factor, which is a topic requires further research (see Section 2.3.2). Regardless, the percent difference remains below $\pm 1\%$ for all discretization values. Therefore, the computational cost in Figure 2(d) plays a large part in selecting the recommended discretization value. The power converges for increasing near wake
165 extent; this is expected as a longer wake captures more induction at the rotor (see the discussion related to Figure 3). From this plot, the necessary near wake length to meet the 2% convergence criteria is a function of wind speed, with higher wind speeds requiring a longer wake. to ensure the criteria is satisfied for most wind speeds while remaining computational tractable, a near wake length of 720° is recommended. Variability in relative error is observed for increased far wake extents at lower wind speeds, but the error generally decreases for longer far wakes. Despite this variation, percent difference remains below 2% for
170 all far wake lengths. This is likely due to the sufficient near wake length. Therefore, far wake length recommendation is largely based on computational expense. Computational time for variations in each parameter is shown in Figure 2. All simulations are run using a tree-code algorithm with a time complexity $\mathcal{O}(n \log n)$. Note that the values reported in Table 4 were deemed optimal for the specific wind turbine used in this paper under uniform inflow wind, and are not necessarily optimal for other configurations. These results could vary based on turbine model and inflow condition, including the addition of turbulence.
175 However, they can serve as a starting point for other systems and inflows.

The wake length required for a given accuracy can be assessed by comparing the induced velocity at the rotor plane as obtained from a vortex cylinder of finite length (u_L) and from a vortex cylinder of infinite length (u_∞), the ratio of which is shown in Figure 3. Both velocities can be obtained using closed form formulae (Branlard and Gaunaa (2014)). It is seen that 99% of the axial induction is provided by the first 4 diameters of the wake of a vortex cylinder. This observation supports the
180 recommended value of $5D$ selected in Table 4.

2.3.2 Regularization

Wake regularization factor, blade regularization factor, and core spreading eddy viscosity were examined for the regularization study. The method was the same as the wake discretization and extent studies, except that results were compared against

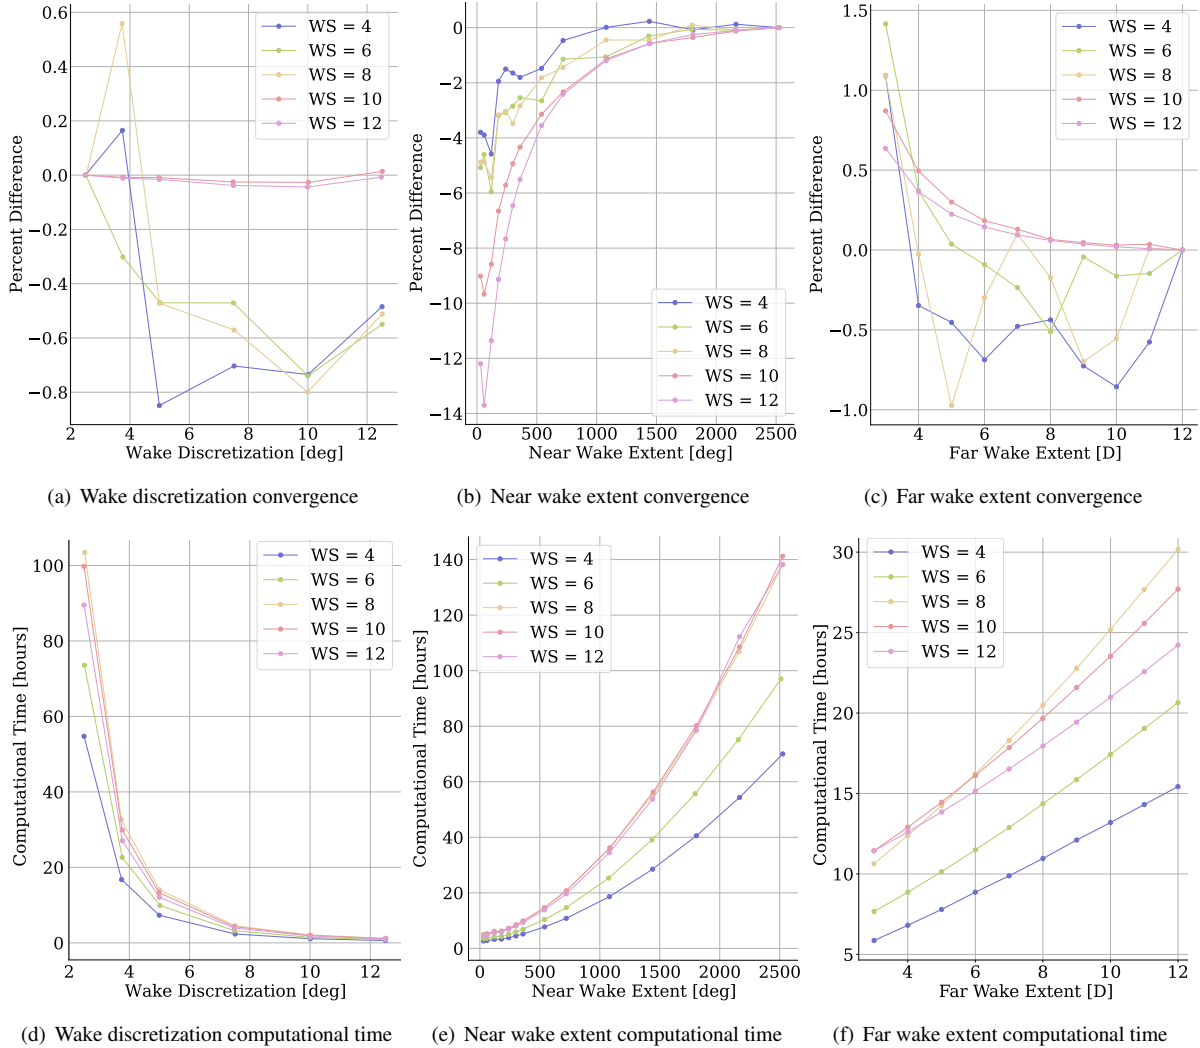


Figure 2. Percent differences (top) and computational time (bottom) of time-averaged rotor power with varying for (a, d) wake discretization, (b, e) near wake extent, and (c, f) far wake extent. Wake discretization results are relative to 2.5° . Near wake extent results are relative to 2520° (7 revolutions). Far wake extent results are relative to 12D.

185 those obtained using the actuator-line formulation of SOWFA (Churchfield et al. (2012)) to determine the optimal parameter values. This was done because it is not possible to know *a priori* which regularization parameter can be used as a reference. A core spreading value of $\epsilon/D=0.05$ was used in SOWFA. This value is close to the typical values used in other studies, but is not expected to produce optimal results (Martínez-Tossas et al., 2015; Martínez-Tossas et al., 2017; Churchfield et al., 2017; Martínez-Tossas et al., 2018). Recent work suggests that optimal results require much finer grid resolutions or advanced
190 aerodynamic formulations (Martínez-Tossas and Meneveau, 2019; Forsting et al., 2019). Using an optimal regularization is an active research topic and will be considered as part of future work. The questions remains as to whether the actuator-line

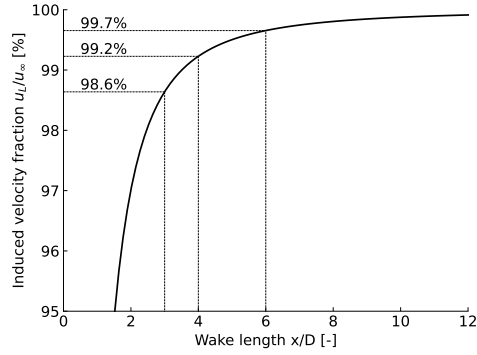


Figure 3. Fraction of induced velocity for various wake length as obtained using vortex cylinders of finite and infinite lengths.

simulations can be used as a reference. The different parameter values found to minimize the difference with SOWFA for different wind speeds (i.e., zero-crossing in Figure 4) are reported in Table 5. Computational time was generally insensitive to

Table 5. Recommended values selected from the results of the regularization convergence study

Parameter	4 m/s	6 m/s	8 m/s	10 m/s	12 m/s
Wake Regularization [dr]	0.4	0.4	0.3	0.9	1.2
Blade Regularization [dr]	0.2	0.9	0.9	0.6	0.2
Core Spread [-]	700	-	-	-	1000

parameter values, so is not reported. Time-averaged generator power results are shown in Figure 4 for the wake regularization
 195 factor study. Based on the results given in Table 5, no clear trend is found between the regularization factors and the wind speed. It appears that a reasonable approximation would consist of setting the regularization parameters to $0.5 dr$, where dr is the blade spanwise discretization. More research is nevertheless needed, both for actuator line CFD and lifting-line based codes, to find the optimal values of these parameters.

3 Modeling Cases

200 In this work, the OpenFAST-FVW code was compared to traditional OpenFAST-BEM and actuator line large-eddy simulation results. Comparison of the FVW method to the traditional BEM method in OpenFAST is performed using the BAR-DRC turbine (Bortolotti et al. (2021)). Some characteristics of the turbines are given in Table 1. Large-eddy simulations were performed using the Simulator fOr Wind Farm Applications (SOWFA) (Churchfield et al. (2012)). For all simulations, structural modeling was done using the structural module *ElastoDyn* from OpenFAST. The turbine controller was not used and all sim-
 205 ulations were performed at a set rotor speed and blade pitch. The tower shadow model for the blade induction and blade loads are the same for BEM and OLAF, the details of which can be found in Aer (2022). An additional tower potential flow model

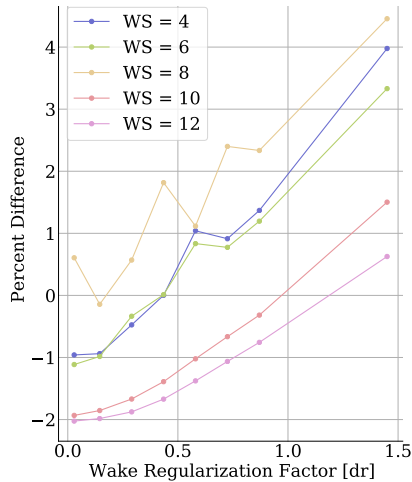


Figure 4. Power percent difference between OLAF and SOWFA simulation results for various wake regularization factors.

was used in OLAF simulations to model the effect of the tower on the wake. BEM simulations were modelled with all relevant and available BEM corrections within OpenFAST. In particular, the Pitt/Peters skew model, Prandtl tip- and hub-loss models, and the Minemna/Pierce dynamic stall model. Details of these models are available at Moriarty and Hansen (2005) and Aer 210 (2022).

Simulations were performed at a mean hub-height inflow velocity of 8 m/s for a range of yaw misalignment angles, shear exponents, and turbulence intensities (TI), as summarized in Table 6. Each parameter was varied separately, with the nominal

Table 6. Variation of inflow conditions for code comparisons. All simulations were performed for a mean inflow velocity of 8 m/s.

Varied Parameter	Yaw Misalignment [deg]	Shear Exponent [-]	TI [%]
Yaw Misalignment	[-30 : 15 : 30]	0	0
Shear Exponent	0	0, 0.01, 0.05, 0.1, 0.2	0
Turbulence Intensity	0	0	0, 1, 5, 10, 15

conditions being no yaw misalignment with steady uniform inflow. For steady OpenFAST simulations, *InflowWind* was used to specify the hub-height inflow velocity and shear exponent. SOWFA used uniform velocity as the inflow boundary condition. 215 For the turbulent OpenFAST simulations, ambient wind inflow was generated synthetically by TurbSim (Jonkman (2014)), which creates two-dimensional (2D) turbulent flow fields. Turbulence is simulated using the Kaimal spectrum with exponential coherence model and the standard IEC turbulence model was used. The time-dependent 2D wind field is propagated along the wind direction at the mean wind speed of the midpoint of the field. Each turbulent case is simulated in TurbSim and OpenFAST six times, using six different random turbulence seeds to generate the wind data at the spatially coherent points. This was done 220 to capture variability in the numerical simulation results associated with the uncertainty imposed by the unmeasured wind inflow. The turbulent inflow was identical for the BEM and OLAF simulations, as they are both run as part of OpenFAST and

thus used the same TurbSim-generated inflow. SOWFA simulations were not conducted for turbulent inflow, partly because it would have been impossible to use the same inflow, thus leading to questionable comparison results.

4 Results

225 For the code-to-code comparison, the results focus on verification of statistical results between OLAF, BEM, and SOWFA. The QoIs were turbine performance, blade-root bending moments, and tower-base bending moments. Blade-span and azimuthal results were also considered.

Many QoIs were considered, as summarized in Table 7. All QoI were considered as time- and azimuthally-averaged quantities. Though all these QoIs were considered, only a select few are presented for much of the analysis. All QoIs are included
 230 in box and whisker plots, which show the median value of all results; individual QoI values; lower and upper quartile values; maximum and minimum values excluding outliers; and outlier points. All inflow conditions are for steady inflow unless stated otherwise. Yaw misalignment cases were simulated in constant uniform inflow (shear exponent = 0) and sheared and TI comparison cases were simulated with no yaw misalignment.

Table 7. Quantities of interest for comparison study.

Quantity of Interest	Component		
Blade tip displacements	OoP	IP	
Blade-root moments	OoP bending	IP bending	Pitching moment
Tower-top deflections	FA	SS	
Tower-top moments	FA bending	SS bending	Yaw moment
Tower-base moments	FA bending	SS bending	Yaw moment
Shaft torque			
Rotor power			
Rotor thrust			

4.0.1 Yaw Misalignment

235 Shown in Figure 5 are time-averaged quantities for several QoIs from OLAF, BEM, and SOWFA simulations for a range of yaw misalignment angles, along with percent differences, computed using Equation 5, of OLAF and BEM results relative to SOWFA results.

$$\%_{\text{Diff,Mean}} = \frac{|\bar{x} - \bar{x}_{\text{SOWFA}}|}{(\bar{x} + \bar{x}_{\text{SOWFA}})/2} * 100 \quad (5)$$

For all QoIs, the results from each computational method follow the same trend with changing yaw misalignment. The trend
 240 depends on the QoI, with most showing reduced values with increasing absolute yaw misalignment. Tower-base side/side and yaw moments showed decreasing values with non-absolute increasing yaw misalignment, and blade-root pitching moment

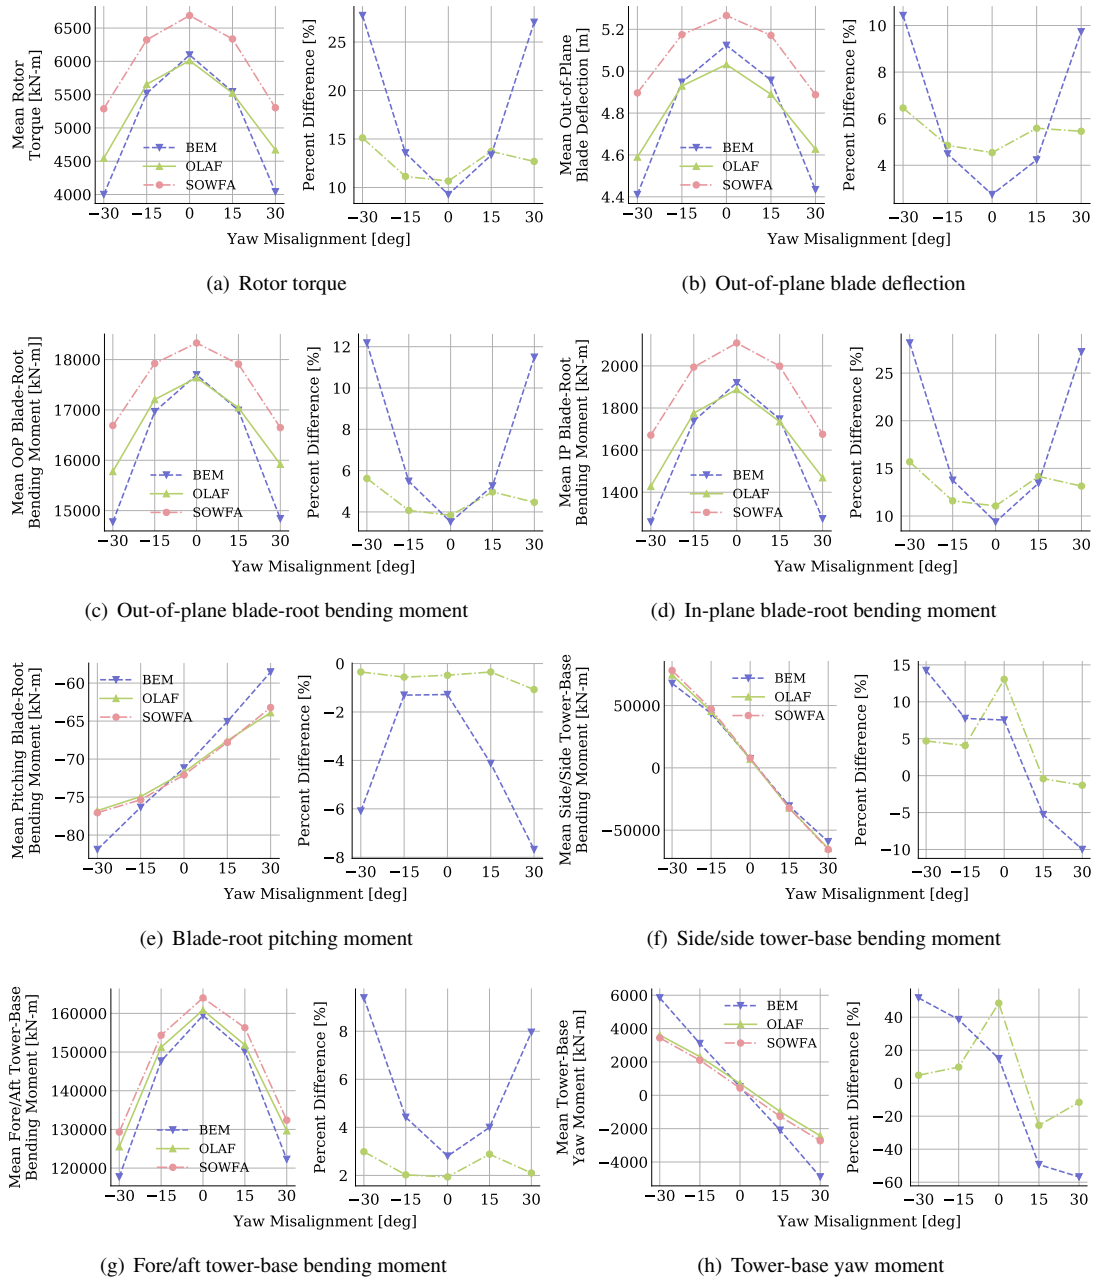


Figure 5. Time-averaged quantities for OLAF, BEM, and SOWFA results with varying yaw misalignment angles. Plots on the left show mean quantities and plots on the right show percent difference of the means from SOWFA results.

showed the opposite trend. Though the same trends were captured by each computational method, the actual results differ. In particular, OLAF and SOWFA results show comparable values with an average percent difference of $<5\%$ for all yaw

misalignment angles, including the most extreme. However, BEM results deviated significantly more from SOWFA results with increasing absolute yaw misalignment, with percent differences at yaw misalignment of $\pm 30^\circ$ reaching up to 48.6% for the tower-base yaw moment. Alternatively, the percent difference between OLAF and SOWFA results appear to be only marginally dependent on yaw misalignment. Note that the high percent error the the OLAF results at 0° are artificially increased due to the small average value at this misalignment angle. Shown in Figure 6 are box and whisker plots of percent difference values between time-averaged mean and standard deviations, computed using Equation 6, of SOWFA results and OLAF or BEM results for all QoIs listed in Table 7 except the blade distributed quantities and those with means near zero. When box and whisker plots are shown, each dot represents an individual QoI value (variation in x-axis location within a bar aids visualization). Box and whisker plots show the median (yellow line) value of all results; lower and upper quartile values (black lines); maximum and minimum values excluding outliers (whiskers); and outlier points (\times symbols).

$$\%_{\text{Diff,Std}} = \frac{|\sigma(x) - \sigma(x)_{\text{SOWFA}}|}{(\sigma(x) + \sigma(x)_{\text{SOWFA}})/2} * 100 \quad (6)$$

Percent differences of time-averaged means of BEM results increase with increasing absolute yaw angle, averaging 5.46% for no yaw misalignment and increasing to 15.9% for $\pm 30^\circ$ yaw misalignment. OLAF results show no dependence on yaw misalignment, with percent differences for all yaw misalignment angles reaching no higher than 8%. Percent differences of standard deviation values tend to be larger for both BEM and OLAF results, averaging 20.6% and 15.1%, respectively across all yaw misalignment angles. Though OLAF standard deviation values do differ with yaw misalignment, the average standard deviations across all QoIs does not seem to depend on yaw misalignment. BEM standard deviation results show dependence to yaw misalignment with increasing percent difference for large absolute yaw misalignment values, but to a lesser extent than what was seen for mean values. Thus, the accuracy of BEM mean and standard deviation results compared to SOWFA results seems to decrease with increased absolute yaw misalignment, whereas OLAF accuracy stays mostly consistent regardless of yaw misalignment.

Shown in Figure 7 are azimuthal-averaged results for all computational methods as well as percent differences of OLAF and BEM results relative to those of SOWFA. For all QoIs, all codes follow comparable trends. Rotor torque and tower-base yaw moments show three large dips corresponding to the blade passing behind the tower. Similarly, OoP blade-root bending results show a dip where the blade passes behind the tower. For OoP blade-root bending moment results, OLAF and SOWFA results are in close agreement for all azimuthal blade locations, though increased differences are seen behind the tower, at which point OLAF predicts a sharper drop in bending moment. BEM results show comparable results, but predict a lower bending moment at all azimuthal locations. When yaw misalignment is introduced, OLAF and SOWFA results remain comparable, again with OLAF predicting lower bending moments when passing behind the tower. As before, BEM predicts lower bending moments at all azimuthal locations, and during the portion of the blade motion where the blade is downstream of the tower the results are actually closer to SOWFA and OLAF results. During the blade motion where the blade is not in the wake of the tower, however, BEM predicts nearly 30% lower bending moment results compared to SOWFA, with -30° performing the worst.

While accuracy is crucial to the success of a computational method, it is important to consider the differences in computation cost of each method used in this work. Shown in Figure 8 is a comparison between the computation time in CPU hours for

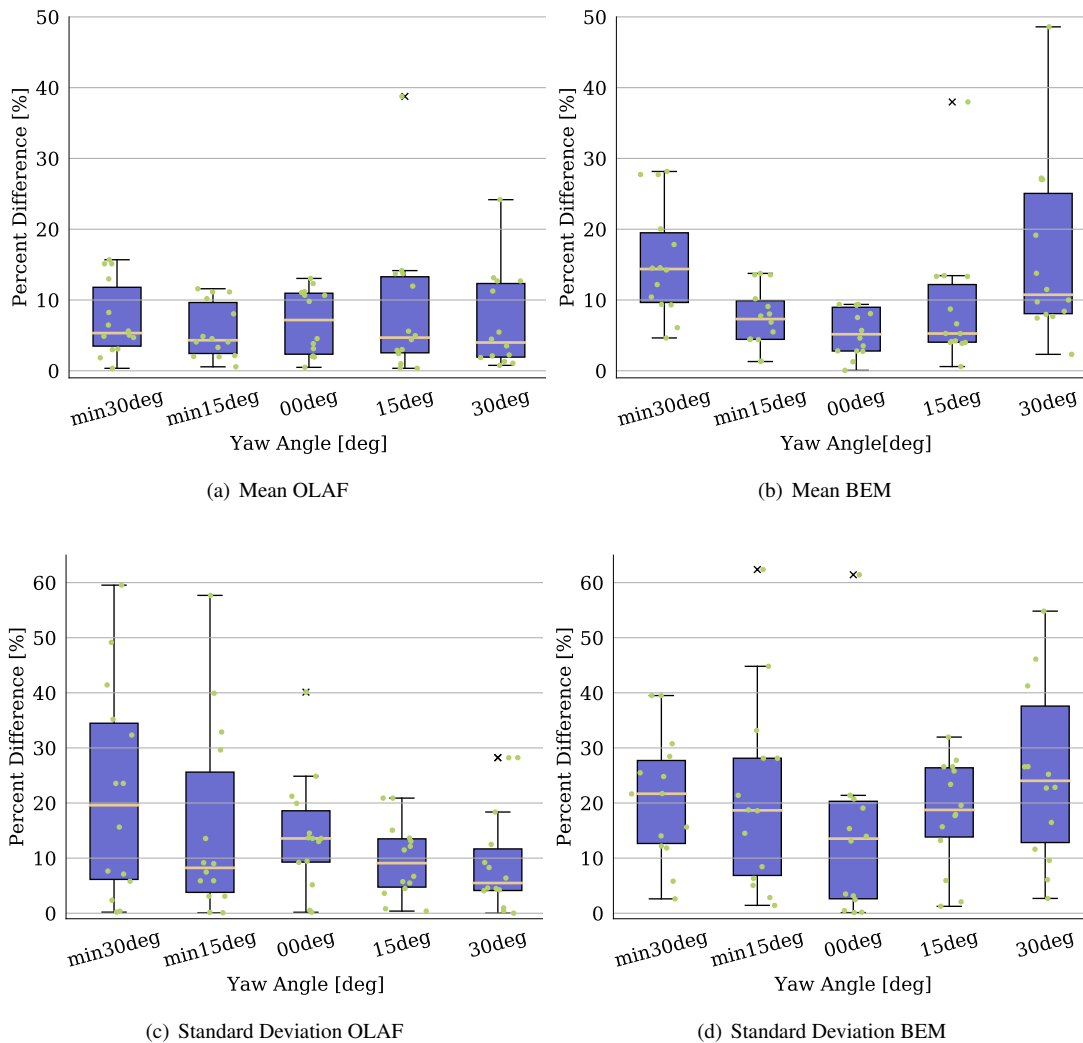


Figure 6. Average percent difference between OLAF and BEM versus SOWFA results across all QoIs for varying yaw misalignment angles. Each dot represents an individual QoI value (variation in x-axis location within a bar aids visualization). Box and whisker plots show the median (yellow line) value of all results; lower and upper quartile values (black lines); maximum and minimum values excluding outliers (whiskers); and outlier points (\times symbols).

each method, as well as the average percent difference values of the same quantities considered in Figure 6. The average percent difference for SOWFA is shown as zero because this is the highest fidelity code. This chart clearly shows the near
 280 $12\times$ error reduction when using OLAF instead of BEM. OLAF does, however, require significantly more computational power than BEM, with OLAF simulations taking $\mathcal{O}(40)$ CPU hours to complete for the simulation specifications used here, whereas BEM requires minutes. When compared to SOWFA, however, OLAF is significantly faster, with SOWFA simulations for this

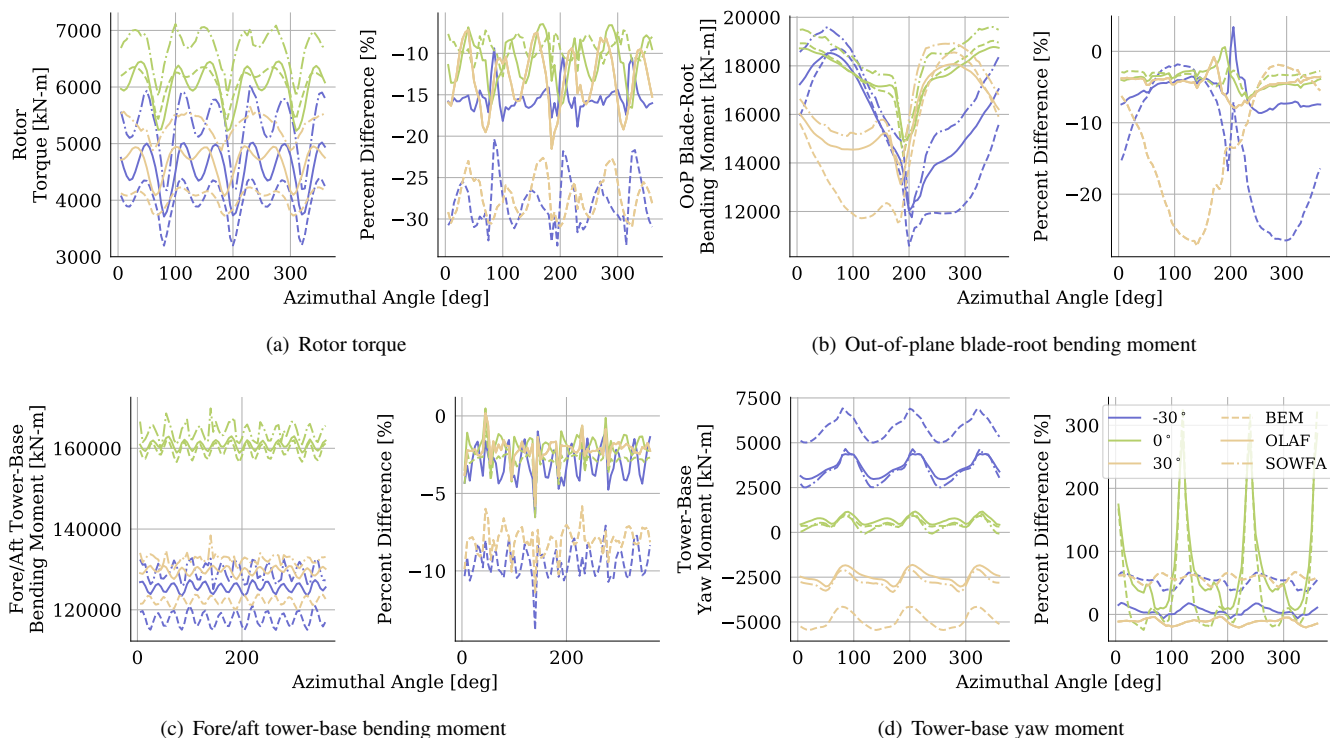


Figure 7. Azimuthal-averaged quantities for OLAF, BEM, and SOWFA results with varying yaw misalignment angles. Plots on the left show mean quantities and plots on the right show percent difference of the means from SOWFA results. Line color indicates yaw misalignment angle and line style indicates computational method. SOWFA results are shown as a dash-dot line, OLAF results are shown as solid lines, and BEM results are shown as dashed lines.

work requiring approximately 260 CPU hours to complete. As always, the choice of which computational method to use is a balancing act between computational cost and accuracy. These results indicate that, given the problem being considered, OLAF could be a reasonable middle ground between engineering models and CFD.

4.0.2 Shear Exponent

Shown in Figure 9 are the time-averaged quantities for several QoIs from OLAF and BEM simulations for a range of shear exponents, along with percent differences of BEM results relative to OLAF results. Note that SOWFA results are only included here at the zero-shear point. This is because of the complexities within SOWFA of running steady inflow with a specified shear exponent as well as the additional computational expense. For all results but tower-base yaw moment, the relative trends of OLAF and BEM are the same with changing shear exponent, though the percent difference between the results does increase slightly with increasing shear exponent. For all shear exponents, OLAF predicts higher loads for the considered components. Tower-base yaw moment, however, increases at a sharper rate for BEM result compared to OLAF results. In fact, at low shear

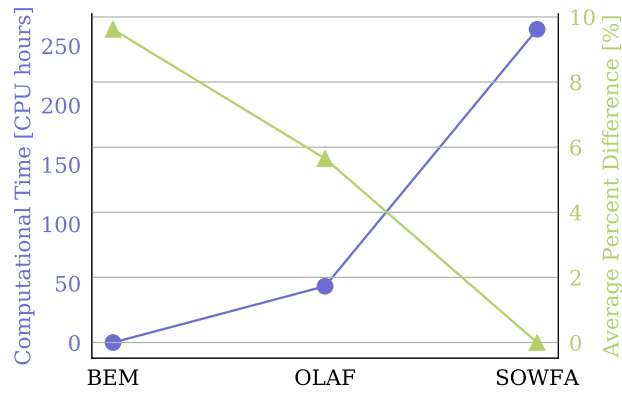


Figure 8. Computational time and average percent difference for each simulations method. computational time is shown by the blue line corresponding to the left axis and average percent difference is shown by the green line corresponding to the right axis. Average percent difference was computed for all results presented in this section.

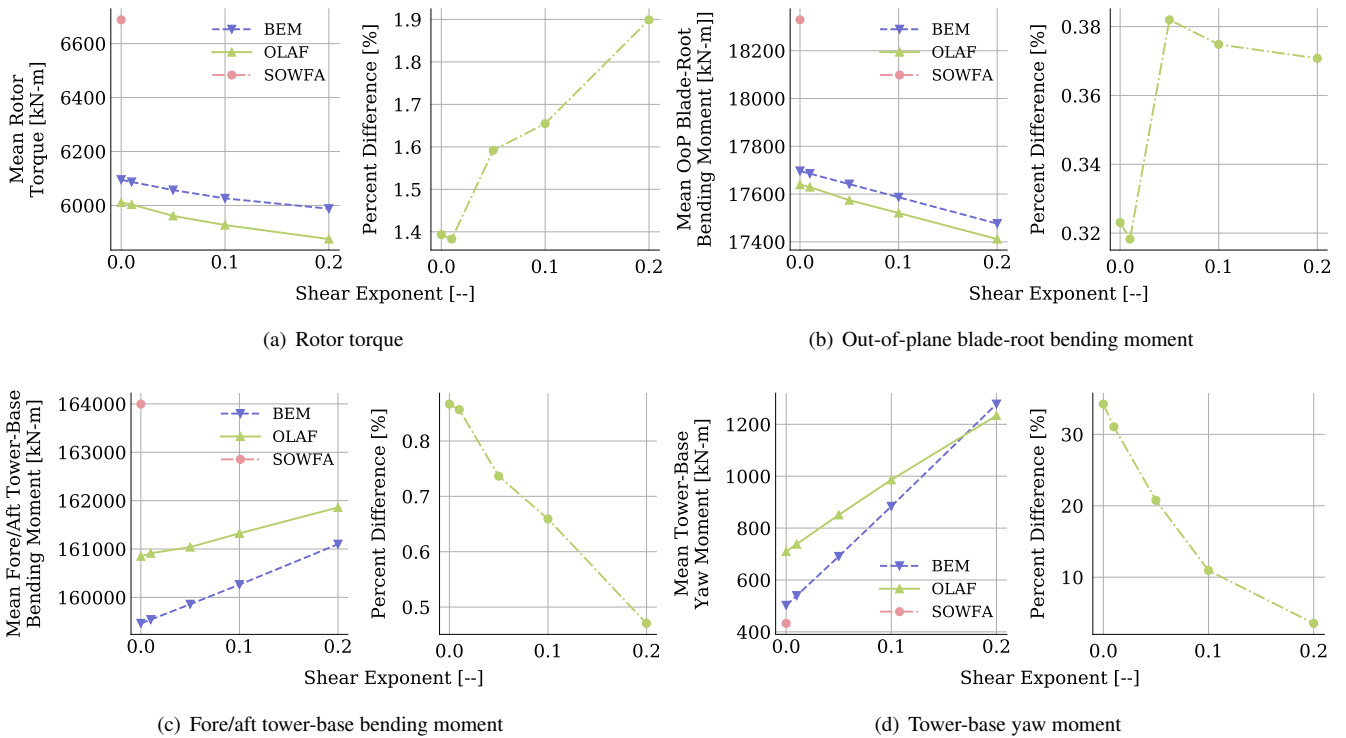


Figure 9. Time-averaged quantities for OLAF, BEM, and SOWFA results with varying shear exponent. Plots on the left show mean quantities and plots on the right show percent difference of the mean results.

exponents OLAF predicts a higher tower-base yaw moment, while BEM predicts a higher yaw moment at a shear exponent
 295 of 0.2. This results in a reduced percent difference between the methods. These results are summarized in Figure 10, which
 shows box and whisker plots for each shear exponent, made up of the percent difference values of each QoI for mean (left)
 and standard deviations (right) of the results. These results show consistent percent differences for all shear exponents across

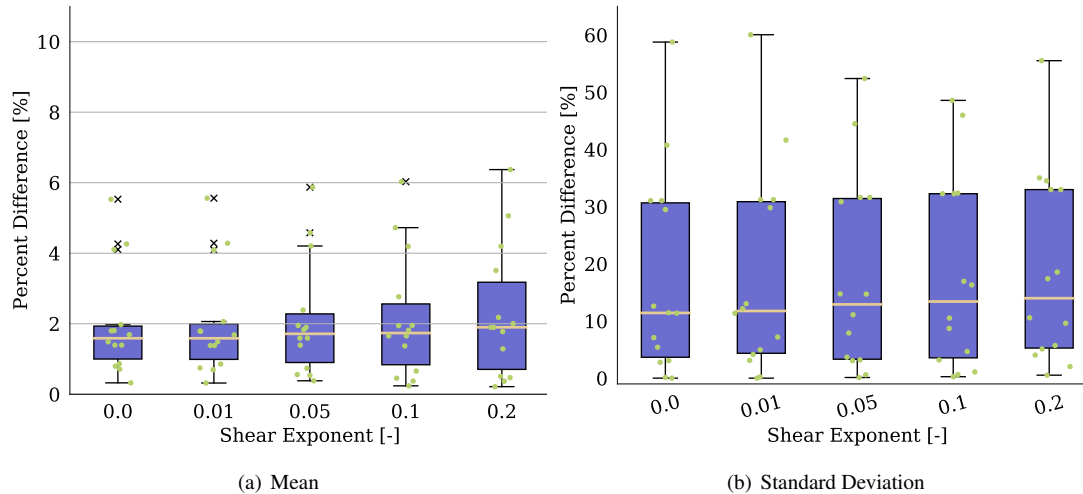


Figure 10. Average percent difference between BEM and OLAF results across all QoIs for varying inflow shear exponents. Each dot represents an individual QoI value (variation in x-axis location within a bar aids visualization). Box and whisker plots show the median (yellow line) value of all results; lower and upper quartile values (black lines); maximum and minimum values excluding outliers (whiskers); and outlier points (× symbols).

all QoIs. For mean results, percent differences deviate at the highest shear exponent only, with the median percent difference increasing. For standard deviation results, the median percent difference remains consistent across all shear exponents, but the
 300 upper range of these values does fluctuate slightly. These results indicate that though shear exponent does have a slightly higher
 impact on time-averaged BEM results compared to OLAF results, it is to a much lesser extent than yaw misalignment.

Shown in Figure 11 are azimuthal-averaged results for all computational methods as well as percent differences between
 BEM and OLAF results. The overall shapes of these results are comparable to those shown for the varying yaw misalignment
 cases in Figure 7. For rotor torque and tower-base fore/aft bending moment, there is a clear separation between OLAF
 305 and BEM results. For rotor torque, the results compare best at the dips corresponding to the blades passing behind the tower.
 For each method, there is minimal change to the results at this point in the blade path with changing shear exponent. This
 is expected, since the flow behind the tower is dominated by the tower wake. The flow behind the tower is also affected by
 the shear exponent in that the mean velocity will vary at a given height based on this value. However, based on these results
 the effects are dominated by the tower wake and shear plays a negligible role in effecting these quantities. When the blades
 310 are not behind the tower, shear exponent has more of an effect on the results, though to a greater extent for BEM results,
 with a higher shear exponent resulting in reduced rotor torque. Minimal differences in tower-base fore/aft bending moment are

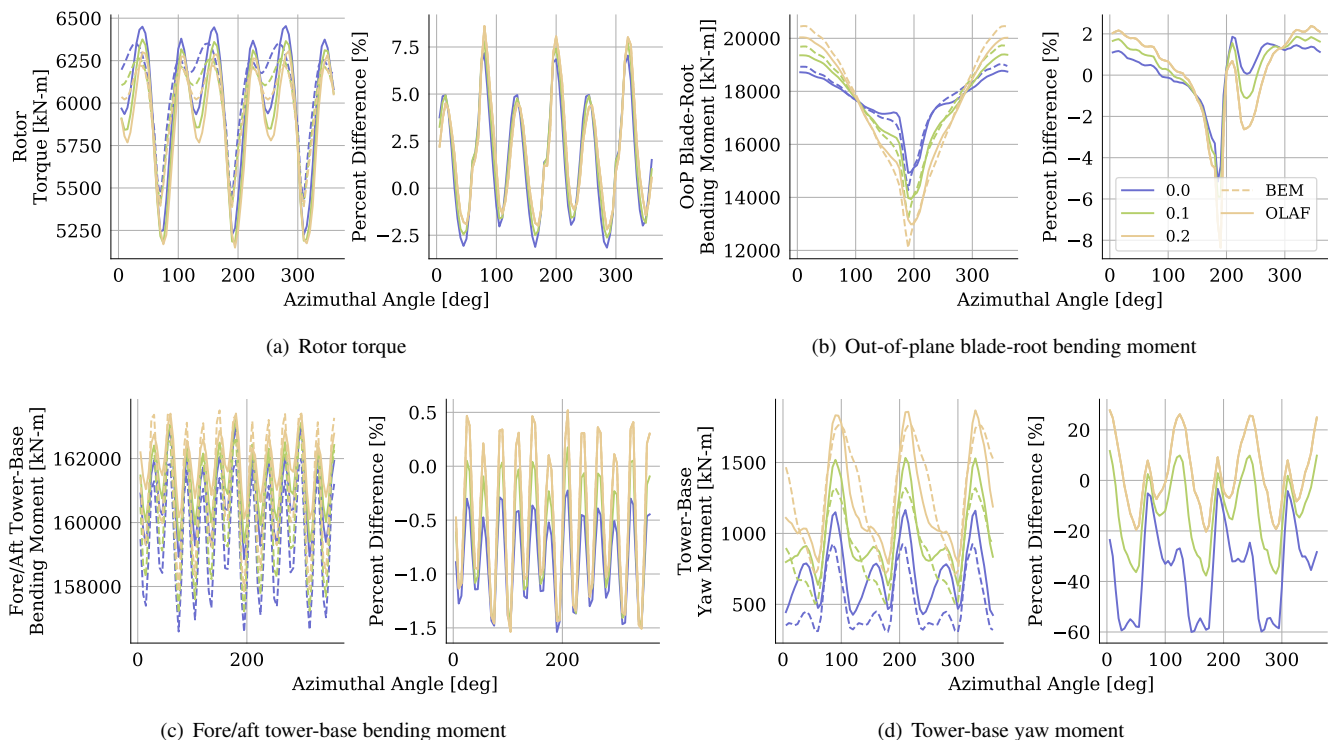


Figure 11. Azimuthal-averaged quantities for OLAF and BEM results with varying shear exponent. Plots on the left show mean quantities and plots on the right show percent difference of the means from OLAF results. Line color indicates shear exponent and line style indicates computational method. OLAF results are shown as solid lines and BEM results are shown as dashed lines.

seen for each method. Overall the moment increases with increasing shear exponent, though OLAF shows appreciably higher moment at all azimuthal angles at a shear exponent of 0.2. This results in higher percent difference at this inflow condition. When comparing results for out-of-plane blade-root bending moment, the largest differences are seen when the blade passes behind the tower. At this location, OLAF predicts a higher bending moment compared to BEM. For both methods, this bending moment decreases with increasing shear exponent. The bending moment increases until the blade is above the turbine, with this maximum value increasing with increasing shear exponent. For all shear exponents, OLAF predicts a higher bending moment than BEM. Though these overall trends are comparable between OLAF and BEM, the average percent difference between these results does increase with increasing shear exponent, though to a greater extent when the blade is in the tower wake.

320 Differences in tower-base yaw moment are considerable between OLAF and BEM, with different azimuthal trends seen at all shear exponents. For all OLAF results, the yaw moment spikes when a blade is behind the tower, followed by a sharp decrease and then another smaller spike before another blade passes behind the turbine. This trend is seen for all shear exponents, though the sharp drop becomes shallower with increasing shear exponent. BEM results are also characterized by a spike when a blade is behind the tower. However, at low shear exponents, the value of this spike is considerably less than that predicted

325 by OLAF, and is preceded by a sharp drop to a value that remains constant until another blade passes behind the tower. This drop value is comparable to that predicted by OLAF, but the secondary bump that OLAF predicts is much reduced in the BEM results and not present at higher shear values. As shear exponent increases, the large spike predicted by BEM surpasses that predicted by OLAF, and the sharp drop is instead a gradual reduction until the minimum value is reached. Thus, while percent difference between the methods remains large for all shear exponents, the primary takeaway is that changing shear exponent drastically changes the azimuthal trend predicted by BEM, whereas OLAF trend changes are more subtle. While these differences are not seen for most other QoIs, it is important to note that changing shear exponent can have a significantly different effect on OLAF compared to BEM results for certain important QoIs.

4.0.3 Turbulence Intensity

Shown in Figure 12 are the time-averaged quantities for several QoIs from OLAF and BEM simulations for a range of TI values, along with percent differences of BEM results relative to OLAF results. In terms of mean results, varying turbulence

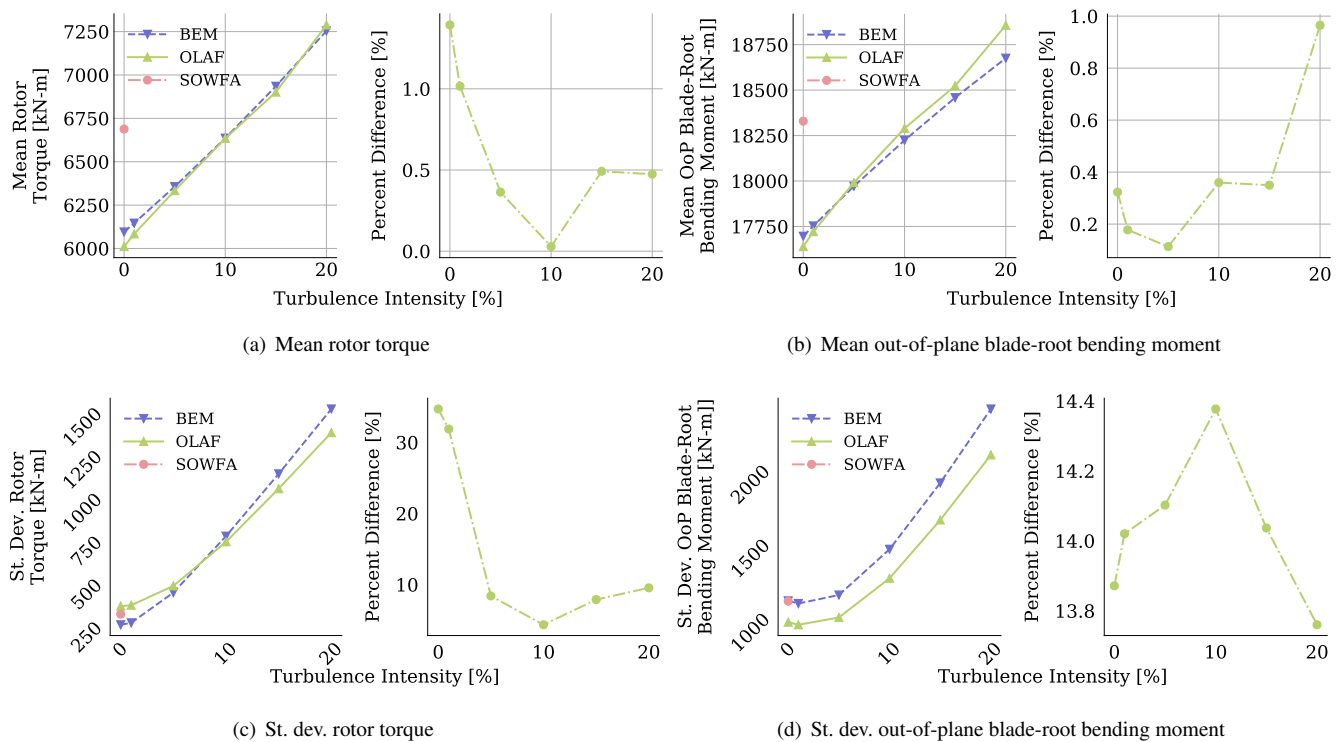


Figure 12. Time-averaged (a and b) and standard deviation (c and d) quantities for OLAF, BEM, and SOWFA results with varying inflow turbulence intensity. Plots on the left show mean quantities and plots on the right show percent difference of the means from BEM results.

335

intensity effects OLAF and BEM comparably. There is some change in percent difference for varying turbulence intensity, but it remains within a few percentage points. This is further supported in Figure 13, which shows box and whisker plots for each

turbulence intensity, made up of the percent difference values of each QoI for mean (left) and standard deviations (right) of the results. Here, minimal differences for all QoIs are shown for mean results. However, standard deviations of results show larger

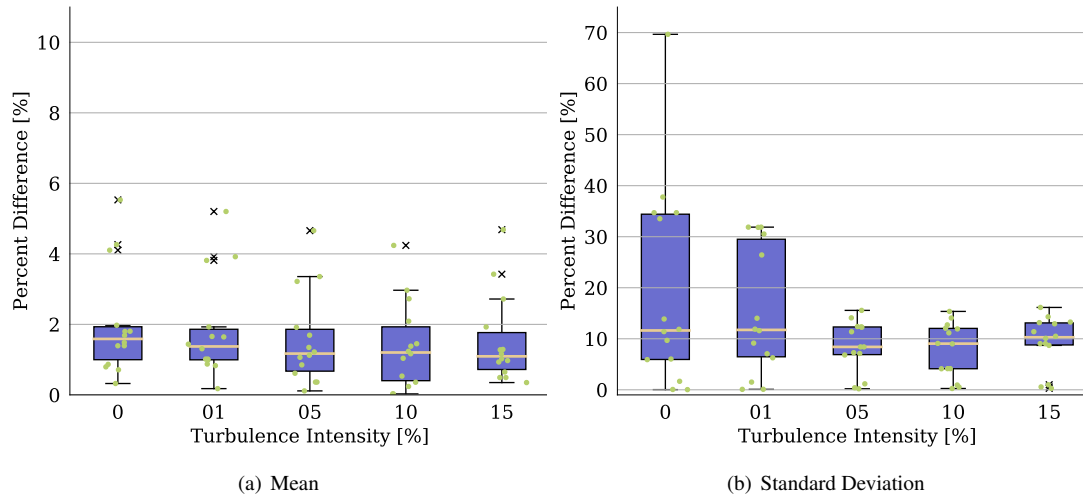


Figure 13. Average percent difference between BEM and OLAF results across all QoIs for varying inflow turbulence intensity levels. Each dot represents an individual QoI value (variation in x-axis location within a bar aids visualization). Box and whisker plots show the median (yellow line) value of all results; lower and upper quartile values (black lines); maximum and minimum values excluding outliers (whiskers); and outlier points (\times symbols).

340 changes with varying TI. Though the median percent difference value remains comparable across the TI values, the upper limit spans from 60% for $TI = 0\%$ down to 20% for $TI \geq 5\%$.

Shown in Figure 14 are azimuthal-averaged results for BEM and OLAF computational methods as well as percent differences of BEM results relative to those of OLAF. As is expected, both methods show increased variability with increasing TI. For all unsteady flow, percent difference results are comparable and there seems to be negligible comparable change due to increasing
 345 TI. However, there is a significant change between steady and unsteady inflow. In particular, for steady flow, i.e. when $TI = 0\%$, BEM predicts significantly larger rotor torque and OoP blade-root bending moments at all azimuthal locations. However, as soon as turbulence is introduced into the inflow, this relationship flips and BEM predicts significantly lower rotor torque and OoP blade-root bending moment for all azimuthal locations.

5 Conclusions

350 The purpose of this work was to determine the accuracy of an aeroelastically coupled FVW method under conditions known to be challenging to lower-fidelity aerodynamic methods. This was done by comparing OLAF results to high-fidelity SOWFA results and low-fidelity BEM results for a large range of TI, shear, and yaw misalignment conditions. Through these comparisons, it was found that for all considered QoIs, SOWFA, OLAF, and BEM results compare well for steady inflow conditions with

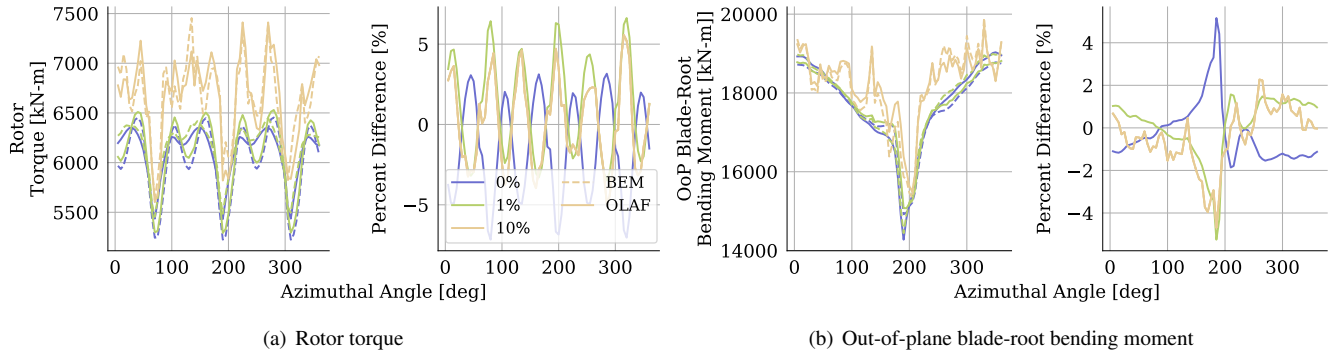


Figure 14. Azimuthal-averaged quantities for OLAF and BEM results with varying inflow turbulence intensity levels. Plots on the left show mean quantities and plots on the right show percent difference of the means from OLAF results. Line color indicates turbulence intensity level and line style indicates computational method. OLAF results are shown as solid lines and BEM results are shown as dashed lines.

no yaw misalignment. For OLAF results, this strong agreement was consistent for all yaw misalignment values, with percent difference values of time-averaged results remaining within 1.2% across all QoIs and varying little with yaw misalignment. The BEM results, however, deviated significantly more from SOWFA results with increasing absolute yaw misalignment, with percent differences at yaw misalignment of $\pm 30^\circ$ reaching up to 48.6%. These trends were true for standard deviations of the results as well, though the BEM results showed less of a change with increasing absolute yaw misalignment.

Consideration must also be given to modeling computational cost. When looking at percent differences of time-averaged results for all QoIs, OLAF showed a near $12\times$ error reduction when using OLAF instead of BEM. As with all methods, increased accuracy comes with increased computational cost, with BEM, OLAF, and SOWFA simulations taking on the order of minutes, 10 CPU hours, and 100 CPU hours to complete for the simulations performed in this work, respectively.

Author contributions. KS led the investigation of OLAF verification work and SOWFA and BEM comparison. BA completed the discretization and convergence studies. LM ran all SOWFA simulations. EB and NJ provided support for this project. KS prepared the article, with support from BA, EB, NJ, and LM.

Competing interests. The authors declare that they have no conflict of interest.

Disclaimer. The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government

Acknowledgements. This work was authored by Alliance for Sustainable Energy, LLC, the manager and operator of the National Renewable Energy Laboratory for the U.S. Department of Energy (DOE) under Contract No. DE-AC36-08GO28308. Funding provided by Department of Energy Office of Energy Efficiency and Renewable Energy, Wind Energy Technologies Office. The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes.

The research was performed using computational resources sponsored by the Department of Energy's Office of Energy Efficiency and Renewable Energy and located at the National Renewable Energy Laboratory.

References

- OLAF Documentation, <https://openfast.readthedocs.io/en/dev/source/user/aerodyn/theory.html>, 2022.
- OLAF Documentation, <https://openfast.readthedocs.io/en/dev/source/user/aerodyn-olaf/index.html>, 2022.
- 380 Ananthan, S., Leishman, J. G., and Ramasamy, M.: The Role of Filament Stretching in the Free-Vortex Modeling of Rotor Wakes, in: 58th Annual Forum and Technology Display of the American Helicopter Society International, Montreal, Canada, 2002.
- Bolinger, M., Lantz, E., Wisler, R., and et al.: Opportunities For and Challenges to Further Reductions in the “Specific Power” Rating of Wind Turbines Installed in the United States, *Wind Engineering*, 45, 351–368, <https://doi.org/10.1177/0309524X19901012>, 2021.
- Boorsma, K., Wenz, F., Lindenburg, K., and et al.: Validation and Accommodation of Vortex Wake Codes for Wind Turbine Design Load Calculations, *Wind Energy Science*, 5, 699–719, <https://doi.org/10.5194/wes-5-699-2020>, 2020.
- 385 Bortolotti, P., Johnson, N., Abbas, N. J., and et al.: Land-Based Wind Turbines with Flexible Rail-Transportable Blades — Part 1: Conceptual Design and Aeroservoelastic Performance, *Wind Energy Science*, 6, 1277–1290, <https://doi.org/10.5194/wes-6-1277-2021>, 2021.
- Branlard, E.: *Wind Turbine Aerodynamics and Vorticity-Based Methods: Fundamentals and Recent Applications*, Springer International Publishing, <https://doi.org/10.1007/978-3-319-55164-7>, 2017.
- 390 Branlard, E. and Gaunaa, M.: Cylindrical Vortex Wake Model: Right Cylinder, *Wind Energy*, 524, 1–15, <https://doi.org/10.1002/we.1800>, 2014.
- Branlard, E., Papadakis, G., Gaunaa, M., and et al.: Aeroelastic Large Eddy Simulations Using Vortex Methods: Unfrozen Turbulent and Sheared Inflow, *Journal of Physics: Conference Series*, 625, 1–13, <https://doi.org/10.1088/1742-6596/625/1/012019>, 2015.
- Churchfield, M. and Lee, S.: SOWFA | NWTC Information Portal, <https://nwtc.nrel.gov/SOWFA>.
- 395 Churchfield, M. J., Moriarty, P. J., Martínez, L. A., and et al.: A Large-Eddy Simulation of Wind-Plant Aerodynamics, 50th AIAA Aerospace Sciences Meeting, AIAA, Nashville, TN, <https://doi.org/10.2514/6.2012-537>, 2012.
- Churchfield, M. J., Lee, S., Schmitz, S., and et al.: Modeling Wind Turbine Tower and Nacelle Effects within an Actuator Line Model, in: AIAA SciTech Forum, 33th Wind Energy Symposium, AIAA, San Diego, CA, <https://doi.org/10.2514/6.2015-0214>, 2015.
- Churchfield, M. J., Schreck, S. J., Martínez-Tossas, L. A., and et al.: An Advanced Actuator Line Method for Wind Energy Applications and Beyond, in: AIAA SciTech Forum, 35th Wind Energy Symposium, AIAA, Grapevine, TX, <https://doi.org/10.2514/6.2017-1998>, 2017.
- 400 Forsting, A. R. M., Pirrung, G. R., and Ramos-García, N.: A Vortex-Based Tip/Smearing Correction for the Actuator Line, *Wind Energy Science*, 4, 369–383, <https://doi.org/10.5194/wes-4-369-2019>, 2019.
- Hansen, M. O. L.: *Aerodynamics of Wind Turbines*, Earthscan, London; Sterling, VA, 2008.
- Hauptmann, S., Bülk, M., Schön, L., and et al.: Comparison of the Lifting-Line Free Vortex Wake Method and the Blade-Element-Momentum Theory Regarding the Simulated Loads of Multi-MW Wind Turbines, *Journal of Physics: Conference Series*, 555, 1–14, <https://doi.org/10.1088/1742-6596/555/1/012050>, 2014.
- 405 Jonkman, B.: *TurbSim User’s Guide v2.00.00*, Tech. Rep. NREL/TP-xxxx-xxxxx, National Renewable Energy Laboratory, Golden, CO, 2014.
- Leishman, J. G., Bhagwat, M. J., and Bagai, A.: Free-Vortex Filament Methods for the Analysis of Helicopter Rotor Wakes, *Journal of Aircraft*, 39, 759–775, <https://doi.org/10.2514/2.3022>, 2002.
- 410 Li, A., Gaunaa, M., Pirrung, G. R., and et al.: A computationally efficient engineering aerodynamic model for non-planar wind turbine rotors, *Wind Energy Science*, 7, 75–104, <https://doi.org/10.5194/wes-7-75-2022>, 2022a.

- Li, A., Pirrung, G. R., Gaunaa, M., and et al.: A computationally efficient engineering aerodynamic model for swept wind turbine blades, *Wind Energy Science*, 7, 129–160, <https://doi.org/10.5194/wes-7-129-2022>, 2022b.
- 415 Martínez-Tossas, L. A. and Meneveau, C.: Filtered Lifting Line Theory and Application to the Actuator Line Model, *Journal of Fluid Mechanics*, 863, 269–292, <https://doi.org/10.1017/jfm.2018.994>, 2019.
- Martínez-Tossas, L. A., Churchfield, M. J., and Leonardi, S.: Large Eddy Simulations of the Flow Past Wind Turbines: Actuator Line and Disk Modeling, *Wind Energy*, 18, 1047–1060, <https://doi.org/10.1002/we.1747>, 2015.
- Martinez-Tossas, L. A., Churchfield, M. J., and Meneveau, C.: Optimal Smoothing Length Scale for Actuator Line Models of Wind Turbine
420 Blades Based on Gaussian Body Force Distribution, *Wind Energy*, 20, 1083–1096, <https://doi.org/10.1002/we.2081/epdf>, 2017.
- Martínez-Tossas, L. A., Churchfield, M. J., Yilmaz, A. E., and et al.: Comparison of Four Large-Eddy Simulation Research Codes and Effects of Model Coefficient and Inflow Turbulence in Actuator-Line-Based Wind Turbine Modeling, *Journal of Renewable and Sustainable Energy*, 10, 1–15, <https://doi.org/10.1063/1.5004710>, 2018.
- Moriarty, P. and Hansen, A. C.: AeroDyn Theory Manual, Tech. Rep. NREL/TP-500-36881, National Renewable Energy Laboratory, Golden,
425 CO, 2005.
- Papadakis, G.: Development of a Hybrid Compressible Vortex Particle Method and Application to External Problems Including Helicopter Flows, Ph.D. thesis, National Technical University of Athens, 2014.
- Rosenhead, L.: The Formation of Vortices from a Surface of Discontinuity, *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, 134, 170–192, <https://doi.org/10.1098/rspa.1931.0189>, 1931.
- 430 Shaler, K.: Wake Interaction Modeling Using A Parallelized Free Vortex Wake Model, Phd thesis, Ohio State University, Columbus, OH, 2020.
- Shaler, K., Branlard, E., and Platt, A.: OLAF User’s Guide and Theory Manual, Tech. Rep. NREL/TP-5000-75959, National Renewable Energy Laboratory, Golden, CO, 2020.
- Sørensen, J. N. and Shen, W. Z.: Numerical Modeling of Wind Turbine Wakes, *Journal of Fluids Engineering*, 124, 393–399,
435 <https://doi.org/10.1115/1.1471361>, 2002.
- van Garrel, A.: Development of a Wind Turbine Aerodynamics Simulation Module, Tech. Rep. ECN-C-03-079, ECN, 2003.
- Vatistas, G. H., Koezel, V., and Mih, W. C.: A Simpler Model for Concentrated Vortices, *Experiments in Fluids*, 11, 73–76, <https://doi.org/10.1007/BF00198434>, 1991.
- Voutsinas, S. G.: Vortex Methods in Aeronautics: How to Make Things Work, *International Journal of Computational Fluid Dynamics*, 20,
440 3–18, <https://doi.org/10.1080/10618560600566059>, 2006.
- Weller, H. G., Tabor, T., Jasak, H., and et al.: A Tensorial Approach to Computational Continuum Mechanics Using Object-Oriented Techniques, *Computers in Physics*, 12, 620–631, <https://doi.org/10.1063/1.168744>, 1998.
- Winckelmans, G. S. and Leonard, A.: Contributions to Vortex Particle Methods for the Computation of Three-Dimensional Incompressible Unsteady Flows, *Journal Of Computational Physics*, 109, 247–273, <https://doi.org/10.1006/jcph.1993.1216>, 1993.