



High Reynolds number wind turbine blade equipped with root spoilers. Part I: Unsteady aerodynamic analysis using URANS simulations.

Thomas Potentier^{1,3}, Emmanuel Guilmineau¹, Arthur Finez², Colin Le Bourdat³, and Caroline Braud¹

¹LHEEA, 1 rue de la Noë 44321 Nantes Cedex 3 - FRANCE

²ENGIE Green, 59 Rue Denuzière 69002 Lyon - FRANCE

³ENGIE Green, 15 rue Nina Simone 44000 Nantes - FRANCE

Correspondence: Thomas Potentier (thomas.potentier@ec-nantes.fr)

Abstract. A wind turbine blade equipped with root spoilers is analysed using 2D Computational Fluid Dynamics (CFD) to assess the unsteady impact of passive devices. Several metrics such as lift and drag coefficients, pressure and instantaneous velocity field around the aerofoil, Power Spectral Density and Strouhal number are used in the 2D unsteady analysis. The spoiler is found to efficiently rearrange the flow, adding lift throughout the positive angles of attack. However, the drawback is a high drag penalty coupled with high unsteadiness of the aerodynamic forces.

1 Introduction

Wind energy, over the last decades, increased its market share thanks to longer blades and a continuous increase in rated power. Nevertheless, to keep lowering the Levelised Cost of Energy (LCoE), onshore turbines need to produce more energy within the same swept area. Indeed, the blade size is restricted to avoid (or limit), among other things: acoustic emission, aeronautical interference, local population rejection... The blade design imposes high blade thickness at the root end of the blade for structural reasons, it leads to significant loss of the aerodynamic performances. It is detrimental to the energy extraction, therefore solutions were developed to improve this blade region, among them, the passive Aerodynamic Add-Ons (AAO).

AAO are devices attached to the blade surface to either increase the power extraction locally or reduce the acoustic emission of the turbine and thereby allowing the exploiting party to use the full turbine's capacity. The current paper will focus on the former type of AAO: passive AAO installed in the root blade area to improve the aerodynamic performances of the thick aerofoil profile types. The AAO solution has been explored by many authors before (see Pechlivanoglou (2013); Saleem (2019); Bach (2016)). It is to be noted that in opposition to passive devices, some active solutions exist in the research state (such as solutions described in: Jaunet and Braud (2018); Boeije et al. (2009); McWilliam et al. (2018)) but are not yet available to the market.

The flow behind two well-known AAO devices, the Vortex Generators (VG) and the Gurney Flaps (GF), has been largely investigated in order to understand its mechanism and control benefit which is summarised hereafter. VG are small fins (thin plates of usually triangular or rectangular shapes attached to a base plate) attached on the aerofoil suction side to delay stall by



re-energising the boundary layer (see Taylor et al. (1947); Godard and Stanislas (2006); Cathalifaud et al. (2009); De Tavernier et al. (2021); Gao et al. (2014); Lin (2002); Skrzypinski et al. (2014); Perivolaris and Voutsinas (2001)). The vortices, aligned with the inflow leaving the device, increase the mixing between high speed flow (free stream) and low speed flow (boundary layer) thus delaying the flow separation (see Schubauer and Spangenberg (1960)). GF are devices installed at the aerofoil trailing edge on the pressure side. They aim to create an artificial camber seen by the flow, it will decrease the lower pressure on the suction side and therefore increase the pressure difference between both sides of the aerofoil thus increasing the generated lift (see Liebeck (1978); Cole et al. (2013); Giguere et al. (1995); Wang et al. (2008); Jang et al. (1998); Sørensen et al. (2014); Mohammadi et al. (2012); Li et al. (2002); Alber et al. (2020); Meena et al. (2017)). The main difficulty in AAO design is the correct sizing: for GF too small and the gain is nonexistent, too large and the drag penalty cannot be compensated by the lift gain. Similarly for VGs, geometrical parameters of the device are affecting the control efficiency. The combined effect of both VG and GF solutions seems to be additive according to Storms and Jang (1994).

Megawatt size wind turbines are experiencing high Reynolds number ($Re > 10^6$) for high relative aerofoil thicknesses at the blade root (relative thickness $> 36\%$), whereas most of the literature available is either targeting thin aerofoils at generally low to moderate Reynolds number, or small AAO sizes generally within the boundary layer thickness. Interesting outputs from Meena et al. (2017) could be drawn such as a detailed characterisation of the shedding vortex types occurring behind aerofoils equipped with different GF heights using Unsteady Reynolds-Averaged Navier-Stokes (URANS) and Large Eddy Simulations. However, the simulations were limited to thin profiles and low Reynolds numbers. The present study will contribute to extend such work towards thick profiles and higher Reynolds numbers. Also, there exist a gap on the AAO size (usually $\geq 5\%$ of blade chord) used by manufacturers and the one available in the literature (up to 1% of blade chord). Another objective of the present paper is to contribute to reduce this gap. The AAO solution presented in this paper is the spoiler, it is a passive obstacle installed on the aerofoil pressure side to increase the aerofoil camber perceived by the flow. Despite a lift enhancing mechanism similar to the large GF one, there is a main difference which lies in its position. The spoiler is installed between 60% and 80% of the local chord and is a long single aerodynamically designed part while the GF is installed perpendicularly to the local chord at the trailing edge and is usually comprised of several smaller parts butted up together.

The European AVATAR project (see Schepers (2017)) studied thick sections at realistic Reynolds number ($Re > 10^6$). According to the authors' knowledge, it is the only literature about wind turbine blade root spoilers at realistic operating conditions. 2D Computational Fluid Dynamics (CFD) simulations were performed on the blade root with and without spoiler using Reynolds Average Navier-Stokes (RANS) thereby smoothing out the possible unsteady effects.

The present paper is therefore dedicated to the analysis of high Reynolds unsteady simulation, $Re_c = 3 \times 10^6$, using a scanned blade shape from an operating 2MW turbine. Two configurations will be analysed: bare blade (no AAO) and a large spoiler existing on an ENGIE Green turbine. The methodology to post-process the scanned blade with the spoiler is explained in Section 2, the CFD set-up and mesh independence study is described in Section 3, finally, analysis of the AAO impacts in term of steady and unsteady aerodynamics properties are presented in detailed in the result Section 4.

2 Methodology

2.1 Blade root section with and without spoiler

The wind turbine geometry used in the present study was acquired during a scanning campaign on an operating 2MW turbine (see Dambrine (2010)). Scanned cross sections were created by extracting thin slices of 5cm wide of the entire point cloud. Then, we post-treated each cross-section by ordering the point cloud coordinates and fitted splines. Several interpolation techniques were tried, the Bezier curves gave the best outcome, resulting in a smooth and continuous geometry despite missing scan data due to the scanner position not being able to capture some areas of the blade (see Figure 1). Nevertheless, small discrepancies (peaks) are present at $x/c \approx 10\%$ and $x/c \approx 60\%$ due to residual panelisation with however negligible on the lift evaluation.

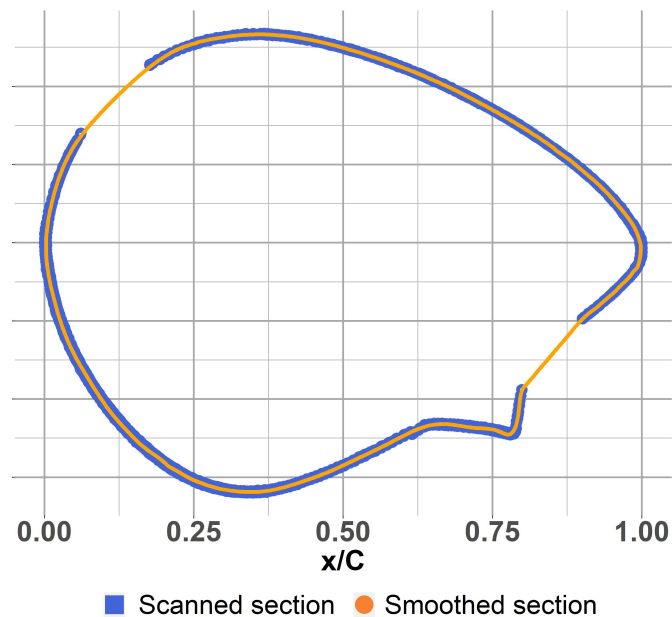


Figure 1. Scanned section and smoothed section at radial position R6 ($\frac{r}{R} = 13\%$). The blue square (■) shows the scanned point cloud while the orange dot (●) shows the smoothed section.

The scanned blade was originally equipped with root spoilers. The blade without spoiler was generated by manually removing parts of the cloud points corresponding to the spoiler location (see Figure 2), consequently wherever the spoiler is not present both geometry are identical. The unsteady analysis will focus on a single radius at the radial position 6m from the blade root: $\frac{r}{R} = 13\%$, r is the local radius and R is the blade length, located in the middle of the spoiler. This location was chosen to minimise 3D effects from the spoiler ends, thus ensuring a closer representation of reality when simulated in 2D.

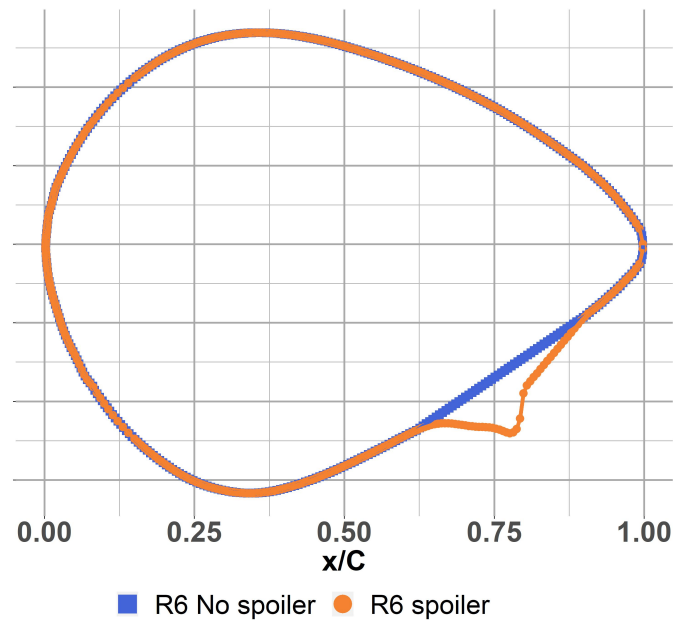


Figure 2. Overimposed aerofoil shapes at radial position R6 ($\frac{r}{R} = 13\%$): the blue square (■) shows the no spoiler coordinates while the orange dot (●) shows the spoiler coordinates

3 CFD computations

3.1 CFD solver

ISIS-CFD, developed by Centrale Nantes and CNRS and available as a part of the FINE™/Marine computing suite, is used in the present study to solve the incompressible Unsteady Reynolds-Averaged Navier-Stokes (URANS) equations. It is based on the finite volume method to build the spatial discretization of the transport equations. The unstructured discretization is face-based, which means that cells with an arbitrary number of arbitrarily shaped faces are accepted (unstructured mesh). A second order backward difference scheme is used to discretize time. The solver can simulate both steady and unsteady flows. The velocity field is obtained from the momentum conservation equations and the pressure field is extracted from the mass equation constraint, or continuity equation, transformed into a pressure equation. In the case of turbulent flows, transport equations for the variables in the turbulence model are added to the discretization. The turbulence model used is SST k- ω (see Menter (1993)). The flow characteristics are representing the air at sea level at a temperature of 15°C, i.e.: $\nu = 1.81 \times 10^{-5} \text{kg m}^{-1} \text{s}^{-1}$ (dynamic viscosity) and $\rho = 1.225 \text{kg m}^{-3}$ (air density). A uniform inflow of 45m/s is set, which induces a chord Reynolds number of: $Re_c = 3 \times 10^6$ for the presented section of $\frac{r}{R} = 13\%$.



3.2 Boundary conditions and mesh independence

85 The domain size study has already been performed (see Potentier et al. (2020)) and the recommended square domain of 80 chords in length was used. The aerofoil related surfaces boundary conditions were described as "no slip wall". The free stream velocity condition was imposed on the inlet, upper and lower boundaries and the outlet boundary was using the "prescribed pressure" condition. Finally, $y^+ = 0.15$ was imposed on the aerofoil surfaces and the automatic grid refinement feature was activated so as to track more accurately the wake vortices (see Wackers et al. (2014, 2017)). The "no spoiler" aerofoil is originally described with 362 pairs of [X;Y] coordinates and the "spoiler" with 503. The leading edges are both positioned at [0;0]. A convergence study was carried out using the lift and drag coefficients, during the mesh refinement the number of faces defining the aerofoil geometry changed as described in Table 1 and Table 2. FINE™/Marine provides the time series for the lift (L) and drag (D) evolution, the respective coefficients are calculated by the equation 1.

$$C_L = \frac{2 \times L}{\rho c U_\infty^2} \quad C_D = \frac{2 \times D}{\rho c U_\infty^2} \quad (1)$$

95 Where U_∞ is the relative velocity of 45m/s and c the aerofoil chord. Four meshes were tested to assess the grid independence: Coarse, Medium, Fine and Very fine. Both cases used the same input conditions for the viscous layers insertion and automatic grid refinement for each mesh. Because the calculations were performed using the automatic grid refinement, the Richardson extrapolation is calculated using the final mesh configuration.

The results in Table 1 and Table 2 show that the grid is independent both in C_L and C_D . The error between the "Very fine" and "Fine" mesh is small enough to be acceptable. For the rest of the study, the "Fine" mesh will be used.

Table 1. Grid independence study for the scanned blade without spoiler at $\alpha = 0^\circ$ and $Re_c = 3 \times 10^6$.

Mesh type	Domain cell count	Aerofoil faces count	C_L	C_L error	C_D	C_D error
Coarse	44 298	459	0.319	-10.28%	0.07697	4.05%
Medium	71 205	675	0.342	-3.97%	0.07622	3.04%
Fine	104 907	1048	0.346	-2.70%	0.07488	1.23%
Very fine	176 921	1535	0.355	-0.41%	0.07486	1.19%
Richardson extrapolation	∞	NA	0.356		0.07397	

4 Results

The impact of the spoiler previously described (see Section 2.1) is analysed in this section at the blade location, $\frac{r}{R} = 13\%$. It will be done using URANS simulations from the ISIS-CFD solver described in Section 3. The steady and unsteady simulation outcomes with and without spoiler are compared in term of aerodynamic forces, local pressure, velocity distribution, Power Spectral Density and instantaneous spatial vortex organisation in Section 4.1 and 4.2.



Table 2. Grid independence study for the scanned blade with spoiler at $\alpha = 0^\circ$ and $Re_c = 3 \times 10^6$.

Mesh type	Domain cell count	Aerofoil faces count	C_L	C_L error	C_D	C_D error
Coarse	54 543	527	0.658	6.04%	0.09015	5.62%
Medium	82 543	733	0.630	1.63%	0.08740	2.39%
Fine	137 122	1085	0.619	-0.18%	0.08705	1.98%
Very fine	227 686	1591	0.620	-0.03%	0.08584	0.57%
Richardson extrapolation	∞	NA	0.620		0.08536	

4.1 Steady aerodynamics

A comprehension of averaged phenomena is necessary before analysing the unsteady behaviour. We will first focus on the angle of attack $\alpha = 6^\circ$, in the linear part of the lift curve, where aerofoils usually operate on a megawatt size turbine. Also, it illustrates a the first noticeable unsteadiness in the flow, which will be detailed later.

110

4.1.1 Mean flow reorganisation

The high velocity region on the upper side (Figure 3), associated to a low field pressure level (Figure 4) exhibits a longer overspeed area over the upper side for the "spoiler" case than for the "no spoiler" case. It induces a longer and stronger negative pressure (see Figure 4), in good qualitative agreement with the steady results from Gonzalez-Salcedo (2016). On the contrary, on the lower side, the high velocity region (Figure 3) is more important for the "no spoiler" case than for the "spoiler" case, inducing a larger negative pressure region on the lower side of the aerofoil.

115

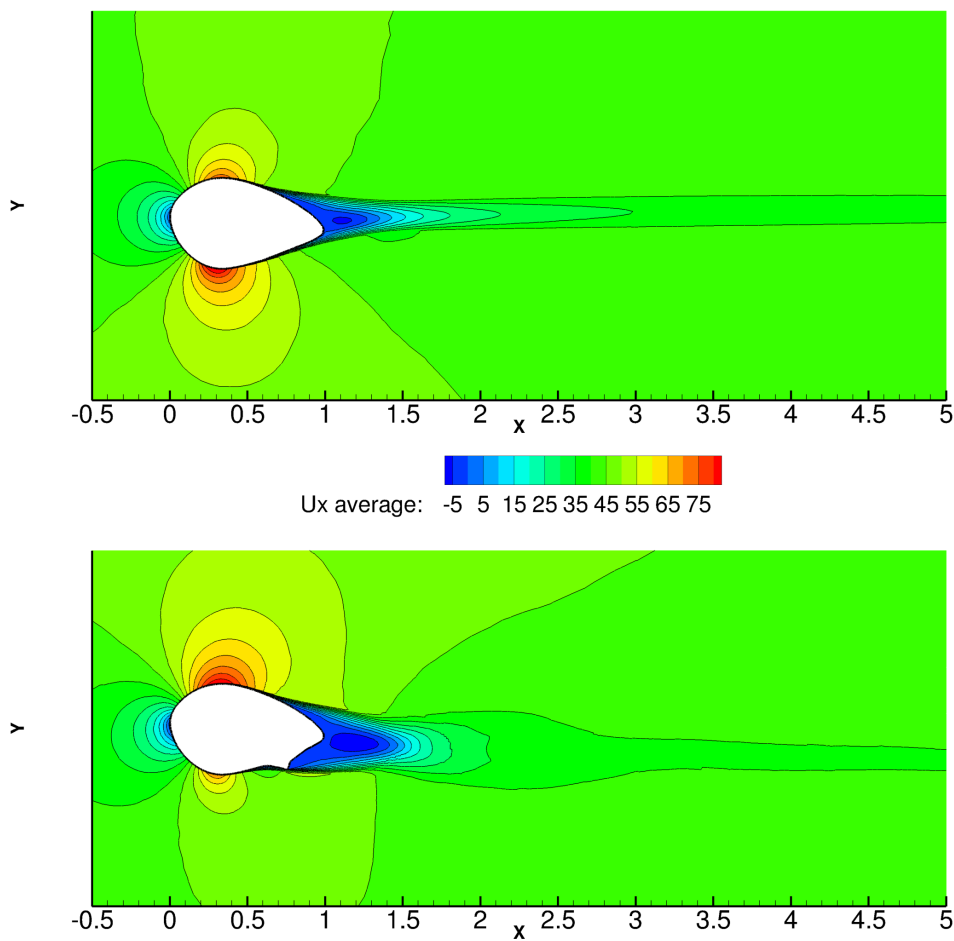


Figure 3. Average horizontal wind speed contour plot for $\alpha = 6^\circ$ and $Re_c = 3 \times 10^6$: top - no spoiler case, bottom - spoiler case.


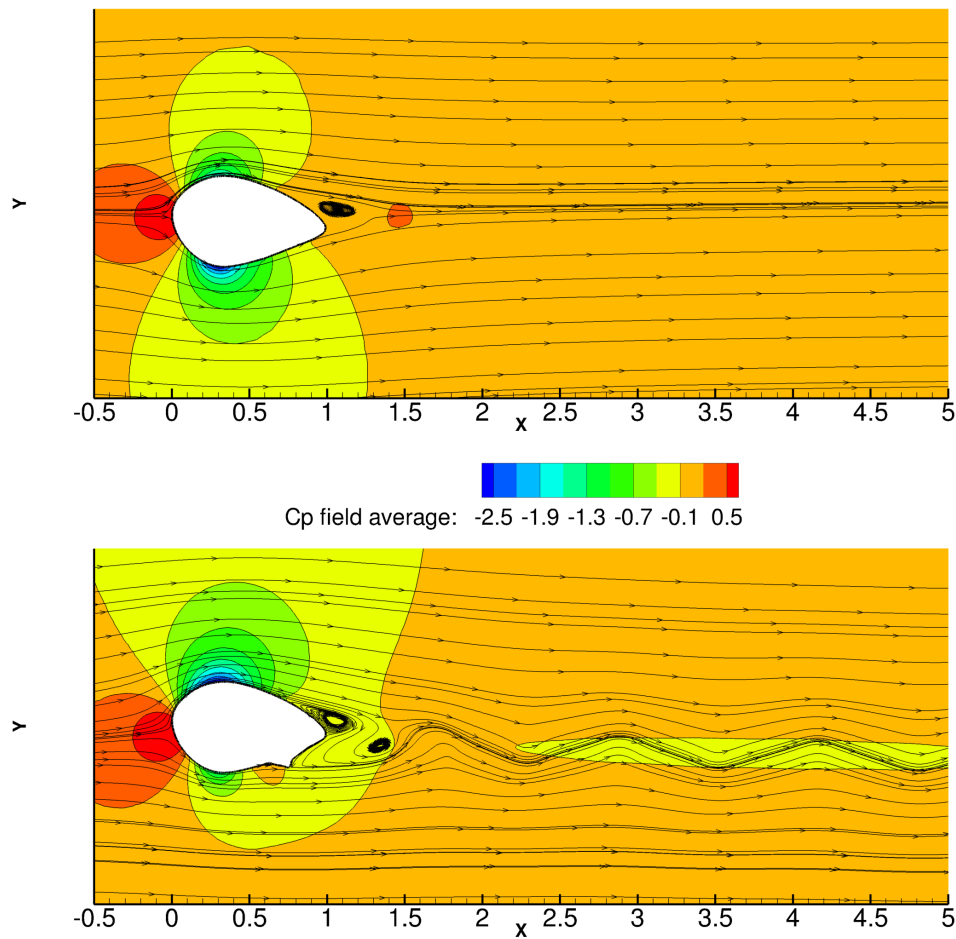



Figure 4. Average pressure field contour plot and instantaneous velocity streamlines for $\alpha = 6^\circ$ and $Re_c = 3 \times 10^6$: top - no spoiler case, bottom - spoiler case.



At the wall, the associated pressure coefficient (C_p) clearly show that the aerofoil with spoiler has a distribution closer to thinner aerofoils, with a much larger net area area between the upper and lower curves, and thus a much larger lift than the reference case (see Figure 5b).

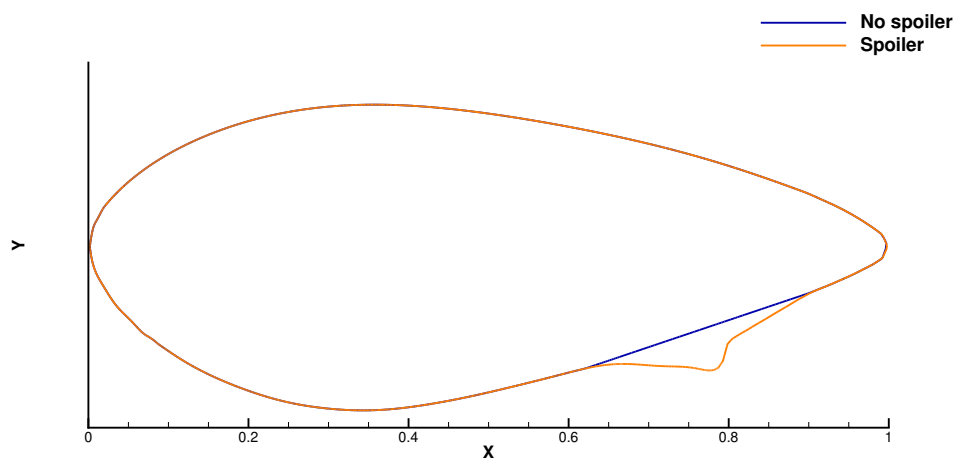

(a) Comparison of the aerofoil shape with and without spoiler.

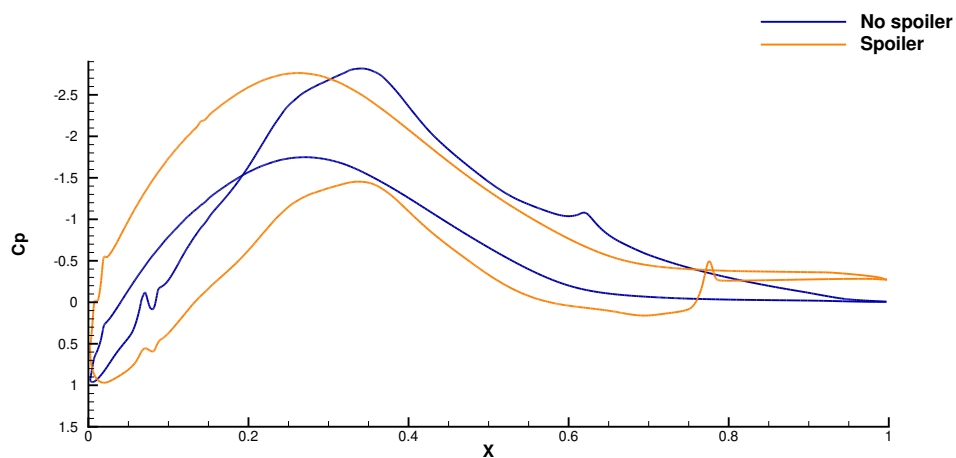

(b) Average wall pressure coefficient plot for $\alpha = 6^\circ$ and $Re_c = 3 \times 10^6$.

Figure 5. Illustration of the aerofoils shapes along with the mean wall pressure coefficient.



120 4.1.2 Steady aerodynamic polar

For $\alpha = 6^\circ$, the lift gain when adding a spoiler is $\Delta C_L = 1.34$. This gain however varies with the angle of attack, as can be seen in Figure 6. For the "no spoiler" case, between -4° and 10° , the C_L is decreasing in the usually called "linear region" to reach negative values. This phenomena has been reported by Schaffarczyk and Arakawa (2020) where they analysed a symmetrical thick profile without spoiler at a higher Reynolds number ($Re > 6 \times 10^6$) but the behaviour was similar. Between 10° and 14° the C_L is increasing along with the C_D . Beyond 14° both aerodynamic coefficients exhibit a bluff-body behaviour. Whereas, for the "spoiler" case, the lift behaviour is more usual for such Reynolds number: a clear negative stall in the vicinity of -4° can be seen and a positive stall around 8° , despite the constant C_L increase.



Figure 6. Lift coefficient polar for the radial position R6 ($\frac{r}{R} = 13\%$). The blue square (■) shows the C_L for the no spoiler case and the orange dot (●) shows the C_L for the spoiler case.



In the wake region, the mean streamwise velocity component, U_x , shows that the mean recirculating area (negative stream-
 wise velocity) behind the aerofoil with spoiler is wider and extends further downstream (see Figure 3) compared to the
 130 "no spoiler" case. This larger wake reflects a drag penalty generated by the spoiler addition that is found of the order of
 $\Delta C_D = 0.0825$ for $\alpha = 6^\circ$. Again, the penalty is highly dependent on the angle of attack (see Figure 7). There is almost no
 drag penalty at low angle of attack, up to $\alpha = 0^\circ$. Beyond, the "spoiler" operates at a significantly higher C_D than the "no
 spoiler" case.

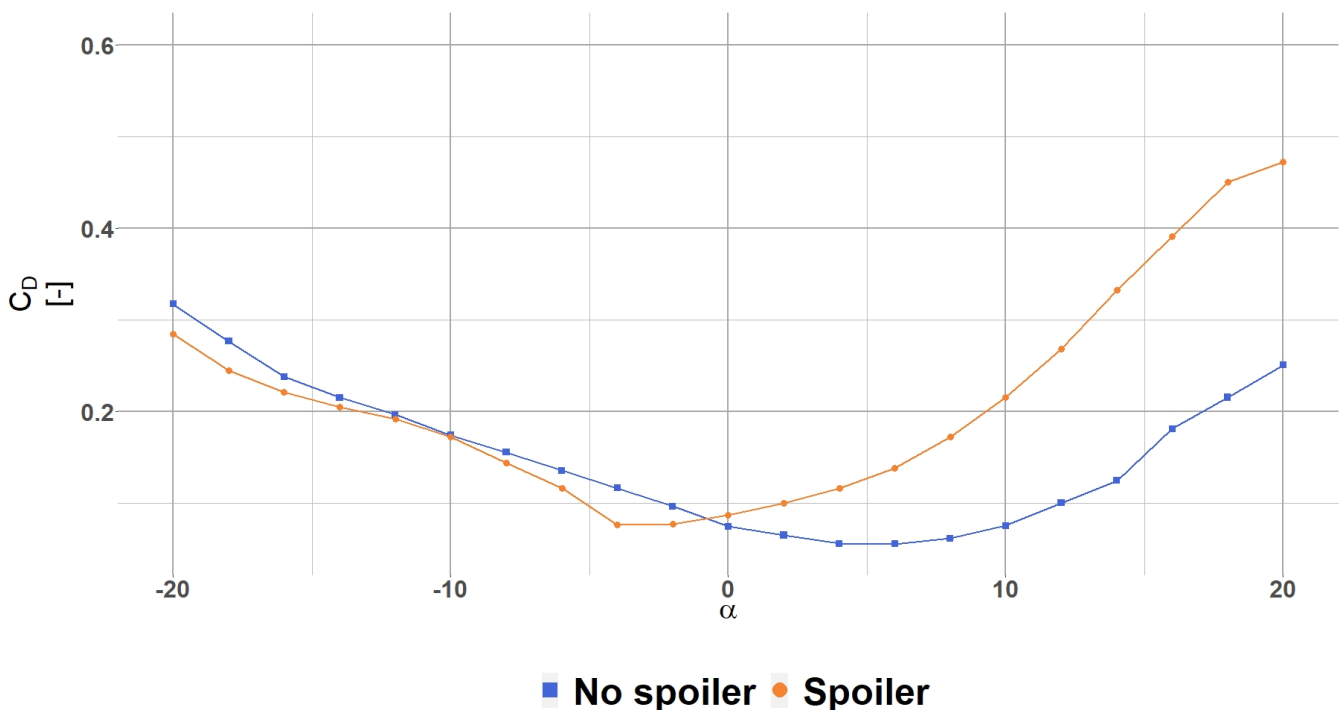


Figure 7. Drag coefficient polar for the radial position R6 ($\frac{r}{R} = 13\%$). The blue square (■) shows the C_D for the no spoiler case and the orange dot (●) shows the C_D for the spoiler case.

In summary, the impact of the spoiler is to redistribute global forces so that the thick root sections become more efficient
 135 in term of lift force at a cost of a drag penalty. This known conclusion is in good agreement with the literature of sub-
 boundary layer GF, except that the lift gain and the drag penalty are much more important and quantified here ($\Delta C_L = 1.34$
 and $\Delta C_D = 0.0825$ for $\alpha = 6^\circ$). Globally, in terms of lift gain, adding a spoiler is found detrimental for the negative angles
 of attack while of high interest for higher angles of attack. Another drawback of the spoiler addition are the unsteady effects
 such as shown by the waviness in the instantaneous streamlines behind the "spoiler" case (see Figure 4) and will be detailed in
 140 the following section. To the authors' knowledge, the unsteadiness behind large devices at high Reynolds number has not been
 evaluated, Unsteady Reynolds Averaged Navier-Stokes results of such phenomena are detailed in the next Section 4.2.



4.2 Unsteady aerodynamics

The unsteady flow organisation behind thick aerofoil profiles with or without AAOs at high Reynolds number is studied here. The flow analysis focuses on such configuration for one angle of attack first ($\alpha = 6^\circ$), then the aerodynamic polar ranging from $-20^\circ < \alpha < 20^\circ$ will be presented. Unsteady impacts of AAO mostly focuses on the wake region, which will be analysed further in term of instantaneous vorticity, Q-criteria, local (wall pressure) and global forces and PSD analysis.

4.2.1 Wake region


The wake can be separated in a near wake region, from $1 < \frac{x}{c} < 2$, and a far wake region which extents until the half of the computing domain (20 chords length). This far wake is shown in a truncated illustration in Figure 3 or Figure 4 until $\frac{x}{c} = 5$.

150


Near wake region

After the convergence is reached, the "spoiler" case shows a periodic C_L and C_D behaviour, whereas the "no spoiler" case does not vary in time (see Figure 8a), as expected. For the "spoiler" case, the net area between the C_p curves varies progressively in synchronicity with the C_L extrema (the red dot illustrates $C_{L_{max}}$ and the blue dot corresponds to $C_{L_{min}}$ on the Figure 8b), leading to a progressive increase and decrease of the lift and drag, as illustrated in Figure 9.

155

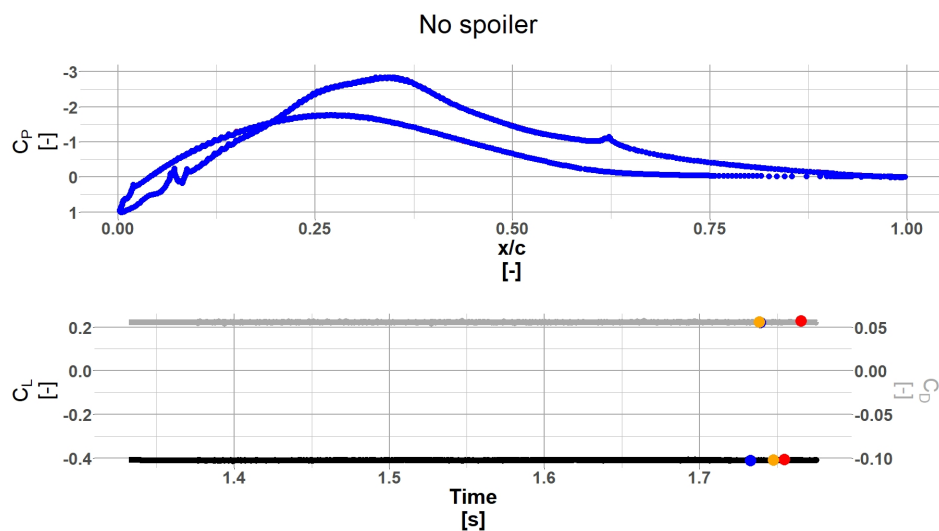

(a) "No spoiler" case C_L and C_p synchronicity

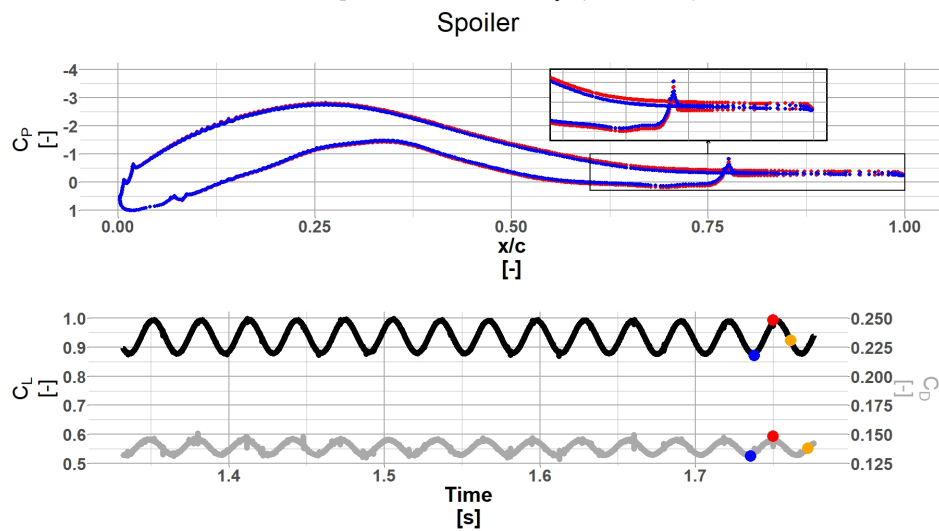

(b) "Spoiler" case C_L and C_p synchronicity

Figure 8. C_p and aerodynamic coefficients evolution in time $\alpha = 6^\circ$ and $Re_c = 3 \times 10^6$. For both the C_p and C_L/C_D plot, the blue dot (●) corresponds to the minimum C_L , the red dot (●) corresponds to the maximum C_L . On the C_L/C_D plot the orange dot (●) corresponds to the mean C_L .

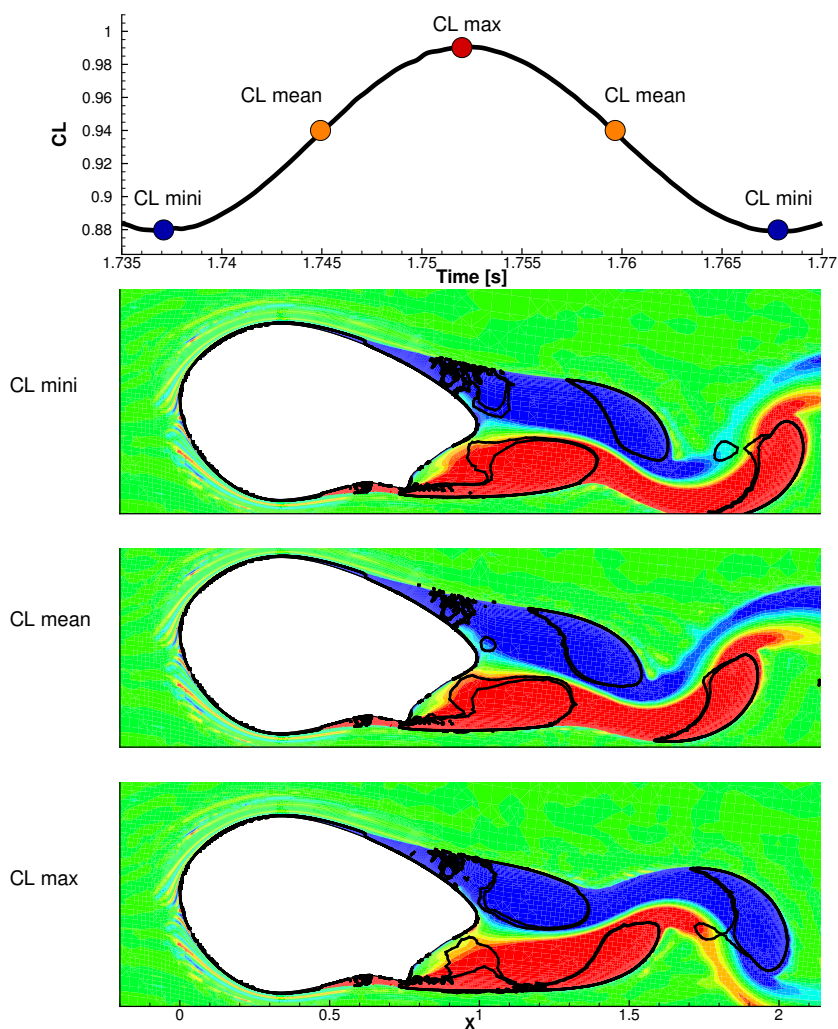


Figure 9. "Spoiler case" illustration of vortices in the vicinity of the trailing edge in relation with the lift coefficient evolution for $\alpha = 6^\circ$ and $Re_c = 3 \times 10^6$. The contour plots depicts instantaneous vorticity contour with Q-criteria lines.

The near wake region is zoomed in Figure 10. It is illustrated by co-plotting a snapshot of the vorticity sign with the Q-criteria. Both instantaneous snapshots show vortices formed in the near wake region due to the roll up of the separated shear layers from both, the upper and lower side of the aerofoil. For the "no spoiler case", the "black lines" (isolines of $0 < Q - criteria < 1000$) clearly shows that vortices are symmetric with the wake centre line. For the "spoiler case", AAO clearly starts the separation of the shear layer in the lower side of the aerofoil while the "black lines" are no longer symmetric with the wake centre line. The time evolution of this near wake organisation exhibits periodic interaction of vortices from each side of the aerofoil. The vortex from the pressure side is rolling up onto the suction side thereby forcing the upper side separation periodically (see attached movie).

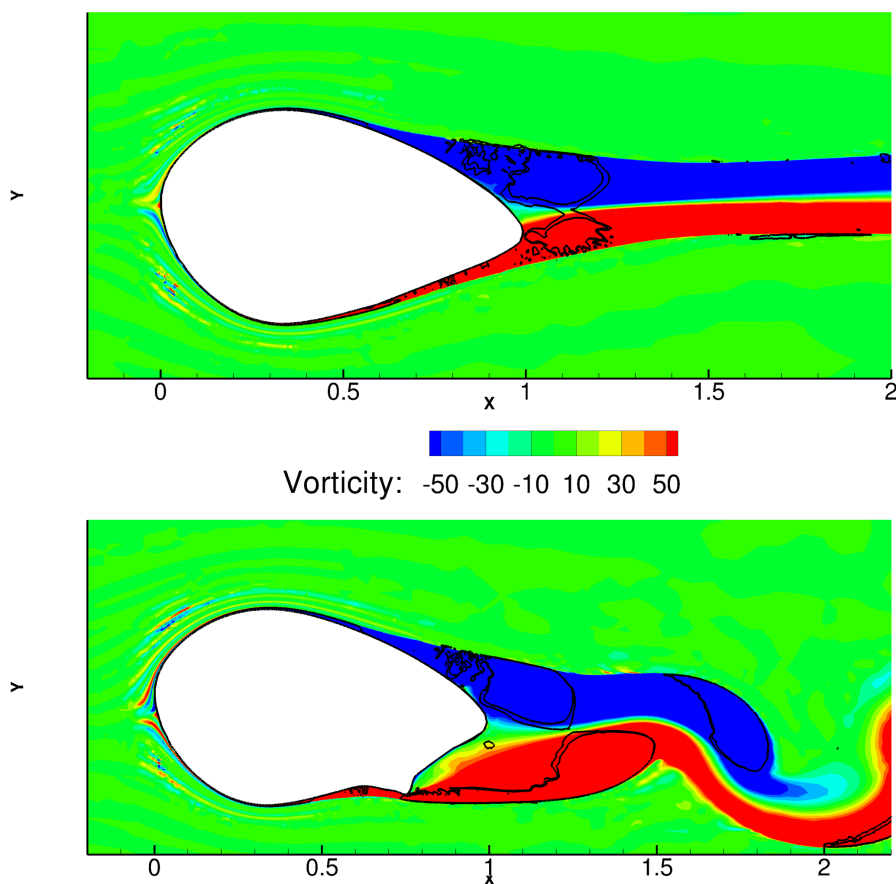


Figure 10. Vorticity contour plot with Q-criteria lines for $\alpha = 6^\circ$ and $Re_c = 3 \times 10^6$, top - no spoiler case, bottom - spoiler case. Red is counterclockwise flow rotation and blue clockwise flow rotation.



In term of energy production, it is interesting to extract the snapshot of the near wake organisation at the optimal lift to
165 drag ratio, which also occurs at $C_{L_{max}}$. For that purpose, the different C_L can be analysed together with the spatial vortex
organisation (see Figure 9). The lift is at its minimum (blue dots) when the top vortex is "far" from the trailing edge and the
lower side vortex is rolling up toward the upper side. The mean C_L (orange dots) is characterised by having both vortices close
to the trailing edge: the top side vortex already separated from the surface and the lower one still attached to the spoiler's tip.
Finally, the maximum lift (red dot) is seen when the lower side vortex is about to separate from the spoiler's tip and the upper
170 side vortex is at its maximum size (it just left the aerofoil's surface). Consequently, it indicates that the pressure is at its lowest
on the upper side. Therefore, in term of energy production, having shed vortices at their maximum size and the closest to the
trailing edge is the best flow organisation.

Far wake region

175 In the far wake region, a single peak frequency emerges, with its harmonics, that can be extracted at $\frac{x}{c} = 3.0$ using PSD
analysis (see Figure 11). The energy content for the "no spoiler" case is several order of magnitude lower than the "spoiler"
case as expected. At last, following the definition of Yarusevych et al. (2009) a Strouhal number of $S_{t-spoiler}^* = 0.15$ is found.
In this definition, the velocity used is the mean free stream velocity and the characteristic length is the distance between two
mean horizontal velocity Root Mean Square extrema at $\frac{x}{c} = 3.0$. This result falls in line with their study where $S_t^* \approx 0.17$ was
180 found, albeit in our case at a much higher Reynolds number and for a much thicker aerofoil and equipped with spoiler.

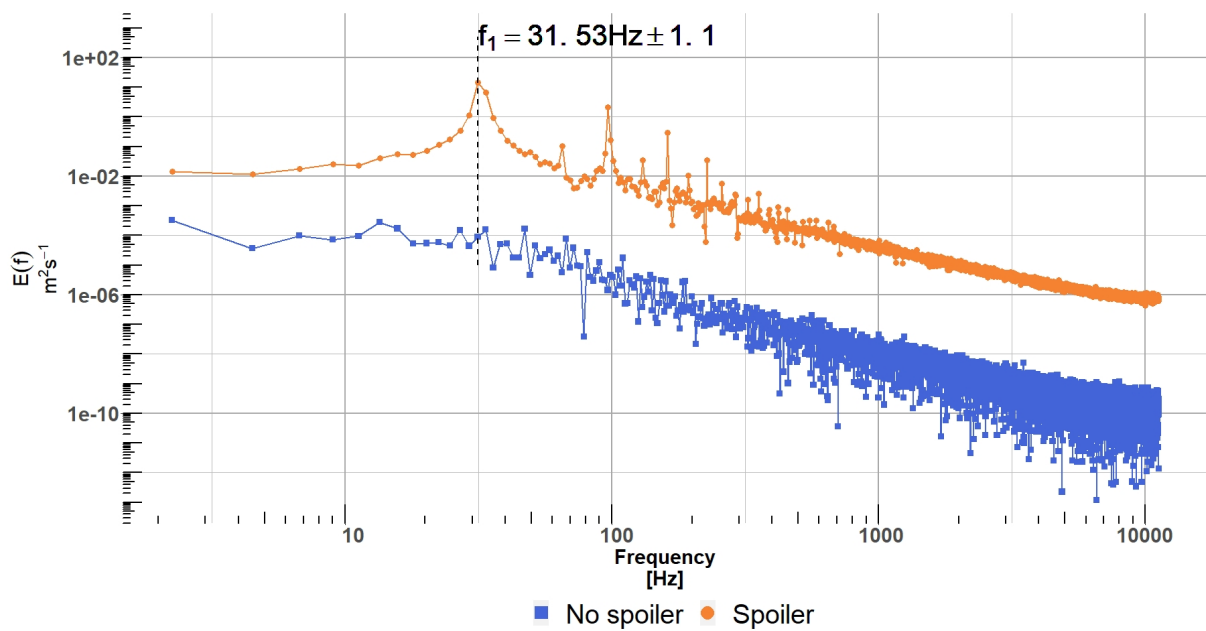


Figure 11. Horizontal velocity PSD, in the wake, at $\sigma_{\text{tip}} = 3.0$. The blue square (■) shows the "no spoiler" case while the orange dot (●) shows the "spoiler" case.



4.2.2 Unsteady aerodynamic polar

This unsteady analysis for $\alpha = 6^\circ$ case is extended towards all other angles of attack. The vortex shedding organisation previously described induces oscillations on the surface pressure and thereby the aerodynamic coefficients C_L and C_D .

185 The behaviour described for the angle of attack $\alpha = 6^\circ$ is present throughout the polar for both cases with varying amplitude of the oscillations. The same analysis was carried out for $\alpha = 10^\circ$ (not presented in this paper), the vortex shedding frequency remains similar, only the amplitude changes. Overall, as long as the angle of attack is in the linear region the vortex shedding frequency remains similar, when approaching stall or in the stall region the frequency drops by half the attached flow region value. The maximum and minimum of these oscillations are reported in Figure 12 and Figure 13. The "no spoiler" case shows a
 190 decreasing variation of lift and drag coefficients from $-20^\circ < \alpha < -2^\circ$. The variation remains constant until the higher angles of attack ($\alpha > 10^\circ$). The variation in aerodynamic coefficients for the "spoiler" case is similar for the negative angle of attack and in the linear region. It increases drastically after 10° showing a possible stall behaviour, as highlighted by the coloured areas. Beyond 14° for the C_L , the variation amplitude is similar to the actual mean aerodynamic value. Overall, the "spoiler" case adds a lot more variation in the aerodynamic loads when it becomes efficient (i.e. the lift is increased).

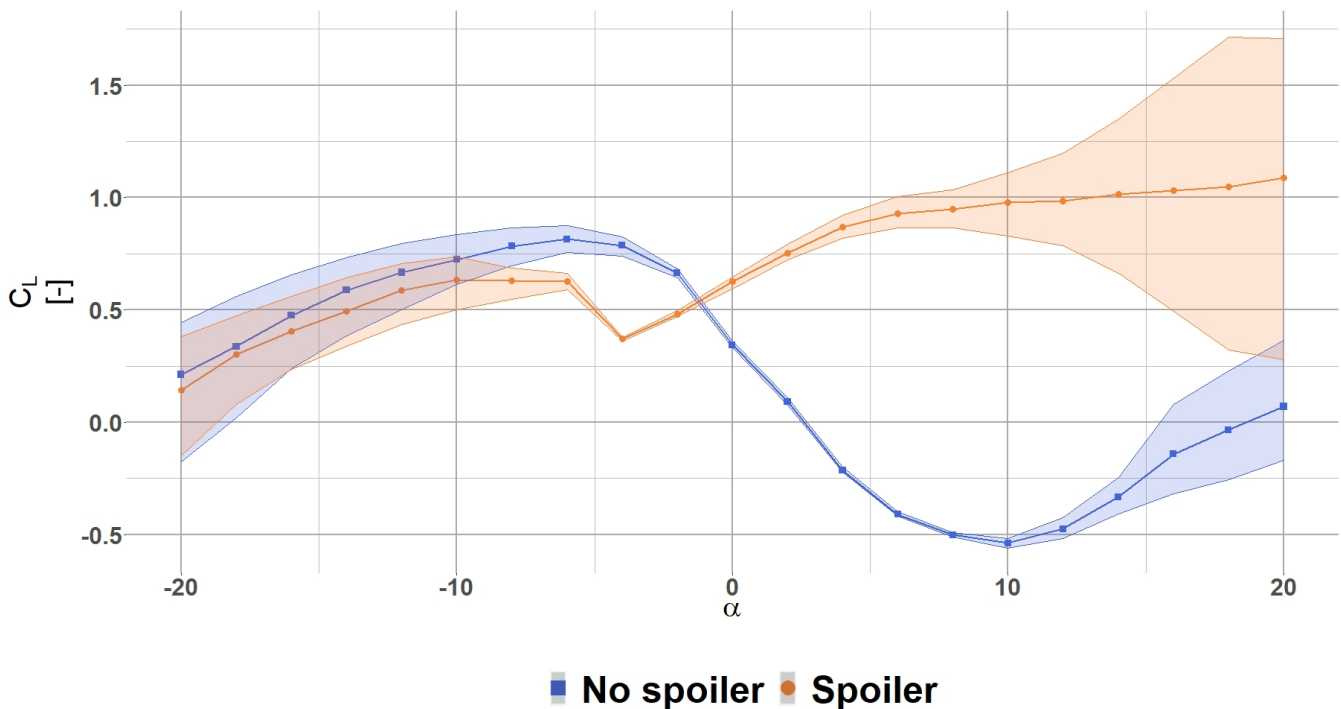


Figure 12. Lift coefficient polar for the radial position R6 ($\frac{r}{R} = 13\%$). The blue square (■) shows the C_L for the no spoiler case and the orange dot (●) shows the C_L for the spoiler case.

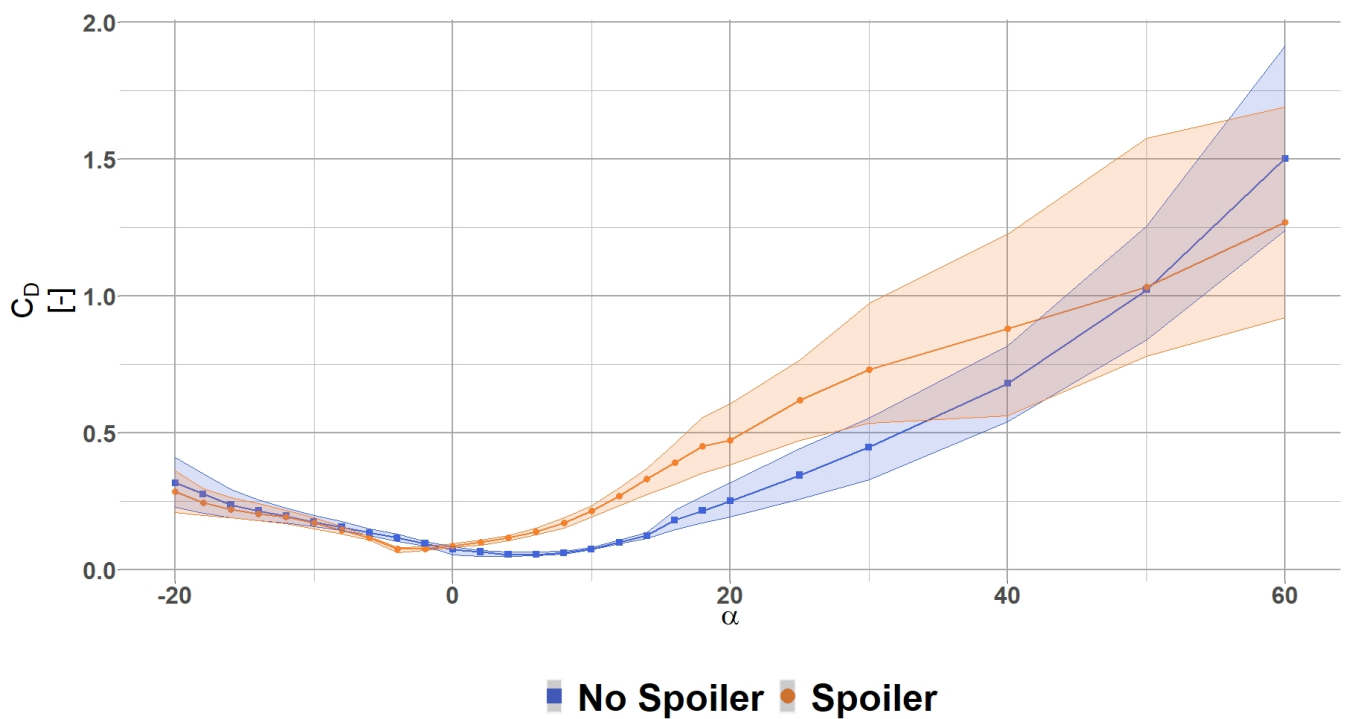


Figure 13. Drag coefficient polar for the radial position R6 ($\frac{r}{R} = 13\%$). The blue square (■) shows the C_D for the no spoiler case and the orange dot (●) shows the C_D for the spoiler case.



195 5 Conclusions

The present study proposes an original 2D URANS description of the unsteady flow behind thick aerofoil (59%) from an operating 2MW wind turbine equipped with spoilers at high Reynolds number. The particularity of this configuration stands on the size of the AAO: it is the real dimension of today's operating wind turbine rather than the sub-boundary layer device sizes usually studied in the literature. This AAO is found to efficiently rearrange the mean flow, adding lift throughout the positive
200 angles of attack. However, the drawback is a high drag penalty coupled with high unsteadiness of the aerodynamic forces. Without spoiler, the aerofoil wake is erratic and not organised. With spoiler, a peak frequency is dominant in the aerodynamic lift and drag coefficients, which corresponds to a vortex shedding organisation. The associated Strouhal number is almost constant $St^* = 0.17$ despite the aerodynamic coefficients variation amplitude changing with the angle of attack. The wake energy content is increased by several order of magnitude compared to the aerofoil without spoiler. This flow reorganisation
205 is present throughout the polar range and is accompanied by larger variation of aerodynamic forces than without spoiler. The impact of this type of excitation will be quantified further in term of energy production and fatigue in future work.

Code and data availability. Available on demand.

Video supplement. A short movie depicting the vortex shedding for both aerofoil shapes is available.

Author contributions. TP performed the scans post-processing, CFD pre-processing and post-processing, and writing of the paper. EG per-
210 formed CFD verification and helped set-up the CFD model. CIB and AF provided feedback from the industrial point of view and CB helped with the proofreading of the manuscript and physical analysis of the results.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. The authors would like to acknowledge the ANRT (Association Nationale de Recherche Technologique) for their financial support.



215 References

- Alber, J., Soto-Valle, R., Manolesos, M., Bartholomay, S., Nayeri, C. N., Schönlau, M., Menzel, C., Paschereit, C. O., Twele, J., and Fortmann, J.: Aerodynamic effects of Gurney flaps on the rotor blades of a research wind turbine, *Wind Energy Science*, 5, 1645–1662, <https://doi.org/10.5194/wes-5-1645-2020>, 2020.
- Bach, A. B.: Gurney flaps and micro-tabs for load control on wind turbines, Ph.D. thesis, Technischen Universität Berlin, 2016.
- 220 Boeije, C., Vries, de, H., Cleine, I., Emden, van, E., Zwart, G., Stobbe, H., Hirschberg, A., and Hoeijmakers, H.: Fluidic load control for wind turbines blades, in: Proceedings of the 47th AIAA Aerospace Sciences Meeting, 5-8 January, 2009, Orlando, Florida, USA, edited by Maureen Hand, x., pp. 1–8, American Institute of Aeronautics and Astronautics Inc. (AIAA), United States, 47th AIAA Aerospace Sciences Meeting, January 5-8, 2009, Orlando, FL, USA ; Conference date: 05-01-2009 Through 08-01-2009, 2009.
- Cathalifaud, P., Godard, G., Braud, C., and Stanislas, M.: The flow structure behind vortex generators embedded in a decelerating turbulent boundary layer, *Journal of Turbulence*, 10, N42, <https://doi.org/10.1080/14685240903273881>, 2009.
- 225 Cole, J. A., Vieira, B. A. O., Coder, J. G., Premi, A., and Maughmer, M. D.: Experimental Investigation into the Effect of Gurney Flaps on Various Airfoils, *Journal of Aircraft*, 50, 1287–1294, <https://doi.org/10.2514/1.C032203>, 2013.
- Dambrine, G.: Impact of Blade Aging on Wind Turbine Production, Master's thesis, European Master in Renewable Energy, 2010.
- De Tavernier, D., Ferreira, C., Viré, A., LeBlanc, B., and Bernardy, S.: Controlling dynamic stall using vortex generators on a wind turbine airfoil, *Renewable Energy*, p. S0960148121003736, <https://doi.org/10.1016/j.renene.2021.03.019>, 2021.
- 230 Gao, L., Zhang, H., Liu, Y., and Han, S.: Effects of vortex generators on a blunt trailing-edge airfoil for wind turbines, *Renewable Energy*, 76, 303–311, <https://doi.org/10.1016/j.renene.2014.11.043>, 2014.
- Giguere, P., Lemay, J., and Dumas, G.: Gurney flap effects and scaling for low-speed airfoils, in: 13th Applied Aerodynamics Conference, American Institute of Aeronautics and Astronautics, San Diego, CA, U.S.A., <https://doi.org/10.2514/6.1995-1881>, 1995.
- 235 Godard, G. and Stanislas, M.: Control of a decelerating boundary layer. Part 1: Optimization of passive vortex generators, *Aerospace Science and Technology*, 10, 181–191, <https://doi.org/10.1016/j.ast.2005.11.007>, 2006.
- Gonzalez-Salcedo, A.: Aerodynamic flow control final report, in: AdVanced Aerodynamic Tool for lARge Rotors, p. 86, European project AVATAR, 2016.
- Jang, C. S., Ross, J. C., and Cummings, R. M.: Numerical investigation of an airfoil with a Gurney flap, *Aircraft Design*, 1, 75–88, [https://doi.org/10.1016/S1369-8869\(98\)00010-X](https://doi.org/10.1016/S1369-8869(98)00010-X), 1998.
- 240 Jaunet, V. and Braud, C.: Experiments on lift dynamics and feedback control of a wind turbine blade section, *Renewable Energy*, 126, 65–78, <https://doi.org/10.1016/j.renene.2018.03.017>, 2018.
- Li, Y., Wang, J., and Zhang, P.: Effects of Gurney Flaps on a NACA0012 Airfoil, *Flow, Turbulence and Combustion*, p. 13, 2002.
- Liebeck, R. H.: Design of Subsonic Airfoils for High Lift, *Journal of Aircraft*, 15, 547–561, <https://doi.org/10.2514/3.58406>, 1978.
- 245 Lin, J. C.: Review of research on low-profile vortex generators to control boundary-layer separation, *Progress in Aerospace Sciences*, 38, 389–420, [https://doi.org/10.1016/S0376-0421\(02\)00010-6](https://doi.org/10.1016/S0376-0421(02)00010-6), 2002.
- McWilliam, M. K., Barlas, T. K., Madsen, H. A., and Zahle, F.: Aero-elastic wind turbine design with active flaps for AEP maximization, *Wind Energy Science*, 3, 231–241, <https://doi.org/10.5194/wes-3-231-2018>, 2018.
- Meena, M. G., Taira, K., and Asai, K.: Airfoil-Wake Modification with Gurney Flap at Low Reynolds Number, *AIAA Journal*, p. 12, 2017.



- 250 Menter, F.: Zonal Two Equation k-w Turbulence Models For Aerodynamic Flows, in: 23rd Fluid Dynamics, Plasmadynamics, and Lasers Conference, Fluid Dynamics and Co-located Conferences, American Institute of Aeronautics and Astronautics, <https://doi.org/10.2514/6.1993-2906>, 1993.
- Mohammadi, M., Doosttalab, A., and Doosttalab, M.: The effect of various gurney flaps shapes on the performace of wind turbine airfoils, in: Proceedings of the ASME Early Career Technical Conference, Atlanta, GA, USA, pp. 2–3, 2012.
- 255 Pechlivanoglou, G.: Passive and Active Flow Control Solutions for Wind Turbine Blades, Ph.D. thesis, Technischen Universität Berlin, 2013.
- Perivolaris, Y. and Voutsinas, S.: A cfd performance analysis of vortex generators used for boundary layer control on wind turbine blades, in: Proceedings of the European Wind Energy Conference, Copenhagen, Denmark, 2001.
- Potentier, T., Guilmineau, E., and Braud, C.: CFD solver and meshing techniques verification using the DANAERO database, 19th PhD Seminar, p. 8, 2020.
- 260 Saleem, Z.: Investigation of passive root flaps on HAWT, Master’s thesis, TU Delft, 2019.
- Schaffarczyk, P. and Arakawa, C.: A thick aerodynamic profile with regions of negative lift slope and possible implications on profiles for wind turbine blades, *Wind Energy*, p. we.2565, <https://doi.org/10.1002/we.2565>, 2020.
- Schepers, J.: Advanced aerodynamic modelling, design and testing for large rotor blades, Final report FP7-ENERGY-2013.2.3.1/ n°608396, European Comission, https://www.eera-avatar.eu/fileadmin/avatar/user/AVATAR_final_report_v26_2_2018.pdf, 2017.
- 265 Schubauer, G. B. and Spangenberg, W. G.: Forced mixing in boundary layers, *Journal of Fluid Mechanics*, 8, 10, <https://doi.org/10.1017/S0022112060000372>, 1960.
- Skrzypiński, W., Gaunaa, M., and Bak, C.: The Effect of Mounting Vortex Generators on the DTU 10MW Reference Wind Turbine Blade, *Journal of Physics: Conference Series*, 524, 012 034, <https://doi.org/10.1088/1742-6596/524/1/012034>, 2014.
- Storms, B. L. and Jang, C. S.: Lift enhancement of an airfoil using a Gurney flap and vortex generators, *Journal of Aircraft*, 31, 542–547, <https://doi.org/10.2514/3.46528>, 1994.
- 270 Sørensen, N. N., Zahle, F., Bak, C., and Vronsky, T.: Prediction of the Effect of Vortex Generators on Airfoil Performance, *Journal of Physics: Conference Series*, 524, 012 019, <https://doi.org/10.1088/1742-6596/524/1/012019>, 2014.
- Taylor, H. D. et al.: The elimination of diffuser separation by vortex generators, Research department report no. r-4012-3, United Aircraft Corporation, East Hartford, Connecticut, 103, 1947.
- 275 Wackers, J., Deng, G., Guilmineau, E., Leroyer, A., Queutey, P., and Visonneau, M.: Combined refinement criteria for anisotropic grid refinement in free-surface flow simulation, *Computers & Fluids*, 92, 209–222, <https://doi.org/10.1016/j.compfluid.2013.12.019>, 2014.
- Wackers, J., Deng, G., Guilmineau, E., Leroyer, A., Queutey, P., Visonneau, M., Palmieri, A., and Liverani, A.: Can adaptive grid refinement produce grid-independent solutions for incompressible flows?, *Journal of Computational Physics*, 344, 364–380, <https://doi.org/10.1016/j.jcp.2017.04.077>, 2017.
- 280 Wang, J., Li, Y., and Choi, K.-S.: Gurney flap—Lift enhancement, mechanisms and applications, *Progress in Aerospace Sciences*, 44, 22–47, <https://doi.org/10.1016/j.paerosci.2007.10.001>, 2008.
- Yarusevych, S., Sullivan, P. E., and Kawall, J. G.: On vortex shedding from an airfoil in low-Reynolds-number flows, *Journal of Fluid Mechanics*, 632, 245–271, <https://doi.org/10.1017/S0022112009007058>, 2009.