

OF²: coupling OpenFAST and OpenFOAM for high fidelity aero-hydro-servo-elastic FOWT simulations

Guillén Campaña-Alonso^{1,2}, Raquel Martín-San-Román¹, Beatriz Méndez-López¹, Pablo Benito-Cia¹, and José Azcona-Armendáriz¹

¹Wind Energy Department, Centro Nacional de Energías Renovables (CENER), Ciudad de la Innovación, 7, 31621 Sarriguren, Spain

²UPM, E.T.S.I. Aeronáutica y del Espacio, Universidad Politécnica de Madrid, Plaza Cardenal Cisneros, 3, 28040 Madrid, Spain

Correspondence: Guillén Campaña-Alonso(gcampana@cener.com)

Abstract. The numerical study of floating offshore wind turbines requires accurate integrated simulations, considering aerodynamics, hydrodynamics, servo and elastic response of these systems. In addition, the floating system dynamics couplings need to be included to calculate precisely the excitation over the ensemble. In this paper, a new tool has been developed coupling the NREL's aero-servo-elastic tool OpenFAST with the Computational Fluid Dynamics (CFD) toolbox OpenFOAM. OpenFAST is used to model the rotor aerodynamics alongside with the flexible response of the different components of the wind turbine and the controller at each time step considering the dynamic response of the platform. OpenFOAM is used to simulate the hydrodynamics and the platform's response considering the loads from the wind turbine. The whole simulation environment is called OF² (OpenFAST & OpenFOAM). The OC4 DeepCWind semi-submersible FOWT together with the NREL's 5MW wind turbine has been simulated using OF² under two load cases. The purpose of coupling these tools to simulate FOWT is to obtain high-fidelity results for design purposes reducing the computational time compared with the use of CFD simulations both for the rotor aerodynamics, that usually consider rigid blades, and the platform's hydrodynamics. The OF² approach allows also to include the aero-servo-elastic couplings that exist on the wind turbine alongside with the hydrodynamic system resolved by CFD. High complexity situations of floating offshore wind turbines, like storms, yaw drifts, weather-vane, or mooring line breaks, that implies high displacements and rotations of the floating platform or relevant non-linear effects can be resolved using OF², overcoming the limitation of many state of the art potential hydrodynamic codes that assume small displacements of the platform. In addition, all the necessary information for the FOWT calculation and design processes can be obtained simultaneously, such as the pressure distribution at the platform components and the loads at the tower base, fairleads tension, etc. Moreover, the effect of turbulent winds and/or elastic blades could be taken in account to resolve load cases from the design and certification standards.

20 1 Introduction

Floating offshore wind turbines (FOWT) design and optimization is necessary to accomplish the requirements with regard to the increase of wind energy capacity installed worldwide. The reduction of the LCOE of offshore wind energy will be possible,

among others, if the fidelity of the tools used to design FOWT is improved without a great increase of computational time. In addition, the coupling of the wind turbine and platform dynamics is necessary to the ensemble optimizations necessary in wind turbine and platform co-design processes.

Most of the state of the art hydrodynamic models used in engineering simulation tools, for the coupled analysis of floating offshore wind turbines (FOWT), are based in two different hydrodynamic models to resolve the hydrodynamic loads on the floating platform: Morison's equation (ME) and potential flow theory (PF). The ME (see Morison et al. (1950)) can be applied to slender bodies and provides the inertia and drag forces over these elements. The PF (see Newman, J.N. (1977); Faltinsen, O.M. (1993)) is applicable to general geometries to solve the hydrodynamic problem, obtaining the added mass, radiation damping, diffraction forces, etc., but does not include viscous effects. The viscous effects can be added to potential models through the drag term of Morison's equation, or by adjusting the damping of the platform based in experimental data (see Azcona (2016)), or Computational Fluid Dynamic (CFD) simulations. This potential solution can be obtained both in the frequency and time domains. Moreover, the forces and moments obtained by solving the potential problem in the frequency domain can be introduced into a time domain solver of the floating platform, see for example Jonkman, J.M. (2007).

As mentioned before, the hydrodynamic response of floating platforms can also be modelled performing high fidelity CFD simulations. This method has become, nowadays, part of the design process of FOWT. These simulations support the design process and allow tuning the integrated numerical tools since the early stages of the process, so that the effort in wave tank testing can be kept once a mature platform design has been achieved. CFD simulations are used to provide quantitative information to the design process such as the damping coefficients needed in the engineering codes. In addition, flow phenomena such as wave run up or pressures over the structure, or the heave plates, are provided to optimize the platform design and to understand its dynamics. Several publications can be found in which CFD is applied to simulate platform hydrodynamics. For instance, the OC6 Phase I collaborative work under the IEA Task 30 provided two publications, in the first one the platform response to bi-chromatic waves was analysed in Wang et al. (2021), making special focus in the waves treatment, pressures over the structure and wave run-up analysis. In the second one, free decay simulations were performed to make a benchmark between different CFD codes, including a detailed comparison with experiments described in Wang et al. (2022a). Both publications demonstrated the potential of CFD use in platform design and characterization, and pointed out the difference with regard to potential-flow solvers simulations. For example, it has been found that the potential-flow solution used in Wang et al. (2021) significantly under-predicts the damping of surge motion. [Another study from Wang et al. \(2022b\) delves deeper into the effect of irregular waves over the DeepCWind platform lending credibility to and confidence in the use of high-fidelity CFD simulations in predicting the global performance of floating wind platforms and for tuning mid-fidelity engineering models.](#)

On the other hand, rotor aerodynamics are simulated in the wind energy industry with different fidelity level tools ranging from blade element momentum theory (BEMT) Bossanyi et al. (2001); Bladed (2010), more complex free vortex filament methods (FVM) Keckskemety and McNamara (2011); Marten et al. (2019), actuator line approaches Quon et al. (2019); Bran-

lard et al. (2014), and the high fidelity fully-resolved CFD simulations. Typically, BEMT and FVM approaches are used for coupled aeroelastic simulations, while the different CFD approaches are used in purely aerodynamic simulations without considering the coupling with flexible degrees of freedom. Moreover, CFD is mainly used in the airfoil level or to specific cases in which extreme aerodynamic events need to be deeply analysed. Recently, in the OC6 Phase III project numerous aerodynamic models with different fidelity levels have been compared, in purely aerodynamic conditions, against wind tunnel experimental data of a wind turbine placed over a moving structure capable of imposing displacements and rotations on the tower base of the wind turbine [Bergua et al. \(2022\)](#)([Bergua et al. \(2022\)](#)). This study has shown that all analyzed aerodynamic models are capable of accurately predict the aerodynamic loads under the forced pitch and surge motion studied in this OC6-Phase III project. However, it has been found that when considering the additional dynamics introduced by the controller the aerodynamic cycles change.

Furthermore, the combined hydro-aero high fidelity simulations of FOWT under wind and wave conditions is a cutting edge technology with few research works available in the literature Otter et al. (2021); Micallef and Rezaeiha (2021). In addition, in the few existing models it is very rare to see couplings with elastic models of the flexible elements of the wind turbine, such as the blades or the tower. And it is even more difficult to find models that include the coupling with the wind turbine control system. Ren et al. (2014) made a CFD analysis of the NREL 5-MW with a TLP structure under wind and wave conditions and simulated with the commercial software FLUENT. In that work only the surge motion was allowed. Liu et al. (2017) presented in their work a coupled CFD simulation using OpenFOAM both in the rotor and in the floating platform. No information was provided about the computational time of that simulations. Tran and Kim (2016) carried out fully coupled aero-hydrodynamic simulations of the OC4-DeepCWind semi-submersible with a wind turbine using CFD and a catenary mooring solver. The major FOWT components were simulated without considering structure deformations. The results considering free decay tests and regular wave conditions showed good agreement with the MARIN tests and the FAST code. Zhang and Kim (2018) also carried out a fully coupled aero-hydrodynamic simulations of the DeepCwid semi-submersible with the NREL 5-MW wind turbine and also compared with experimental measurements of the OC5 project Robertson et al. (2017). In this work, the simulation time for one case was 20 days with 66 CPUs. In addition, it was found that the power output is more sensitive than the thrust force to platform motions.

Moreover, in the design and certification process of FOWT, following standards such as IEC-61400-3-2 Ed1 International Electrotechnical Commission (2019) or NI572 Bureau Veritas (2019), the hydrodynamic pressure over the surface of the platform may be requested alongside with the loads at tower base or mooring tensions at the fairleads for different cases with the wind turbine in normal operational state, storms or under fault conditions. Even more, some specific FOWT designs equipped with single point mooring (SPM) may have large rotations in order to weather-vane with the wind, that can violate some limitations or assumptions of the state of the art design codes like OpenFAST (see Jonkman (2009)). Therefore, a new simulation tool is presented in this work, called OF², that combine a high fidelity representation of the hydrodynamic behaviour of the floating platform with an aero-servo-elastic representation of the tower and rotor-nacelle assembly. This approach reduces the

computational time with regard to full CFD simulations of FOWT, allowing to introduce the control system in the simulation and including flexible response of the different FOWT components. The dynamic pressure, the mooring tension, wave run-up and the body forces can be obtained as in the visualization example that has been represented in Fig. 1.

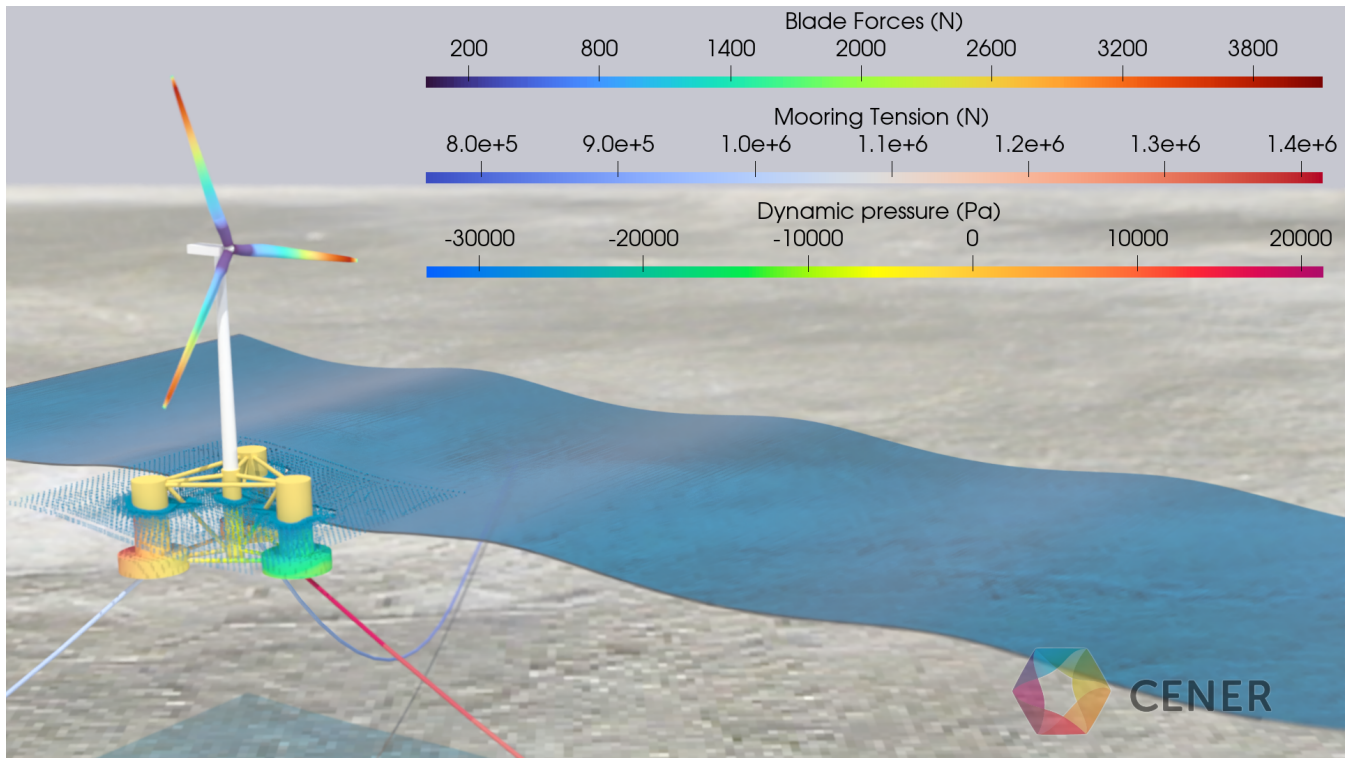


Figure 1. Visualization of an OF^2 simulation. The forces on the blades are shown alongside the mooring line tension and the dynamic pressure on the platform.

The rest of the article is organized as follows: the methodology to couple OpenFAST and OpenFOAM is defined in Sect. 2, then the verification methodology is included in Sect. 3. It includes, firstly, the description of the load cases simulated to demonstrate the applicability of the method and the advantages with regard to potential codes or fully CFD simulations. Secondly, the FOWT model used to test OF^2 will be described as well as the simulations set-up and the results. Finally, the conclusions of this work will be presented in Sect. 4.

2 OF^2 methodology: OpenFAST and OpenFOAM coupling

In this work OpenFAST and OpenFOAM are coupled in order to better simulate the floating platform's hydrodynamic response and to overcome engineering models limitations. With the following approach, the aero-servo-elastic response of the wind tur-

105 bine is simulated with OpenFAST, while the floating platform dynamics and fluid flow are simulated with OpenFOAM. The resulting tool has been named OF².

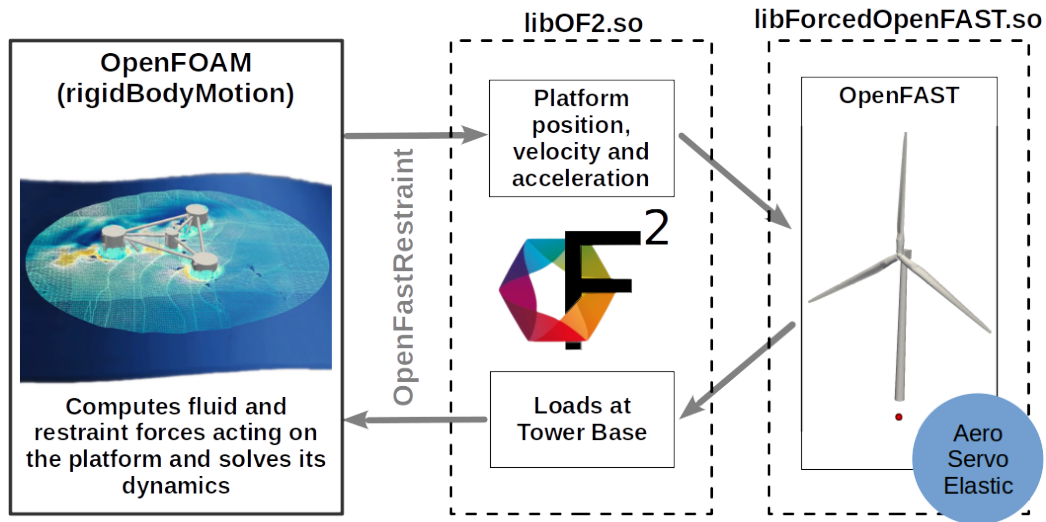


Figure 2. Flowchart of OF² coupling process.

Hence, this OF² environment has been made through the development of two new shared libraries. The operation scheme of all the OF² libraries within OpenFOAM can be seen in Fig. 2. Firstly, `libForcedOpenFAST.so` has been developed. This library allows to run OpenFAST imposing the floating platform displacements (see Martín-San-Román (2022) for details of imposition of movements in OpenFAST). Secondly, a new Rigid Body Motion type restraint, named `libOF2.so`, has also been created. This `libOF2.so` restraint uses the functions existing inside `libForcedOpenFAST.so` in order to apply the loads computed by OpenFAST on the Rigid Body, i.e., the floating platform. Therefore, at each time step, the floating platform dynamics is solved by the Rigid Body Motion library within OpenFOAM. When the OF² restraint is executed, it uses the displacement, velocity and acceleration of the floating platform as an input for the functions of `libForcedOpenFAST.so` that impose this displacement to the wind turbine modelled within OpenFAST and calculate the corresponding loads, power and deformations of the different wind turbine components. Finally, the loads at the tower base point are then applied to OpenFOAM's body, along with the ones resulting from the other restraints (like mooring lines or external forces if any) and fluid forces. Once the platform's dynamics response is solved, the mesh is updated and adapted to the new platform's position and the fluid flow is solved finishing the current time step iteration. This approach ensures that the effect of the platform dynamics over the tower and rotor nacelle assembly is considered in both the servo, elastic and aerodynamic response of each of these components and vice versa. An example of a simplified `dynamicMeshDict` file used in OpenFOAM to describe the body dy-

110
115
120

namics using the new shared libraries can be seen in ~~Listing A~~[Appendix A](#).

3.1 Load Cases

In order to verify OF², two verification load cases have been evaluated with OF² and an OpenFAST-only approaches. The two cases have been based on the Load Case (LC) 3.1 of the OC4 project Robertson et al. (2014b), with a steady uniform [\(deterministic\)](#) wind speed of 8 m/s and a regular wave height (H) of 6 m and a period (T) of 10 s. In the first load case analyzed in this work, called 3.1*, no waves have been included. All the main characteristics of these two load cases have been summarized in Table 1.

Table 1. Description of the Load cases analysed, adapted from OC4 Phase II Robertson et al. (2014b).

Load Case	3.1*	3.1
Description	Deterministic at below rated	Deterministic at below rated
Wind turbine initial condition	$\Omega = 9$ rpm blade pitch = 0 degrees nacelle yaw = 0 degrees	$\Omega = 9$ rpm blade pitch = 0 degrees nacelle yaw = 0 degrees
Enabled DOFs	All	All
Wind Condition	Steady, uniform, no shear $V_{hub} = 8$ m/s	Steady, uniform, no shear $V_{hub} = 8$ m/s
Wave Condition	No wave	Regular Stokes II: $H = 6$ m, $T = 10$ s

3.2 Simulation set-up

The new tool, OF², has been used to evaluate the response under wind and waves loading. For this study, OpenFAST v2.6.0 and OpenFOAM v21.06 have been coupled to model the NREL 5-MW wind turbine on the OC4 semi-submersible DeepCWind floating platform (see Jonkman et al. (2007) and Robertson et al. (2014a)).

The tower and rotor nacelle assembly have been modelled considering the flexibility of the different components. For the three blades, two flexible modes in flap-wise direction and one in edge-wise direction have been considered. Additionally, for the drive-train, a torsional mode has been included and two flexible modes have been also considered, both in fore-aft direction and side-side direction, to represent the tower flexible response. The floating platform is considered as a fully rigid structure. Furthermore, an in-house controller designed for this FOWT has been used.

Moreover, the mooring system has been simulated using MoorDyn (see Hall (2017)) using the OpenFOAM's restraint developed by Chen and Hall (2022). This restraint has been modified to work together with the OpenFOAM's Rigid Body Motion library and it has been called `libmoordynRestraint.so`. The way to include this new restraint in the `dynamicMeshDict`, is also included in [Listing-Appendix A](#).

145

For the CFD simulations performed inside OF² an unstructured mesh has been created with snappyHexMesh, where the domain size is 581m581 m /403m 403 m/278m- 278 m in the surge, sway and heave directions. The smaller element on the platform's surface mesh has a size between 0.3 and 0.6 m and no boundary layer has been added close to the body. Three refinement regions have been used, the first is a box around the floating platform where the mesh size is 0.6 m in the vertical direction and an aspect ratio of 4; the other two are boxes located around the still water level, ensuring a minimum of 20 cells per wave height and 50 cell per wave length, as suggested in Connell and Cashman (2016). This settings result in a 2.3 million of elements mesh. Different mesh details are shown in Fig. 3 (overall view), Fig. 4 (platform body view) and Fig.5 (platform surroundings view).

150

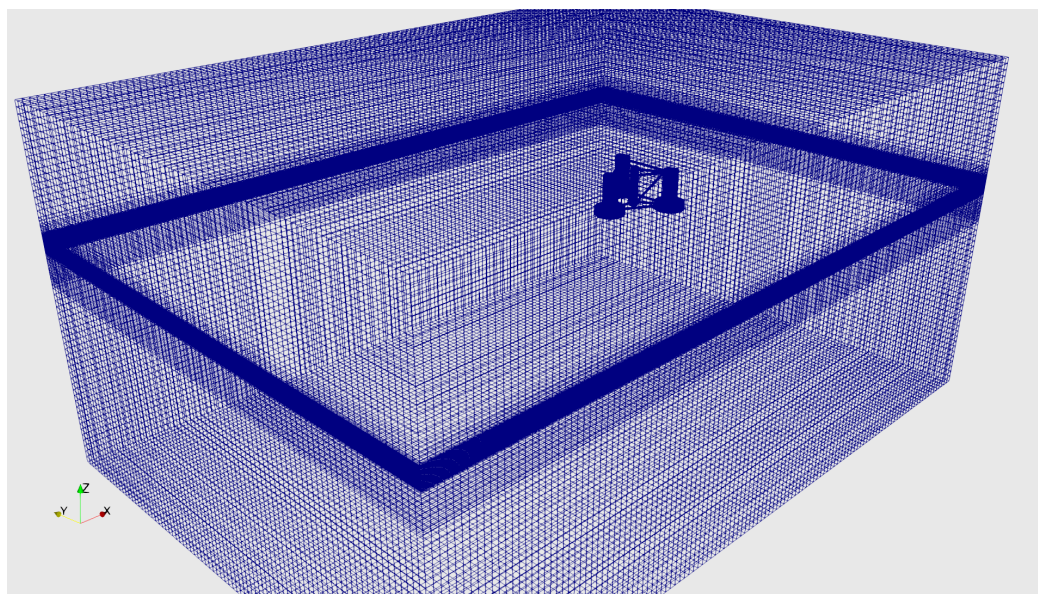


Figure 3. Computational domain mesh, overall view.

155

Regarding the numerical schemes used, first order implicit laminar simulations with OpenFOAM v21.06 have been done. In particular, Gauss linear spatial schemes, for the gradient terms, and Gauss upwind and Gauss MUSCL schemes, for the divergence terms, have been used. Also, MULES interface capturing scheme has been selected. Finally, the PIMPLE algorithm has been used to solve the pressure-velocity coupling. The under-relaxation factors for both velocity and pressure have been set to 1. As the simulation of a floating platform movement needs from a dynamic mesh approach, a morphing mesh technique has been

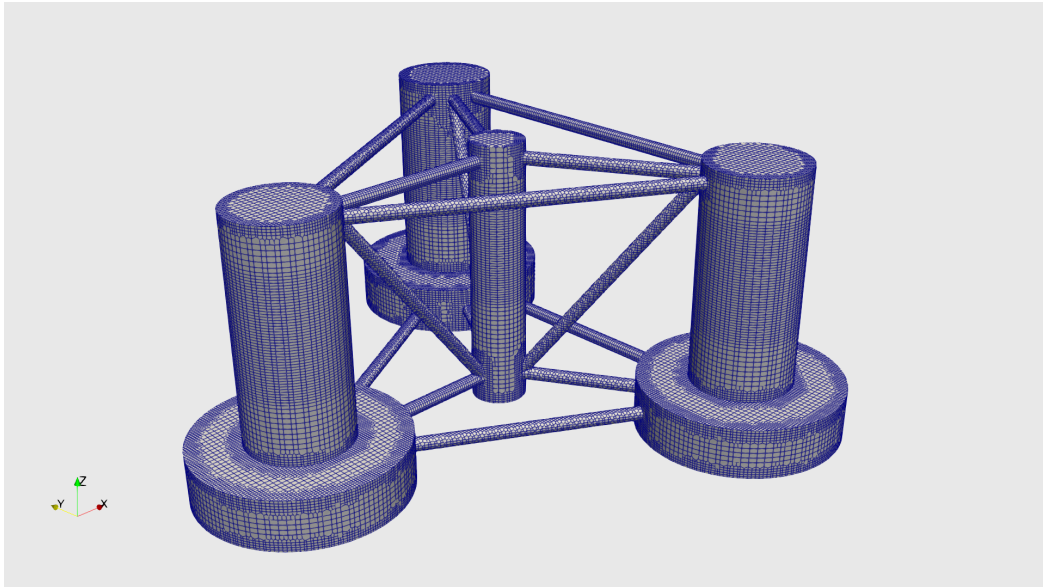


Figure 4. Platform surface mesh.

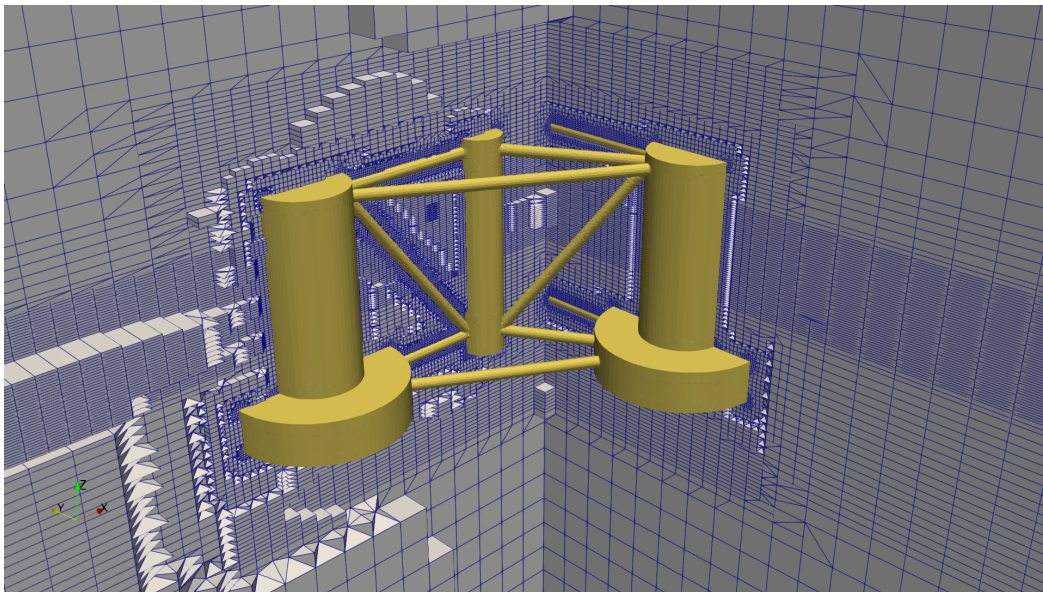


Figure 5. Near platform refinement.

160 selected to be used in this work to accommodate the motion of the floater. Additionally, the displacement Laplacian, as the motion solver, and the moving wall, as the boundary condition in the floating platform, have been used. With an implicit algorithm the mesh morphing is updated at each iteration driven by the platform dynamics. Finally, the used boundary conditions are wave velocity inlet and pressure outlet in the inlet and outlet boundaries, the ground is considered as a wall and the domain sides are modelled with an slip condition. Moreover, the boundary condition used for wave generation uses a ramp time scale factor
165 to avoid numerical divergence. In order to absorb the waves at the outlet, the shallowWaterAbsorption boundary condition has been used, this boundary condition applies a zero gradient condition to the phase field and to the vertical component of the velocity while it sets to zero the other two velocity components. For the floating platform the movingWallVelocity boundary condition is used. The resulting wave elevation profile has an initial transitory state were the wave amplitude is gradually increased. This transient evolution is shown in Fig. 6.

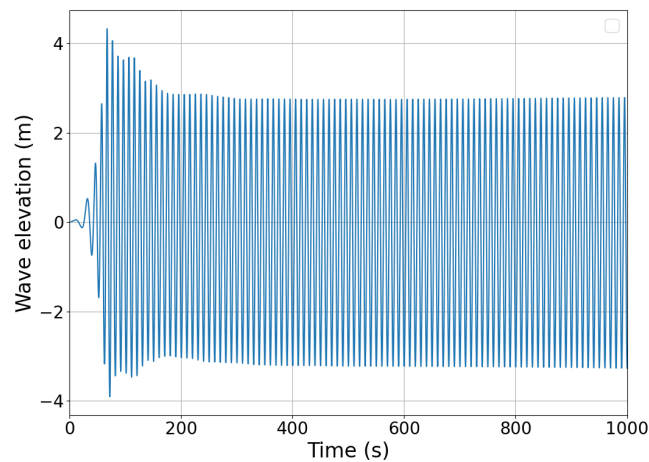


Figure 6. Wave elevation transient evolution.

170 In order to analyse the OF² performance an OpenFAST-only model for comparison purposes has been created to define the complete integrated model of the FOWT. It has to be noted that the OpenFAST model for the tower and RNA (Rotor Nacelle Assembly) is the same in the OpenFAST-only model and the coupled tool OF². In particular, the same BEM (Blade Element Model) approach has been applied to compute the aerodynamic loads at the rotor, and the same wind files have been used in both simulations. The ElastoDyn representation of the tower and rotor nacelle assembly in OpenFAST is the same used
175 in the OF² solver as well as the same MoorDyn input files. ~~The wave elevation profile used in OpenFAST to generate the wave kinematics has been extracted from OF² simulations of the undisturbed wave train.~~ It should be noted that the wave elevation signal used in OpenFAST simulation of LC 3.1 has been extracted from an empty channel simulation performed with OpenFOAM, this is, from a simulation of the sea state without the floating platform. This wave elevation signal monitored at the platform's initial reference point ($x = 0m$) is used by OpenFAST to determine the loads that the wave exert to the platform

180 along the whole simulation. Therefore, the waves that affect the dynamics of both OpenFAST and OF² simulations ~~are exactly the same.~~ should be comparable, even though the actual wave in the OF² approach is three dimensional.

In the OpenFAST-only simulations, the platform's hydrodynamic response has been represented through the HydroDyn module (see Jonkman (2009)) with a combination of potential-flow and Morison equation. The drag coefficient of the members range between 0.56 and 0.68, depending on the diameter, as is defined in Robertson et al. (2017). A drag coefficient of 9.6 has
185 been used for the heave plates, using the plates area as reference to compute the force. Non-linear hydrodynamics has been included using full QTF (Quadratic Transfer Functions). The ~~two load cases computed in this work have case LC3.1* has~~ a simulation time of 400 s and the LC3.1 of 1000 s both of them with a time step of 0.01 s. The OF² simulations have been run on 1 node ~~each~~ equipped with dual AMD EPYC 7543 32-core processor and 128 GB of RAM.

3.3 Results

190 Hereafter, the results obtained by both approaches, OpenFAST-only and OF² are compared. Firstly, the time series results of the platform's degrees of freedom (DOF) and loads are compared in order to have a qualitative comparison of the results obtained from both OF² and ~~OpenFAST tools~~ OpenFAST-only approaches. Then, a quantitative comparison of the mean and standard deviation values of these DOF ~~have~~ has also been performed.

~~The main platform's DOF results~~

195 3.3.1 Still water case: LC3.1*


The results corresponding to the still water case, LC3.1*, can be seen in Fig. 7. This figure includes the results obtained for surge (top), heave (middle) and pitch (bottom) ~~. The sub-figures of the left column represent the results of LC 3.1* (i.e., the case with still water), while the sub-figures on the right column represent the results for LC 3.1 (i.e., including the regular wave motions (left column) and the respective loads (right column)).~~

200


As it can be seen in ~~Fig. 7~~, ~~both simulation approaches present similar platform's dynamic responses. In particular, for the case in still water, the signals of the transient caused by the constant wind loading are very close in both models for the surge and pitch motions. A slight difference in the mean heave position of around 0.05 m between both approaches may be caused by small differences in the displaced volume. Once the regular wave is introduced, more differences between both simulation approaches arise. In particular, the surge motion predicted by both codes in Fig. 8a, present a different transient evolution. Nevertheless, once both simulations reach the stationary position, it can be observed that the amplitude of the motion is very similar. The mean displacement is also equivalent in both simulations, showing that mean drift forces from non-linear effects are similar. In Fig. 7c, a small difference in the mean heave position is appreciated. This is consistent with the difference observed for the still water case. In addition, the amplitude of the heave motion for the OpenFAST-only simulation is larger~~

205 ~~than for Figs. 7a, 7c and 7e, OF². Similarly, OpenFAST-only approach also predicts a large amplitude in the pitch motion compared to~~ is able to properly model the dynamic behaviour of the FOWT. The surge motion for both of the compared approaches present similar values in terms of period, mean value and amplitude. However, slight differences on the amplitude


210

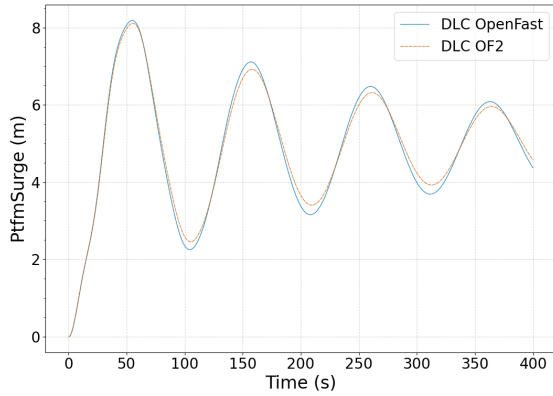


(a) LC 3.1* Surge

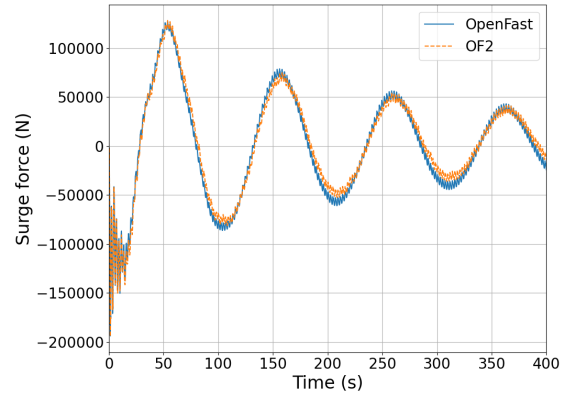


(b) LC 3.1* Surge force

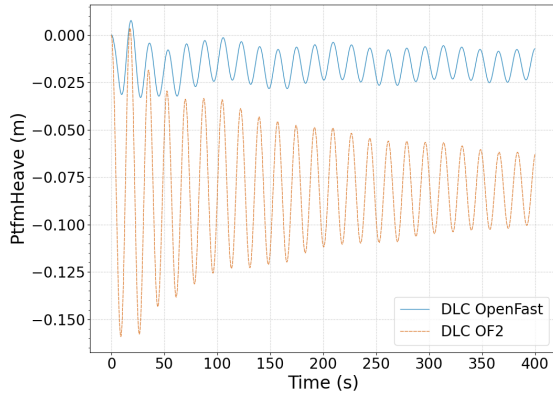


(c) LC 3.1* Heave

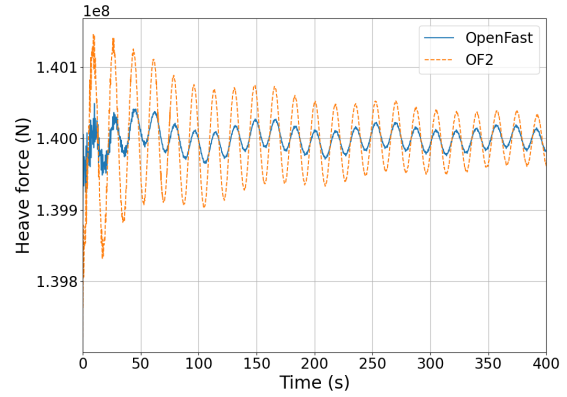

(d) LC 3.1* Heave force

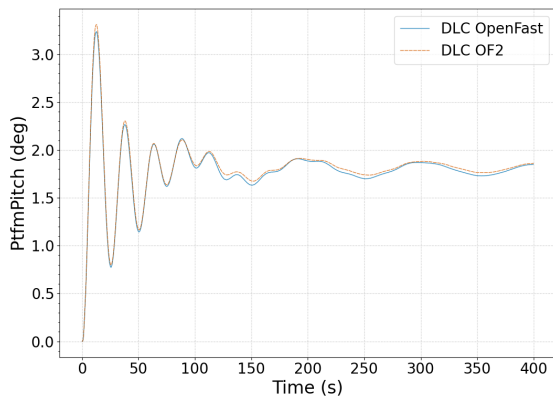

(e) LC 3.1* Pitch

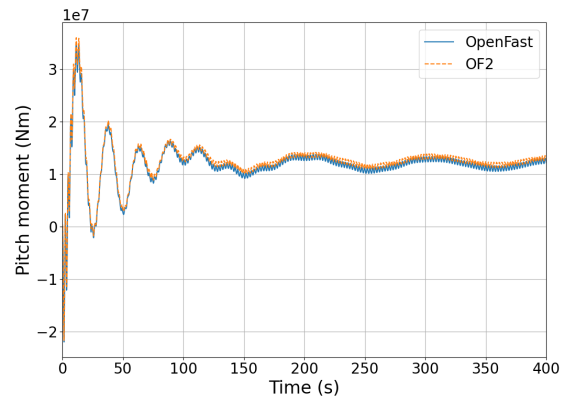

(f) LC 3.1* Pitch moment

Figure 7. Platform response (left column) and hydrodynamic loads (right column) in surge (top), heave (middle), pitch (bottom) degrees of freedom in still water case, LC 3.1*, (left column) and regular wave case, LC 3.1, (right column). The results obtained with OpenFAST have been presented in blue while OF² have been represented with orange.

215 arise due to the different modelling of hydrodynamic loads. For the heave response, it must be noted that there is a difference of less than 0.1 m between the mean value of both simulations. It is considered that this offset of around a 0.5 % of platform's draft is caused by the difference in the submerged volume. In OF² (see Fig. ??). These differences in the amplitude for the heave and pitch motions could be caused by the simplified treatment of the viscous loads done in the OpenFAST, in particular for the heave plates this volume is not user-defined but a result of the surface mesh employed, using a different refinement on the surface mesh would lead to a smaller heave offset but this deviation can be assumed negligible. The comparison between the pitch responses demonstrates the OF² feasibility and, therefore, it can be assumed that the OF² approach is verified.

220

Hydrodynamic forces in surge (top), heave (middle), pitch (bottom) directions in still water case, LC 3.1*, (left column) and regular wave case, LC 3.1, (right column). The results obtained with OpenFAST have been presented in blue while OF² have been represented with orange.


225 The force results shown in Fig. ??, follow the same scheme as the motions in Fig. 7. In particular, Fig. ?? compares Figures 7b, 7d and 7f compare the resulting hydrodynamic forces loads acting on the platform for each modelling approach. Moments for the deterministic case without waves, LC3.1*. Notice that moments are computed with regard to the platform reference point. The In particular, the loads computed under the OF² approach are those exerted by the fluid on the platform, i.e., both hydrodynamic and the hydrodynamic and the hydrostatic loads. Whereas, the The demanded loads output under the OpenFAST approach are the integrated hydrodynamic loads. Therefore, it must be noted that these OpenFAST's loads and they also take
230 into account hydrostatic forces. Firstly Therefore, it must be noted that both approaches determine similar mean loads. For the case with still water, and that the surge force and pitch moment are very similar. The small scale differences in the heave force amplitudes are caused by the larger motions of the OF² simulation, that is initialized at farther position from its equilibrium, compared to the OpenFAST-only simulation. However, once the regular wave is introduced, the amplitude of the forces is higher in the A comparison of the disaggregated loads (hydrostatic and hydrodynamic) has been also performed, showing the
235 same trend.

3.3.2 Regular wave case: LC3.1


The regular wave case time series, LC3.1, are presented in Fig. 8 following the same scheme as for the previous case, showing the platform degrees of freedom on the left column and the hydrodynamic loads on the right column.

240


When the wave excitation is considered (LC3.1) on platform motions, Figs. 8a, 8c and 8e, differences arise mainly at the signals amplitude. The surge motion, which is mainly driven by wind load, has a different initial transient behaviour. This is due to the initialization of the OpenFAST-only approach, specially for the heave and pitch approach. Once both of the approaches are close to the stationary state the surge behaviour is similar. The Fig. 8c shows a different mean heave value, this responds
245 to the same offset that has been previously seen in the case LC3.1*. However, the pitch motion in OF² shows an amplitude modulation that is not appreciated in the previous degrees of freedom, figs 8a and 8c, while it presents a similar mean value to

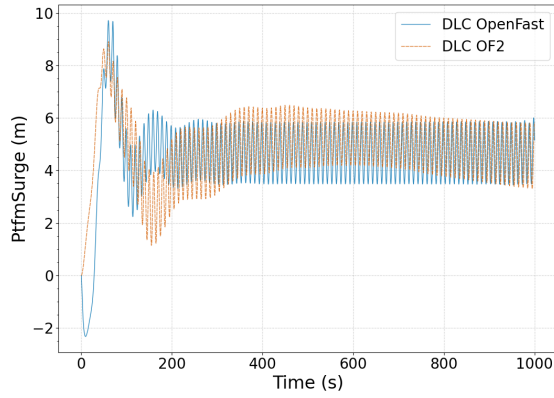


(a) LC 3.1 Surge

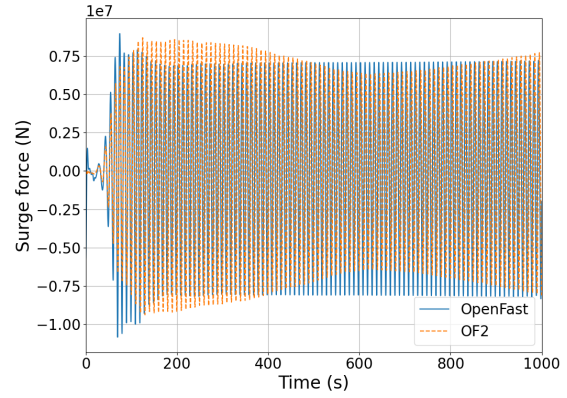


(b) LC 3.1 Surge force

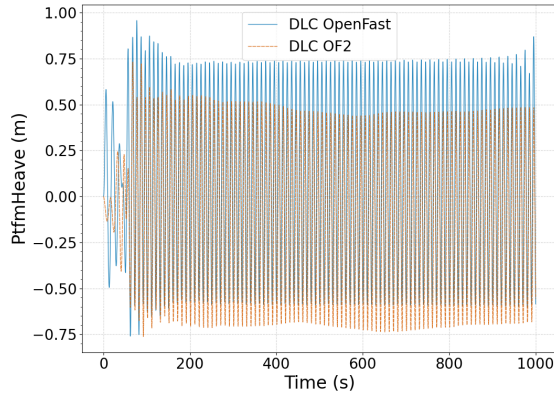


(c) LC 3.1 Heave

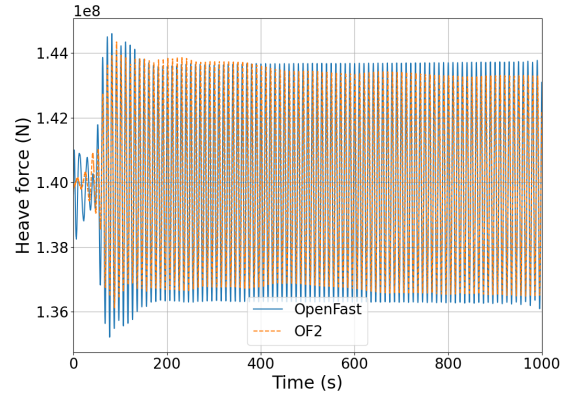

(d) LC 3.1 Heave force

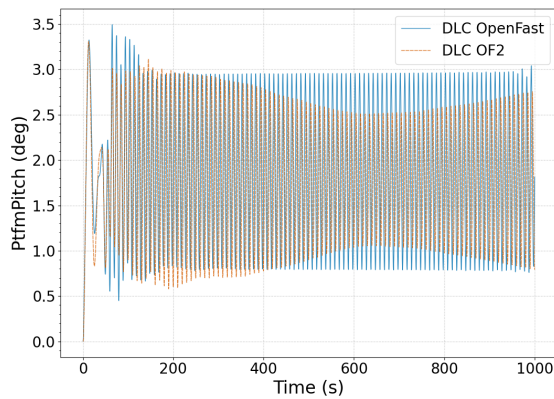

(e) LC 3.1 Pitch

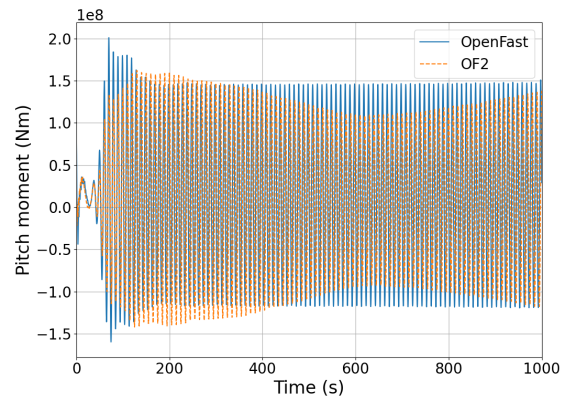

(f) LC 3.1 Pitch moment

Figure 8. Platform response (left column) and hydrodynamic loads (right column) in surge (top), heave (middle), pitch (bottom) degrees of freedom in regular wave case, LC 3.1. The results obtained with OpenFAST have been presented in blue while OF² have been represented with orange.

the OpenFAST result. If the loads are analyzed, Figs. 8b, 8d and 8f, this modulation is also observed in the pitching moment. This is ~~consistent with the results for the motions already presented~~ caused by how the wave evolves in OF². In order to show this effect, the wave elevation time series from both, the empty channel (represented in blue and used in OpenFAST) and that of the OF² simulation (represented in orange and measured 50 m upstream of the platform), have been included in Fig. 7, and it is likely that these differences are caused by the different hydrodynamic approaches, in particular for the viscous effects.⁹ In Fig. 9 an amplitude modulation is also observed on the OF² wave elevation signal, which leads to the unexpected behaviours aforementioned. Numerical wave makers have many sources of uncertainties and are subject of studies as exposed in Windt et al. (2019). Therefore, the wave modelling employed at this OF² simulations should be improved in order to obtain the desired regular wave. Furthermore, these inconsistencies in the wave elevation mean that this OF² result is not directly comparable with the results of Robertson et al. (2014a) in terms, for example, of the phase shift between the wave and the hydrodynamic forces in heave or pitch.

In addition

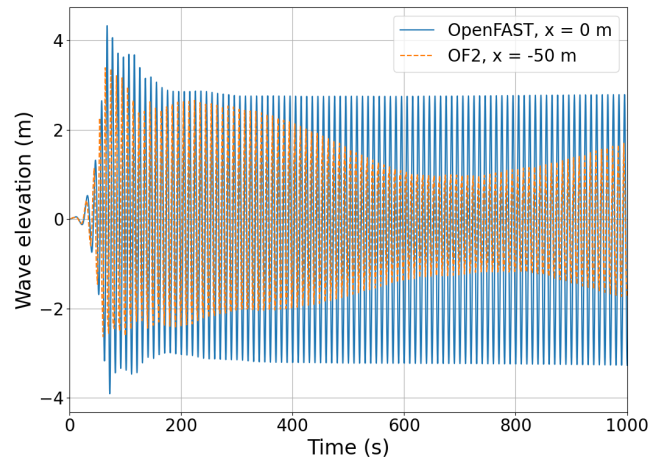


Figure 9. Comparison between wave elevation signals. The OF² signal is measured at $x = -50$ m

Nevertheless, since the OF² approach solves the fluid domain, the pressure distribution on the platform surface, among other outputs, is available for further analysis reinforcing the suitability of this tool for co-design processes and also to support certification processes. For example, in Fig. 10, the dynamic pressure distribution over the floating platform is shown at a particular instant of the simulation. Additionally to the high fidelity simulation of the platform dynamics, with OF² it is also possible to include the control and flexibility response of the wind turbine with a lower computational effort than with a fully flexible CFD approach. Therefore, the flexible response predicted by OF² at the tower top and the blade tip locations have been compared against OpenFAST-only simulations in Fig. 11 and Fig. 12, respectively, only for LC 3.1 with regular wave. The comparison of these variables for the still water case are not included for simplicity. Nevertheless, the comparison for that

case is equivalent. In these figures it can be seen that the differences in amplitude, specially for the pitch platform rotation that have been previously observed in Fig. 8e, are also visible in the tower top fore-aft displacement and blade tip out-of-plane deflection in Fig. 11a and 12a, respectively.


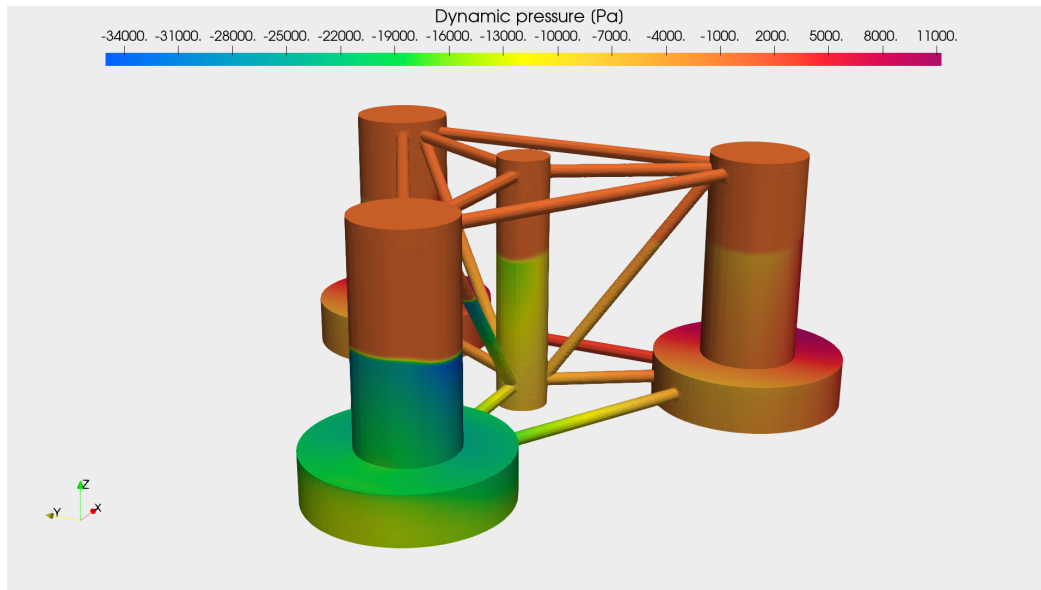



Figure 10. LC 3.1 Pressure distribution over the floating platform at time 300 s.

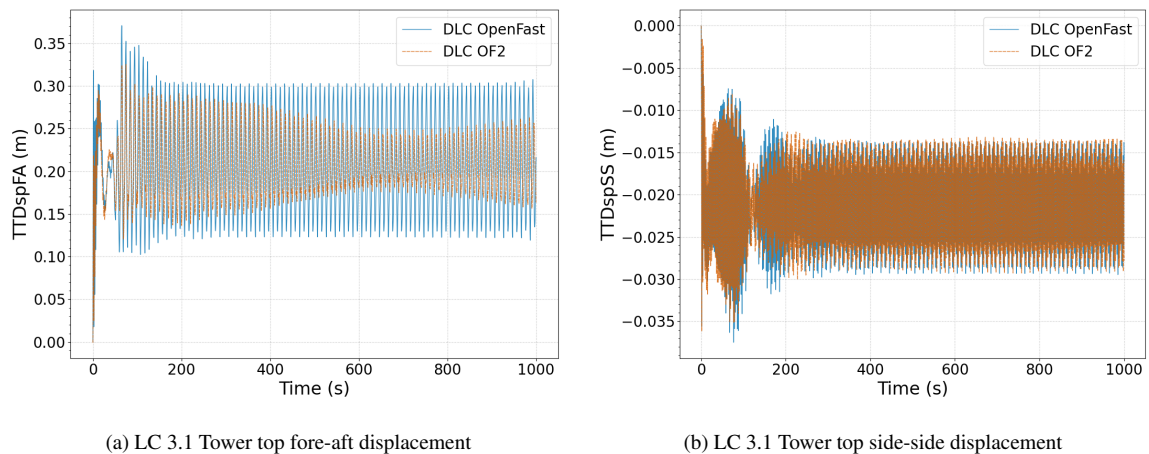


(a) LC 3.1 Tower top fore-aft displacement

(b) LC 3.1 Tower top side-side displacement

Figure 11. Tower top deformations for the regular wave case, LC 3.1. Tower top fore-aft deflection (left) and tower top side-side deflection (right). The results obtained with OpenFAST have been presented in blue while OF² have been represented in orange.

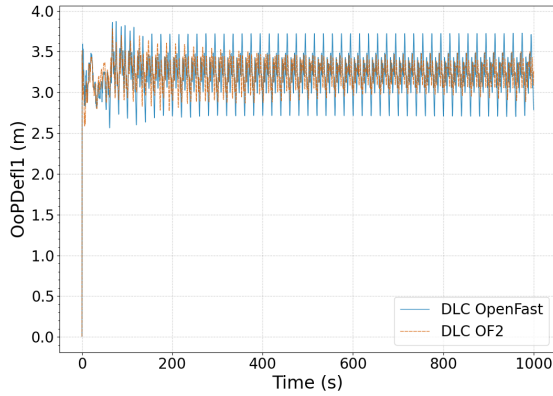


(a) LC 3.1 Blade tip out-of-plane displacement

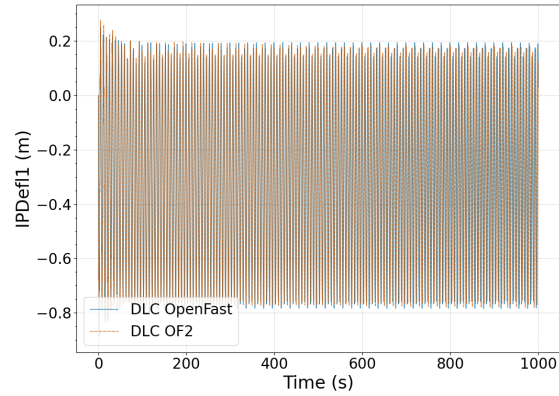


(b) LC 3.1 Blade tip in-plane displacement

Figure 12. Blade tip deformations for the regular wave case, LC 3.1. Blade tip out-of-plane deflection (left) and blade tip in-plane deflection (right). The results obtained with OpenFAST have been presented in blue while OF² have been represented in orange.

Moreover, the control performance for the regular wave case LC 3.1, is presented in Fig. 13. Both, rotational speed (Fig. 13a) and generator power (Fig. 13b) present a slightly lower mean value and a smaller amplitude in OF² than in OpenFAST-only and a smaller amplitude. These deviations are due to the differences on the FOWT movements.

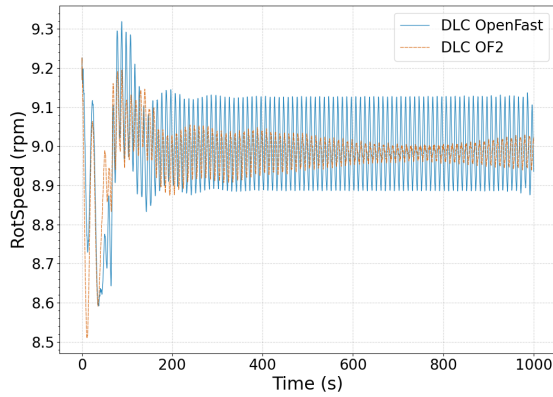

(a) LC 3.1 Rotational speed

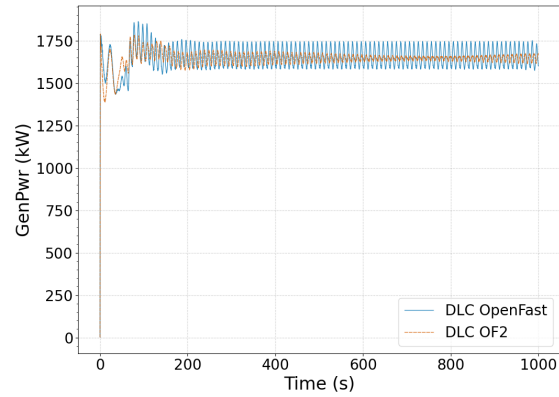

(b) LC 3.1 Generator Power

Figure 13. General regulation variables for the regular wave case, LC 3.1. The rotational speed (left) and the generator power (right). The results obtained with OpenFAST have been presented in blue while OF² have been represented in orange.

Finally, the statistical analysis of all these time signals has been included in Table 2. In this table, the standard deviation (std) and the mean values (mean) for the two approaches compared in this work have been included. Additionally, the differences

obtained between the two models have been quantified in terms of normal differences as shown in Eq. 1:

$$Diff[\%] = 100 \frac{OF^2 - OpenFAST}{OpenFAST} \quad (1)$$

280 Therefore, with this metric, if the difference is a positive value means a higher value in OF^2 than in OpenFAST-only results. This metric has been applied for both the standard deviation and the mean value. It is noticeable in Table 2 that the higher differences between OF^2 and OpenFAST-only approaches are obtained in platform sway and heave DOF. However, as these degrees of freedom have a very small range, it must be stated that the actual difference (without normalizing) is less than 10 mm in sway and ~~1210~~ cm in heave. Although there have been shortcomings in wave generation, which can be further improved
 285 by employing alternative techniques, the presented metrics unequivocally establish the validity of the novel OF^2 tool for the assessment of floating offshore wind turbines.

Table 2. Statistical results of the different variables analyzed for the load case under wind and waves LC 3.1. The standard deviation (std) and the mean values (mean) for each model used, OpenFAST and OF^2 have been included, alongside with the normalized differences obtained between the two models following Eq. 1

Variable	Units	OpenFAST		OF^2		Diff [%]	
		std	mean	std	mean	std	mean
Platform Surge	(m)	3.36	4.62 <u>4.72</u>	1.76 <u>5.86</u>	4.55 <u>7.7</u>	-47.53 <u>-74.54</u>	-1.60 <u>63.1</u>
Platform Sway	(m)	0.01	0.00	0.01 <u>2.37</u>	0.01	94.45 <u>-29178</u>	2134.41 <u>176</u>
Platform Heave	(m)	0.55	0.06 <u>0.05</u>	0.41 <u>0.11</u>	-0.06 <u>-0.05</u>	-25.79 <u>-7.63</u>	-204.73 <u>-198</u>
Platform Roll	(deg)	0.02	0.10	0.01 <u>0.16</u>	0.10	-6.57 <u>-951.02</u>	-0.84 <u>-1.0</u>
Platform Pitch	(deg)	0.93	1.89 <u>1.86</u>	0.79 <u>0.91</u>	1.79 <u>1.74</u>	-15.22 <u>-1.6</u>	-5.03 <u>-6.4</u>
Platform Yaw	(deg)	0.03	-0.06	0.02 <u>2.41</u>	-0.06 <u>-0.08</u>	-31.26 <u>-7444.84</u>	6.43 <u>6.78</u>
Blade tip In-plane Displacement	(m)	0.33	-0.30	0.33	-0.30	-0.24 <u>0.42</u>	0.05 <u>-0.9</u>
Blade tip Out-of-plane Displacement	(m)	0.29	3.23	0.21 <u>0.30</u>	3.22 <u>3.20</u>	-27.15 <u>-3.47</u>	-0.09 <u>-0.9</u>
Tower Top Fore-aft Displacement	(m)	0.07	0.21	0.05 <u>0.07</u>	0.21 <u>0.20</u>	-31.86 <u>-1.28</u>	-1.57 <u>-2.5</u>
Tower Top Side-side Displacement	(m)	0.01	-0.02	0.01	-0.02	-21.07 <u>-60.81</u>	-0.35 <u>-1.2</u>
Generator Power	(kW)	107.88	1649.92 <u>1647.98</u>	76.29 <u>116.113</u>	1641.35 <u>1624.99</u>	-31.14 <u>7.6325</u>	-0.52 <u>-1.4</u>
Rotational Speed	(rpm)	0.17	8.99	0.11 <u>0.17</u>	8.98 <u>8.95</u>	-35.75 <u>-2.99</u>	-0.15 <u>-0.4</u>

The approach proposed in this work, using OF^2 to perform coupled simulations of floating offshore wind turbines, present advantages both over the lower ~~fidelity-complexity~~ resolution and over other high fidelity approaches found in the literature.
 290 For example, when comparing OF^2 capabilities with potential flow hydrodynamic solvers, OF^2 allows to include higher order terms and viscous effects that are more difficult to fit in lower ~~fidelity-complexity~~ models like HydroDyn. Moreover, OF^2 will allow to overcome the limitation of HydroDyn that assumes small rotations for the platform response applying the hydrodynamic loads without updating these rotations and taking into account the actual position of the free surface. This advantage

295 makes OF² a recommendable tool for detailed analysis of the response of concepts equipped with SPM since they do not
 have any restrictions for rotation around the vertical axis. Additionally, OF² present lower computational costs than others
 fully coupled high fidelity simulations found in the literature. To quantify this difference in computational cost Table 3 has
 been included. This table specifies for each tool used in this study and those from Tran and Kim (2016) and Zhang and Kim
 (2018), some details of the modelling methodology, the number of cores used for the simulation, the simulated time, and the
 time it took to complete the simulation. As it can be seen, OF² has a much higher computational cost than OpenFAST-only
 300 approach. However, it still allows ten-minute load simulations to be carried out in less than 1 day. Moreover, with OF², detailed
 simulations of complex cases can be addressed using less than 56% of the computational resources necessary for a complete
 CFD approach for both aero and hydro dynamics. Nevertheless, as the computational cost in any CFD study depends mainly
 on the refinement of the mesh and the influence, for example, of certain calculation options. For instance, the meshes used in
 this study with OF² do not have prismatic boundary layers, so the computational cost might not be fully comparable with those
 used in Tran and Kim (2016) or Zhang and Kim (2018).
 305

Table 3. Computational cost of different tools used for the coupled analysis of FOWT under wind and wave loading

Tool	Hydrodynamic	Aerodynamic	Flexibility	Controller	Simulated time	Cores	Wall-clock time	Core hours
OpenFAST	PF and ME	BEMT	Yes	Yes	400 <u>1000</u> s	1	7 minutes	0.1167
OF ²	CFD-URANS	BEMT	Yes	Yes	400 <u>1000</u> s	64	13.1 <u>133.5</u> hours	838.4 <u>2142</u>
Tran and Kim (2016)	CFD-URANS	CFD-URANS	No	No	500 s	32	24 days	18432
Zhang and Kim (2018)	CFD-URANS	CFD-URANS	No	No	300 s	66	20 days	31680

4 Conclusions

A new simulation tool, called OF², for time domain simulations of FOWT has been developed. The main conclusions of this work can be summarized as follows:

- 310 – OF² combines a high fidelity resolution of the hydrodynamic response of a floating platform with a multi-complexity
 aero-servo-elastic tool for the simulation of the wind turbine.
- With the coupling of OpenFAST to a CFD simulation of the platform hydrodynamics, all the potential from OpenFAST
 can be used to introduce the wind turbine components flexible behaviour, turbulent winds and the control laws necessary
 for the FOWT operation.
- 315 – The new tool has the advantage of ~~a reduction of 95% of~~reducing the computational time with regard to the use of a full
 CFD approach that includes the turbine aerodynamics.

- Load cases with big-large platform displacements and wind turbine operation events can be simulated with OF². Current engineering tools present limitations in accurately capture-capturing the effect of large displacements and state of the art CFD simulations typically consider rigid rotors.
- 320 – OF² has been verified in this study against OpenFAST-only simulations. The OC4 semi-submersible floating platform Robertson et al. (2014a) and the NREL 5 MW wind turbine Jonkman et al. (2007), under co-directional wind and wave loading, has been used in this verification. The results have shown that the principal platform degrees of freedom present very similar mean values between the OF² and the OpenFAST-only approaches, in particular for the wind-only cases. Once the regular waves are introduced, higher differences arise, specially for the heave and pitch motions. It is likely
325 that ~~this is caused by the different treatment of the viscous forces, that~~ these differences are caused by a undesired loose of the wave amplitude in the OF² solves using a higher-complexity approach simulation. Further research in the wave modelling should be done to improve the OF² results.
- In addition, as OF² solves the complete fluid domain, it provides a detailed representation of the distributed magnitudes on the platform surface, which can be useful for the calculation and design process. For example, it can be obtained
330 simultaneously the pressure distribution at platform components and the loads from the tower, the anchoring system, etc.
- OF² could be used as part of the FOWT co-design techniques to optimize the design and therefore, contribute to the reduction of LCOE of offshore wind energy.
- With OF², an advance in the state of the art of simulation codes for FOWTs has been done. This will support the reduction of offshore wind energy cost reduction needed to boost the maturity of floating offshore wind energy.
- 335 In future works OF² will be used to analyze SPM designs to study weather-vaning response under co-directional and misaligned wind and wave loading. Moreover, OF² will be used to obtain the required distributed loads over the platform surface, alongside with the loads from the fairleads and tower base, to be used in an structural simulation tool for the analysis of ultimate and fatigue loads over the floating structure. OF² will be also used coupled with MUST Martín-San-Román (2022), an in-house tool ~~;~~-based in OpenFAST, for the coupled analysis of multi wind turbine floating platforms. This will allow ana-
340 lyzing the response of these type of configurations when equipped with SPM. MUST includes a free vortex filament method (FVM) module for the rotor aerodynamics, that will provide more accurate prediction of aerodynamic loads in the misaligned conditions that arise under large displacements of the system.

Appendix A: Extract of the dynamicMeshDict file

```
345 1: /*-----*-- C++ -*-----*\
2: | ===== |
3: | \\ / F i e l d | OpenFOAM: The Open Source CFD Toolbox |
4: | \\ / O p e r a t i o n | Version: v2106 |
5: | \\ / A n d | Web: www.OpenFOAM.com |
350 6: | \\ / M a n i p u l a t i o n | |
```

```

7:  \*-----*//
8:  FoamFile
9:  {
10:     version      2.0;
11:     format       ascii;
12:     class        dictionary;
13:     object       dynamicMeshDict;
14: }
15: // *****//
360 dynamicFvMesh      dynamicMotionSolverFvMesh;
17: motionSolver       rigidBodyMotion;
18: motionSolverLibs
19: (
20:     "librigidBodyMeshMotion.so"
365     "libmoordynRestraint.so"
22:     "libOF2.so"
23: );
24: rigidBodyMotionCoeffs
25: {
370     ...
27:     bodies
28:     {
29:         platformBody
30:         {
375             type          rigidBody;
32:             parent        root;
33:             ...
34:         }
35:     }
380     restraints
36:     {
38:         OpenFastRestraint
39:         {
40:             type          OpenFast;
385             body          platformBody;
42:             openfast_file "path/to/fst/file";
43:             initial_rotation (x y z);
44:             initial_position (x y z);
45:             fromJtoLoadApplicationPoint (x y z);
390             fromJtoPtfmReferencePoint (x y z);
47:         }
48:         MoordynRestraint
49:         {
50:             type          moordyn;
395             body          platformBody;
52:             fromJtoPtfmReferencePoint (x y z);
53:         }
54:     }
400 }

```

Author contributions. Guillén Capaña-Alonso: Tool development, methodology definition, verification, OF² simulations and writing. Raquel Martín-San-Román: Tool development, verification, methodology definition, OpenFAST simulations and writing. Pablo Benito-Cia: Tool development, methodology definition and verification. Beatriz Méndez-López: Funding acquisition, conceptual definition and writing. José Azcona-Armendáriz: Results analysis, verification and writing.

405 *Competing interests.* The authors declare that they have no conflict of interest.

Acknowledgements. This work has been funded by the Government of Navarra under the scope of the COSTA project (grant number 0011-1383-2022-000000)

References

- Azcona, J.: Computational and Experimental Modelling of Mooring Line Dynamics for Offshore Floating Wind Turbines, Phd, Universidad Politécnica de Madrid, 2016.
- 410 Bergua, R., Robertson, A., Jonkman, J., Branlard, E., Fontanella, A., Belloli, M., Schito, P., Zasso, A., Persico, G., Sanvito, A., Amet, E., Brun, C., Campaña-Alonso, G., Martín-San-Román, R., Cai, R., Cai, J., Qian, Q., Maoshi, W., Beardsell, A., Pirrung, G., Ramos-García, N., Shi, W., Fu, J., Corniglion, R., Lovera, A., Galván, J., Nygaard, T. A., dos Santos, C. R., Gilbert, P., Joulin, P.-A., Blondel, F., Frickel, E., Chen, P., Hu, Z., Boisard, R., Yilmazlar, K., Croce, A., Harnois, V., Zhang, L., Li, Y., Aristondo, A., Mendikoa Alonso, I., Mancini, S., Boorsma, K., Savenije, F., Marten, D., Soto-Valle, R., Schulz, C., Netzband, S., Bianchini, A., Papi, F., Cioni, S., Trubat, P., Alarcon, D., Molins, C., Cormier, M., Brüker, K., Lutz, T., Xiao, Q., Deng, Z., Haudin, F., and Goveas, A.: OC6 Project Phase III: Validation of the Aerodynamic Loading on a Wind Turbine Rotor Undergoing Large Motion Caused by a Floating Support Structure, *Wind Energy Science Discussions*, 2022, 1–33, <https://doi.org/10.5194/wes-2022-74>, 2022.
- Bladed: Bladed Theory Manual Version 4.0, 2010.
- 420 Bossanyi, E., Burton, T., and Sharpe, D.: *Wind Energy Handbook*, John Wiley and Sons, 2001.
- Branlard, E., Gaunaa, M., and MacHefaux, E.: Investigation of a new model accounting for rotors of finite tip-speed ratio in yaw or tilt, *Journal of Physics: Conference Series*, 524, <https://doi.org/10.1088/1742-6596/524/1/012124>, 2014.
- Bureau Veritas: BV-NI572 - Classification and Certification of Floating Offshore Wind Turbines, 33, https://erules.veristar.com/dy/data/bv/pdf/572-NI_2019-01.pdf, 2019.
- 425 Chen, H. and Hall, M.: CFD simulation of floating body motion with mooring dynamics: Coupling MoorDyn with OpenFOAM, *Applied Ocean Research*, 124, 103 210, <https://doi.org/10.1016/j.apor.2022.103210>, 2022.
- Connell, K. O. and Cashman, A.: Development of a numerical wave tank with reduced discretization error, pp. 3008–3012, Institute of Electrical and Electronics Engineers Inc., <https://doi.org/10.1109/ICEEOT.2016.7755252>, 2016.
- Faltinsen, O.M.: *Sea Loads on Ships and Offshore Structures*, Cambridge University Press, 1993.
- 430 Hall, M.: MoorDyn User ' s Guide, Manual, <http://www.matt-hall.ca/files/MoorDyn-Users-Guide-2017-08-16.pdf>, 2017.
- International Electrotechnical Commission: IEC 61400-3-2 Ed. 1.0, 2019.
- Jonkman, J., Butterfield, S., Musial, W., and Scott, G.: Definition of a 5-MW Reference Wind Turbine for Offshore System Development, Technical report tp-500-38060, NREL, 2007.
- Jonkman, J. M.: Dynamics of Offshore Floating Wind Turbines-Model Development and Verification, *Wind Energy*, 12, 459–492, <https://doi.org/10.1002/we.347>, 2009.
- 435 Jonkman, J.M.: Dynamics Modeling and Loads Analysis of an Offshore Floating Wind Turbine, 2007.
- Keckskemety, K. M. and McNamara, J. J.: Influence of Wake Effects and Inflow Turbulence on Wind Turbine Loads, *AIAA Journal*, 49, 2564–2576, <https://doi.org/10.2514/1.j051095>, 2011.
- Liu, Y., Xiao, Q., Incecik, A., Peyrard, C., and Wan, D.: Establishing a fully coupled CFD analysis tool for floating offshore wind turbines, *Renewable Energy*, 112, 280–301, <https://doi.org/10.1016/j.renene.2017.04.052>, 2017.
- 440 Marten, D., Paschereit, C. O., Huang, X., Meinke, M. H., Schroeder, W., Mueller, J., and Oberleithner, K.: Predicting Wind Turbine Wake Breakdown Using a Free Vortex Wake Code, pp. 0–16, <https://doi.org/10.2514/6.2019-2080>, 2019.
- Martín-San-Román, R.: Coupled dynamics of multi wind turbine floating platforms, Ph.D. thesis, Escuela Técnica Superior de Ingeniería Aeronáutica y del Espacio, Universidad Politécnica de Madrid (UPM), <https://oa.upm.es/72234/>, 2022.

- 445 Micallef, D. and Rezaeiha, A.: Floating offshore wind turbine aerodynamics: Trends and future challenges, *Renewable and Sustainable Energy Reviews*, 152, 111 696, <https://doi.org/10.1016/j.rser.2021.111696>, 2021.
- Morison, J., O'Brien, M., Johnson, J., and Schaaf, S.: The Force Exerted by Surface Waves on Piles, *Journal of Petroleum Technology*, 2(5), 149–154, 1950.
- Newman, J.N.: *Marine Hydrodynamics*, The MIT Press, 1977.
- 450 Otter, A., Murphy, J., Pakrashi, V., Robertson, A., and Desmond, C.: A review of modelling techniques for floating offshore wind turbines, *Wind Energy*, pp. 1–27, <https://doi.org/10.1002/we.2701>, 2021.
- Quon, E., Doubrawa, P., Annoni, J., Hamilton, N., and Churchfield, M.: Validation of wind power plant modeling approaches in complex terrain, *AIAA Scitech 2019 Forum*, <https://doi.org/10.2514/6.2019-2085>, 2019.
- Ren, N., Li, Y., and Ou, J.: Coupled wind-wave time domain analysis of floating offshore wind turbine based on Computational Fluid Dynamics method, *Journal of Renewable and Sustainable Energy*, 6, <https://doi.org/10.1063/1.4870988>, 2014.
- 455 Robertson, A., Jonkman, J., Masciola, M., Song, H., Goupee, A., Coulling, A., and Luan, C.: Definition of the Semisubmersible Floating System for Phase II of OC4, Technical Report TP-5000-60601, NREL, 2014a.
- Robertson, A., Jonkman, J., Vorpahl, F., Wojciech, P. and Qvist, J., Frøyd, L., Chen, X., Azcona, J., Uzunoglu, E., Guedes Soares, C., Luan, C., Yutong, H., Pengcheng, F., Yde, A., Larsen, T., Nichols, J., Buils, R., Lei, L., Nygaard, T., Manolas, D., and He: Offshore Code Comparison Collaboration Continuation Within IEA Wind Task 30: Phase II Results Regarding a Floating Semisubmersible Wind System, in: *International Conference on Ocean, Offshore and Arctic Engineering, OMAE*, 2014b.
- 460 Robertson, A. N., Wendt, F., Jonkman, J. M., Popko, W., Dagher, H., Gueydon, S., Qvist, J., Vittori, F., Azcona, J., Uzunoglu, E., Soares, C. G., Harries, R., Yde, A., Galinos, C., Hermans, K., De Vaal, J. B., Bozonnet, P., Bouy, L., Bayati, I., Bergua, R., Galvan, J., Mendikoa, I., Sanchez, C. B., Shin, H., Oh, S., Molins, C., and Debruyne, Y.: OC5 Project Phase II: Validation of Global Loads of the DeepCwind Floating Semisubmersible Wind Turbine, *Energy Procedia*, 137, 38–57, <https://doi.org/10.1016/j.egypro.2017.10.333>, 2017.
- 465 Tran, T. T. and Kim, D.-H.: Fully coupled aero-hydrodynamic analysis of a semi-submersible FOWT using a dynamic fluid body interaction approach, *Renewable Energy*, 92, 244–261, <https://doi.org/10.1016/j.renene.2016.02.021>, 2016.
- Wang, L., Robertson, A., Jonkman, J., Yu, Y.-H., Koop, A., Borràs Nadal, A., Li, H., Bachynski-Polić, E., Pinguet, R., Shi, W., Zeng, X., Zhou, Y., Xiao, Q., Kumar, R., Sarlak, H., Ransley, E., Brown, S., Hann, M., Netzband, S., Wermbter, M., and Méndez López, B.: OC6
- 470 Phase Ib: Validation of the CFD predictions of difference-frequency wave excitation on a FOWT semisubmersible, *Ocean Engineering*, 241, <https://doi.org/10.1016/j.oceaneng.2021.110026>, 2021.
- Wang, L., Robertson, A., Jonkman, J., Kim, J., Shen, Z.-R., Koop, A., Borràs Nadal, A., Shi, W., Zeng, X., Ransley, E., Brown, S., Hann, M., Chandramouli, P., Viré, A., Ramesh Reddy, L., Li, X., Xiao, Q., Méndez López, B., Campaña Alonso, G., Oh, S., Sarlak, H., Netzband, S., Jang, H., and Yu, K.: OC6 Phase Ia: CFD Simulations of the Free-Decay Motion of the DeepCwind Semisubmersible, *Energies*, 15,
- 475 <https://doi.org/10.3390/en15010389>, 2022a.
- Wang, L., Robertson, A., Kim, J., Jang, H., Shen, Z.-R., Koop, A., Bunnik, T., and Yu, K.: Validation of CFD simulations of the moored DeepCwind offshore wind semisubmersible in irregular waves, *Ocean Engineering*, 260, 112 028, <https://doi.org/https://doi.org/10.1016/j.oceaneng.2022.112028>, 2022b.
- Windt, C., Davidson, J., Schmitt, P., and Ringwood, J. V.: On the assessment of numerical wave makers in CFD simulations, *Journal of Marine Science and Engineering*, 7, <https://doi.org/10.3390/JMSE7020047>, 2019.
- 480 Zhang, Y. and Kim, B.: A Fully Coupled Computational Fluid Dynamics Method for Analysis of Semi-Submersible Floating Offshore Wind Turbines Under Wind-Wave Excitation Conditions Based on OC5 Data, *Applied Sciences*, 2018.