# <u>Seasonal</u> Variability of Wake Impacts on <u>U.S.</u> Mid-Atlantic Offshore Wind Plant <u>Power Production</u>

David Rosencrans<sup>1,2</sup>, Julie K. Lundquist<sup>1,2,3</sup>, Mike Optis<sup>2,4</sup>, Alex Rybchuk<sup>2</sup>, Nicola Bodini<sup>2</sup>, and Michael Rossol<sup>2</sup>

<sup>1</sup>Department of Atmospheric and Oceanic Sciences, University of Colorado, Boulder, 80303, USA <sup>2</sup>National Renewable Energy Laboratory, Golden, 80401, USA <sup>3</sup>Renewable and Sustainable Energy Institute, Boulder, 80303, USA <sup>4</sup>Veer Renewables, Courtenay, V9N 9B4, Canada

Correspondence to: David Rosencrans (David.Rosencrans@Colorado.edu)

# 10

#### Abstract

The mid-Atlantic will experience rapid wind plant development due to its promising wind resource located near large population centers. Wind turbines and wind plants create wakes, or regions of reduced wind speed, that may negatively affect downwind turbines and plants. Long mid-Atlantic wakes are causing growing concern. As a result, we evaluate wake variability and annual energy production with the first year-long modeling assessment using the Weather Research and Forecasting model, deploying 12 MW turbines across the domain at a density of 3.14 MW km<sup>-2</sup>, matching the planned density of 3 MW km<sup>-2</sup>. Using a series of simulations with no wind plants, one wind plant, and complete build-out of lease areas, we calculate wake effects and distinguish the effect of wakes generated internally within one plant from those generated externally between plants. We also vary the amount of added turbulence kinetic energy (TKE) between 0% and 100% to provide some uncertainty quantification. The strongest wakes, propagating 55 km, occur in summertime stable stratification, just when New

- England's grid demand peaks in summer. The seasonal variability of wakes in this offshore region is much stronger than diurnal variability of wakes. Overall, wear-long wake impacts reduce power output by a range between 38.2% and 34.1% (for 0%-100% added TKE). Internal wakes cause greater year-long power losses, from 29.2% to 25.7%, compared to external wakes, from 14.7% to 13.4%. The overall impact is different from the linear sum of internal wakes and external wakes due to
- 25 <u>non-linear processes.</u> Additional simulations quantify wake uncertainty by modifying the added amount of turbulent kinetic energy, from wind turbines, introducing power output variability of 3.8%. Finally, we compare annual energy production, to New England grid demand and find that the lease areas can supply <u>58.8% to 61.2%</u> of annual load.

Style Definition: Heading 1	
Style Definition: Heading 2:	No bullets or numbering
Deleted: Annual	

Deleted: Deployments

Deleted: 8

Deleted: W

Deleted: M Deleted: -

Del	leted: the mean
Del	leted: by 35.9
	<b>leted:</b> , between 0% and 100% added turbulent kinetic energy, bectively
Del	leted: (27.4%)
Del	leted:
Del	leted: (14.1%)
Del	leted: (TKE)
Del	leted: (AEP)
Del	leted: roughly 60%



# 45 1 Introduction

50

The U.S. offshore wind industry is flourishing, with a target capacity of 30 GW by 2030 (White House, 2021). New England features the highest population density in the United States and commensurate utility usage, making offshore wind an attractive regional electricity source. Twenty-seven active lease areas now span the mid-Atlantic Outer Continental Shelf (OCS). The OCS features low turbulence (Bodini et al., 2019) and fast winds, with 100  $\mu$  winds averaging 10 m s<sup>-1</sup> (Musial et al., 2016). Consequently, large wind plants will be constructed to harness the ample wind resource.

Meteorological conditions and construction challenges constrain siting options for large wind plants. Because the average wind direction is southwesterly (Bodini et al., 2019), a southwest-to-northeast wind plant orientation mitigates external waking from neighboring plants. Further, preserving efficient vessel transit, upholding common fishery practices, and prioritizing safe Coast Guard search-and-rescue operations necessitates 1x1-nm corridors (W.F. Baird & Associates, 2019). Considering these

55 Coast Guard search\_and\_rescue operations necessitates 1x1-nm corridors (W.F. Baird & Associates, 2019). Considering these constraints, wind plants will be densely packed into clusters.

Densely packed clusters produce wakes <u>that</u> adversely affect downwind turbines (Nygaard, 2014; Platis et al., 2018; Lundquist et al., 2019; Schneemann et al., 2020). Wakes are plumes downwind of turbines with slower wind speeds and increased

60 turbulence. Mid-Atlantic wakes induced by large wind plants could impose wind speed deficits up to 2 m s<sup>-1</sup> (Pryor et al., 2021; Golbazi et al., 2022). Wind speed deficits can be replenished by wake recovery in which turbulence entrains momentum from aloft into the waked zone (Stevens et al., 2016; Gupta and Baidya Roy, 2021). However, stably stratified conditions suppress mixing for wake recovery (Fitch et al., 2013; Vanderwende et al., 2016; Porté-Agel et al., 2020). Under certain conditions, mid-Atlantic wakes could propagate 100 km or more (Pryor et al., 2021; Golbazi et al., 2022; Stoelinga et al., 2022).

Wake characteristics have been evaluated using physics-based models of varying complexity. High-fidelity methods include computational fluid dynamics models solving Reynolds-averaged Navier-Stokes equations (Antonini et al., 2020), large-eddy simulations, resolving the turbine rotor as an actuator disk (Mirocha et al., 2014; Aitken et al., 2014; Shapiro et al., 2019; Arthur et al., 2020), and mesoscale models parameterizing a hub-height momentum sink, sometimes including a turbulence source

- 70 et al., 2020), and mesoscale models parameterizing a hub-height momentum sink, sometimes including a turbulence source (Fitch et al., 2013; Volker et al., 2015; Archer et al., 2020; Gupta and Baidya Roy, 2021), as reviewed by Fischereit et al. (2022). Pryor et al. (2021) characterized mid-Atlantic wake impacts using mesoscale modeling of 55 simulation days. They examined modified wind plant layouts of 15<sub>4</sub>MW turbines under different flow scenarios, considering power densities between 2.1 and 4.34 MW km<sup>-2</sup>. Stoelinga et al., (2022),estimated wake impacts using 15<sub>4</sub>MW turbines and 16 simulation days under typical southwesterly flow. Golbazi et al. (2022) considered summertime wakes with three scales of turbines to consider
- surface impacts. Finally, Rybchuk et al. (2022) addressed the sensitivity to wake characteristics under idealized conditions by varying planetary boundary layer (PBL) schemes.

2

 Deleted:	

# Deleted: Deleted:

# Deleted: which

Deleted: A
Deleted: (RANS)
Deleted: (LES)

(	Deleted: -
(	Deleted: (
(	Deleted: Stoelinga et al. (2022)
$\geq$	Deleted: -

#### Table 1. Summary of WRF simulations.

Simulation Type	Acronym	Turbine	Period	Added TKE	# Turbines
		Туре		Amount	
No Wind Farms	NWF	N/A	09/2019-	N/A	0
			09/2020		
Vineyard Wind	WW	12 MW	09/2019-	0% and 100%	177
Only			09/2020		
Lease Areas	LA	12 MW	09/2019-	0% and 100%	1,418
			09/2020		
Call Areas	CA	12 MW	09/2019-	100%	3,219
			11/2019		
			07/2020-		
			09/2020		

Deleted: VW\_only

In this work, we assess intra-plant and inter-plant wakes throughout the mid-Atlantic OCS using a year-long mesoscale modeling study. The simulations use the Weather Research and Forecasting JWRF) model Version 4.2.1<sub>\*</sub>(Skamarock et al.,

- 2019), One set of simulations runs with no wind farms (NWF) as a control, validated with lidar measurements, while the other uses the Fitch wind farm parameterization (WFP) (Fitch et al., 2012 with updates described by Archer et al. 2020) to incorporate turbine effects. Our simulations incorporate 12, MW turbines, similar to the 13, MW turbines to be installed at the Vineyard Wind lease area, and a power density of 3.14 MW km<sup>-2</sup>. Simulations employ different wind plant layouts, including the Vineyard Wind Lease Area alone (VW), all lease areas (LA), and the lease areas plus the call areas (CA), to assess different waking scenarios (Table 1). We prioritize Vineyard Wind as the first lease area to begin construction. WFP simulations run separately by added turbulent kinetic energy (TKE) amount, including 0% added TKE (TKE\_0) and 100% added TKE (TKE\_100) to quantify the full range of uncertainty. NWF, VW, and LA simulations run from 01 September 2019 to 01 September 2020 to capture a full year with available lidar measurement data. Due to computational costs, CA simulations focus on the summertime stable period from 01 September to 31 October 2019 and 01 July to 31 August 2020 (Table 1). This time period highlights wake impacts during months with presumed frequent stable stratification and high electricity demands
- (Livingston and Lundquist, 2020) as a worst-case scenario.

Delet	ed: Model
Delet	ed: v
Delet	ed:
	ed: (Skamarock et al., 2019)(Skamarock et al., Skamarock et al., 2019)
Delet	ed: -
Delet	ed: -
Delet	ed: VW only

Deleted: VW only

The remainder of this <u>article</u> is structured as follows: Section 2 introduces the model setup and configuration, model validation, and the analysis methods. Section <u>3</u> discusses variability in stratification, wakes, and power production. Section <u>4</u> concludes the work and offers recommendations for future work.

#### 2 Methods


120


# WRF Modeling Setup

- We assess the effects of wakes and power production across the mid-Atlantic OCS using numerical weather prediction simulations with WRF Version 4.2.1 and the WFP (Fitch et al., 2012). Version 4.2.1 allows for modifying the amount of TKE produced by wind turbines and ensures turbulence advection (Archer et al., 2020). Two nested domains comprise 6 km and 2 km horizontal resolutions (Pronk et al., 2022; Xia et al., 2022), respectively (Figure 1). This same domain and period of study have been used to explore interactions between power production and sea breezes (Xia et al., 2022). Fine vertical resolution (10 m) near the surface stretches aloft, with 17 levels within the lowest 200 m as recommended by Tomaszewski and Lundquist,
- 130 (2020). We choose an 18 s time step in the outer domain, 54 vertical levels, a 5,000-Pa top, simple diffusion, and damping 6,000 m below the model top to prevent gravity wave reflection. Hourly 30 km initial and boundary conditions are provided by the European Centre for Medium-Range Forecasts (ECMWF) fifth-generation reanalysis (ERA5) data set (Hersbach et al., 2020). Sea surface temperature is provided by the UK Met Office Operational Sea Surface Temperature and Sea Ice Analysis (OSTIA) data set (Donlon et al., 2012). We choose the Noah Land Surface Model (Niu et al., 2011), the Mellor-Yamada
- 135 Nakanishi and Nino Level 2.5 PBL and surface layer (Nakanishi and Niino, 2006), New Thompson microphysics (Thompson et al., 2008), and the Rapid Radiative Transfer Model longwave and shortwave radiative transfer (Iacono et al., 2008) schemes. The Kain–Fritsch cumulus scheme parameterizes cloud microphysics in the outer domain only (Kain, 2004).

(	Deleted: paper
(	Deleted: 4
(	Deleted: 5

(	Deleted: v
~~(	Deleted: modification
(	Deleted: of
(	Deleted: -
$\mathbb{K}$	Deleted: -
X	Deleted: Fig. 1
(	Deleted: -
(	Deleted: -
(	Deleted:

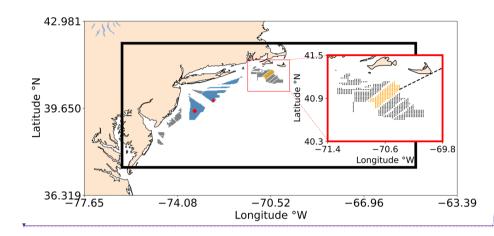



Figure, L: Simulation Domain 1 includes the entire region, and simulation Domain 2 is outlined by the black rectangle. Each dot represents a wind turbine. Vineyard Wind is shown in orange, wind energy lease areas in gray, and call areas in blue. The red square zooms in on the Rhode Island/Massachusetts block of lease areas. E05 (triangle) and E06 (diamond) floating lidars are shown in red.

#### Wind Turbine Layouts

155

Wind turbines are sited within lease areas offshore of the U.S. East Coast (Figure 1) as defined by the Bureau of Ocean Energy Management (BOEM, n.d.). Following realistic deployment strategies, we site individual turbines 1 nm, or 8.6 rotor diameters,

160 apart and an additional 0.5 nm from lease area boundaries (W.F. Baird & Associates, 2019; Beiter et al., 2020; Musial W., personal communication, Sept. 2020). This layout provides a power density of 3.14 MW km<sup>-2</sup>. Lower power densities in U.S. waters reflect wake concerns in Europe and the need to increase turbine spacing for wake replenishment. Areas that had already been approved for development are denoted as the lease areas. Areas where competitive interest was yet to be determined are denoted as the call areas, Both lease areas, and call areas are filled to spatial capacity with turbines (Figure 1).

165 recognizing renewable energy targets (218th Legislature, 2018).

Deleted:	
Deleted: .	
Deleted: .	
Deleted: d	
Deleted: d	
Deleted: is zoomed	
Deleted: red	
Deleted: red	
Formatted: Indent: First line: 0"	
Deleted: Fig. 1	


)

# Wind Turbine Characteristics

185

190

At the time of preparing this project,  $12_{4}$ MW turbines were speculated to be installed at Vineyard Wind. Since then,  $13_{4}$ MW turbines have been chosen for Vineyard Wind. For our simulations, we parameterize  $12_{4}$ MW turbines scaled from a  $15_{4}$ MW reference turbine with a  $138_{4}$ m hub height and  $215_{4}$ m rotor diameter. No power is produced in region 1 of the power curve, from 0 m s<sup>-1</sup> to cut-in wind speed (3 m s<sup>-1</sup>). Power production increases between cut-in wind speed and rated speed (11 m s<sup>-1</sup>), region 2 of the power curve. Between rated and cut-out wind speed (30 m s<sup>-1</sup>), region 3, an increase in wind speed no longer yields additional power production (Beiter et al., 2020) (Figure 2a).

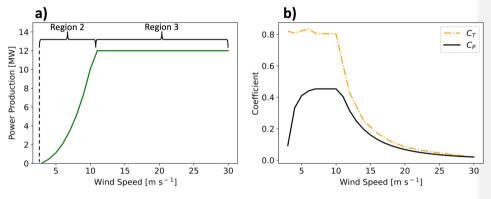

_	
·(C	Deleted: -
	Deleted: -
	Deleted: -
Ć	Deleted: -
	Deleted: -
C	Deleted: -
) (C	<b>Deleted:</b> (3 m s <sup>-1</sup> )
	Deleted: Fig. 2
(F	Formatted: Border: : (No border)

Deleted: . Deleted: . Deleted: -Deleted: . Deleted: Curves

Deleted: -

#### Wind Farm Parameterization

We use the WFP (Fitch et al., 2012) to incorporate the effects of wind turbines on the 2 km grid. Horizontal wind speed
reduction from turbine drag (Eq. 1), power production (Eq. 2), and turbulence generation (Fitch et al., 2012; Archer et al., 2020) (Eq. 3) are calculated in the WFP from:

Figure 2: Characteristics of the 12,MW scaled turbine used herein. (a) The power curve and (b) curves showing the thrust

coefficients ( $C_T$ , dashed orange) and the power coefficients ( $C_P$ , solid black) with wind speed across the x-axis.

$$\frac{\delta |\mathbf{V}|_{ijk}}{\delta t} = -\frac{N_{ij}C_T(|\mathbf{V}|_{ijk})|\mathbf{V}|_{ijk}^2 A_{ijk}}{2(z_{k+1} - z_k)}$$
(1)

$$\frac{\delta P_{ijk}}{\delta t} = \frac{N_{ij}C_{P}(|\boldsymbol{V}|_{ijk})|\boldsymbol{V}|_{ijk}^{i}A_{ijk}}{2(z_{k+1} - z_{k})}$$
(2)

$$\frac{\delta T K E_{ijk}}{\delta t} = \frac{N_{ij} C_{T K E} \left( |\mathbf{V}_{|ijk} \rangle |\mathbf{V}|_{ijk}^{3} A_{ijk}}{2(z_{k+1} - z_{k})}$$
(3)

where i, j, and k represent Cartesian model coordinates,  $C_T(|\mathbf{V}|_{ijk})$  is the wind-speed-dependent thrust coefficient,  $|\mathbf{V}|$  is the 215 wind speed at turbine hub height,  $\rho$  is the air density,  $A_{ijk}$  is the rotor swept area,  $N_{ij}$  is the number density of turbines in grid cell ij,  $C_P(|\mathbf{V}|_{ijk})$  is the wind-speed-dependent power coefficient,  $z_k$  is the height of vertical model level k, and  $C_{TKE}$  is the fraction of energy converted to TKE (Fitch et al., 2012). These values are calculated at each model level, as the use of a rotorequivalent wind speed generally exerts a minor effect (Redfern et al., 2019).

- 220 The thrust and power coefficients ( $C_T$  and  $C_P$ , respectively) vary with wind speed as defined by wind turbine manufacturers (Figure 2b). The thrust coefficient  $C_T$  is the non-dimensionalized thrust force exerted by wind on the rotor-swept plane (Burton et al., 2011).
- The power coefficient, C<sub>P</sub>, governs the fraction of rotor kinetic energy converted into electrical power. This conversion is not perfectly efficient due to electrical and mechanical losses (Fitch et al., 2012; Archer et al., 2020). The leftover fraction of energy (Eq. 4) from the difference between C<sub>T</sub> and C<sub>p</sub> is transformed into turbulence, C<sub>TKE</sub>.

$$C_{TKE} = C_T - C_P$$

(4)

Deleted: Fig. 2

Deleted: and

Deleted: Fig. A1

Formatted: Border: : (No border)

Because electromechanical losses are not represented by the WFP, all leftover energy converts to  $TKE_{\pi}$  so the TKE may be overestimated (Fitch et al., 2012; Archer et al., 2020). Some researchers suggest this TKE term is unnecessary (Volker et al.,

230 2015), although comparisons to large-eddy simulations (Vanderwende et al., 2016) and observations (Siedersleben et al., 2020) suggest the turbine-produced TKE is critical to include. Any overestimation of TKE would enhance turbulent mixing, thereby exaggerating turbulent transport of momentum that causes wake recovery, and overestimating power production. Therefore, Archer et al. (2020) propose reducing C<sub>TKE</sub> to 25%. For these simulations, we bound this uncertainty by carrying out simulations with 100% and 0% added TKE (Figure A1). Turbulence advection is turned on.


#### 235


240

#### Observations

We compared the NWF simulation to observations of offshore wind profiles. Two buoy-mounted meteorological ocean observing systems, denoted E05 and E06, are located within the Hudson North and Hudson South Call Areas of the New York Bight (Figure 3). Each buoy system samples line-of-sight boundary-layer wind speed and wind direction using the ZephIR ZX300M light detection and ranging (lidar) instrument. The lidars are mounted 2 m above the sea surface and take measurements at 20 m intervals up to 200 m, providing 10 min averages of wind speed and direction, which the New York State Energy Research and Development Authority (NYSERDA) has made publicly available (DNV, 2022). We use floating lidar data to validate simulations for 01 September 2019 to 01 September 2020.



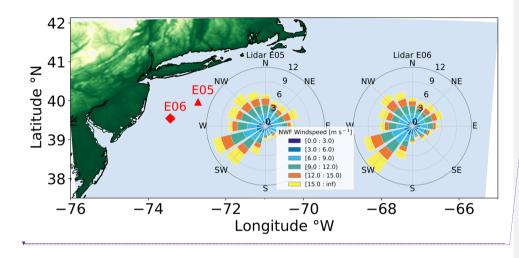

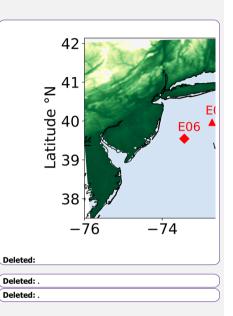

#### Figure, 3: Hub-height wind roses for the NYSERDA Hudson North (E05) and Hudson South (E06) floating lidars during the period 01 September 2019 to 01 September 2020. E06 is shown as the red diamond and E05 as the red triangle.

# **Stability Classification**

Different methods can be used to identify stratification, or atmospheric stability. Stable stratification can occur in coastal regions when warm air advects over a cooler sea surface, thereby suppressing buoyancy and turbulent mixing. Likewise, 260 unstable stratification can occur when cool air advects over a warmer sea surface. Some observations suggest more frequent unstable stratification, based on the Obukhov length (Archer et al., 2016). The sign of the Obukhov length depends on the sign of heat flux and can be a useful metric for determining stability conditions. Other observations suggest that minimal turbulence and strong veer can be characteristic of stable conditions (Bodini et al., 2019). Wind veer increases in stable stratification as the influence of buoyant turbulence-induced friction decreases. Thus, winds turn to approach quasigeostrophic flow at a quicker rate which can be further exaggerated by the presence of a low-level jet.

265

255

We calculate the Obukhov length (Monin and Obukhov, 1954) (L), representative of the height at which buoyant production of turbulence first dominates mechanical shear production of turbulence (Eq. 8):

8

# Formatted: No bullets or numbering

$$L = -\frac{u_*^3 \theta_v^-}{\kappa g(\overline{w'} \theta_v')}$$

(8)

where u<sub>\*</sub> is the friction velocity (UST from WRF output), θ<sub>v</sub> is the virtual potential temperature, κ is the von-Karman constant of 0.4, g is gravitational acceleration, and w θ<sub>v</sub>' is the vertical turbulent heat flux (HFX from WRF output). Lengths between 0 m and -1,000 m are characterized as unstable stratification and lengths between 0 m and 1,000 m are categorized as stable stratification (Muñoz-Esparza et al., 2012). We assess the sensitivity to the chosen cut-off value by also calculating neutral conditions using a 500-m threshold. Lengths approaching negative or positive infinity are neutral. Each timestamp from the NWF run is assigned a stability for the period 01 September 2019 to 01 September 2020 at a grid point centered on Vineyard Wind.

280

285

#### **Model Validation**

We validate the NWF model by comparing wind speed estimated by the turbine-free simulations with observations from E05 and E06 lidars. Model output is obtained from the grid cells containing the lidars in  $20_{4}$ m intervals from 60 m to 200 m following Pronk et al. (2022). Wind speeds and directions are compared using a suite of metrics (Eq<sub>4</sub> 5-7) including the correlation coefficient (CC), centered root-mean-square error (cRMSE), and bias:

$$CC = \frac{\sum_{i}^{N} (V_{WRF_{i}} - \overline{V_{WRF}}) (V_{lidar_{i}} - \overline{V_{lidar}})}{N\sigma_{WRF}\sigma_{lidar}}$$
(5)

$$cRMSE = \sqrt{\frac{\sum_{i}^{N} \left( \left( V_{WRF_{i}} - \overline{V_{WRF}} \right) - \left( V_{lidar_{i}} - \overline{V_{lidar}} \right) \right)^{2}}{N}}$$
(6)

$$Bias = \frac{\sum_{i} \left( v_{WRF_{i}} - v_{lidar_{i}} \right)}{N}$$
(7)

where V is the wind speed, N is the total number of values, and  $\sigma$  is the standard deviation. Earth Mover's Distance (EMD), 290 or the Wasserstein metric, is calculated with a SciPy function (Virtanen et al., 2020) as in other wind resource evaluations (Hahmann et al., 2020).

Table 2. Percentage of data removed at 140 m due to NaN values.

	<u>Unstable</u>	<u>Stable</u>	Neutral
<u>E05</u>	<u>1.35%</u>	<u>6.44%</u>	<u>0.33%</u>
<u>E06</u>	<u>3.64%</u>	<u>9.48%</u>	<u>0.62%</u>

0
9


Deleted: s

Formatted: Caption, Centered, Keep with next

Deleted: m Deleted: d

- 300 Time stamps in which the lidar returns NaN values are removed from WRF data sets during comparison (<u>Table 2</u>). Doing so removes 8.1% of wind speed data at 140 m at E05, made up by 1.35%, 6.44%, and 0.33% in unstable, stable, and neutral stratification, respectively. Similarly, 13.7% of wind speed data is removed at E06 and is made up by 3.64%, 9.48%, and 0.62% in unstable, stable, and neutral stratification, respectively. A CC value of one indicates a perfect correlation between NWF and lidar values. A value of 0 for cRMSE indicates that all values, with model bias removed, lie on the 1:1 regression line. A cRMSE value greater than 0 indicates the distance of residual points from the regression line. Negative biases indicate
- an underestimation from WRF while positive biases indicate overestimation. A value of 0 for EMD indicates that probability density functions from each data source are equivalent. A positive EMD indicates that the NWF wind speed distribution must shift towards lower values to match the lidar distribution.

Deleted: and	
Deleted: 6	
Deleted: at	
Deleted: 140 m at E05 and	
Deleted: . respectively	

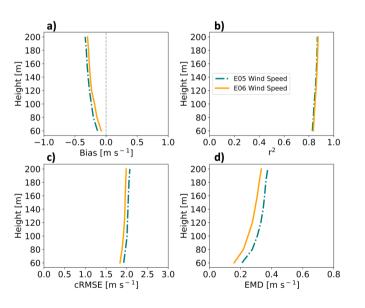


~	~
- 4	11


Figure, 4; Vertical profiles for wind speed comparative metrics at the E05 (teal) and E06 (orange) lidars from 01 September 2019 to 01 September 2020. Shown are (a) bias, (b) correlation, (c) cRMSE, and (d) EMD,

(	Deleted: .
~(	Deleted: .
~(	Deleted: centered root-mean-square error
X	Deleted: earth mover's distance

NWF wind speed profiles are compared with lidar observations for the period 01 September 2019 to 01 September 2020 to assess model skill (Figure 4). Note that Pronk et al. (2022) provide validation metrics against the E05 lidar profile during the 325 same period of study and find similar results. Negative biases increase in magnitude with height between 0 m s<sup>-1</sup> and -0.5 m  $s^{-1}$  (Figure 4a), showing the model underestimates the wind speed. Strengths of variation among WRF output and the lidars range between 0.82 and 0.86 (Figure 4b). Centered RMSE increases with height around 2 m s<sup>-1</sup> (Figure 4c). Finally, EMD values originate around 0.2 m s<sup>-1</sup> at 60 m and increase with height (Figure 4d). Comparing lidars E05 and E06, WRF performs better at E06 with a smaller bias by  $0.04 \text{ m s}^{-1}$ , lower cRMSE by  $0.08 \text{ m s}^{-1}$ , better correlation by 0.003, and smaller EMD by  $0.05 \text{ m s}^{-1}$ .

330

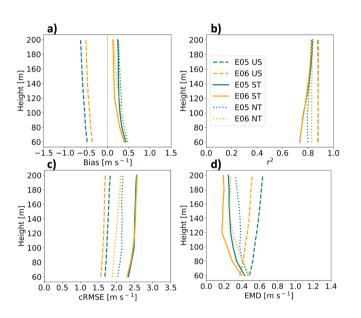



335

We further assess the NWF performance, partitioned by stability conditions. In unstable stratification, WRF wind speeds have a negative bias that gradually increases in magnitude with height from  $-0.5 \text{ m s}^{-1}$  at 60 m (Figure 5a). In stable and neutral conditions, WRF overestimates wind speeds by roughly 0.5 m s<sup>-1</sup> at 60 m with smaller biases further aloft (Figure 5a).

ſ	Deleted: Fig. 4
F	Formatted: Border: : (No border)
(I	Deleted: Fig. 4
F	Formatted: Border: : (No border)
1	Deleted: Fig. 4
I)	Deleted: Fig. 4
F	Formatted: Border: : (No border)
F	Formatted: Border: : (No border)
ſ	Deleted: Fig. 4
F	Formatted: Border: : (No border)

Comparing between E05 and E06 profiles, WRF performs better at the E06 lidar location by 0.1 m s<sup>-1</sup> in unstable conditions, 0.08 m s<sup>-1</sup> in stable conditions, and 0.05 m s<sup>-1</sup> in neutral conditions.

355

NWF and lidar wind speeds correlate well. Correlation remains largest in unstable conditions for all heights (Figure 5b). The worst strength of relationship occurs in stable stratification although there is improvement aloft, and by 160 m, correlation between stable and neutral conditions is largely equivalent (Figure 5b). On average, WRF performance is the same in unstable and stable conditions and better at E06 by 0.02 in neutral conditions.

Centered RMSE profiles change with stratification. In unstable conditions, cRMSE increases somewhat with height
 originating from greater than 1.5 m s<sup>-1</sup> at 60 m (Figure 5c). In stable stratification, the cRMSE profile begins at roughly 2.3 m s<sup>-1</sup> at 60 m and increases with height. In neutral conditions, cRMSE increases with height from around 2 m s<sup>-1</sup>. As before, WRF performs better at E06. On average, cRMSE is lower at E06 by 0.1 m s<sup>-1</sup> in unstable conditions, by a negligible amount in stable conditions, and by 0.1 m s<sup>-1</sup> in neutral conditions.

Earth Mover's Distance has more variability with height. Jt is largest in unstable stratification, increasing with height from roughly 0.5 m s<sup>-1</sup> at 60 m (Figure 5d). In stable conditions, EMD decreases with height and originates at slightly greater than 0.4 m s<sup>-1</sup> at 60 m. In neutral stratification, EMD decreases with height from slightly greater than 0.4 m s<sup>-1</sup>. On average, WRF performs better at E06 by 0.1 m s<sup>-1</sup> in unstable conditions, by 0.06 m s<sup>-1</sup> in stable conditions, and by 0.05 m s<sup>-1</sup> in neutral conditions. The stable conditions of the stable conditions. The stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions are stable conditions. The stable conditions are stable conditions are stable conditions are stable conditions. The stable conditions are stable conditines are stable conditions are stable

(	Deleted: Fig. 5
~(	Formatted: Border: : (No border)
(	Deleted: Fig. 5
~(	Formatted: Border: : (No border)

Deleted: Fig. 5	
Formatted: Border: : (No border)	
Deleted: m	
Deleted: d	
Deleted: EMD	

Deleted: Fig. 5

Formatted: Border: : (No border)

# Deleted: 1

# Stability Classification

Different methods can be used to identify stratification, or atmospheric stability. Stable stratification can occur in coastal regions when warm air advects over a cooler sea surface, thereby suppressing buoyancy and turbulent mixing. Likewise, unstable stratification can occur when cool air advects over a warmer sea surface. Some observations suggest more frequent unstable stratification, based on the Obukhov length (Archer et al., 2016). The sign of the Obukhov length depends on the sign of heat flux and can be a useful metric for determining stability conditions. Other observations suggest that minimal turbulence and strong veer can be characteristic of stable conditions (Bodini et al., 2019). Wind veer increases in stable stratification as the influence of buoyant turbulence-induced friction reduces. Thus, winds turn to approach quasi-geostrophic flow at a quicker rate which can be further exaggerated by the presence of a low-level jet. ¶

Here we obtain the WRF-output Obukhov length (Monin and Obukhov, 1954) (L), representative of the height at which buoyant production of turbulence first dominates mechanical shear production of turbulence (Eq. 8): ¶

where u, is the friction velocity,  $\theta_{\rm v}$  is the virtual potential temperature,  $\kappa$  is the von-Karman constant of 0.4, g is gravitational acceleration, and  $\overline{w}^{-}\theta_{\rm v}^{-}$  is the vertical turbulent heat flux. Lengths between 0 m and -1,000 m are characterized as unstable stratification and lengths between 0 m and 1,000 m are categorized as stable stratification. Lengths approaching negative or positive infinity are neutral. Each timestamp from the NWF run is assigned a stability for the period 01 September 2019 to 01 September 2020 at a grid point centered on Vineyard Wind.

Deleted:

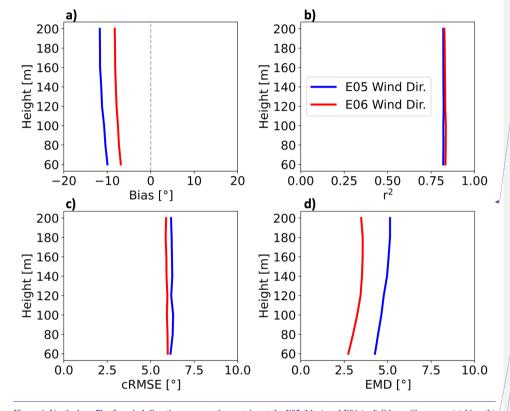


Figure 6. Vertical profiles for wind direction comparative metrics at the E05 (blue) and E06 (red) lidars. Shown are (a) bias, (b)<sup>4</sup> correlation, (c) cRMSE, and (d) EMD.


415

Next, we show metrics to compare WRF-output wind direction profiles with lidar measurements. Bias is negative, or counterclockwise, at both E05 and E06 lidar locations. NWF output resolves wind directions better at E06 with a mean bias of -7.8° with height as compared to -11.1° at E05 (Figure 6a). Correlation coefficients at both locations are strong, at 0.83 and 0.82 for E06 and E05, respectively (Figure 6b). Mean cRMSE is similar between lidar locations, at 5.9° and 6.2° for E06 and

420 E05, respectively (Figure 6c). Finally, EMD is lower at E06, increasing with height between with an average of 3.3° (Figure

Forn	natted:	Captio	on
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
Forn	natted:	Font:	10 pt, Font color: Auto
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
Forn	natted:	Font:	10 pt, Font color: Auto
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
Forn	natted:	Font:	10 pt, Font color: Auto
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
Forn	natted:	Font:	10 pt, Font color: Auto
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font
Forn	natted:	Font:	10 pt, Font color: Auto
	atted: Auto	Font:	(Default) Times New Roman, 10 pt, Font

Formatted: Keep with next

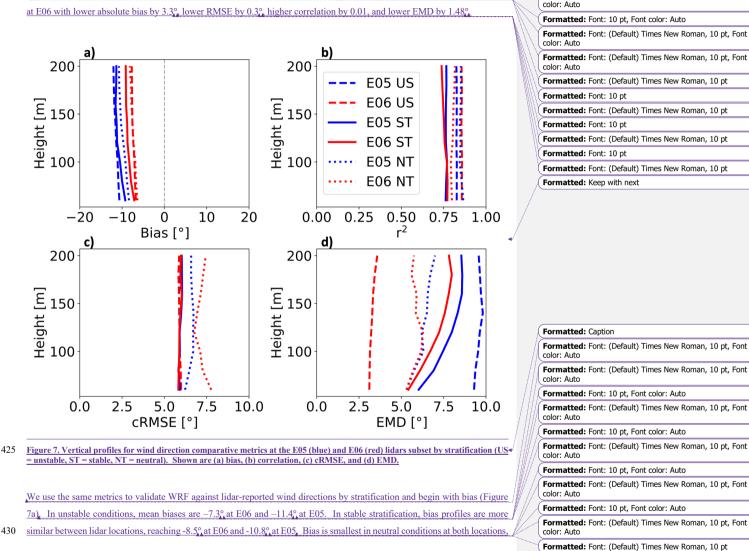

Formatted: Font: (Default) Times New Roman, 10 pt, Font

6d). EMD is larger at E05, increasing with height between with an average of 4.8% (Figure 6d). Overall, WRF performs better

with mean values of -7.3<sup>o</sup> at E06 and -9.8<sup>o</sup> at E05. Overall, WRF performs better at E06 lidar location by 4.1<sup>o</sup> in unstable conditions, by 2.3<sup>o</sup> in stable conditions, and better at the E05 lidar location by 2.5<sup>o</sup> in neutral conditions.

The correlation between WRF-derived lidars-measured wind directions is strong in all stability conditions at both lidar


- 435 locations (Figure 7b). The strength of relation in unstable conditions is 0.86 at E06 and 0.83 at E05. In stable conditions, the mean correlation is 0.76 at both E06 and E05. In neutral conditions, the strengths of relation are 0.80 at E06 and 0.85 at E05. Overall, WRF performs better at E06 by 0.03° in unstable conditions, the same in stable conditions, and better at E05 by 0.05° in neutral conditions.
- 440 Profiles for cRMSE are similar in unstable and stable conditions with worse performance in neutral conditions (Figure 7c). In both unstable and stable conditions, mean cRMSE is 5.9° at both E05 and E06. In neutral conditions, mean cRMSE is 7.2° at E06 and 6.6° at E05. WRF performs the same at both lidar locations in unstable and stable conditions and is better at E05 by 0.6° in neutral conditions.
- 445 Large variability exists for EMD between lidar locations in WRF (Figure 7d). Unstable stratification features the largest spread between lidar locations, with EMD values of 3.3° at E06 and 9.6° at E05. In stable conditions, EMD is 7.1° at E06 and 7.8° at E05 and 6.3° at E05. On average, WRF performs best at the E06 lidar location 6.3° in unstable conditions, 0.7° in stable conditions, and 0.5° in neutral conditions.
- 450 <u>Wind speed timeseries are collected and averaged for the full year-long period from the grid cells housing lidars E05 and E06</u> in NWF and from the lidar measurements. The shear exponent is calculated as:

 $a = \frac{\log(v_2) - \log(v_1)}{\log(z_2) - \log(z_1)}$ 

455 where  $p_{\theta_1}$  and  $p_{\rho_2}$  are the mean wind speeds at heights  $z_{\theta_2}$  and  $z_{\rho_2}$  respectively. We hold  $p_{\theta_1}$  and  $z_{\theta_2}$  constant at a reference height of 60 m and substitute  $p_{\rho_2}$  and  $z_{\rho_3}$  with values from 80 m to 200 m at 20-m intervals.

Formatted: Font: 10 pt, Font color: Auto
Formatted
Formatted ([2]
Formatted ([3]
Formatted ([4])
Formatted: Font: (Default) Times New Roman, 10 pt
Formatted: Font: (Default) Times New Roman, 10 pt
Formatted: Indent: First line: 0", Line spacing: 1.5 lines
Formatted: Font: (Default) Times New Roman, 10 pt, Font color: Auto
Formatted ([5])
Formatted
Formatted: Font: (Default) Times New Roman, 10 pt

Formatted: Font: (Default) Times Ne	w Roman, 10 pt
Formatted: Indent: First line: 0", Lir	ne spacing: 1.5 lines
Formatted: Font: (Default) Times Ne color: Auto	w Roman, 10 pt, Font
Formatted	( [7]
Formatted	( [8]
Formatted	( [9]
Formatted	( [10]
Formatted	( [11]
Formatted	( [12]
Formatted	( [13]
Formatted	( [14]
Formatted	( [15]
Formatted: Font: (Default) Times Ne	w Roman, 10 pt
Formatted	( [16]
Formatted: Font: 10 pt, Font color: A	Auto
Formatted	( [17]
Formatted	( [18]
Formatted	( [19]
Formatted	( [20]
Formatted	( [21]
Formatted	( [22]
Formatted	( [23]
Formatted	( [24]
Formatted	( [25]

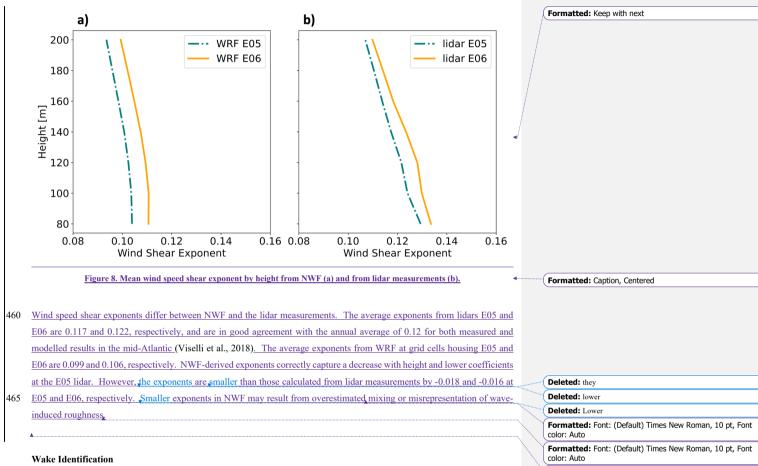

The wake delineates the region downwind of turbines with a velocity deficit and turbulence enhancement. We identify the 470 wind speed wake deficit by subtracting NWF wind speeds from WFP wind speeds at the hub height. Averaging across all times during the period 01 September 2019 to 01 September 2020 identifies the overall mean wake wind speed. Because wakes typically propagate to the northeast (Figure 3), we calculate the propagation distance of wakes under various conditions along a line extending northeast of Vineyard Wind and report the distance along the line where wake wind speeds reach a

Deleted: Fig. 3 Formatted: Border: : (No border)

Auto

Formatted: Font: (Default) Times New Roman, Font color:

threshold. The threshold of  $-0.5 \text{ m s}^{-1}$  is chosen following Golbazi et al., (2022); Rybchuk et al., (2022). Finally, we define the areal extent of wakes as the area with a wind speed deficit less than  $-0.5 \text{ m s}^{-1}$ .

480

485

#### **Grid Balancing**

We compare model-output energy production to New England grid demand. Demand data are provided hourly (NEISO, 2023a). For comparison, we compute hourly averages of WFP power production from each set of simulations. We compare those averages to the national energy supply by acquiring the total from the U.S. Energy Information Administration (EIA, 2023).

Deleted: with

Deleted: with

 Deleted: by
 Deleted: through
 Deleted: VW only

Power	Variabilit	y

Assessing power variability is essential for addressing temporally changing grid demands. We assess the differences in electricity generation for each deployment scenario by collecting power output from grid cells containing wind turbines
 separately from VW, LA, and CA simulations. Power is summed across grid cells containing turbines and averaged at 1 day, 7 day, and 30 day intervals for comparison. We address seasonal and diurnal variability by further separating and averaging power production totals at each timestep into bins by month and hour of day. Power losses from external, internal, and the total wake effects are calculated from variability.

$$Loss_{external} = 100 - \left(\frac{P_{LA,CA}}{P_{VW}}\right) * 100\%$$

$$Loss_{internal} = 100 - \left(\frac{P_{VW}}{P_{NWF}}\right) * 100\%$$

$$LOSS_{total} = 100 - \left(\frac{P_{LA,CA}}{P_{NWF}}\right) * 100\% ,$$
(11)

495

	where $P_{LA,CA}$ is the power production at Vineyard Wind grid cells in the presence of wakes by either the LA or the CA, $P_{VW}$ is
	the power production in the presence of internal wakes from VW, and $P_{NWF}$ is the power production from coupling hub-height
500	wind speeds to the power curve. These methods are performed separately by added TKE amount. We note that the upwind
	conditions change in a LA or CA scenario, due to external wakes, which can modify the internal losses in the numerator of
	Eq. 9. Thus, we provide an alternative method for calculating the external power losses as the difference between the total
	losses and the internal losses:

505

 $LOSS_{external} = LOSS_{total} - LOSS_{internal}$ 

Deleted: .
 Deleted: This method is performed separately by added TKE amount. Power is summed across grid cells containing turbines and averaged at 1-day, 7-day, and 30-day intervals for comparison. We address seasonal and diurnal variability by further separating and averaging power production totals at each timestep into bins by month and hour of day.
 Deleted: Wonly

Formatted: Font: Times New Roman, Not Italic

Deleted: W

(12)

Formatted: Font: Times New Roman, Not Italic

Formatted: Font: Times New Roman, Not Italic

Cluster-induced power deficits at Vineyard Wind occur due to external wakes from the upwind lease and call areas. Power output from <u>VW</u>, LA, and CA simulations are averaged in hourly windows at grid cells containing Vineyard Wind turbines to reduce the effects of numerical noise (Appendix F). The resulting power averages from LA and CA simulations are divided by the averages from <u>VW</u> at each time stamp. The hour of day and month of year categorize each time stamp and percentages are placed into bins accordingly. Within each bin the percentages are averaged. Only power production totals greater than 9.9 MW are considered when calculating power losses. This threshold represents the power production total when all turbines within Vineyard Wind begin operating, at the cut-in wind speed. For reference, the total power production for Vineyard Wind

- at rated power is 2,124 MW. This method is repeated separately for TKE\_0 and TKE\_100 runs.
- 530 Individual wind turbines generate internal wakes within the Vineyard Wind plant that adversely affect power production. To quantify internal wake effects at Vineyard Wind, we collect NWF wind speeds at the hub height in each cell containing Vineyard Wind turbines. Wind speeds are convolved with the power curve and scaled by the number of turbines per cell at 0.01 m s<sup>-1</sup> intervals. This method returns the amount of power that Vineyard Wind would produce in the absence of wakes. Hourly power averages are obtained from both NWF and VW runs and considered only if power production exceeds 9.9 MW.
- 535 <u>VW</u> power totals are divided by the NWF power estimations from the power curve. Again, each time\_stamp is categorized by hour of day and month of year, and percentages are binned for averaging. These steps are repeated for both TKE\_0 and TKE\_100 runs.

# **3** Results

525


# 540 Year-Round NWF Stratification


The predominance of NWF stability conditions changes throughout the year (Figure 9, Figure 10) as assessed using the Obukhov length (L) centered at Vineyard Wind.

Deleted: V	W_only		
Deleted: V	W_only		
Deleted: or	1		
(Deleted: V	W_only		

(	Deleted: Fig. 6
~(	Deleted: Fig. 7
)	Formatted: Font: Border: : (No border)
X	Formatted: Font: Border: : (No border)
Y	Deleted: L



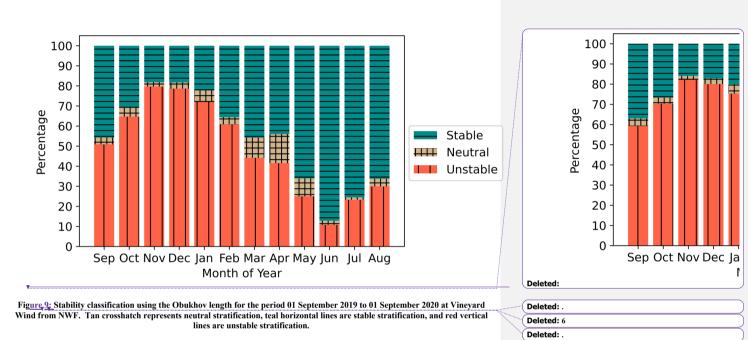

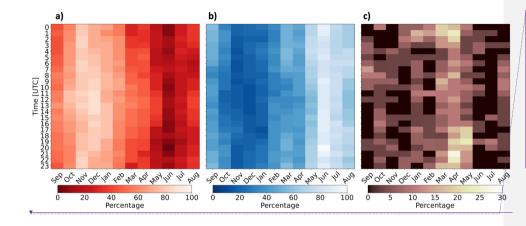




Figure 10: Percentages of occurrence for (a) stable stratification, (b) unstable stratification, and (c) neutral stratification from 01 September 2019 to 01 September 2020.

565 The winter features predominant unstable stratification <u>whereas</u> the summer features frequent stable stratification (Bodini et al., 2019; Optis et al., 2020) (Figure 9, Figure 10). The strong stability in summer is caused by nearby surface-heated air advecting over the colder OCS. These dynamics reverse during winter when cold air from land advects over warmer water. Overall, stratification is most frequently unstable during November and stable during June. April features the greatest percentage of neutral conditions as the springtime transition from cooler to warmer air reduces the air-sea temperature gradient.
570 The same pattern occurs elsewhere throughout the OCS because diurnal variability in stratification is weaker than the seasonal cycle (Figure 10). The mean unstable, stable, and neutral percentages of occurrence at Vineyard Wind are 48.4%, 46.3%, and 5.2%, respectively, for the period 01 September 2019 to 01 September 2020, using a 1,000-m threshold for neutral conditions. Using a 500-m threshold for neutral conditions, the percentages are 44.3%, 44.4%, and 11.2%. Stability calculations from the

)(	Deleted: .
(	Deleted: while
(	Deleted: Fig. 6
-(	Deleted: Fig. 7
`(	Formatted: Border: : (No border)
Y	Formatted: Border: : (No border)
(	Deleted:
(	Deleted: Fig. 7
-(	Deleted: 53.6
`(	Deleted: 41.9
Y	Formatted: Border: : (No border)
Y	Deleted: 4.5
Y	Deleted: and s
1	Deleted: Fig. B1

Deleted:

Deleted: 7

Deleted: Fig. C1

#### Wake Variability

conditions aloft (Figure C1).

575

580

Here, we categorize wakes by the maximum wind speed deficit, the spatial extent, and the downwind propagation distance. While wakes remain relatively unchanged between TKE\_0 and TKE\_100, they drastically vary by stratification. The maximum average wake wind speed deficit intensifies from  $-1.5 \text{ m s}^{-1}$  to  $-2.8 \text{ m s}^{-1}$ , moving from unstable to stable conditions

model grid cells that house lidars E05 and E06 reveal similar results (Figure B1). However, L may not always represent

for TKE 100 (Figure 11a,c). Normalized with mean NWF hub-height wind speeds of 9.2 m s<sup>-1</sup> (unstable) and 11.2 m s<sup>-1</sup> (stable), the corresponding mean wind speed deficits are 16% and 25%. Similarly, the maximum average wind speed deficit intensifies from -1.8 m s<sup>-1</sup> to -3.1 m s<sup>-1</sup>, a normalized reduction of 19% and 27%, moving from unstable to stable at TKE\_0 (Figure 11b,d). Thus, reducing TKE from 100% to 0% has a smaller impact on wake strength than increasing stability.

#### 600

# Table 3. Wake wind speed reduction by stratification and TKE amount.


	Unstable TKE 100	Stable TKE 100	Unstable TKE 0	Stable TKE 0	•
Wind Speed	$-1.5 \text{ m s}^{-2}$	$-2.8 \text{ m s}^{-2}$	$-1.8 \text{ m s}^{-2}$	$-3.1 \text{ m s}^{-2}$	*
<u>Deficit</u>					
<u>Normalized</u>	<u>16%</u>	<u>25%</u>	<u>19%</u>	<u>27%</u>	•
<u>deficit</u>					

The areal extent of wakes changes by stability and added TKE. Wake deficits stronger than the -0.5 m s<sup>-1</sup> cutoff in unstable 605 stratification at TKE\_100 (Figure 11a) cover a total area of 7,264 km<sup>2</sup> and represent the best-case scenario where wakes impact the smallest area. In stable stratification at TKE 100 (Figure 11c), wakes cover a larger area of 15,848 km<sup>2</sup>, or 2.2 times larger. A similar increase occurs using TKE\_0, although areal coverage of the wake is larger due to weaker turbulence-induced wind speed replenishment from aloft. At TKE 0 in unstable conditions (Figure 11b), wakes stronger than  $-0.5 \text{ m s}^{-1}$  cover an area of 7,860, km<sup>2</sup>. In stable stratification, the area increases to 15,568 km<sup>2</sup> (Figure 11d), a factor of 2. The spatial extent of strong wakes spreading furthest throughout the region, representing the worst-case scenario, occurs in stable conditions at

# 610

TKE 100. Wakes interact between immediate wind plant neighbors for all scenarios.

D	eleted: Fig. 8
D	eleted: 6
F	ormatted: Border: : (No border)
D	eleted: 4
D	eleted: 2
D	eleted: Fig. 8
Va	eleted: While here we address the uncertainty introduced by rrying the added TKE, Rybchuk et al. (2022) address uncertainty troduced by varying planetary boundary layer (PBL) schemes.
F	ormatted: Border: : (No border)
F	ormatted: Caption, Centered, Keep with next
F	ormatted: Font: Bold
F	ormatted: Left
F	ormatted Table
F	ormatted: Font: Bold
F	ormatted: Superscript
F	ormatted: Superscript
F	ormatted: Left
F	ormatted: Centered
F	ormatted: Font: Bold
F	ormatted: Left
F	ormatted: Centered
D	eleted: Fig. 8
D	eleted: 96
F	ormatted: Border: : (No border)
D	eleted: Fig. 8
D	eleted: 16,404
F	ormatted: Border: : (No border)
D	eleted: from
D	eleted: reduced
D	eleted: Fig. 8
F	ormatted: Border: : (No border)
D	eleted: 952
D	eleted: 16,060

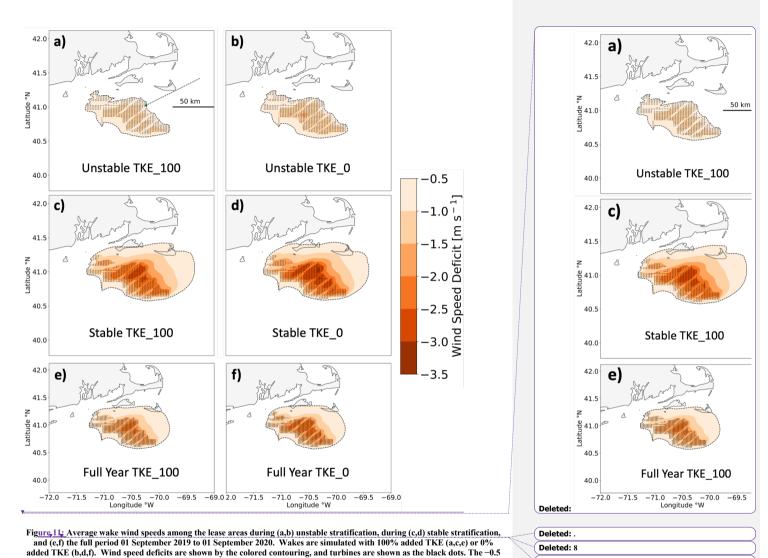

Deleted: .





m s<sup>-1</sup> threshold is outlined by the black dashed line.

640

645

Stratification exerts a stronger effect on wake propagation distance than does TKE. For instance, wakes extending 1 km downwind in unstable conditions reach  $55_4$  km in stable conditions at TKE 100 (Figure 11a,c), similar to the estimate of 50 km from Golbazi et al. (2022). Likewise, wake deficits reaching  $1_4$  km downwind in unstable stratification reach  $53_4$  km downwind in stable stratification at TKE\_0 (Figure 11b,d). The same pattern exists for CA wakes (Figure D1). Overall, altering the added TKE amount has a small impact on the propagation distance of wakes relative to stratification, and combining stable stratification with TKE\_0 results in the strongest wakes.

Yearly averaged wakes show similar trends with TKE and stability (<u>Table 4</u>). The maximum wake strength intensifies from -2.2 m s<sup>-1</sup> to -2.5 m s<sup>-1</sup> moving from TKE\_100 to TKE\_0 (<u>Figure 11e,f</u>). Reducing TKE also increases the spatial coverage
of wakes from 13,040 km<sup>2</sup> using TKE\_100 (<u>Figure 11e</u>) to covering 13,268 km<sup>2</sup> using TKE\_0 (<u>Figure 11e</u>). Downwind propagation distances remain similar over the yearlong period with wakes reaching 43 km at TKE 100 and 41 km at TKE 0.

Table 4. The wake wind speed deficit, spatial extent, and downwind propagation distance by added TKE amount.

Spatial Extent

13,040 km<sup>2</sup>

13,268 km<sup>2</sup>

Propagation Distance

43 km

41 km

Wind Speed Deficit

 $-2.2 \text{ m s}^{-1}$ 

-2.5 m s<sup>-1</sup>

Deleted: 8			
Deleted: Fig	. 8		
Formatted:	Border: : (No bo	rder)	
Deleted: 3			
Deleted: 5			
Deleted: Fig	. 8		
Formatted:	Border: : (No bo	rder)	
Deleted: 1			
Deleted: Fig	. 8		
Deleted: Fig	. 8		
Deleted: Fig	. 8		

Formatted: Caption, Centered, Keep with next

	Formatted: Superscript
	Formatted: Superscript
 	Formatted: Superscript

655

TKE 100


TKE 0


Reduced TKE limits turbulence-induced momentum transport from aloft, thereby increasing wake strength. Counterintuitively, longer-lasting wakes in TKE\_100 develop from a larger reduction in momentum from wake recovery above the turbines\_(Fitch et al., 2012; Siedersleben et al., 2020), leaving less momentum available for replenishment downwind.

**Deleted:** The same patterns exist for VW\_only and CA (Fig. D1) wakes....

### 670 Power Deficits

# 3.1.1 External Wake Losses

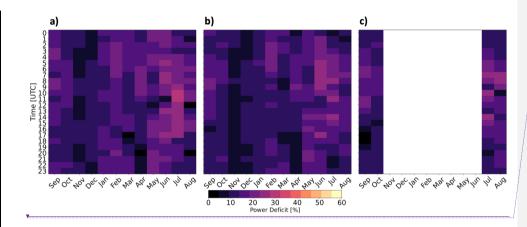



# Deleted: Deleted:

Deleted: 9

Deleted: Deleted: Fig. 10

Deleted:

Deleted: (Eq. 9)

Deleted: Fig. 9

Deleted: Fig. 9

Deleted: Fig. 9

Deleted: while

Figure 12; The power deficit at Vineyard Wind when waked by (a) the LA at TKE\_0, (b) the LA at TKE\_100, and (c) the CA at TKE 100. White space reflects the simulation period. The color bar is broad to facilitate comparison with losses in Figure 13,

675

Vineyard Wind experiences power deficits due to external wakes from the LA and the CA, Considering external wakes from the LA at TKE 0 (Eq. 9), the average vearlong power deficit at Vineyard Wind is 14.7% (Figure 12a) and increases to 15.7% considering only the four stable CA months. When Vineyard Wind is waked by the LA at TKE\_100, the average yearlong power deficit reduces to 13.4% (Figure 12b) because increased turbulence supports faster replenishment. During the four months only, the deficit is 14.4%. When incorporating wakes from the CA (at TKE 100), the mean Vineyard Wind power

680 deficit (over four months) is 14.3% (Figure 12c). By calculating the external power losses as the difference between total and internal losses (Eq. 12) instead, the deficits are 8.97% and 8.43% for the LA at TKE 0, and TKE 100, respectively. However, power losses vary as larger reductions from external wakes occur during summer whereas smaller reductions occur during winter.

685

External wake-induced losses vary both diurnally and seasonally. Larger power deficits occur more often during summer due to stable stratification (Figure 9, Figure 10a). Smaller power deficits occur during winter (Figure 12), with faster winds that exceed rated wind speed and unstable conditions that erode wakes faster. Larger power deficits correspond with stable stratification in June and July. Conversely, smaller power deficits occur with unstable stratification throughout November and 690 December. These patterns occur because colder air advects over warmer water in winter which causes unstable conditions

Deleted: Fig. 6	
Deleted: Fig. 7	
Deleted: Fig. 9	
Deleted: of advection of	

that erode wakes faster. Conversely, warmer air advects over colder water during the summer, inducing stable conditions that limit turbulent wake recovery. While wake-induced losses vary somewhat across the diurnal cycle, there is no discernible pattern. The ocean's large heat capacity suppresses daytime heating which limits changes in stratification, and by extension, the magnitude of changes in wake losses.

710

# b) a) 012345678901234567890123 Time [UTC] cer or hay de lar tay to hay the line and cer or to be lar to hay the line to 20 30 40 Power Deficit [%] ō 10 50 60 40

# Figure 13: The percentage of power loss at Vineyard Wind from internal wakes at (a) TKE\_0 and (b) TKE\_100.

715 Internal power deficits (Eq. 10) at Vineyard Wind are at least 25% stronger than externally induced power deficits but experience similar variability with stability and TKE amount (Figure 13). Internal waking induces weaker deficits during winter and stronger deficits during summer. As with external wakes, a clear diurnal pattern fails to emerge. Yearlong internal wakes from TKE\_0 and TKE\_100 induce power losses of 29.2% and 25.7%, respectively. During the four stable months only,

Deleted: .	
Deleted: 10	
Deleted: .	

Deleted: Fig. 10

3.1.2 Internal Wake Losses

the deficits increase to 36.9% and 32.9%, respectively. Using different PBL schemes with similar turbine spacing under steady-725 state idealized conditions, Rybchuk et al. (2022) find similar internal losses to capacity factor, up to 31.6%.

The average yearlong power deficits at Vineyard Wind considering internal wakes and external wakes from the LA range between 38.2% (TKE 0) and 34.1% (TKE 100). These results concur with wake-induced losses found by Pryor et al. (2021) of 35.3% among the LA, based on 11 five day periods of different flow scenarios. Observations of wake-induced power losses have large variability over the year, ranging from as low as 5% to as high as 40% (Lee and Fields, 2021). Overall, external wakes produce yearly averaged power losses of 14.1%, whereas internal wakes induce larger losses of 27.4%. Thus, we stress

the importance of resolving region-specific and time-varying wakes for accurate energy prediction estimates.

#### **Annual Energy Production**

740

735 Predictions of energy supply are critical for planning, operations, and diversification of renewables. Without internal or external wake effects, Vineyard Wind would produce 11.61 TWh and meet 10.02% of New England's average demand. Annual energy production (AEP) from <u>VW</u>, considering just internal wakes, reduces to 9.19 TWh (TKE 0) or 9.55 TWh (TKE\_100), which could meet 7.94% to 8.24% of New England's demand. Including both internal and external wakes from the LA, Vineyard Wind would produce 8.19 TWh (TKE\_0) or 8.65 TWh (TKE\_100), meeting 7.07% to 7.47% of demand.

Increasing the number of <u>wind</u> turbines increases the demand fulfilled; AEP from the LA is 68.12 TWh (TKE\_0) or 70.9 TWh (TKE\_100), supplying 58.82% to 61.22% of New England's demand. On an hourly basis, the LAs fulfill demand only 24.6% (TKE\_0) and 26.5% (TKE\_100) of the time, highlighting the necessity for resolving accurate wake losses across the OCS. Previous work (Livingston and Lundquist, 2020) assuming a constant 20% wake loss, shown here to be underestimated, suggested that 2,000 10 MW turbines could meet New England's demand 37% of the time. In all, the LA, with 1,418 12-MW

745 suggested that 2,000 10, MW turbines could meet New England's demand 37% of the time. In all, the LA, with 1,418 12-MV turbines, supply 68 TWh year<sup>-1</sup> and 71 TWh year<sup>-1</sup>, or 1.72% (TKE\_0) to 1.65% (TKE\_100) of the nation's energy supply.

#### Power Variability by TKE Amount

# 3.1.3 Temporal Power Variability

750 While differences in wake strength between TKE amounts alter power production, wind speed exerts a larger influence. Maximum power is produced during spring with the least amount of power produced during summer (Figure 14a) for both TKE\_0 and TKE\_100, because spring features faster wind speeds (Figure 14b). Power production responds to hub-height wind speeds (Figure 14) more than stability conditions (Figure 9, Figure 10). Reduced power production during summer may be problematic as New England's top-10 utility demand days since 1997 have all occurred in July or August (NEISO, 2023b).


26

	Deleted: both TKE amounts,
(	Deleted: ,
$\geq$	Deleted: is 35.9
(	Deleted:
(	Deleted: 5-
(	Deleted: while

Deleted: VW\_only


Deleted:


-(	Deleted: Fig. 11
-(	Deleted: Fig. 11
_(	Deleted: Fig. 11
(	Deleted: Fig. 6
(	Deleted: Fig. 7

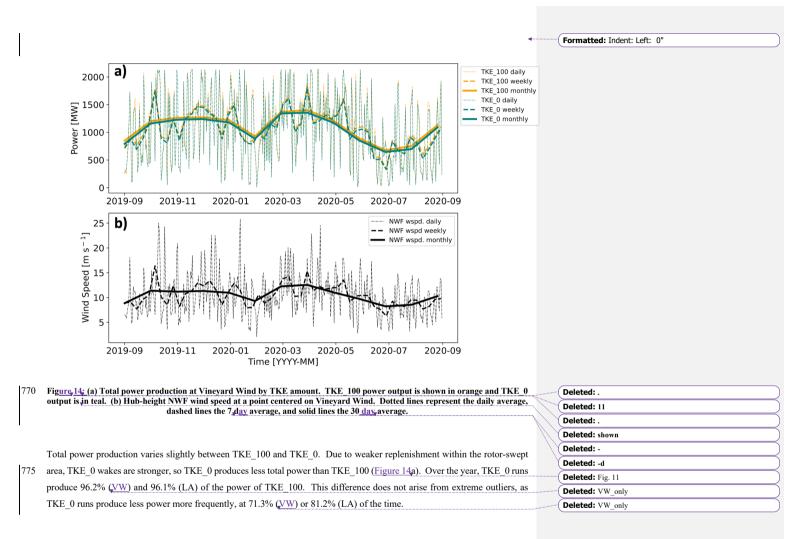


### 3.1.4 Power Variability by Wind Speed

Differences in power production (TKE\_100 – TKE\_0) vary by NWF hub-height wind speed (Figure 15). These differences are small at slow wind speeds, because little momentum is available for wake recovery, and at faster wind speeds within region 3 of the power curve (11–30 m s<sup>-1</sup>) where wind speed changes do not affect power production (Figure 2a). Differences in wind speed within region 3 should have no effect on power production and are caused by numerical noise propagating through Vineyard Wind (Figure F1). The largest differences in power production occur in region 2 and around rated wind speed where the power curve is steep (Figure 2a, Figure 15). Additionally, large differences in power production can occur in specific meteorological conditions such as frontal propagation.

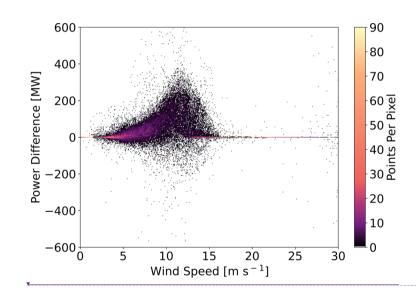





Figure\_15: The difference in power production (TKE 100-TKE\_0) at Vineyard Wind as a function of wind speed. Colored contouring depicts the density of scattered points per pixel. Wind speeds are obtained every 10 m from a point centered on Vineyard Wind at, hub height.

800

790

795

Comparison of power production between TKE amounts by other meteorological variables lacked significant trends. For example, we additionally analyzed differences in power production by wind direction, following the hypothesis that northerly wind directions could transport more turbulence to Vineyard Wind because land has a higher roughness length than the ocean.
 TKE\_100 runs may harness this mechanical turbulence more for wake replenishment. Analysis of differences in power production by PBL height also failed to show significant patterns. We assumed that higher PBL heights indicated a greater

28

Deleted: Fig. 12

Deleted: Fig. E1 Deleted: Fig. 2 Deleted: Fig. 12 reservoir of turbulence from which TKE\_100 runs could replenish the wake, resulting in greater power production. Further analysis concluded by comparing power differences with the aforementioned variables' rates of change. However, we reached the same conclusions, as higher densities of scattered points <u>existed</u> around frequently occurring conditions such as southwesterly wind directions.


Deleted: occurred


820

825

Wake strength varies spatiotemporally between TKE\_0 and TKE\_100 runs. While the mean difference in wind speed at hub height between TKE\_100 and TKE\_0 runs indicates that TKE\_0 produces stronger wakes, this averaging may obscure the actual spatiotemporal variability. For example, a wind plant may have greater TKE\_100 wake wind speeds while its nearby neighbor has greater TKE\_0 wake wind speeds at the same point in time. Additionally, a specific wind plant may not consistently produce stronger wakes under one TKE setting. A wind plant may fluctuate between producing stronger wakes in

TKE\_100 runs and TKE\_0 runs throughout time. This finding suggests that other boundary-layer dynamics play a role in wake strength, and the variability of power production must be explored.

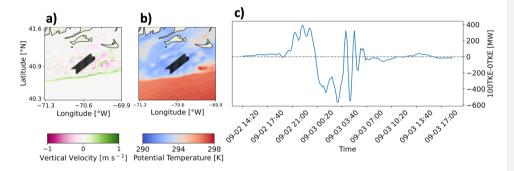



#### 835

We note that wind speed and numerical noise are not the only contributors to power differences. One case study analysis shows that TKE\_0 and TKE\_100 separately produce more power within respective 99<sup>th</sup> percentiles over a short period of time in September (Figure 16c). Investigation reveals that a cold front propagated through Vineyard Wind from the northwest to the southeast during this period. The cold front is identified by a lenticular band of upward vertical motion at the frontal head

840 followed by turbulent vertical motion (Figure 16a) in addition to advection of lower potential temperatures (Figure 16c). As

D	eleted: .	)
D	eleted: 13	>
D	eleted: .	>

_					
De	hot	tor	•	Fig	1

Deleted: Fig. 13	
Deleted: Fig. 13	

the cold front approaches, more power is produced by the TKE\_100 simulation and is within the 99<sup>th</sup> percentile. When the frontal head first interacts with Vineyard Wind, more power is produced by the TKE\_0 simulation and is within the 99<sup>th</sup>

850

860

percentile. Conversely, TKE\_100 produces more power following the frontal head. Frontal propagation can induce Kelvin– Helmholtz instabilities, the turbulence of which may aid wake recovery by vertically mixing momentum (Jiang, 2021). Increased turbulence in the TKE\_100 simulation can harness more downward vertical transport of momentum from Kelvin– Helmholtz instabilities aft of the frontal head, increase wake replenishment, and produce more power.

#### 855 4 Conclusions

This modeling study assesses the variability of wake effects across the mid-Atlantic OCS based on yearlong simulations, including uncertainty quantification and approaches for distinguishing internal and external wake effects. In addition to a simulation without wind plants (NWF), validated by comparison to floating lidar observations, three wind plant layouts are explored including the Vineyard Wind lease area alone ( $\sqrt{W}$ ), all lease areas (LA), and the lease areas plus the call areas (CA). Modifying the added TKE amount (TKE\_0 or TKE\_100) by turbines provides uncertainty quantification in power production estimates.

The OCS is characterized by more frequent unstable stratification during winter and stable stratification during summer (Bodini et al., 2019; Optis et al., 2020; Debnath et al., 2021). In stable conditions, wakes are stronger and propagate further downwind,
(Fitch et al., 2013; Vanderwende et al., 2016; Porté-Agel et al., 2020). In the worst-case scenario where downwind wake recovery diminishes during stable stratification at TKE\_100, mean wakes propagate 55 km downwind. While wakes may not reach downwind clusters on average, inter-cluster waking occurs intermittently. While TKE\_0 produces stronger wakes than

TKE 100, downwind propagation distance differs by only 2 km.

- 870 Reduced wake wind speeds, as compared to the NWF simulation, affect power production. Yearly averaged wake losses induce power deficits at Vineyard Wind from 38.2% (TKE\_0) to 34.1% (TKE\_100). This deficit comprises both internal and external waking. External wakes induce yearly averaged power losses of 14.7% (TKE\_0) or 13.4% (TKE\_100), whereas wakes from the CA induce similar losses of 14.3% over 4 months. Using an alternative method, external wakes induce losses of 8.97% and 8.43% for the LA at TKE\_0, and TKE\_100, respectively. Internal wakes at Vineyard Wind promote larger power
- 875 losses of 29.2% (TKE\_0) or 25.7% (TKE\_100). Wake-induced power losses vary seasonally with smaller diurnal variability. Larger power deficits occur during summer, where frequent stable conditions limit wake erosion. Although upwind clusters may generate strong external wakes among the LA, wind plant orientation with respect to prevailing winds can reduce adverse impacts from nearby neighbors. Ample distance for replenishment of external wakes by the CA moderates the negative effects. Internal wake losses remain larger due to shorter distances with limited wake recovery. Both external and internal wake-

Deleted: L Deleted: Area Deleted: VW\_only

Deleted: 8

(	<b>Deleted:</b> a 35.9%
~(	Deleted: is composed
(	Deleted: of
Y	Deleted: while

Deleted: u

induced losses grow in summer stably stratified conditions. These losses similarly increase in strength for TKE\_0 simulations from inhibited recovery.

Resolving precise wake losses and AEP are crucial for stakeholders and grid operators. In the absence of wakes, Vineyard Wind could supply 10.02% of New England's demand. Operating alone, Vineyard Wind's supply reduces to 7.94% (TKE\_0) or 8.24% (TKE\_100). Adding external wakes from the LA, Vineyard Wind's annual supply lessens to 7.07% (TKE\_0) or

- 895 7.47% (TKE\_100). Although wakes are stronger among the LA, the greater number of turbines can meet 58.82% (TKE\_0) and 61.22% (TKE\_100) of New England's demand, or roughly 1.72% and 1.65% of national demand. However, the LA only satisfy demand about 25% of the time on an hourly basis. Overall, spring features maximum power production with the fastest hub-height wind speeds. Wind speeds are slower in summer, reducing power production during July and August, which have featured New England's top-10 utility demand days since 1997 (NEISO, 2023b).
- 900

905

Variable TKE amounts marginally impact power generation. TKE\_0 simulations average 3.8% less production than TKE\_100 throughout the year, as reduced turbulence in TKE\_0 limits momentum transport into the waked zone. Although differences in power production are small, both simulations exhibit large variability at short temporal periods. Improving WFP accuracy by accounting for wind shear throughout the rotor-swept region (Redfern et al., 2019) and dynamic air density may increase the variability in power production further (Wu et al., 2022). Further, different sizes of turbines may be installed in some of

these regions, and the size of the turbine can influence the impacts of the turbine (Golbazi et al., 2022).

Future wind resource assessments may neglect differences between TKE\_0 and TKE\_100 because the power production offset is minor, although we identify a strong outlier during a frontal passage when differences in power production between
910 TKE\_100 and TKE\_0 are large. While power production differences are minor, effects on other atmospheric variables may be more significant (Figure AL). Variability may be influenced by other meteorological conditions. Successive analyses should consider yearlong CA simulations to identify the full range of external wake impacts. Although we infer that the effects of CA wakes on Vineyard Wind are small relative to LA wakes, yearlong estimates may show otherwise. Notably, we find that internal wakes have larger impacts on power production than those generated externally.

915

# **5** Appendices


#### Appendix A

To assess the sensitivity of simulations to the amount of parameterized TKE, we conducted a set of  $2_{4}$  day test runs from 11 to 13 July 2017. This time period was chosen for its predominance of southwesterly winds, which represent typical conditions


920 across the OCS and for the availability of Air-Sea Interaction Tower lidar observations for wind profile validation of the NWF


Deleted: Fig. A1

Deleted:



925

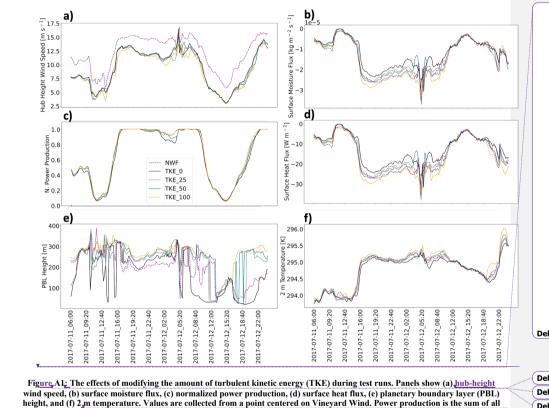

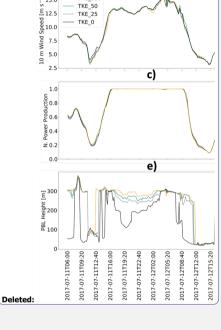

TKE\_100

15.0

a)

(	Deleted: .
(	Deleted: .
$\geq$	Deleted: 10-m
·(	Deleted: -
)	Deleted: Fig. A1
-//	Deleted: Fig. A1
// /	Deleted: b
//	Deleted: differences
_(	Deleted: arrangement
•••••••	Deleted: in

930 cells containing <u>wind</u> turbines. TKE\_100 is shown in orange, TKE\_50 in blue, TKE\_25 in gray, and TKE\_0 in black, <u>and NWF in</u> <u>purple dashes</u>.

Hub-height wind speeds vary by simulation type and added TKE amount (Figure A1a). Mean WFP wind speeds are always slower than NWF wind speeds, due to the momentum sink introduced by wind turbines, by 2.9 m s<sup>-1</sup>. Larger variations between

935 wind speeds (Figure A1a) correspond with larger spreads in power output by TKE amount (Figure A1a). The sequencing of

power production driven by TKE amount remains consistent, namely that the differences progress from TKE 0 to TKE 25 to TKE\_50 to TKE\_75 to TKE\_100. Because power production totals for TKE\_25 and TKE\_50 are typically bounded by the totals for TKE\_0 and TKE\_100, production simulations incorporate TKE\_0 and TKE\_100 only to account for the full range of uncertainty throughout a full yearlong period from 01 September 2019 to 01 September 2020.

Although subtle, several important meteorological quantities from the model grid cell at the center of Vineyard Wind vary by

Deleted: are Deleted: precise Deleted: always

Deleted: around	
Deleted: 15	
Deleted: 20	
Deleted: Fig. A1	
Deleted: 1	
Deleted: 39	
Deleted: Fig. A1	

	Deleted: 4.15
$\sim$	Deleted: Fig. A1
$\langle \rangle$	Deleted: 5
$\langle \rangle$	Deleted: 20
$\langle \rangle$	Deleted: -
$\backslash$	Deleted: 26
$\langle \rangle$	Deleted: Fig. A1
$\langle \rangle$	Deleted: height
	Deleted: very
	Deleted: 15
	Deleted: 20
	Deleted: from
	Deleted: 2-15:2
110	Deleted: 0
	Deleted: Fig. A1
	Deleted: Fig. A1


the added TKE amount. For example, wind speeds are slower on 12 July between 12:00 and 16:00 UTC (Figure A1a). The wind speed reduction during this time period causes a corresponding decrease in turbulent transport of moisture. The mean difference in moisture fluxes throughout the <u>full</u> period between TKE\_100 and TKE\_0 is 2.84 × 10<sup>-6</sup> kg m<sup>-2</sup> s<sup>-1</sup> (Figure A1b). Note that the surface moisture flux remains negative throughout the period. While maritime moisture profiles typically exhibit a decrease in concentration with height, corresponding with a positive flux, mixing from the turbines reduces the near-surface


950

concentration and reverses the gradient.

- 960 Heat flux exhibits large variability. The mean difference in heat flux throughout the <u>full</u> period between TKE\_100 and TKE\_0 is <u>3.61</u> W m<sup>-2</sup> (Figure A1d). The wind speed decrease between 12:00 and 16:00 UTC reduces surface stresses and turbulent transport of heat. The reduction in heat flux <u>during this time period</u> causes 2 m temperatures to decrease and exhibit less variability by TKE amount, with a mean difference of 0.26 K between TKE\_100 and TKE\_0 (Figure A1f).
- 965 The reduction in turbulent mixing lowers the PBL regardless of TKE amount, to shallow heights between 30 to \$0 m,at 13:00, UTC (Figure ALc). The near-surface PBL height suppresses the small variations in turbulent mixing across test runs and causes fluxes to equalize. PBL heights differ the most by added TKE amount and may result from changes in weighting between two separate height determination methods present in the MYNN physics driver (Figure ALc).



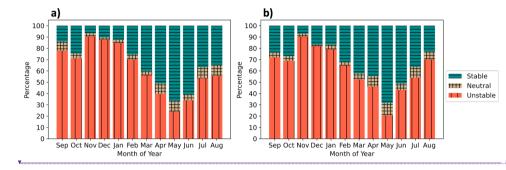



Figure, Bl. Stability classification using the Obukhov length for the period 01 September 2019 to 01 September 2020 at the (a) E05 and (b) E06 lidars from NWF, Tan cross hatch are neutral stratification, blue horizontal bars are stable stratification, and red 1000 vertical bars are unstable stratification.

Stratification at the E05 and E06 lidars (Figure B1) exhibits similar seasonal variability to Vineyard Wind (Figure 9). The winter months feature predominant unstable stratification caused by cold air advecting over a warm sea surface. Into the spring and early summer, stratification transitions to more common stable conditions as warm air advects over a cooler sea surface. Stratification is most commonly unstable in November and stable in May.

# Appendix C


1005


Surface estimates of L may not represent stability aloft (Figure CL) and may overestimate unstable conditions. When considering monthly averaged potential temperature profiles through the rotor layer, only November and December appear 1010 unstably stratified. While September and October appear predominantly unstable based on surface estimates, potential temperature gradients within the rotor-swept area suggest slightly stable conditions, supporting inferences that offshore conditions are stable during late summer. Therefore, our limited set of CA simulations focus on 01 September to 31 October 2019 and 01 July to 31 August 2020 for its presumed abundance of stable stratification.


Deleted: Fig. C1

Deleted: (Fig. B1)

Deleted: 5 Deleted:

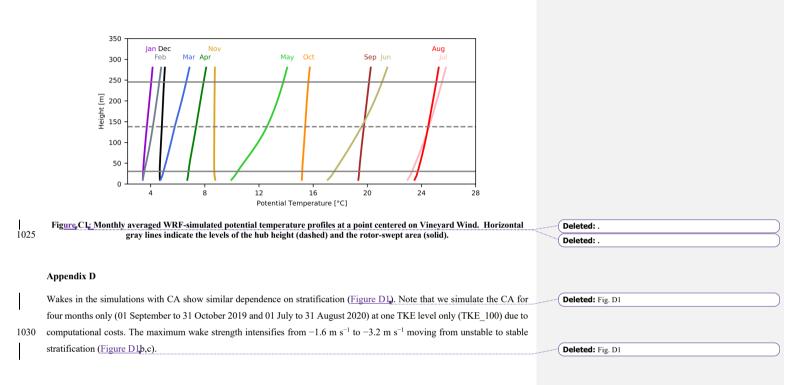

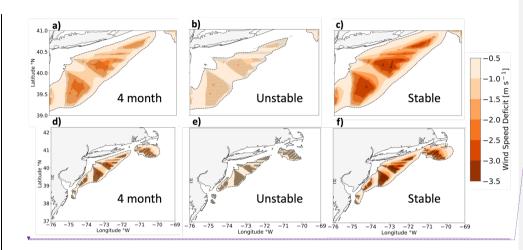

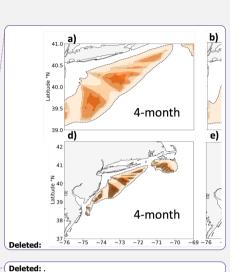

Figure, D1: Average wake wind speed deficits, among the call areas (a,d) for the combined 4, month period, 01 September to 31 October 2019 and 01 July to 31 August 2020, (b,e) during unstable stratification, and (c,f) during stable stratification. All panels show 100% added TKE. Wake wind speed deficits are shown by the colored contour and turbines are shown as black dots. The upper row is zoomed in to increase granularity.

Wake propagation distance for the call area simulation is also affected by stratification. During the 4 months considered, unstable, stable, and neutral conditions occur 48.82%, 48.74%, and 2.43% of the time, respectively. As such, there is 1045 essentially an even split between the percentage of occurrence of unstable and stable conditions. In unstable conditions, wakes from the two southernmost lease areas fail to reach neighboring downwind clusters on average, and no wakes stronger than this threshold reach the Rhode Island/Massachusetts (RIMA) block (Figure Dlc). In stable stratification, wakes from each cluster reach downwind clusters, including the RIMA block (Figure D1f). Averaged over all 4 months, wakes between LA and the CA along the New Jersey and New York Bight affect each other, but no wakes reach the RIMA block. Wakes may 1050 still interact with downwind plants at individual times and affect power production.

Deleted: Fig. D1 Deleted: Fig. D1 Deleted: lease areas (LA)


Commented [DJR1]: Include Longitude x-label

Deleted: .

Deleted: s

Deleted:

1040

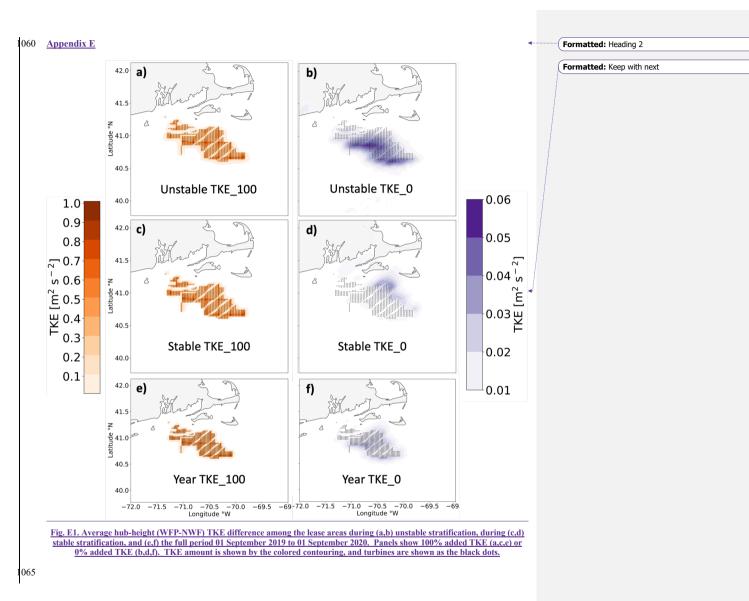

Here, we characterize the (WFP-NWF) TKE differences by maximum value and by spatial extent. The maximum average TKE additions remain similar by stratification at TKE\_100, reaching 1.00 m<sup>2</sup> s<sup>-2</sup>, 1.01 m<sup>2</sup> s<sup>-2</sup>, and 1.00 m<sup>2</sup> s<sup>-2</sup> during unstable conditions, stable conditions, and the full year, respectively (Fig. E1a,c,e). The amount of added TKE is not homogeneous across the wind plants in TKE\_100, as the greatest contributions occur in grid cells containing more wind turbines. Some

070

0 TKE is introduced in TKE 0 due to wind speed shear, although the amounts are over an order of magnitude smaller. The maximum average TKE amounts for TKE 0 are 0.05 m<sup>2</sup> s<sup>-2</sup>, 0.03 m<sup>2</sup> s<sup>-2</sup>, and 0.03 m<sup>2</sup> s<sup>-2</sup> during unstable conditions, stable conditions, and the full year, respectively. Being purely shear-induced, regions experiencing the most TKE in TKE 0 correspond more with the maximum wake wind speed deficits (Figure 11b,d,f).

075 We further characterize added TKE amounts by their spatial extent. We report the area encompassed by added TKE amounts greater than a threshold of 0.005 m<sup>2</sup> s<sup>-2</sup> because a cutoff of 0 m<sup>2</sup> s<sup>-2</sup> includes noise throughout the domain (Figure F1) and the spatial extent is not realistic. In TKE\_100, the spatial extents are 10,724 km<sup>2</sup>, 10,064 km<sup>2</sup>, and 9,608 km<sup>2</sup> in unstable stratification, stable stratification, and for the full year, respectively (Fig. E1a,c,e). In TKE 0, the spatial extents are 13,888 km<sup>2</sup>, 10,724 km<sup>2</sup>, and 11,332 km<sup>2</sup> in unstable stratification, stable stratification, stable stratification, the spatial extent stratification, and for the full year, respectively (Fig. E1a,c,e).

#### 1080

#### Appendix **F**

Results can show evidence of numerical noise, which emerges when simulations incorporate the WFP (Ancell et al., 2018; Lauridsen and Ancell, 2018). In our simulations, these brief periods of numerical noise emerge and decay, often coincident with precipitation. While we expect differences in wake wind speed immediately downwind of power plants, it is unlikely that these differences could advect to the southeast corner of the domain, roughly 600 km southeast of Vineyard Wind (Figure Fla). If this numerical noise occurred in grid cells with turbines, then this noise would introduce error in power estimations.

We explored several approaches to mitigate the numerical noise, none of which succeeded. First, we increased the floatingpoint accuracy of numerical calculations by enabling double precision in WRF. Double precision limits the growth of rounding error to smaller magnitudes (Ancell et al., 2018). This attempt aimed to confine perturbations to smaller orders of magnitude that take longer amounts of time to become substantial. To prevent "runaway" error growth after long periods of time, we submit simulation restarts each month.

In observing a spatial correlation of numerical noise with convective precipitation during test runs, we reran test simulations 1095 with a more complex microphysics scheme. The Thompson microphysics scheme, used throughout, is double-moment with respect to cloud ice only. We substituted the Morrison microphysics scheme, which is fully double-moment with respect to cloud droplets and rain, cloud ice, snow, and graupel (Morrison et al., 2009). The use of Morrison microphysics did not improve numerical noise, so its computational cost could not be justified.

38

#### Deleted: E

Deleted: Fig. E1

Next, we introduced a filter for shortwave numerical noise by prohibiting upgradient diffusion. Doing so requires setting the parameter diff 6th opt to 2 in the namelist, as certain combinations of advection and diffusion orders are conducive to mitigating noise around heavy precipitation (Kusaka et al., 2005). While Kusaka et al. (2005) found the combination of fifth-


1105 order advection and sixth-order diffusion to perform best, we had previously attempted this combination because default advection in WRF is fifth-order. Thus, we attempted the next best recommendation-combining sixth-order advection and diffusion. Again, this combination did not improve results.

We made a final attempt at noise reduction by running an ensemble of three members using a stochastic kinetic energy backscatter scheme, Ensemble members contain seeds with variable time steps that randomly inject kinetic energy into grid cells (Berner, 2013), These stochastic supplements replenish the kinetic energy sink from unresolvable subgrid-scale processes. We followed recommendations to perturb the stream function and potential temperature backscatter rates by  $1 \times 10^{-5}$  and  $1 \times$ 10<sup>-6</sup>, respectively. Again, while subtle differences emerged between the simulations, little improvement was found.

Deleted: the combination of


Deleted: e (SKEBS) Deleted:

Deleted: (Berner, 2013)(Berner, 2013)

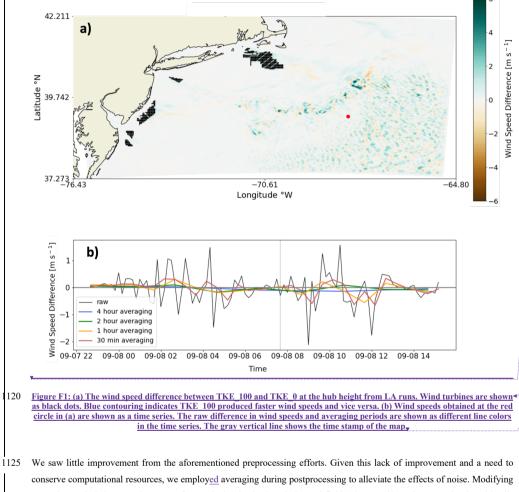

conserve computational resources, we employed averaging during postprocessing to alleviate the effects of noise. Modifying averaging periods impacts the range of numerical noise in the wind speed field (Figure F1b). Noise occurring in grid cells / containing turbines could undermine power estimation accuracy and we observed noise occurring in the southeastern portion / of the domain. Subtraction of wind speeds between simulations with variable TKE amounts should only show differences

130 within the wake, and such differences are a result of noise. Averaging periods provides greater relief. While 2, and 4 hour

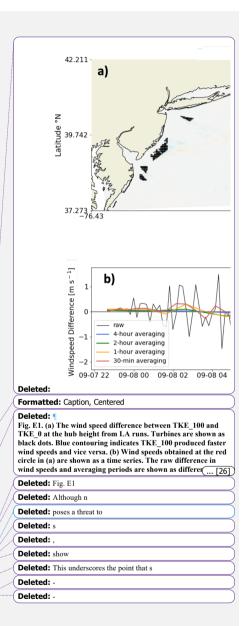

averaging periods deliver the best results, these temporal scales can hide important diurnal variability. Conversely, a 304 minute averaging period can improve results, but local extrema occasionally reach magnitudes similar to the magnitudes of the raw noise. Thus, hourly averaging can mitigate noise without masking important variability. As a final note, other researchers have

160 benefitted by employing grid nudging within this domain above the PBL (Golbazi, M., personal communication, September 2022).

#### 6 Code and Data Availability

The data and files that support this work are publicly available. The ERA5 boundary conditions can be downloaded from the
 ECMWF Climate Data Store at https://cds.climate.copernicus.eu/cdsapp#!/dataset/reanalysis-era5-pressure-levels?tab=form.
 Shapefiles including the bounding extents of the lease and call areas are at https://www.boem.gov/renewable-energy/mapping-and-data/renewable-energy-gis-data. Individual turbine coordinates and their power and thrust curves are provided at https://zenodo.org/record/7374283#.Y4YZxC-B1KM. WRF namelists for NWF and WFP simulations <u>can be obtained at https://zenodo.org/record/7374239#.Y4YaOy-B1KM</u>. The simulation output data <u>available in HDF5 format at https://data.openei.org/submissions/4500</u>

#### 7 Author Contributions

Conceptualization: JKL and MO. Methodology: DR, JKL, and MO. Software: DR, AR, MR. Validation: DR. Formal analysis: DR. Investigation: DR and JKL. Resources: MO, NB. Writing – original draft: DR and JKL. Writing – review and editing: all co-authors. Visualization: DR. Supervision: JKL, MO, NB. Project administration: MO and NB. Funding acquisition: MO and NB.

#### 8 Competing Interests

Author Mike Optis co-authored the submitted manuscript while an employee of the National Renewable Energy Laboratory (NREL). He has since founded Veer Renewables, which recently released a wind modeling product, WakeMap, which is based on a similar numerical weather prediction modeling framework as the one described in this manuscript. Data from WakeMap is sold to wind energy stakeholders for profit. Public content on WakeMap includes a website (https://veer.eco/wakemap/), a white paper (https://veer.eco/wp-content/uploads/2023/02/WakeMap\_White\_Paper\_Veer\_Renewables.pdf) and several LinkedIn posts promoting WakeMap.

#### 41

Deleted: found

 Deleted: may

 Deleted: may be acquired

 Deleted:

 Deleted:

 Deleted:

Deleted: LK.L

#### 9 Acknowledgements and Statements

This work was supported by an agreement with NREL under APUP UGA-0-41026-125. This work was authored [in part] by the National Renewable Energy Laboratory, operated by Alliance for Sustainable Energy, LLC, for the U.S. Department of Energy (DOE) under Contract No. DE-AC36-08GO28308. Funding was provided by the U.S. Department of Energy Office

- of Energy Efficiency and Renewable Energy Wind Energy Technologies Office and by the National Offshore Wind Research and Development Consortium under agreement no. CRD-19-16351. The views expressed in the article do not necessarily represent the views of the DOE or the U.S. Government. The U.S. Government and the publisher, by accepting the article for publication, acknowledge that the U.S. Government retains a nonexclusive, paid-up, irrevocable, worldwide license to publish
- 1200 or reproduce the published form of this work, or allow others to do so, for U.S. Government purposes. Neither NYSERDA nor OceanTech Services/DNV have reviewed the information contained herein and the opinions in this report do not necessarily reflect those of any of these parties. A portion of computation used the Blanca condo computing resource at the University of Colorado Boulder. Blanca is jointly funded by computing users and the University of Colorado Boulder. A portion of computation used the Summit supercomputer, which is supported by the National Science Foundation (awards ACI-1532235
- and ACI-1532236), the University of Colorado Boulder, and Colorado State University. The Summit supercomputer is a joint effort of the University of Colorado Boulder and Colorado State University. A portion of this research was performed using computational resources sponsored by the DOE's Office of Energy Efficiency and Renewable Energy and located at NREL.

Deleted: U.S. Department of Energy's Deleted: the National Renewable Energy Laboratory

#### 10 References

1195

1210 218th Legislature: NJ Renewable Portfolio Standards, https://www.njleg.state.nj.us/2018/Bills/A4000/3723\_I1.PDF, 2018.

Aitken, M. L., Kosović, B., Mirocha, J. D., and Lundquist, J. K.: Large eddy simulation of wind turbine wake dynamics in the stable boundary layer using the Weather Research and Forecasting Model, Journal of Renewable and Sustainable Energy, 6, 033137, https://doi.org/10.1063/1.4885111, 2014.

1215 Ancell, B. C., Bogusz, A., Lauridsen, M. J., and Nauert, C. J.: Seeding Chaos: The Dire Consequences of Numerical Noise in NWP Perturbation Experiments, Bull. Amer. Meteor. Soc., 99, 615–628, https://doi.org/10.1175/BAMS-D-17-0129.1, 2018.

Antonini, E. G. A., Romero, D. A., and Amon, C. H.: Optimal design of wind farms in complex terrains using computational fluid dynamics and adjoint methods, Applied Energy, 261, 114426, 1220 https://doi.org/10.1016/j.apenergy.2019.114426, 2020.

Archer, C. L., Colle, B. A., Veron, D. L., Veron, F., and Sienkiewicz, M. J.: On the predominance of unstable atmospheric conditions in the marine boundary layer offshore of the U.S. northeastern coast,



1225 Journal of Geophysical Research: Atmospheres, 121, 8869–8885, https://doi.org/10.1002/2016JD024896, 2016.

Archer, C. L., Wu, S., Ma, Y., and Jiménez, P. A.: Two Corrections for Turbulent Kinetic Energy Generated by Wind Farms in the WRF Model, Monthly Weather Review, 148, 4823–4835, https://doi.org/10.1175/MWR-D-20-0097.1, 2020.

1230 Arthur, R. S., Mirocha, J. D., Marjanovic, N., Hirth, B. D., Schroeder, J. L., Wharton, S., and Chow, F. K.: Multi-Scale Simulation of Wind Farm Performance during a Frontal Passage, Atmosphere, 11, 245, https://doi.org/10.3390/atmos11030245, 2020.

Beiter, P., Musial, W., Duffy, P., Cooperman, A., Shields, M., Heimiller, D., and Optis, M.: The Cost of Floating Offshore Wind Energy in California Between 2019 and 2032, Renewable Energy, 113, https://doi.org/10.2172/1710181, 2020.

Berner, J.: WRF Implementation Details and Version history of a Stochastic Kinetic-Energy Backscatter Scheme (SKEBS), National Center for Atmospheric Research Tech. Note, https://www2.mmm.ucar.edu/wrf/users/docs/skebs in wrf.pdf, 2013.

Bodini, N., Lundquist, J. K., and Kirincich, A.: U.S. East Coast Lidar Measurements Show Offshore
 Wind Turbines Will Encounter Very Low Atmospheric Turbulence, Geophysical Research Letters, 46, 5582–5591, https://doi.org/10.1029/2019GL082636, 2019.

BOEM: Renewable Energy GIS Data | Bureau of Ocean Energy Management, https://www.boem.gov/renewable-energy/mapping-and-data/renewable-energy-gis-data, n.d.

Burton, T., Jenkins, N., Sharpe, D., and Bossanyi, E.: Wind Energy Handbook, John Wiley & Sons, 784 pp., 2011.

Debnath, M., Doubrawa, P., Optis, M., Hawbecker, P., and Bodini, N.: Extreme wind shear events in US offshore wind energy areas and the role of induced stratification, Wind Energy Science, 6, 1043–1059, https://doi.org/10.5194/wes-6-1043-2021, 2021.

DNV: NYSERDA Floating LiDAR Buoy Data,

1250 https://oswbuoysny.resourcepanorama.dnvgl.com/download/f67d14ad-07ab-4652-16d2-08d71f257da1, 2022.

Donlon, C. J., Martin, M., Stark, J., Roberts-Jones, J., Fiedler, E., and Wimmer, W.: The Operational Sea Surface Temperature and Sea Ice Analysis (OSTIA) system, Remote Sensing of Environment, 116, 140–158, https://doi.org/10.1016/j.rse.2010.10.017, 2012.

1255 EIA: Frequently Asked Questions (FAQs) - U.S. Energy Information Administration (EIA), https://www.eia.gov/tools/faqs/faq.php, 2023.

Fischereit, J., Brown, R., Larsén, X. G., Badger, J., and Hawkes, G.: Review of Mesoscale Wind-Farm Parametrizations and Their Applications, Boundary-Layer Meteorol, 182, 175–224, https://doi.org/10.1007/s10546-021-00652-y, 2022.

1260 Fitch, A. C., Olson, J. B., Lundquist, J. K., Dudhia, J., Gupta, A. K., Michalakes, J., and Barstad, I.: Local and Mesoscale Impacts of Wind Farms as Parameterized in a Mesoscale NWP Model, Monthly Weather Review, 140, 3017–3038, https://doi.org/10.1175/MWR-D-11-00352.1, 2012.

Fitch, A. C., Lundquist, J. K., and Olson, J. B.: Mesoscale Influences of Wind Farms throughout a Diurnal Cycle, Mon. Wea. Rev., 141, 2173–2198, https://doi.org/10.1175/MWR-D-12-00185.1, 2013.

1265 Golbazi, M., Archer, C. L., and Alessandrini, S.: Surface impacts of large offshore wind farms, Environ. Res. Lett., 17, 064021, https://doi.org/10.1088/1748-9326/ac6e49, 2022.

Gupta, T. and Baidya Roy, S.: Recovery Processes in a Large Offshore Wind Farm, Wind Energy Science Discussions, 1–23, https://doi.org/10.5194/wes-2021-7, 2021.

Hahmann, A. N., Sīle, T., Witha, B., Davis, N. N., Dörenkämper, M., Ezber, Y., García-Bustamante, E.,
González-Rouco, J. F., Navarro, J., Olsen, B. T., and Söderberg, S.: The making of the New European Wind Atlas – Part 1: Model sensitivity, Geoscientific Model Development, 13, 5053–5078, https://doi.org/10.5194/gmd-13-5053-2020, 2020.

Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., Schepers, D., Simmons, A., Soci, C., Abdalla, S., Abellan, X., Balsamo, G., Bechtold, P.,

- 1275 Biavati, G., Bidlot, J., Bonavita, M., De Chiara, G., Dahlgren, P., Dee, D., Diamantakis, M., Dragani, R., Flemming, J., Forbes, R., Fuentes, M., Geer, A., Haimberger, L., Healy, S., Hogan, R. J., Hólm, E., Janisková, M., Keeley, S., Laloyaux, P., Lopez, P., Lupu, C., Radnoti, G., de Rosnay, P., Rozum, I., Vamborg, F., Villaume, S., and Thépaut, J.-N.: The ERA5 global reanalysis, Quarterly Journal of the Royal Meteorological Society, 146, 1999–2049, https://doi.org/10.1002/qj.3803, 2020.
- 1280 Iacono, M. J., Delamere, J. S., Mlawer, E. J., Shephard, M. W., Clough, S. A., and Collins, W. D.: Radiative forcing by long-lived greenhouse gases: Calculations with the AER radiative transfer models, Journal of Geophysical Research: Atmospheres, 113, https://doi.org/10.1029/2008JD009944, 2008.

Jiang, Q.: Impact of Elevated Kevin-Helmholtz Billows on the Atmospheric Boundary Layer, Journal of the Atmospheric Sciences, 1, https://doi.org/10.1175/JAS-D-21-0062.1, 2021.

1285 Kain, J. S.: The Kain–Fritsch Convective Parameterization: An Update, Journal of Applied Meteorology and Climatology, 43, 170–181, https://doi.org/10.1175/1520-0450(2004)043<0170:TKCPAU>2.0.CO;2, 2004.

Kusaka, H., Crook, A., Knievel, J. C., and Dudhia, J.: Sensitivity of the WRF Model to Advection and Diffusion Schemes for Simulation of Heavy Rainfall along the Baiu Front, SOLA, 1, 177–180, https://doi.org/10.2151/sola.2005-046, 2005.

Lauridsen, M. J. and Ancell, B. C.: Nonlocal Inadvertent Weather Modification Associated with Wind Farms in the Central United States, Advances in Meteorology, 2018, e2469683, https://doi.org/10.1155/2018/2469683, 2018.

Lee, J. C. Y. and Fields, M. J.: An overview of wind-energy-production prediction bias, losses, and uncertainties, Wind Energy Science, 6, 311–365, https://doi.org/10.5194/wes-6-311-2021, 2021.

Livingston, H. G. and Lundquist, J. K.: How many offshore wind turbines does New England need?, Meteorological Applications, 27, e1969, https://doi.org/10.1002/met.1969, 2020.

Lundquist, J. K., DuVivier, K. K., Kaffine, D., and Tomaszewski, J. M.: Costs and consequences of wind turbine wake effects arising from uncoordinated wind energy development, Nature Energy, 4, 26–34, https://doi.org/10.1038/s41560-018-0281-2, 2019.

Mirocha, J. D., Kosovic, B., Aitken, M. L., and Lundquist, J. K.: Implementation of a generalized actuator disk wind turbine model into the weather research and forecasting model for large-eddy simulation applications, Journal of Renewable and Sustainable Energy, 6, 013104, https://doi.org/10.1063/1.4861061, 2014.

1305 Monin, A. S. and Obukhov, A. M.: Basic laws of turbulent mixing in the surface layer of the atmosphere, Tr. Akad. Nauk SSSR Geophiz. Inst., 24, 30, 1954.

Morrison, H., Thompson, G., and Tatarskii, V.: Impact of Cloud Microphysics on the Development of Trailing Stratiform Precipitation in a Simulated Squall Line: Comparison of One- and Two-Moment Schemes, Monthly Weather Review, 137, 991–1007, https://doi.org/10.1175/2008MWR2556.1, 2009.

1310 Muñoz-Esparza, D., Cañadillas, B., Neumann, T., and van Beeck, J.: Turbulent fluxes, stability and shear in the offshore environment: Mesoscale modelling and field observations at FINO1, Journal of Renewable and Sustainable Energy, 4, 063136, https://doi.org/10.1063/1.4769201, 2012.

Musial, W., Heimiller, D., Beiter, P., Scott, G., and Draxl, C.: 2016 Offshore Wind Energy Resource Assessment for the United States, https://doi.org/10.2172/1324533, 2016.

1315 Nakanishi, M. and Niino, H.: An Improved Mellor–Yamada Level-3 Model: Its Numerical Stability and Application to a Regional Prediction of Advection Fog, Boundary-Layer Meteorol, 119, 397–407, https://doi.org/10.1007/s10546-005-9030-8, 2006.

NEISO: ISO New England - Energy, Load, and Demand Reports, https://www.isone.com/isoexpress/web/reports/load-and-demand/-/tree/dmnd-rt-hourly-sys, 2023a.

1320 NEISO: Reliable Electricity. Competitive Prices. Clean-Energy Transition., https://www.iso-ne.com, 2023b.

Niu, G.-Y., Yang, Z.-L., Mitchell, K. E., Chen, F., Ek, M. B., Barlage, M., Kumar, A., Manning, K., Nivogi, D., Rosero, E., Tewari, M., and Xia, Y.: The community Noah land surface model with multiparameterization options (Noah-MP): 1. Model description and evaluation with local-scale

measurements, Journal of Geophysical Research: Atmospheres, 116, 1325 https://doi.org/10.1029/2010JD015139, 2011.

Nygaard, N. G.: Wakes in very large wind farms and the effect of neighbouring wind farms, J. Phys.: Conf. Ser., 524, 012162, https://doi.org/10.1088/1742-6596/524/1/012162, 2014.

Optis, M., Bodini, N., Debnath, M., and Doubrawa, P.: Best Practices for the Validation of U.S. 1330 Offshore Wind Resource Models, National Renewable Energy Lab. (NREL), Golden, CO (United States), https://doi.org/10.2172/1755697, 2020.

Platis, A., Siedersleben, S. K., Bange, J., Lampert, A., Bärfuss, K., Hankers, R., Cañadillas, B., Foreman, R., Schulz-Stellenfleth, J., Djath, B., Neumann, T., and Emeis, S.: First in situ evidence of wakes in the far field behind offshore wind farms, Sci Rep, 8, 2163, https://doi.org/10.1038/s41598-1335 018-20389-y, 2018.

Porté-Agel, F., Bastankhah, M., and Shamsoddin, S.: Wind-Turbine and Wind-Farm Flows: A Review, Boundary-Layer Meteorol, 174, 1-59, https://doi.org/10.1007/s10546-019-00473-0, 2020.

Pronk, V., Bodini, N., Optis, M., Lundquist, J. K., Moriarty, P., Draxl, C., Purkavastha, A., and Young, E.: Can reanalysis products outperform mesoscale numerical weather prediction models in modeling the wind resource in simple terrain?, Wind Energ. Sci., 7, 487-504, https://doi.org/10.5194/wes-7-487-1340 2022, 2022.

Pryor, S. C., Barthelmie, R. J., and Shepherd, T. J.: Wind power production from very large offshore wind farms, Joule, 5, 2663-2686, https://doi.org/10.1016/j.joule.2021.09.002, 2021.

Redfern, S., Olson, J. B., Lundquist, J. K., and Clack, C. T. M.: Incorporation of the Rotor-Equivalent 1345 Wind Speed into the Weather Research and Forecasting Model's Wind Farm Parameterization, Mon. Wea. Rev., 147, 1029-1046, https://doi.org/10.1175/MWR-D-18-0194.1, 2019.

Rybchuk, A., Juliano, T. W., Lundquist, J. K., Rosencrans, D., Bodini, N., and Optis, M.: The sensitivity of the fitch wind farm parameterization to a three-dimensional planetary boundary layer scheme, Wind Energy Science, 7, 2085–2098, https://doi.org/10.5194/wes-7-2085-2022, 2022.

1350 Schneemann, J., Rott, A., Dörenkämper, M., Steinfeld, G., and Kühn, M.: Cluster wakes impact on a far-distant offshore wind farm's power, Wind Energy Science, 5, 29-49, https://doi.org/10.5194/wes-5-29-2020, 2020.

Shapiro, C. R., Gayme, D. F., and Meneveau, C.: Filtered actuator disks: Theory and application to wind turbine models in large eddy simulation, Wind Energy, 22, 1414–1420,
https://doi.org/10.1002/we.2376, 2019.

Siedersleben, S. K., Platis, A., Lundquist, J. K., Djath, B., Lampert, A., Bärfuss, K., Cañadillas, B., Schulz-Stellenfleth, J., Bange, J., Neumann, T., and Emeis, S.: Turbulent kinetic energy over large offshore wind farms observed and simulated by the mesoscale model WRF (3.8.1), Geoscientific Model Development, 13, 249–268, https://doi.org/10.5194/gmd-13-249-2020, 2020.

1360 Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Liu, Z., Berner, J., Wang, W., Powers, J. G., Duda, M. G., and Barker, D. M.: A description of the advanced research WRF model version 4, 145, https://tinyurl.com/2mcpvxfs, 2019.

Stevens, R. J. A. M., Gayme, D. F., and Meneveau, C.: Effects of turbine spacing on the power output of extended wind-farms, Wind Energy, 19, 359–370, https://doi.org/10.1002/we.1835, 2016.

1365 Stoelinga, M., Sanchez-Gomez, M., Poulos, G. S., and Crescenti, J.: Estimating Long-Range External Wake Losses in Energy Yield and Operational Performance Assessments Using the WRF Wind Farm Parameterization, 20, https://arcvera.com/wp-content/uploads/2022/08/ArcVera-White-Paper-Estimating-Long-Range-External-Wake-Losses-WRF-WFP-1.0.pdf, 2022.

Thompson, G., Field, P. R., Rasmussen, R. M., and Hall, W. D.: Explicit Forecasts of Winter

1370 Precipitation Using an Improved Bulk Microphysics Scheme. Part II: Implementation of a New Snow Parameterization, Monthly Weather Review, 136, 5095–5115, https://doi.org/10.1175/2008MWR2387.1, 2008.

Tomaszewski, J. M. and Lundquist, J. K.: Simulated wind farm wake sensitivity to configuration choices in the Weather Research and Forecasting model version 3.8.1, Geoscientific Model Development, 13, 2645–2662, https://doi.org/10.5194/gmd-13-2645-2020, 2020.

Vanderwende, B. J., Kosović, B., Lundquist, J. K., and Mirocha, J. D.: Simulating effects of a windturbine array using LES and RANS, Journal of Advances in Modeling Earth Systems, 8, 1376–1390, https://doi.org/10.1002/2016MS000652, 2016.

Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E.,

- Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., Carey, C. J., Polat, İ., Feng, Y., Moore, E. W., VanderPlas, J., Laxalde, D., Perktold, J., Cimrman, R., Henriksen, I., Quintero, E. A., Harris, C. R., Archibald, A. M., Ribeiro, A. H., Pedregosa, F., and van Mulbregt, P.: SciPy 1.0: fundamental algorithms for scientific computing in Python, Nat Methods, 17, 261–272,
  https://doi.org/10.1028/c41502.010.00666.2.2020
- 1385 https://doi.org/10.1038/s41592-019-0686-2, 2020.



Viselli, A., Faessler, N., and Filippelli, M.: Analysis of Wind Speed Shear and Turbulence LiDAR Measurements to Support Offshore Wind in the Northeast United States, ASME 2018 1st International Offshore Wind Technical Conference, https://doi.org/10.1115/iowtc2018-1003, 2018.

Volker, P. J. H., Badger, J., Hahmann, A. N., and Ott, S.: The Explicit Wake Parametrisation V1.0: a
wind farm parametrisation in the mesoscale model WRF, Geosci. Model Dev., 8, 3715–3731, https://doi.org/10.5194/gmd-8-3715-2015, 2015.

W.F. Baird & Associates: Vessel Navigation Through the Proposed Rhode Island/Massachusetts and Massachusetts Wind Energy Areas,

https://static1.squarespace.com/static/5a2eae32be42d64ed467f9d1/t/5dd3d3e476d4226b2a83db25/1574 1395 163438896/Proposed+1x1+layout+from+RI-MA+Leaseholders+1+Nov+19+%281%29.pdf, 31 October 2019.

White House, T.: FACT SHEET: Biden Administration Jumpstarts Offshore Wind Energy Projects to Create Jobs, https://www.whitehouse.gov/briefing-room/statements-releases/2021/03/29/fact-sheet-biden-administration-jumpstarts-offshore-wind-energy-projects-to-create-jobs/, 29 March 2021.

1400 Wu, C., Luo, K., Wang, Q., and Fan, J.: A refined wind farm parameterization for the weather research and forecasting model, Applied Energy, 306, 118082, https://doi.org/10.1016/j.apenergy.2021.118082, 2022.

 Xia, G., Draxl, C., Optis, M., and Redfern, S.: Detecting and characterizing simulated sea breezes over the US northeastern coast with implications for offshore wind energy, Wind Energy Science, 7, 815– 829, https://doi.org/10.5194/wes-7-815-2022, 2022.

#### Page 15: [1] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [1] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

## Page 15: [2] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [2] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [3] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [3] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

I

T

#### Page 15: [4] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [4] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [5] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

# Page 15: [5] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

# Page 15: [5] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

# Page 15: [6] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

## Page 15: [6] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [6] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [7] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

# Page 15: [7] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

# Page 15: [7] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

#### Page 15: [8] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

I

T

# Page 15: [8] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

## Page 15: [9] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [9] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [9] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [10] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [10] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [11] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [11] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [11] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [12] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [12] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [13] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [13] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

I

T

# Page 15: [13] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

## Page 15: [13] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

## Page 15: [14] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [14] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

## Page 15: [15] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

# Page 15: [15] Formatted David Joseph Rosencrans 9/12/23 10:11:00 AM

Font: (Default) Times New Roman, 10 pt

#### Page 15: [16] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

#### Page 15: [16] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

# Page 15: [16] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: (Default) Times New Roman, 10 pt, Font color: Auto

### Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

I

I

#### Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

### Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

### Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [17] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [18] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [18] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

### Page 15: [18] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [19] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [19] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [19] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

I

I

#### Page 15: [20] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [20] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

### Page 15: [20] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

### Page 15: [21] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [21] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [21] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [22] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [22] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

## Page 15: [22] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [23] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [23] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

### Page 15: [23] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

#### Page 15: [24] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [24] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [24] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

I

L

1

T

1

x

# Page 15: [25] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [25] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

# Page 15: [25] Formatted David Joseph Rosencrans 7/22/23 2:35:00 PM

Font: 10 pt, Font color: Auto

Page 40: [26] Deleted David Joseph Rosencrans 9/7/23 8:52:00 AM