

# Influence of rotor blade flexibility on the near wake behavior of the NREL 5MW wind turbine

Leo Höning<sup>1,3</sup>, Laura J. Lukassen<sup>1,2</sup>, Bernhard Stoevesandt<sup>3</sup>, and Iván Herráez<sup>4</sup>

<sup>1</sup>Institute of Physics, University of Oldenburg, Carl von Ossietzky University Oldenburg, Küpkersweg 70, 26129 Oldenburg, Germany

<sup>2</sup>ForWind, Institute of Physics, Carl von Ossietzky University Oldenburg, Küpkersweg 70, 26129 Oldenburg, Germany

<sup>3</sup>Fraunhofer Institute for Wind Energy Systems – Fraunhofer IWES, Küpkersweg 70, 26129 Oldenburg, Germany

<sup>4</sup>University of Applied Sciences Emden/Leer, Constantiapl. 4, 26723 Emden, Germany

**Correspondence:** Leo Höning (leo.hoening@iwes.fraunhofer.de)

**Abstract.** High fidelity CFD simulations of the NREL 5MW wind turbine rotor are performed, comparing the aerodynamic behavior of flexible and rigid blades with respect to local blade quantities as well as the wake properties. The main focus has been set on rotational periodic quantities of blade loading and fluid velocity magnitudes in relation with the blade tip vortex trajectories describing the development of those quantities in the near wake. The results show that the turbine loading in a quasi-steady flow field is mainly influenced by blade deflections due to gravitation. Deforming blades change the aerodynamic behavior, which in turn influences the surrounding flow field, leading to non-uniform wake characteristics with respect to speed and shape.

## 1 Introduction

Since renewable energies gained increasing attention in the context of global warming, the wind energy industry has grown considerably over the last decades, even though the growth should be even larger to reach the climate goals (WindEurope, 2022). In this context, the ever increasing demand of energy, the urgency of replacing fossil resources and the economic demand for low prices in a highly competitive energy market lead to growing rotor sizes (Serrano-González and Lacal-Aránategui, 2016; GWEC, 2021). Larger rotors allow for higher energy output and a reduction of the levelized cost of energy. On the other hand, increasing rotor diameters along with mass restrictions force the blade structures to become slender, which is accompanied by more flexibility and, thus, larger deformations of the blade due to wind loads. While blade flexibility has little effect on the overall rotor performance for smaller wind turbine rotors, aeroelasticity has significant effects on multi-megawatt turbines with long and slender blades (Rahimi et al., 2016b). Instabilities like vortex-induced vibrations or flutter occur with an increased probability and therefore gained increasing research interest over the last years (Heinz et al., 2016a, b; Horcas et al., 2022; Manolas et al., 2022). These highly unsteady phenomena need to be investigated further to ensure a prevention of unwanted blade vibrations. In this context, this work is intended to contribute to the basic understanding of deforming wind turbine blades.

Most wind turbine design tools are based on computationally efficient engineering tools using low-fidelity Blade Element Momentum (BEM) theory models. Low-fidelity models are often based on smaller, more rigid turbines and need to be corrected towards dynamic flow phenomena like dynamic stall for a rapidly changing angle of attack, 3D effects near the blade root and tip or skewed wakes for more flexible cases (Rahimi et al., 2018). In order to gain more reliable results, high-fidelity fluid-structure interaction (FSI) tools that couple computational fluid dynamics (CFD) with computational structural dynamics (CSD) models have been recently receiving increasing attention.

Several studies have investigated the difference between rigid and flexible rotors with respect to aerodynamic loads. Yu and Kwon (2014) showed that the aeroelastic deformation of the NREL 5MW wind turbine, which has a rotor diameter of 126m, results in a reduction of aerodynamic loads mainly due to torsional deformation. The non-linear Euler Bernoulli beam, that was used in that study, was coupled to their in-house incompressible fluid solver once per revolution. Similar findings were made by Dose et al. (2018), where the same rotor was simulated with OpenFOAM using a finite element method (FEM) based on a non-linear Geometrically Exact Beam Theory (GEBT) implementation including a loose coupling once per time step between the structure and the flow field that is calculated solving the Unsteady Reynolds-Average Navier-Stokes (URANS) equations, neglecting the influence of gravity. This study showed that the averaged aerodynamic power output is reduced due to two reasons. On the one hand, the blades are bending towards a smaller rotor diameter, which results in less area to extract energy from, and on the other hand, due to the twisting of the blades towards lower angles of attack (AoA), which leads to a lower lift-to-drag ratio. This reduction of AoA due to the torsional deformation was also shown by Liu et al. (2019) for a floating setup under surge motion making use of OpenFOAM coupled to the multi body dynamic solver MBDyn. Guma et al. (2021) simulated a pre-bent 80m diameter turbine in turbulent inflow using the CFD code FLOWer, showing an increase in rotor torque for the flexible blades due to the bending resulting in an increasing AoA and a deformation towards a larger rotor disk area. The opposing behavior in these studies can be explained by the different structural models of the underlying turbines. However, these findings have not been related to effects in the respective wind turbine rotor wakes yet.

Besides the aerodynamic loading, wind turbine blades are influenced by gravity and centrifugal forces, that bend the blades independently of the aerodynamic forces. The influence of these forces is expected to be growing with increasing rotor sizes and the naturally accompanying flexibility of the structures. While the centrifugal force is expected to be constant in time for a constant rotational speed of the rotor and tends to straighten the blade in radial direction, the gravity force has a 1P blade passing frequency, with its direction depending on the azimuthal position. This leads to a dynamic blade deformation behavior as a result of the gravitational loading in contrast to the almost constant influence of the centrifugal force. Despite its influence on deformation and loading, Sayed et al. (2019) concluded that the gravitational impact on the total power output of a generic 10 MW wind turbine is negligible. The influence of gravitation on the turbine wake has not been investigated in detail yet but it is important to understand the influence of blade flexibility in the context of wind farm layouts, where the wake of a turbine in the first row affects the inflow of turbines in the second row.

Comparisons between wakes of rigidly and flexibly modelled rotors have been studied for differently sized rotor blades. Under complex flow situations, i.e. sheared and yawed inflow, Grinderslev et al. (2021) showed that little differences are visible in the wake of a 2.3MW rotor using URANS in the incompressible Navier-Stokes solver EllipSys3D. Li et al. (2015)

simulated the NREL 5MW rotor coupled to a multi-body dynamics solver and investigated local aerodynamic behavior under turbulent inflow. Under these complex conditions they concluded that on the scale of the turbine diameter, turbulence has a larger influence on the wake of a rotor than the flexibility of blades. However, smaller scales in wake regions closer to the rotor  
60 have not been investigated yet. Those are important, since the way the fluid is interacting with a wind turbine determines its characteristics further downstream.

On the other hand, small scale numerical investigations of the rotor near wake expansions have been performed making use of Navier-Stokes actuator disc (AD), actuator line (AL) approaches and 3D vortex panel methods (Micallef et al., 2020) or body fitted rigid Reynolds Averaged Navier-Stokes simulations (RANS) (van Kuik et al., 2014; Herráez et al., 2017). Hodgkin  
65 et al. (2022) investigated the stability of a wind turbine tip vortex making use of large eddy simulations (LES) and an AL approach. Whilst AD/AL methods are limited to engineering corrections and small turbine RANS simulations assume the blades to be rigid, a coupled FSI investigation regarding the near wake expansion has not been performed according to the authors' knowledge.

Based on these findings, the objective of this study is to investigate the effects of blade flexibility and gravitational loading  
70 on the blade aerodynamic forces of an averaged sized MW turbine as well as their impact on the near wake behavior, i.e. wake velocity deficits and blade tip vortex trajectories. The rotor is investigated under rated operating conditions in uniform inflow perpendicular to the rotor plane. Although this setup is supposed to reflect optimal rotor blade behavior, we will show that in this baseline case already differences can be seen in the flow of rigid and flexible blades resulting in non-uniform wake behavior for flexible blades. It is assumed that these results are superimposed by even more influences under off-rated conditions. The  
75 aerodynamic findings in the rotor plane are linked towards near wake effects, highlighting the differences of the tip vortex trajectories and wake velocity deficits of rigid and flexible blades. In this paper we investigate the characteristic aerodynamic parameters that are necessary for analyzing the near wake development. This can be of interest for wind farm studies.

In Sect. 2 the numerical setup including the solvers and post-processing methodologies is described. The results of the simulated cases focusing on aerodynamic characterization of rigid and flexible blades and turbine wake behavior are discussed  
80 in Sect. 3. Finally, a conclusion is given in Sect. 4, recapitulating the results and giving an outlook for future investigations.

## 2 Numerical methods and setup

In order to study the impact of structural flexibility on the aerodynamic behavior, simulations of the NREL 5MW generic reference wind turbine (Jonkman et al., 2009) are performed. With a rotor diameter of 126m, it can be considered an averaged sized wind turbine in comparison to currently installed wind turbines (U.S. Department of Energy, 2021). Additionally, several  
85 studies of coupled CFD-CSD simulations on that specific turbine were performed (Yu and Kwon, 2014; Li et al., 2015; Liu et al., 2019) that can be taken into account for comparison purposes. This is important, since for a generic wind turbine no measurement campaigns are conducted that simulations could be compared to.

## 2.1 Numerical discretization schemes and solver setup

Simulations are performed using the open-source software OpenFOAM (2022), where the incompressible, transient flow solver *pimpleDyMFoam* is coupled to the in-house non-linear structural finite element beam solver BeamFOAM (Dose, 2018). The structural beam implementation makes use of the finite element GEBT formulation that was originally proposed by Reissner (1972) and Simo (1985) and is capable of resolving large deformations of wind turbine blades. Within this study, 49 isoparametric beam elements per blade are used corresponding to the generic NREL design, each consisting of two nodes with six degrees of freedom. Each beam accounts for gyroscopic effects and stiffening due to centrifugal forces. The temporal integration made use of the second-order generalized- $\alpha$  scheme (Arnold and Brüls, 2007). The coupling of fluid and structure is embedded inside the OpenFOAM framework without the necessity of external code communication and operates in a so-called loose coupling manner, which means that information is exchanged once per time step.

The incompressible, transient flow is simulated using the hybrid Spalart-Allmaras delayed detached eddy simulation method (Spalart et al., 2006). To advance the solution in time, a second-order implicit backward method was used. The spatial discretization makes use of a second-order accurate Gauss linear scheme for the gradient terms and a first order Gauss upwind scheme for the divergence terms. The rotation of the blades is accounted for by using sliding mesh interfaces between the three blade grids, the rotor disk and the farfield grid.

## 2.2 Case setup

This work focuses on the blade flexibility, therefore the complexity of the setup is reduced. The inflow is uniform and perpendicular to the rotor plane. The rotor is neither coned nor tilted, which leads to symmetric inflow conditions. The tower and nacelle are not modelled as well, and the blades are extruded at the blade roots towards the center of rotation to compose a closed hub region of the three cylindrical structures. Rotor operation is set towards rated conditions. All settings listed in Table 1.

Parameter	Value
Rated aerodynamic power	5.3 MW
Number of rotor blades	3
Blade length / rotor diameter	61.5 m / 126 m
Rated wind speed ( $U_\infty$ )	11.4 m/s
Rated rotational speed	12.1 RPM
Blade pre-cone angle	0°
Rotor tilt angle	0°
Blade mass	17740 kg

**Table 1.** Overview of the main rotor characteristics of the NREL 5MW reference turbine and the investigated conditions.

The boundary conditions of the rectangular domain are shown in Table 2. All sides are modelled as slip walls. The values of the turbulent quantities are set for laminar flow at the inlet. Fully turbulent conditions are assumed in the boundary layer on the blade surface.

Parameter	Inlet	Outlet	Free-stream initial conditions
Velocity [ $m/s$ ]	11.4 (Dirichlet)	Neumann	11.4
Pressure [ $Pa$ ]	Neumann	0.0 (Dirichlet)	0.0
Modified turbulent viscosity $\tilde{\nu}$ [ $m^2/s$ ]	4.5e-5 (Dirichlet)	Neumann	4.5e-5
Turbulent eddy viscosity $\nu_t$ [ $m^2/s$ ]	3e-6 (Dirichlet)	Neumann	3e-6

**Table 2.** Overview of the initial and boundary conditions for the inlet, outlet and internal field of all simulated cases.

In order to investigate the influence of flexibility of the blades on the aerodynamic behavior and near wake effects, three simulations are performed: one with rigid blades (called *rigid* case in the following), one with flexible blades (called *flexible* case), and one with flexible blades excluding gravity effects (*flexible-noG* case).

### 115 2.3 Numerical Grid


The numerical grid for all simulations is based on the numerical grid used by Dose (2018). They showed that a reasonable convergence for investigating aerodynamic effects taking into account fluid-structure interactions was reached for a mesh consisting of 36.38 million cells. This mesh was called the *Medium* sized mesh and is composed of five mesh parts, namely three blade meshes, a farfield and a rotor mesh.

120 The blade meshes were created using the BladeBlockMesher utility (Rahimi et al., 2016a), which composes 2D sectional meshes into a 3D structured blade volume mesh, consisting only of hexahedral cells. The blade meshes are generated with a resolution of 260 cells in spanwise direction. The chordwise component contains 300 cells and 40 cells are distributed in blade normal direction. The cells normal to the surface follows a ratio of 1.2 and in order to limit the computational costs and to circumvent high aspect ratio cells inside the boundary layer, an adaptive wall function is applied (Fig. 1c). This wall function is capable of blending automatically between a high-Re and a low-Re approach, depending on the local  $y^+$  value. For the majority of the cells inside the first layer, a  $y^+$  value between 30 and 70 is applied. Here, the wall function ensures a consistent turbulent viscosity profile for all simulated walls. In situations with low velocities close to the blades and smaller  $y^+$  values, the wall function is switched off automatically to increase accuracy for e.g. flow separation.

130 The domain measures 5 rotor diameters (D) upstream and 15D downstream of the rotor plane. All sides are located 3.5D from the rotational center (Fig. 1a). The overall domain set-up was kept, but as this study is highlighting the behavior of the tip vortex trajectory, additional mesh refinement was introduced in the wake of the blade tips to ensure a proper resolution of the flow in that region. This refinement is accounted for using a ring shaped zone downstream of the blade tips, as shown in Fig. 1b. As shown in literature (van Kuik et al., 2014; Micallef et al., 2016; Herrerez et al., 2017; Micallef et al., 2020), the trajectory of the tip vortex is expected to have a characteristic inboard motion in the order of 1%-2% of blade length. This movement needs

135 to be captured properly. With the level of refinement used in this study, we ensure a minimum of seven cells within this scale. The highest resolution is located around the blade tip, where the vortex and blade surface are closest. Since the trajectory of the tip vortex is part of both the rotor mesh and the farfield mesh, both grid regions are equipped with an increased amount of cells, leading to a total grid size of 73.05 million cells. This already doubles the numerical costs of the *Medium* case mesh. The total amount of cells and their distribution after the refinements is shown in Tab. 3. In contrast to Dose et al. (2018), the

140 setup used here allows very detailed vortex core tracking in the vicinity of the blade tip. An even higher cell refinement would exceed 100 million cells and would not be manageable by the used infrastructure.

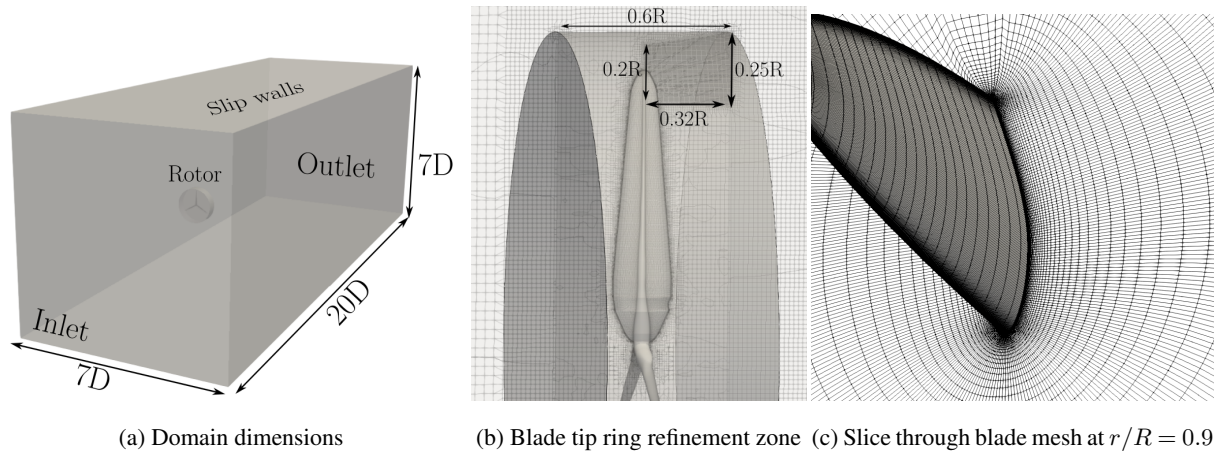

**Figure 1.** Mesh specifications: (a) The overall domain size and shape; (b) Blade tip ring refinement zone and size; (c) Mesh resolution in the boundary layer at  $r/R = 0.9$

Mesh	Blade mesh cells $\times 10^6$	Rotor mesh cells $\times 10^6$	Farfield mesh cells $\times 10^6$	Total cells $\times 10^6$
<i>Medium</i> (Dose et al., 2018)	3 x 3.56	7.23	18.47	36.38
<i>Tip refined</i> mesh used in this study	3 x 3.56	13.11	59.93	73.05

**Table 3.** Amount of cells in different mesh regions, comparing the baseline *Medium* mesh of the former study described in Dose et al. (2018) with the *Tip refined* mesh used within this work.

## 2.4 Mesh deformation algorithm

To account for blade deformations inside the CFD domain, a mesh update algorithm developed by Dose (2018) was used. This method aims at providing a cost efficient and robust algorithm specifically developed for wind turbine simulations in

145 OpenFOAM. Here, new mesh point coordinates are calculated in each time step without the need of solving a set of equations,

wherefore the deformation calculation costs are similar to those of a rigid mesh rotation. Within this method, all mesh volume cells surrounding the blade, as well as the blade surface cells are projected onto the moving blade beam using a Newton algorithm. Each cell is assigned to a specific beam element to account for the respective blade deformation magnitude. All mesh cells are assigned into one of three mesh regions that are differently affected by the blade deformation. The closest region surrounding the blade surface moves rigidly with the blade, making sure no boundary layer cells are deformed during the process. Between the rigidly moved mesh region and the outer fixed zone, a polynomial of selectable order smooths out the blade mesh motion. Within this study, a first order polynomial is used. All cells outside of this transition region are not affected by any deformation.

## 155 **2.5 Aerodynamic data extraction**

The wake induction is extracted from the CFD simulation using the in-house 3-point method first introduced by Rahimi et al. (2016c). This method gives the opportunity to account for unsteady blade deformations and non-symmetric inflows for all azimuthal positions. Other aerodynamic quantities, i.e. angle of attack (AoA), lift and drag coefficients, on the rotor blades are derived from the obtained induction factors and the calculated pressure distribution, as well as the viscous forces. This method uses six points, three points on the pressure and three points on the suction side, which are distributed parallel to the chord of each analyzed blade section. The distance of the points towards the local chord is kept constant, to account for blade deformation during the simulation. These points are used to interpolate a representative AoA and local induced velocity while excluding effects of bound circulation as well as reducing the up and downwash of the blade. This method gives the possibility to account for dynamic effects like yaw misalignment, different azimuth positions and deforming blades also close to the blade root and tip, which is considered important for the investigation of blade tip vortex trajectories. Since the aerodynamic quantities are based on probing locations inside the fluid domain, the results are influenced by vortices trailing from the blade surface, therefore the resulting quantities at the tip are to be considered a qualitative estimate to assess the aerodynamic behavior for a relative comparison between different blade setups.

## **2.6 Simulations framework**

170 Simulations are performed on the EDDY high performance computing cluster of the University of Oldenburg (HPC, 2022). 480 computing cores are used in each simulation run, computing a total of 220 seconds, i.e., 44 full rotor rotations. One simulation run took about 25 days, with less than 1% more computational effort for the *flexible* case setup in comparison towards the *rigid* calculation. Simulation results were extracted from the last full rotor rotation if not stated differently.

## **3 Results and discussion**

175 In the following, the three simulation cases, i.e., *rigid*, *flexible* and *flexible-noG* are investigated in more detail, highlighting their respective impact on the aerodynamic rotor blades behavior and connects these findings with the characteristics of the flow

in the wake of the rotor. The effect of flexibility and gravitation on the aerodynamic performance at the rotor blades is studied in Sect. 3.1. The resulting effects on the near wake, i.e. velocity induction and tip vortex trajectory, are shown in Sect. 3.2 and 3.3.

180

### 3.1 Aerodynamic behavior

185 Firstly, the overall global thrust  $T$  and power  $P$  quantities are computed by  $\langle T(\Theta) \rangle_{rtn}$  and  $\langle P(\Theta) \rangle_{rtn}$ , where  $\Theta$  describes the azimuth angle and  $\langle \rangle_{rtn}$  denotes the average over the last rotor revolution  $0^\circ \leq \Theta < 360^\circ$ , which corresponds to a time span of  $\Delta t = 4.959$  seconds.  $0^\circ$  and  $360^\circ$  define a blade pointing in upwards direction. The averaged quantities for the three simulation cases are in good agreement with literature. Tab. 4 shows a comparison to various sources for rigid and flexible simulations of the NREL5MW rotor, taking into account slightly different configurations with respect to rotor tilt, pre-cone or tower inclusion. In the current investigation, the total thrust shows slightly higher loads when including blade flexibility compared to the rigid case, while the total aerodynamic power slightly decreases. This is also confirmed in the study by Dose et al. (2018), which uses a similar setup.


Simulation	Model	Thrust [kN]	Power [MW]
<b>Current work</b> [ <i>rigid</i> ]	Spalart-Allmaras DDES	757.8	5.45
Dose et al. (2018) [ <i>rigid</i> ]	k- $\omega$ -SST URANS	761.7	5.51
Li et al. (2015) [ <i>rigid</i> ]*	k- $\omega$ -SST DDES	758.7	5.41
Imiela et al. (2015) [ <i>rigid</i> ]**	k- $\omega$ -SST RANS	780	5.54
<b>Current work</b> [ <i>flexible</i> ]	Spalart-Allmaras DDES	759.2	5.43
<b>Current work</b> [ <i>flexible-noG</i> ]	Spalart-Allmaras DDES	760.0	5.44
Dose et al. (2018) [ <i>flexible-noG</i> ]	k- $\omega$ -SST URANS	771.3	5.49
Imiela et al. (2015) [ <i>flexible</i> ]**	k- $\omega$ -SST RANS	808	5.66

**Table 4.** Rotationally averaged thrust and power results for rigid and flexible setups. [\*simulation contains precone, tilt and tower; \*\*simulations contain pre-cone]

190 In the next step, the rotationally averaged force distributions of axial and tangential forces are investigated, i.e.  $\langle F_{ax}(r, \Theta) \rangle_{rtn}$  and  $\langle F_{tan}(r, \Theta) \rangle_{rtn}$ . Under flexible conditions and a uniform wind coming from the front, the blades tend to bend towards lower aerodynamic forces in the outboard region of the rotor, where the largest deformations are apparent. This holds for spanwise positions outboard of  $\approx 47\text{m}$  ( $\approx 75\%$  relative span) as shown in Figure 2, where the rotationally averaged tangential force in the upper graph and the rotationally averaged axial force in the lower graph are smaller for flexible blades, respectively. This is  
195 important, since most of the torque, and therefore power of wind turbines, is extracted from the wind in the outer third of the rotor blades due to the corresponding lever arms and the larger swept area. It is also shown, that neglecting the gravitational loads barely influences the mean aerodynamic loads, as the corresponding tangential and axial forces are only slightly lower



than the loads of the flexible blades including gravity. For spanwise positions between 50% and 75% radius, the blade forces including flexibility are slightly larger than for the *rigid* case, which aligns with the study by Dose et al. (2018). This is due to the fact that the deformation of the blade leads to slightly higher AoAs for the flexible cases throughout the whole span. In the blade region outboard of 75%  $r/R$  the forces are lower for the flexible cases. This can be explained by two counter acting phenomena. On the one hand the higher angle of attack leads to higher loads on the blade. On the other hand, the large flapwise deformation leads to a reduction of the rotor radius and thus in lower a circumferential speed and a change in inflow angle closer to the tip. The contribution of the angle of attack on the loads can be considered approximately linear, whereas the influence of the speed on the blade forces is quadratic and therefore prevails. The resulting forces outboard of 75% span are therefore smaller for the flexible blades although a larger AoA is present. Nevertheless, the radial part between 50% and 75% of the blade contributes less to the overall power output than the outer part, due to the smaller lever arm. Also a smaller total force difference between the *rigid* and *flexible* case than in the most outboard 25% of blade span makes this region less attractive for this study, which aims at highlighting the differences between these setups. The blade region inboard of 50% blade span is not shown since the total deformation in all investigated regions is much smaller and the resulting differences in the force distributions are negligible.

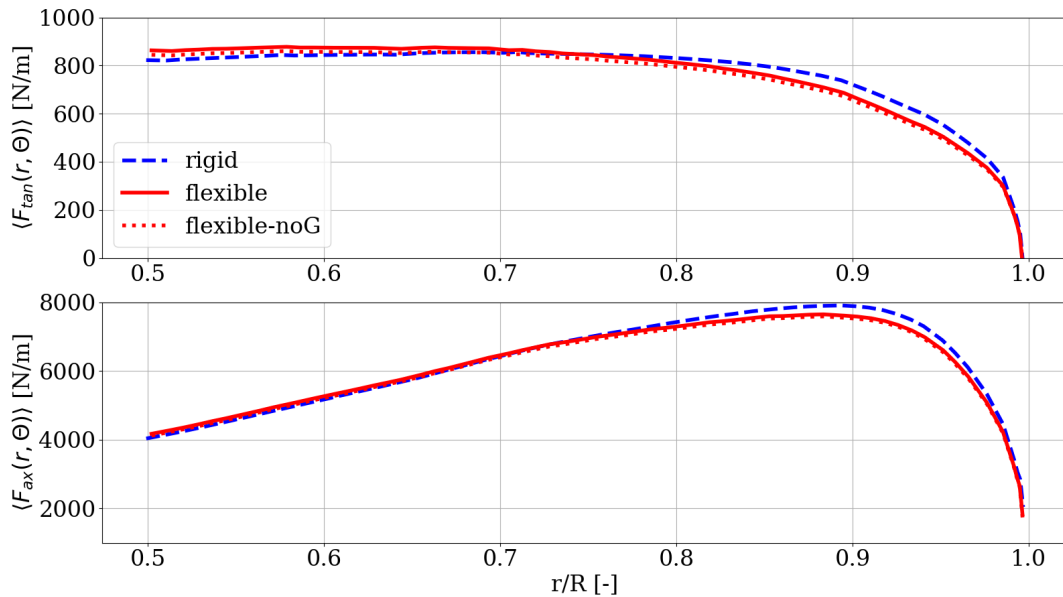

**Figure 2.** Rotationally averaged tangential and axial force distributions  $\langle F_{tan}(r, \Theta) \rangle_{rtn}$  and  $\langle F_{ax}(r, \Theta) \rangle_{rtn}$  for rigid and flexible blades over the outer half of blade span related to normalized radial locations.  $R$  is the rotor radius and  $r$  defines the radial position on the blade.

It is important to note that even though the curves of *flexible* and *flexible-noG* in Figure 2 lie almost on top of each other, a detailed look into the distribution resolved over one rotation shows clear differences. For that purpose, the force development of the 0.95  $r/R$  location from Figure 2 is plotted against the respective azimuth angle in Figure 3. As visible in Figure 3(a), the


215 time series of the sectional forces at a spanwise position of 95% span shows almost constant forces for the *rigid* blade and the *flexible-noG* case. While both flexible setups, consistent with the averaged forces of Figure 2, show lower force values than the *rigid* case, a sinusoidal behavior within one rotation is clearly dominating the force development of the *flexible* blade including gravity. The reduction of forces due to blade deformation aligns with the findings of Yu and Kwon (2014). The lowest loads are given at an azimuth angle of around  $90^\circ$ , while the maximal loads occur around  $270^\circ$  azimuth. A frequency analysis of  
220 the forces acting on the flexible blades (with gravity, i.e. *flexible* case, and without gravity, i.e. *flexible-noG* case) is shown in Figure 3 (b). The dominant frequency in the *flexible* case is corresponding to the rotationally periodic 1P frequency (light green vertical line), which is not existing in the *flexible-noG* case. However, both cases show a clear impact of the second lowest eigenfrequency, which corresponds to the first edgewise mode (2nd vertical dashed black line). The larger impact of the edgewise component of blade vibrations, in contrast to the flapwise mode, is based on the fact that for attached flows, the  
225 aerodynamic damping in flapwise direction is significantly larger than in edgewise direction (Hansen, 2007) and is therefore also more pronounced in the force frequencies. In Figure 3 (b) the 1P frequency and the other eigenfrequencies (Eigenf.) are clearly distinguishable.

While this frequency only has the second highest power spectral density in the *flexible* blade case, it dominates the force time series in the *flexible-noG* simulation. This clearly shows that the external 1P excitation only arises from the gravitation  
230 and therefore is not present in the *flexible-noG* results.

In Figure 4, the blade tip deformation is shown, which also corresponds to the maximal deformation in edgewise, flapwise and torsional direction of the whole blade. Although being slightly further outboard than the section at 95% span from Figure 3, it describes an equivalent blade deformation behavior.

The dominating dynamic sinusoidal edgewise deflection component in Figure 4 (a) can be directly linked to the 1P gravi-  
235 tational load in Figure 3, since the lever arm of gravitation for a blade in horizontal positions at  $90^\circ$  and  $270^\circ$  azimuth is the largest. The main cause of the reduction of power of the flexible blades in comparison to the rigid can on the one hand be traced back to the flapwise deflection (Figure 4 (b)), which results in a smaller area swept by the turbine blades and therefore less energy that is extracted from the wind. On the other hand, the torsional degree of freedom impacts the loading, since a lower angle of attack is directly linked to a reduction of the local lift and drag components in the "linear region" and therefore  
240 impacts the lift-to-drag ratio (Rajakumar and Ravindran, 2010). As shown in Figure 4 (c), the torsional component is in phase with the edgewise deformation and has its largest influence at  $90^\circ$  and  $270^\circ$  azimuth.

This shows that a wind turbine rotor operating at rated conditions in a uniform inflow faces its largest influence of a dynamic excitation of structural deformation due to gravitational loads. Here, between  $0^\circ$  and  $180^\circ$  azimuth, the blade bends forward towards the leading edge and during the upward rotation between  $180^\circ$  and  $360^\circ$  azimuth, it bends backwards in the direction  
245 of the trailing edge. Due to the structural nature of this blade, the center of mass (CM) is located downstream of the elastic axis (EA) on the chord line. This holds true for all sections along the blade, exemplarily shown in Figure 5. In combination with the local twist angles, the gravity force leads to a torsion of the blade. Thus, for a downward moving blade, the angle of attack is reduced with increasing twist angle, while the AoA is increased for an upward moving blade, where the twist angle is reduced. This can be explained using the simplified velocity triangle, where the inflow speed  $U_{inf} = U_\infty \cdot (1 - a)$  and the

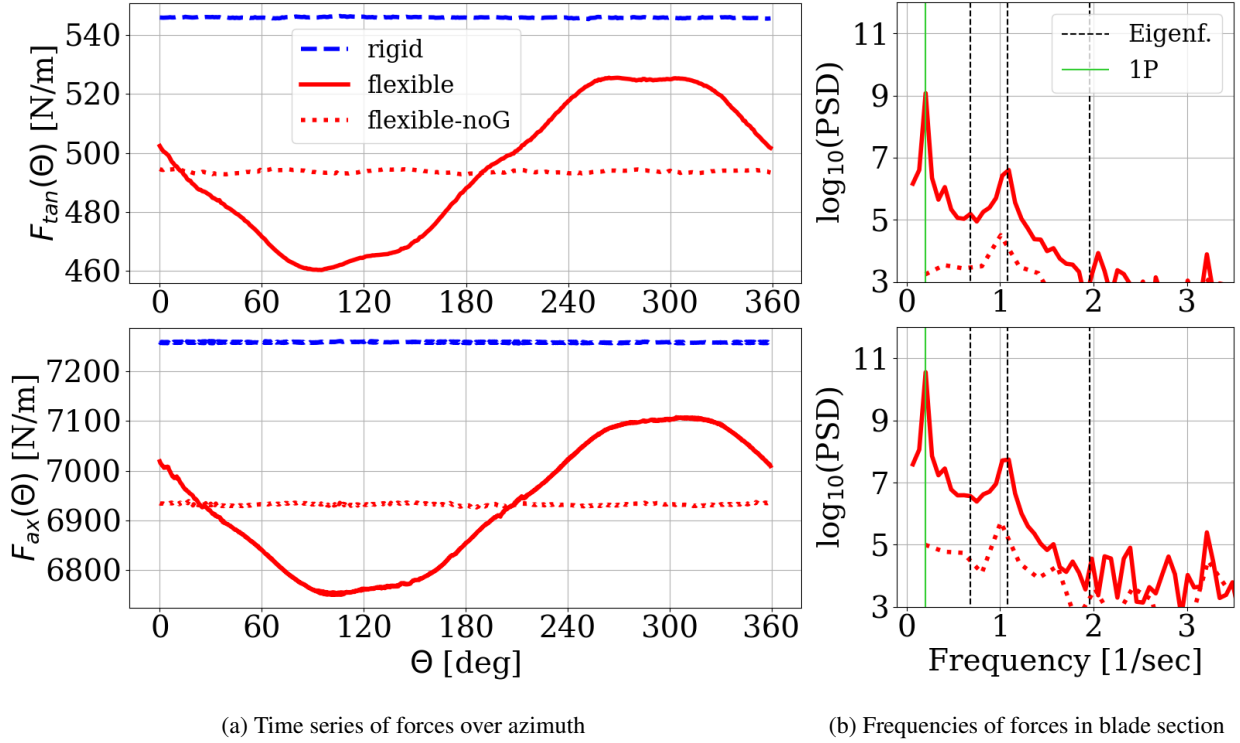

(a) Time series of forces over azimuth

(b) Frequencies of forces in blade section


**Figure 3.** Tangential force ( $F_{tan}(\Theta)$ ) and axial force ( $F_{ax}(\Theta)$ ) for the three cases of rigid and flexible blades over one rotation at 95% span (i.e. at  $r/R = 0.95$ ), where the flexible blade forces are shown including gravity (solid red line) and without gravity (dotted red line). The rigid blade forces are shown in dashed blue.

250 circumferential speed  $U_{rot} = \omega r \cdot (1 + a')$  form the relative velocity  $U_{rel}$ . Here,  $a$  reflects the local axial induction and  $a'$  the local tangential induction factors. The constant  $\omega$  gives the rotational speed.

The dynamic torsion of the blade (Fig. 4 (c)) clearly shows the deformation due to the gravitation, forming a sinusoidal shape with a maximal deformation amplitude of  $|\Delta\tilde{\phi}| = 0.5^\circ$ . Additionally, higher frequency components can be found in the time-series and superimpose the sinusoidal torsion behavior with oscillations due to the eigenfrequencies of the blade with a much smaller magnitude. Although barely visible in the three investigated deformation components (Figure 4), it can be observed in the resulting forces acting on the blade especially in the frequency domain (Figure 3(b)). In contrast, the *flexible-noG* case displays nearly constant aerodynamic forces and deformation due to the fact that the gravitational induced loads are completely missing (Figure 4).

In the subsequent analysis of blade flexibility on different aerodynamic quantities, the focus lies therefore on the comparison of the rigid blades with the flexible blades including gravitational loads.

260

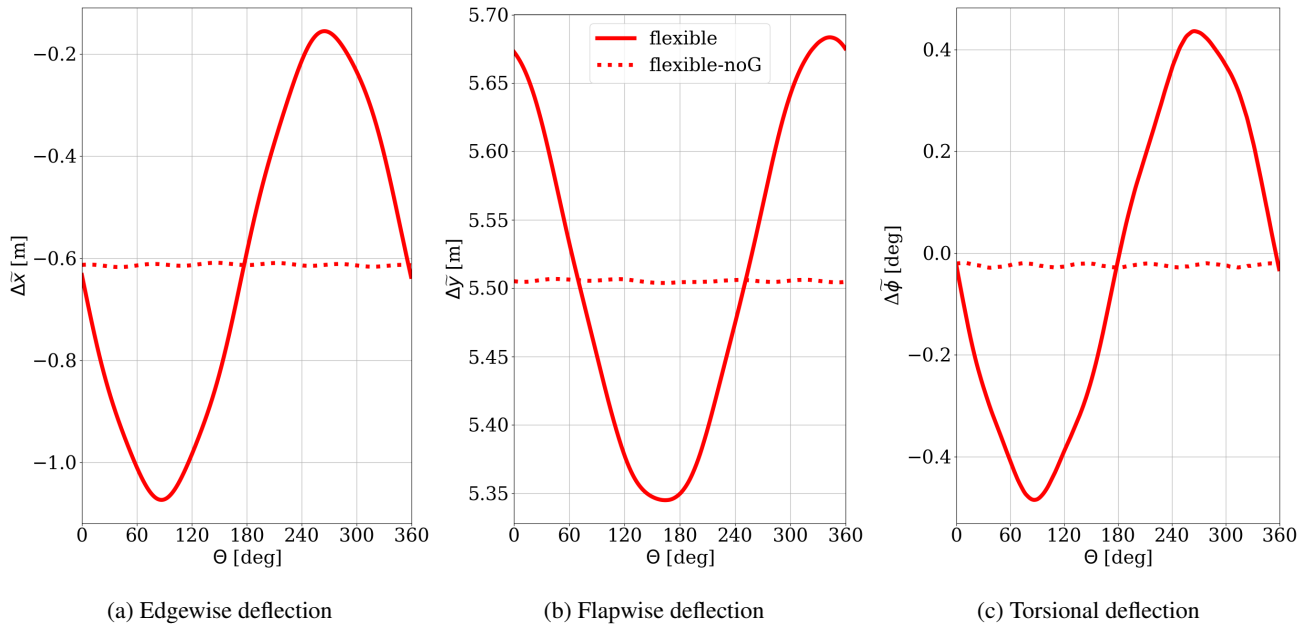


**Figure 4.** Edgewise ( $\Delta\tilde{x}$ ), flapwise ( $\Delta\tilde{y}$ ) and torsional ( $\Delta\tilde{\phi}$ ) blade tip deformation over one rotation for the *flexible* and *flexible-noG* case at  $r/R=1$ .


### 3.1.1 Angle of Attack

As stated above, the inflow is constant and homogeneous for all cases, so the effect of the blade flexibility can be best assessed by focusing on the comparison between the rigid blades and the blades subjected to the periodic gravity-induced blade deformation. The *flexible-noG* simulations, in which no significant deformations occur (Figure 4), are therefore omitted from the analysis. Therefore, in the following all investigations refer to the *rigid* and *flexible* cases. A comparison of the local AoA for the most outboard 10% of the blade simulations (corresponding to  $0.9 \leq r/R \leq 1$ ) is shown in Figure 6, where the respective azimuthal position is plotted against the radial location on the blade, showing *rigid* results in Figure 6a and *flexible* results in Figure 6b. The investigated AoA magnitude is accounted for with color bins of 0.4 degrees.

For the *rigid* blade case, the AoA becomes larger with increasing radius but stays constant for each section independently of the azimuth angle. The radial increasing effect is also visible for the *flexible* blade, but in contrast to the *rigid* case, it deviates over the azimuth angle, showing the expected sinusoidal shape. The smallest AoA for the flexible blades is observed at  $90^\circ$  azimuth, whilst for  $270^\circ$  azimuth its maximum is present. This phenomenon can directly be linked to the torsional deformation, as shown in Fig.4c, where the gravitation twists the blade towards lower AoA during a downwards movement of the blade and towards higher AoAs when moving upwards again.

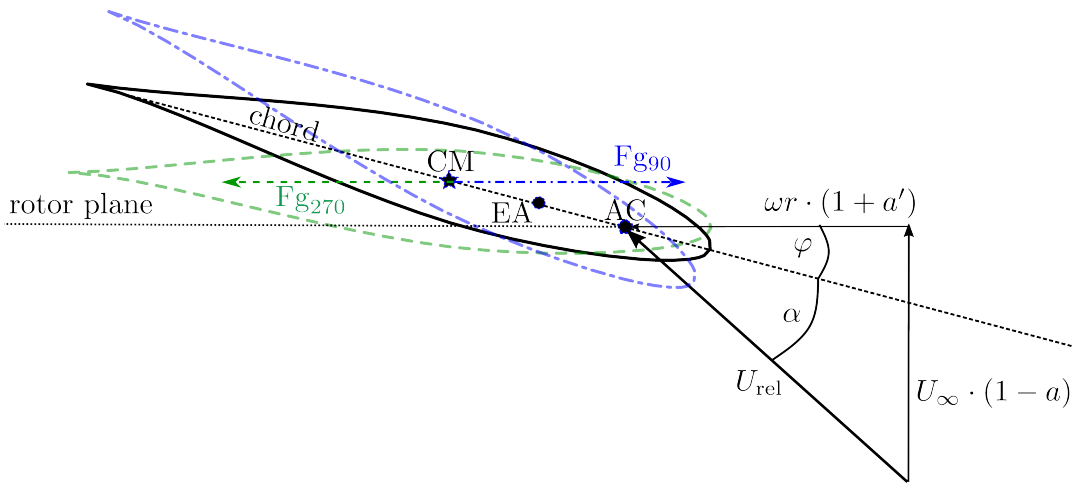

**Figure 5.** Simplified representation of the gravity force acting on a turbine blade section at radial position  $r$ . Black solid airfoil: undeformed blade twist condition of rigid blade, blue dashed dotted airfoil: nose down deformation for azimuth angles of  $0^\circ \leq \Theta \leq 180^\circ$ , green dashed airfoil: nose up deformation for azimuth angles of  $180^\circ \leq \Theta \leq 360^\circ$ .  $F_{g90}$  (in blue) and  $F_{g270}$  (in green) show the direction of gravitation for the respective azimuth angles. The local twist angle and AoA are given by  $\varphi$  and  $\alpha$ , respectively. The relative velocity  $U_{rel}$  results from the velocity components in axial direction ( $U_\infty \cdot (1 - a)$ ) and rotational velocity  $\omega r \cdot (1 + a')$ , where  $a$  and  $a'$  define the induction factors in axial and tangential directions.  $U_\infty$  defines the undisturbed freestream velocity and  $\omega$  the angular velocity. Center of mass (CM), elastic axis (EA) and aerodynamic center (AC) are all located on the chord line.

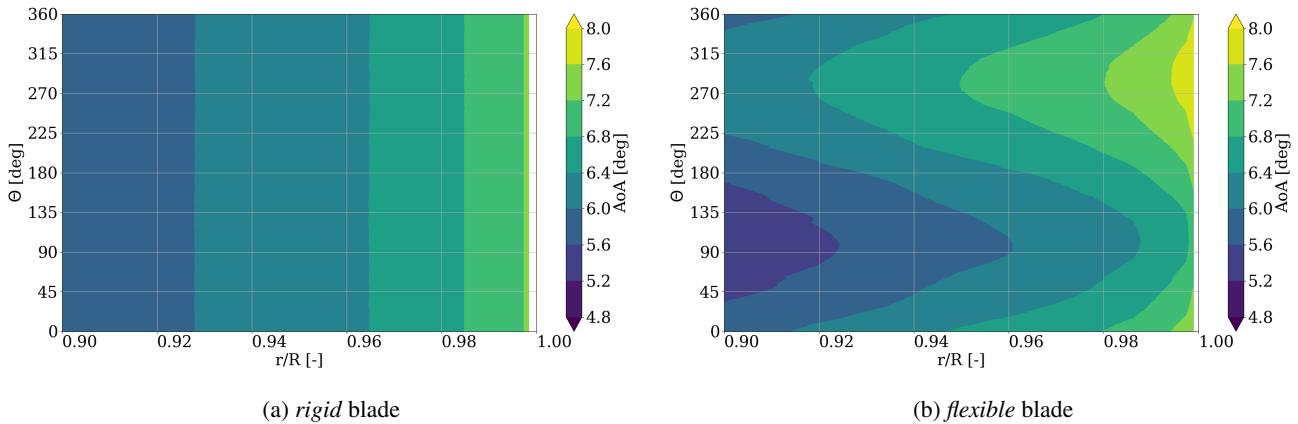


**Figure 6.** Angle of Attack distribution for  $0.9 \leq r/R \leq 1.0$  during one rotation for (a) rigid and (b) flexible blades.

### 275 3.1.2 Axial induction

Similar trends are visible in the representation of the axial induction (Figure 7), where each color bin represents an axial induction portion of 0.03. A general reduction of the axial induction towards the tip is visible for *rigid* and *flexible* blades.

At the most outboard position it vanishes due to the ever shrinking surface and the blade boundary layers merging between pressure and suction side of the blade.

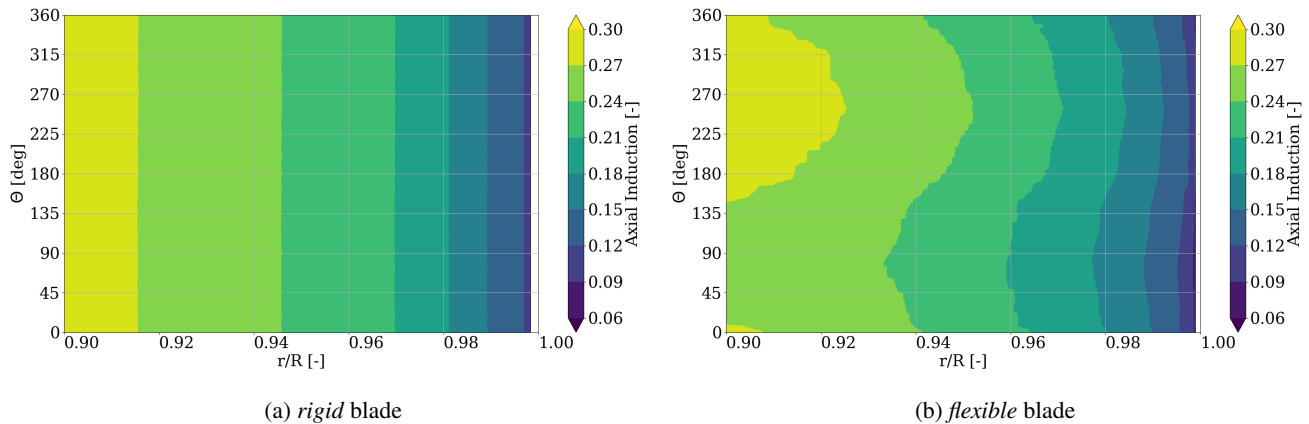

**Figure 7.** Axial induction factor distribution for  $0.9 \leq r/R \leq 1.0$  during one rotation for (a) *rigid* and (b) *flexible* blades.


280 Since the axial induction factor describes the amount of velocity reduction of the freestream normal to the rotor plane, it gives an estimate of the amount of energy taken from the fluid. From Figure 7, it is therefore expected that more energy is extracted with the *flexible* blade pointing towards  $270^\circ$  than at  $90^\circ$  azimuth. This matches the findings in Figure 3, where the maximal axial and tangential force is occurring at  $\approx 270^\circ$  and the minimal force is to be found at  $\approx 90^\circ$  azimuth, respectively.

### 3.1.3 Lift, drag and lift-to-drag ratio


285 Next to the forces described in Sect. 3.1, the lift, drag and lift-to-drag ratio coefficients play an important role, since they represent the loading on the blades and allow for an estimate whether the blade is operating under optimal conditions. Since modern wind turbines are lift driven, a maximal energy extraction from the wind is present, when the lift-to-drag ratio reaches its maximum, which corresponds to the maximal ratio of lift over drag. Lift and drag are also direct inputs to engineering models like the blade element momentum theory, so that a deep understanding of those quantities is vital for the improvement  
290 of such design tools (Schepers et al., 2018).

The coefficients for lift and drag are calculated from the simulation results using the local pressure distribution at various sections along the blade leading to a force vector that is split into lift and drag directions using the angle of attack calculated from the 3-point method in Sect. 3.1.1. Figure 8 shows the lift coefficient distribution of the *rigid* and *flexible* blade cases in bins of 0.015, with consistent reduction of lift towards the tip. The minimal lift at  $90^\circ$  and maximal lift at  $270^\circ$  azimuth for  
295 the flexible blades is as expected since the same behavior is shown in Figure 3 for the absolute force values in tangential and normal direction.

The drag coefficient in Figure 9, contrary to the corresponding lift values, increases with radial distance. Since under these operating conditions, the drag values in general are very small, drag bins of 0.0075 are shown. The distribution of minimal and

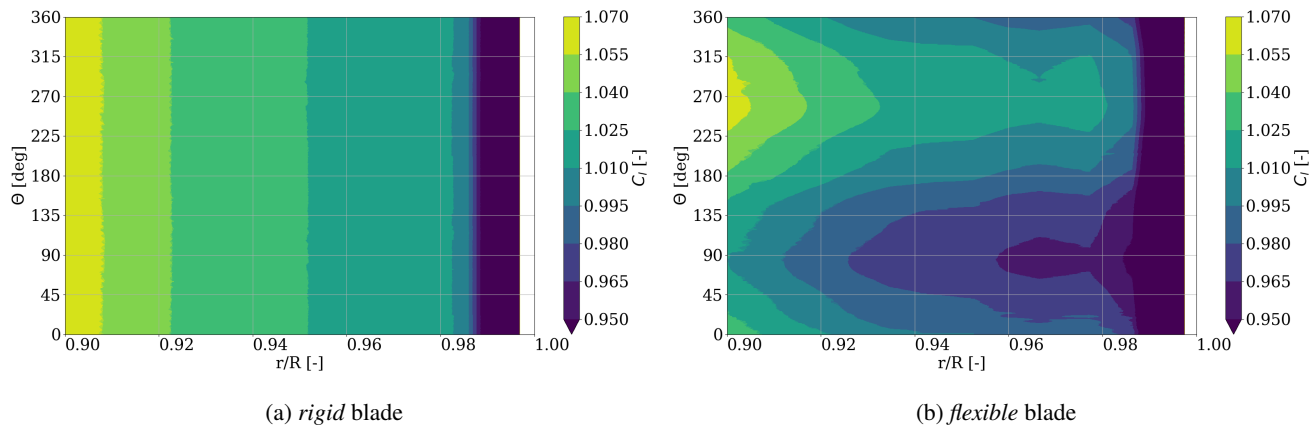

**Figure 8.** Lift coefficient ( $C_l$ ) distribution for  $0.9 \leq r/R \leq 1.0$  during one rotation for (a) *rigid* and (b) *flexible* blades.

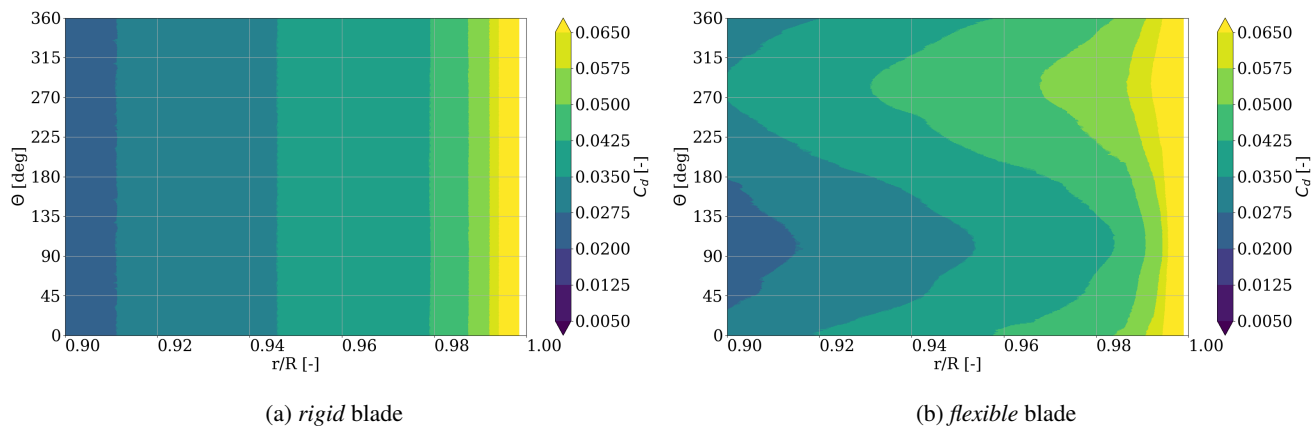


**Figure 9.** Drag coefficient ( $C_d$ ) distribution for  $0.9 \leq r/R \leq 1.0$  during one rotation for (a) *rigid* and (b) *flexible* blades.

maximal drag coefficient values coincides with the findings of lift and AoA. This is an expected behavior, since most airfoils  
 300 operate in the so-called "linear region" when exposed to incoming angles of attack between  $4.8^\circ$  and  $8.0^\circ$  (cf. Figure 6), where  
 the boundary layer is fully attached to the blade surface and the drag force is directly proportional to the angle of attack.

Since in the investigated region the drag grows faster with increasing AoA compared to the lift, the lift-to-drag ratio of  
 $Cl/Cd$  is not constant but shows sinusoidal behavior for the flexible blade over one rotation with a maximal lift-to-drag ratio  
 for minimal drag at an azimuth of  $90^\circ$  (Figure 10). From an aerodynamic standpoint, the blade airfoils in the investigated  
 305 region therefore show better performance when the blade is moving downwards, than for an upward moving blade.

Summarized, the aerodynamic investigation of the most outboard 10% of the blade (i.e.  $0.9 \leq r/R \leq 1.0$ ) reveals a major  
 difference between *rigid* and *flexible* structures. The investigation of AoA, induction, and force coefficients shows a clear  
 dependency of the flexible blades on the azimuth angle. Since the aerodynamic behavior in the rotor plane characterizes the

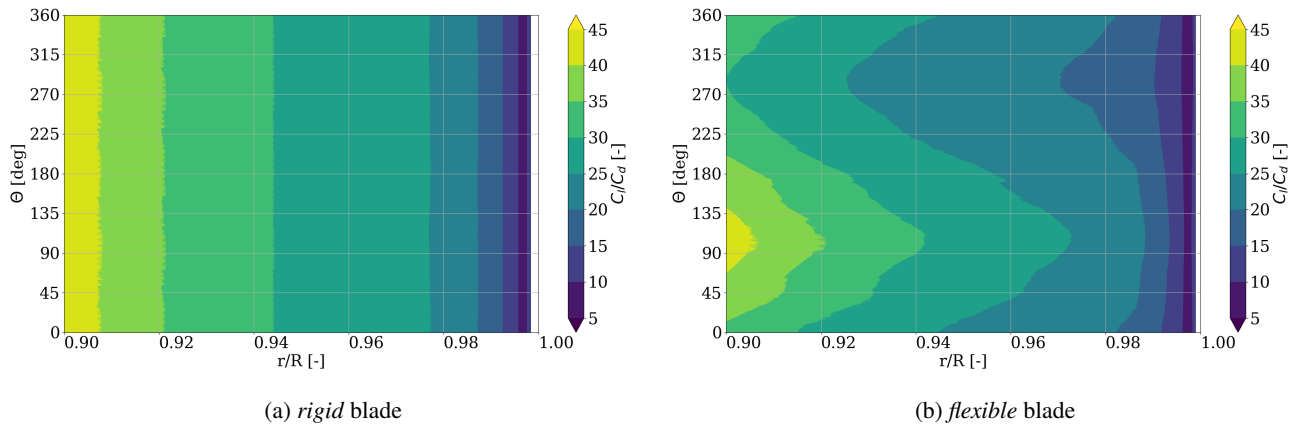

**Figure 10.** Lift-to-drag ratio distribution for  $0.9 \leq r/R \leq 1.0$  during one rotation for (a) *rigid* and (b) *flexible* blades.


interaction of blades with the surrounding air, differences in the induction due to flexibility are expected to be visible in the  
 310 wake of the turbine, too. This is studied in the next section.

### 3.2 Effects in the wake

To investigate the effect of a sinusoidal aerodynamic behavior within one rotation of the blade, a characterization of the  
 whole wake cross section at different downstream locations is made. Here, slices at  $1/4D$  and  $1/2D$  in the wake of the turbine  
 normal to the flow direction are investigated with respect to the mean speed magnitude for speed in  $x, y, z$ -direction, i.e.  
 315  $\left\langle \sqrt{u_x^2 + u_y^2 + u_z^2} \right\rangle_{rot}$ . Here,  $\langle \rangle_{rot}$  denotes the average over the last whole rotation. In Figure 11, the mean velocity distribution  
 of the wakes of both simulations are compared, with the *rigid* blade case in Figure 11(a) and the results for the *flexible* blades in  
 Figure 11(b). The velocity magnitude ranges are chosen such that the region of maximal blade deformation becomes apparent.  
 The resulting shape of the visualized speed reduction is forming a uniform ring. The *rigid* blade case shows a uniform wake  
 velocity deficit over the whole azimuth with minimal wake speed at  $\approx 80\%$  span. This radial location of minimum speed can  
 320 also be observed in the case of the flexible blades but with a clear shift between left and right, corresponding to  $270^\circ$  and  $90^\circ$   
 azimuth. Here, a velocity difference of  $\approx 5\%$  is visible between the two sides. Also the expansion of the visualized wake speed  
 is larger at  $270^\circ$  than at  $90^\circ$  azimuth. This results in a non-uniform thickness of the ring shape, indicating that the wake stream  
 tube expansion itself is deformed in a way that the wake radius is larger at azimuthal positions of lower wake speed and smaller  
 at azimuthal positions with higher wake speed.

325 Although less significant, similar results are shown for a  $1/2D$  downstream location as shown in Figure 12. The total in-  
 fluenced area seems to expand and smear out. Since mixture of fluid between the outer free-stream and the inner wake is not  
 expected within 1 to 2 diameters downstream of the turbine (Ainslie, 1988), this can be explained by increasing turbulent  
 mixture inside the stream tube, that is created by the rotor itself. This effect is more dominant at the  $1/2D$  downstream location  
 compared to the  $1/4D$  downstream location. The minimal wake speed in the *flexible* case is shifted slightly towards the ground



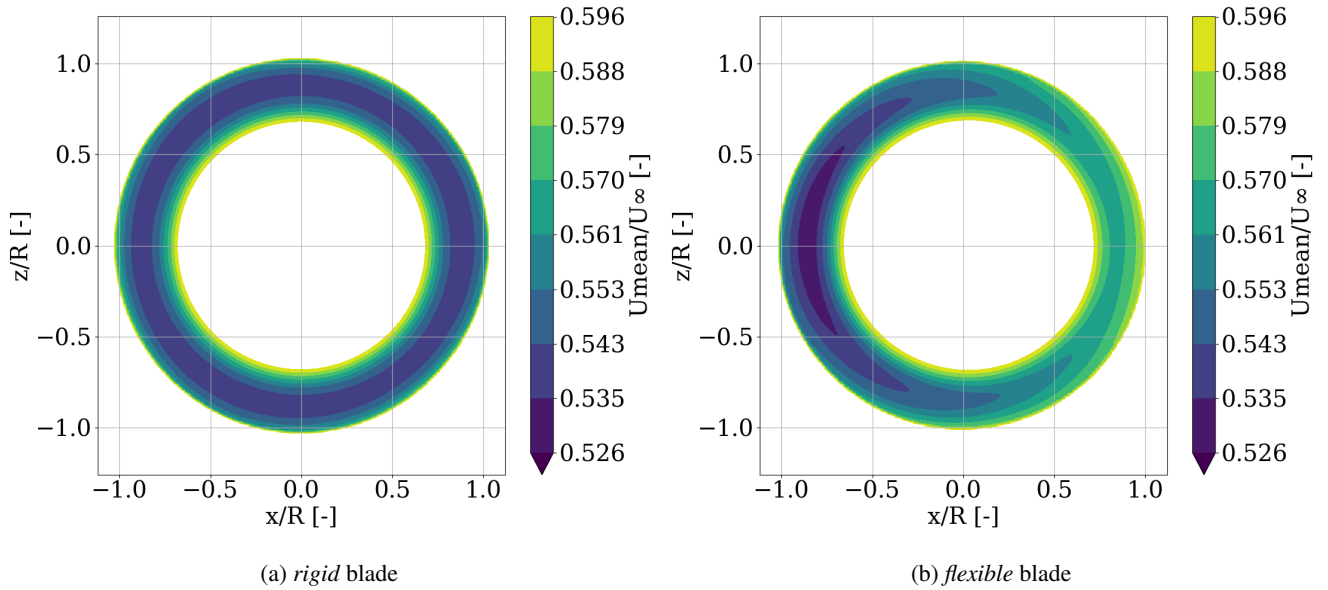

**Figure 11.** Mean velocity magnitude slice in the  $x$ - $z$ -plane at  $1/4D$  downstream of the turbine with incoming flow direction in  $y$ -direction. Color coding bounded such that all values of  $U_{mean}/U_{\infty} > 0.596$  are shown in white, while all values of  $U_{mean}/U_{\infty} < 0.526$  are marked in dark blue.


330 (dark blue region), which is attributed to the counterclockwise rotation of the wake. Similar rotation is also present in the *rigid* blade case, but it is not visible here due to the uniform character of the *rigid* rotor wake. This rotation opposing the clockwise rotation of the turbine is based on the conservation of momentum and has been reported in many studies before (Shen et al., 2007; Zhang et al., 2012; Mühle et al., 2017). Contrary to the uniform ring shape of the *rigid* wake, again the shape of the wake of the *flexible* simulation is deformed, trending towards an oval contour.

335 This is consistent with the results from the aerodynamic investigation in Sect. 3.1, where lower speeds in the wake of azimuthal positions of larger induction or higher angles of attack were observed. Thus, the impact of *flexible* rotor blades on the aerodynamic behavior of the wind turbine is as well transported into the wake and still visible at least  $1/2D$  downstream of the turbine.

### 3.3 Tip Vortex Trajectory in the near wake


340 From the findings of the aerodynamic behavior in Sect. 3.1 and the mean wind speeds analyzed in Sect. 3.2, a clear difference between azimuth positions of  $90^\circ$  and  $270^\circ$  is evident for *flexible* blades in contrast to the *rigid* blade representation. Apart from the difference in mean wind speeds, also the shape of the wake stream tube deviates. To quantify these variations, a deeper investigation of the blade tip vortex trajectories is made in the following.

In general, the stream tube, being formed by all particles of the fluid moving through the rotor plane, has a smaller diameter  
 345 upstream of the turbine, where the speed is higher, than downstream of the rotor disk where the speed is smaller (Figure 13(a)).

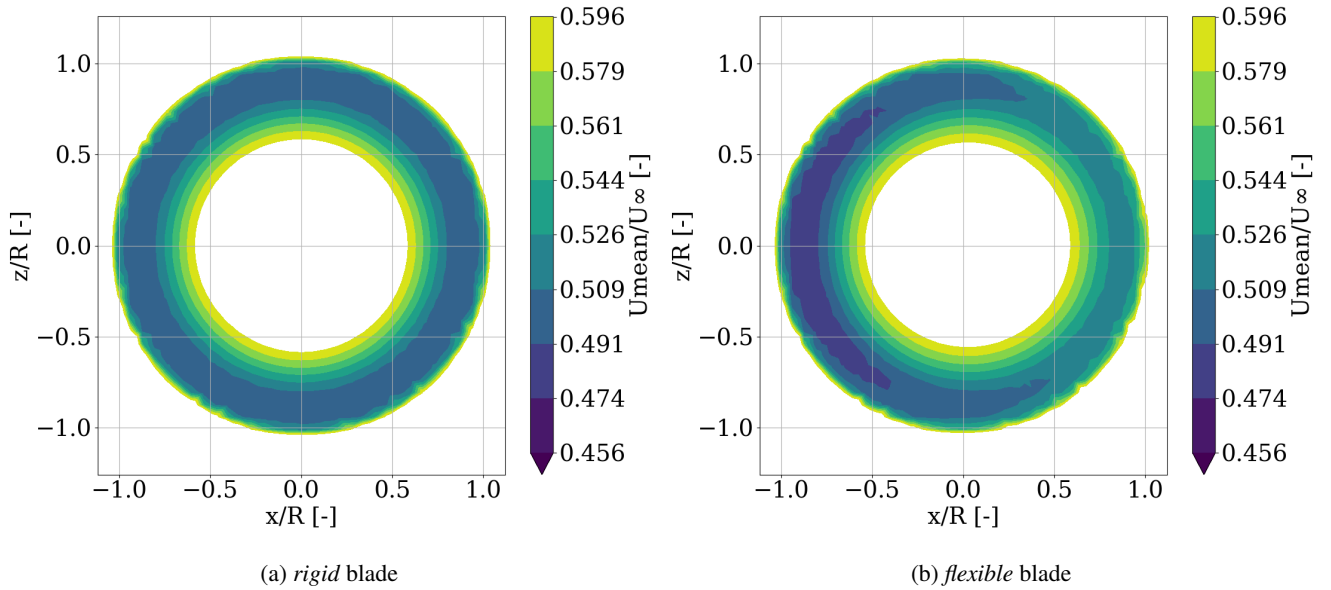

**Figure 12.** Mean velocity magnitude slice in the  $x$ - $z$ -plane at 1/2D downstream of the turbine with incoming flow direction in  $y$ -direction. Color coding bounded such that all values of  $U_{mean}/U_{\infty} > 0.596$  are shown in white, while all values of  $U_{mean}/U_{\infty} < 0.456$  are marked in dark blue.


The larger the reduction of wind velocity, the wider the stream tube is to be expected further downstream as a consequence of the mass conservation. A representative structure, that describes the behavior of the stream tube at the blade tip, is the trajectory of the tip vortex of the blades, since it reflects the most outboard part of the fluid moving through the rotor plane. Based on the comparison of the *rigid* and *flexible* blades in Sect. 3.2, different behavior for the wake expansion has to be visible at different azimuth positions. For that purpose, the tip vortex trajectories are extracted from the flow field in horizontal planes parallel to the inflow direction making use of the  $\lambda_2$  criterion described in Jeong and Hussain (1995). Figure 13(b) shows a representative  $\lambda_2$  field extracted from the *rigid* blade CFD simulation at different time instants orthogonal to the rotor plane. Here,  $r/R$  defines the radial and  $y/R$  the axial position normalized by the blade length. The wake age is defined such that at  $0^\circ$  the blade tip is located at  $r/R = 1.0$  and  $x/R = 0.0$ . During rotation, the blade passes through the slice, forming a tip vortex that is transported downstream in time, following a characteristic path. For the uniform conditions of the *rigid* setup, this path is independent of the blade position and can be extracted in any plane perpendicular to the rotor plane. The largest deviations of the aerodynamic quantities (Sect. 3.1) and the wake velocity reductions (Sect.3.2) are present for the azimuth angles, where the blade is positioned horizontally, i.e.,  $90^\circ$  and  $270^\circ$ . Therefore, it is also expected that the largest differences in the tip vortex trajectories are visible under these conditions. To quantify these differences and the influence of blade flexibility on the path, the vortex trajectory is analyzed for tip vortices trailed at  $90^\circ$  and  $270^\circ$  for the *rigid* and *flexible* simulation. This radial location of the vortex trajectory is defined by the position of maximal values of  $\lambda_2$  inside the vortex core.

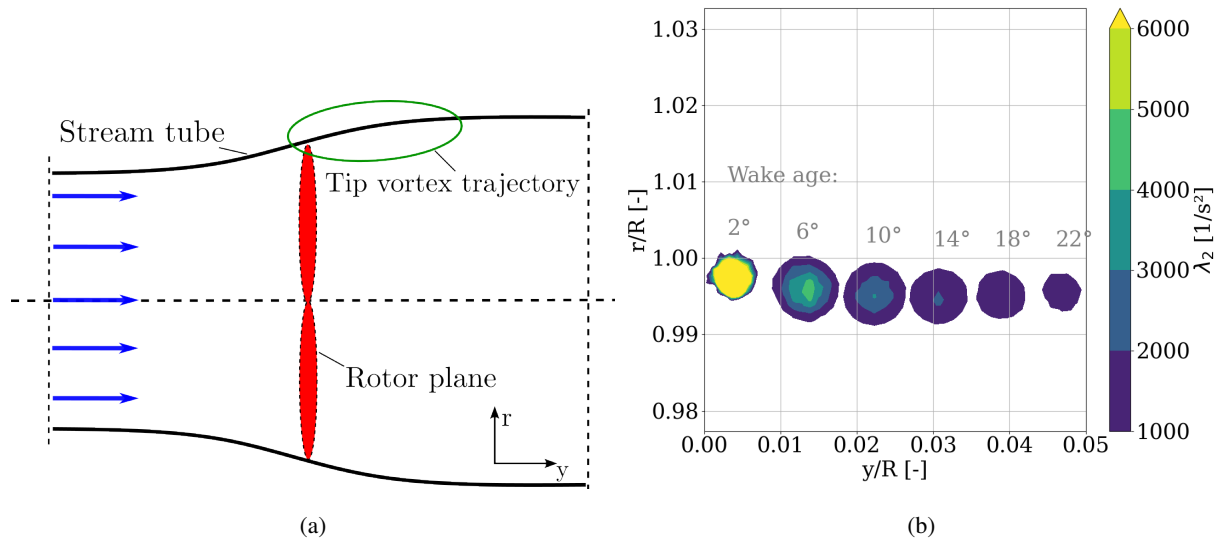

**Figure 13.** Stream tube extraction from the  $\lambda_2$  field: (a) general representation of a stream tube through a rotor plane. (b) tip vortex cores at different instants in time. Color coding bounded such that all values of  $\lambda_2 < 1000$  are shown in white, while all values of  $\lambda_2 \geq 6000$  are marked in yellow.

Figure 14 shows the non-dimensionalized radial location of the tip vortex trajectory averaged over the latest five times the blade is passing through the plane of interest. The wake age is limited to  $120^\circ$ , since this corresponds to the instant the next blade is slicing through the plane, forming a new vortex trajectory heading downstream normal to the rotor plane. The radial position  $r$  of the vortex core is normalized by the blade radius  $R$ . Vortex core locations are tracked at each  $2^\circ$  of the wake age, making sure that the near wake expansion is properly resolved. A characteristic inboard tip vortex motion is visible for all cases for the first  $20^\circ$  wake age before expanding the stream tube and exceeding the actual radius of the rotor blades between  $35^\circ$  and  $50^\circ$  wake age. This characteristic trajectory aligns with the findings of van Kuik et al. (2014) and Herráez et al. (2017) for their investigation for rigid blades, but a comparison between rigid and flexible blades is displayed for the first time in this work.

It is visible that the radial location of the tip vortex of the rigid blade case exceeds the trajectory of the flexible blades at  $90^\circ$  azimuth in the whole investigated region (Fig.14 (a)), whereas opposing behavior is shown at  $270^\circ$  azimuth (Figure 14 (b)). A larger stream tube expansion corresponds to a higher velocity reduction and vice versa. This is supported by the findings made in the previous section 3.1, where the investigation of axial induction factors in Figure 7 showed that the flexible blades induce a higher velocity reduction at  $270^\circ$  and induce a lower velocity reduction in the axial component at  $90^\circ$  azimuth compared to the rigid blade case. Apart from the impact on the wake flow, this effects the loading of the rotor as well. Non-uniform blade root bending moments are the consequence for each of the three blades, leading to an additional 3P main shaft and tower top excitation in case of a full wind turbine setup. Consequently, this needs to be considered in the design process of large flexible rotors.

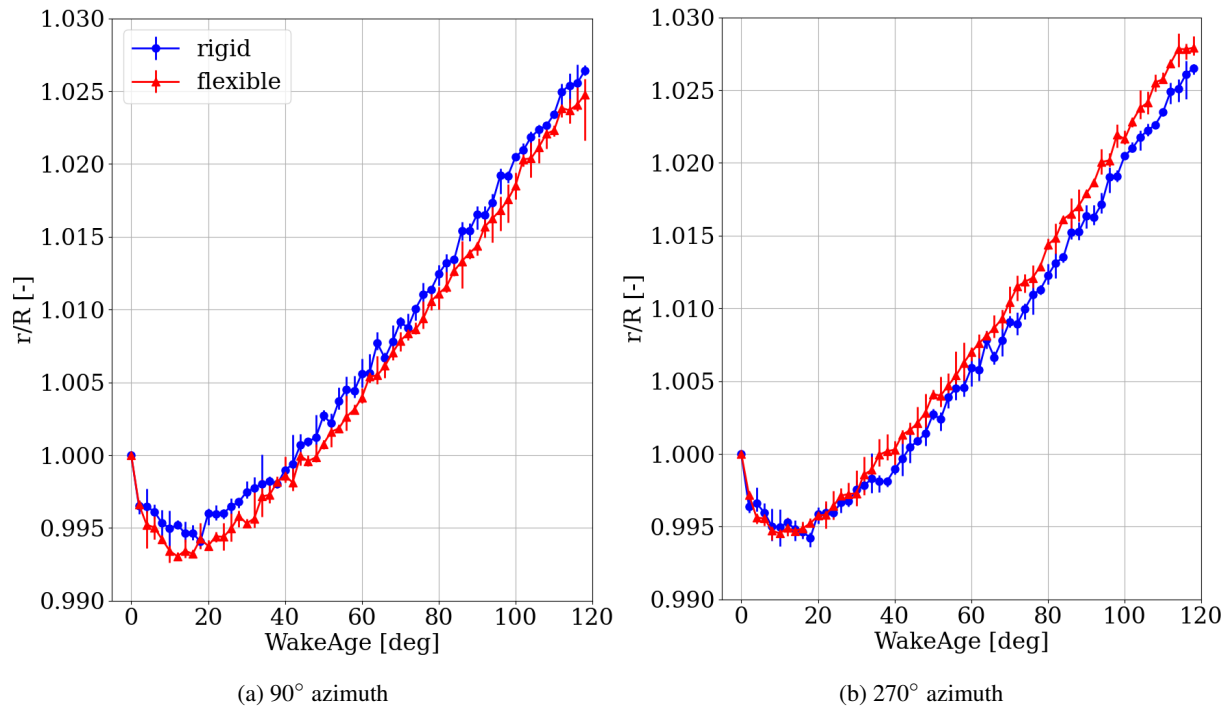

**Figure 14.** Tip vortex trajectory for rigid blades (blue) and flexible blades (red) at 90° azimuth and 270° azimuth (averaged over five blade vortex trajectories), including asymmetric error bars for the maximal and minimal values of all trajectories.

#### 380 4 Conclusion

In the current study, three different simulations of the NREL5MW turbine were performed using a uniform inflow velocity at rated conditions. A rigid blade setup is compared to a setup with flexible blades with gravity and flexible blades without gravity. Aerodynamic quantities have been extracted from the flow field using the 3-Point method. As with any other method, uncertainties in the obtained results are unavoidable. However, the uncertainties apply in the same manner to the rigid and flexible blade cases. Since the focus of this investigation lies on a relative comparison between the rigid and flexible cases, and not on the absolute value of the aerodynamic quantities, the possible influence of the uncertainties is considered not to be critical for our analysis.

It was shown that the aerodynamic forces of flexible rotor blades vary with the azimuth angle of each blade respectively. This effect becomes stronger in outer parts of the blades, which contribute most to the global power output due to larger lever arms, as a consequence of the deformations induced by the gravitational loads. In uniform inflow, this effect is dominated by gravitational loading, that especially increases torsional deformations and, therefore, leads to a dynamic change in induction and AoA. Since the direction of gravitation strictly follows a 1P frequency, the resulting excitation of the blades shows a rotationally periodic sinusoidal behavior in all investigated aerodynamic quantities. With this turbine setup, the investigation

reveals a much larger lift-to-drag ratio for a blade moving downwards than for an upward moving blade, which leads to the  
395 conclusion that the investigated blade region performs better when the blade is descending.

Furthermore, it was shown that in contrast to the uniform wake of a *rigid* rotor, this varying aerodynamic behavior of the  
*flexible* setup is also transported into the wake, visible in rotationally periodic wake speed deficits. This deficit is rotating op-  
posing to the turbine in counterclockwise direction leading to an asymmetry in the speed distribution varying with downstream  
distance. A 5% speed difference was observed for the *flexible* simulation case within one rotation at  $1/4D$  and  $1/2D$  downstream  
400 locations. This asymmetry, visible in the deformation of the wake shape, can be quantified by the tip vortex trajectory at  $90^\circ$   
and  $270^\circ$  azimuth within the first  $120^\circ$  of wake age. This led to the conclusion that the radial near wake expansion downstream  
of the downward moving blades is smaller for the *flexible* blades than for the *rigid* blade setup. Opposing behavior was ob-  
served in the near wake of the blades moving upward. To the author's knowledge this effect has not been addressed before and  
it can serve as a basis for the analysis of more complex operating conditions.

405 With wind turbines becoming larger and larger, the described influences are expected to be more pronounced, since larger  
diameters are directly accompanied with more flexible structures. It is therefore worth studying these effects in more detail.  
Thus, these effects should be taken into account for future investigations and designs of large, flexible rotor blades, since the  
sinusoidal varying aerodynamic forces increase the impact of alternating blade loads on various turbine components. Also  
during conditions, where blades operate close to stall, the deformation due to gravitational loading could potentially cause  
410 unwanted flow separation and lead to highly dynamic phenomena, e.g dynamic stall. Additionally the decay of the wake  
further downstream and the impact of blade-flexibility driven skewed wakes on a following turbine, for example in a wind  
farm, should be investigated.

*Data availability.* The raw data of the simulation results can be provided by contacting the corresponding author.

*Author contributions.* Leo Höning performed the simulations, post-processing and analysis. Laura J. Lukassen and Iván Herráez provided  
415 assistance and guidance of the underlying methods. Leo Höning wrote the paper with corrections of Laura J. Lukassen, Bernhard Stoevesandt  
and Iván Herráez.

*Competing interests.* The contact author has declared that none of the authors has any competing interests.

*Acknowledgements.* The computations were performed on the high-performance computing system EDDY of the University of Oldenburg,  
which is part of the project WIMS- Cluster (FKZ 0324005) funded by the Federal Ministry of Economic Affairs and Climate Action.

## 420 References

- Ainslie, J.F.: *Calculating the flowfield in the wake of wind turbines*. Journal of Wind Engineering and Industrial Aerodynamics, 27 213-224, 1988.
- Arnold, M. and Brüls, O.: *Convergence of the generalized- $\alpha$  scheme for constrained mechanical systems*. Multibody Syst. Dyn., 18 (2) 185-202, 2007.
- 425 Dose, B.: *Fluid-structure coupled computations of wind turbine rotors by means of CFD*. PhD Thesis, 2018.
- Dose, B., Rahimi, H., Herráez, I., Stoevesandt, B. and Peinke, J.: *Fluid-structure coupled computations of the NREL 5 MW wind turbine by means of CFD*. Renewable Energy, 129, 2018.
- Grinderslev, C., González Horcas, S. and Sørensen, N.M.: *Fluid-structure interaction simulations of a wind turbine rotor in complex flows, validated through field experiments*. Wind Energy, 1-17, 2021.
- 430 Guma, G., Bangga, G., Lutz, T. and Krämer, E.: *Aeroelastic analysis of wind turbines under turbulent inflow*. Wind Energy Science, 6:93-110, 2021.
- Global Wind Energy Council: *Global Wind Report*. <https://gwec.net/global-wind-report-2021/>, [accessed 04.2022]., 2021.
- Hansen, M.: *Aeroelastic instability problems for wind turbines*. Wind Energy, 10:551-577, 2007.
- Heinz, J.C., Sørensen, N.N. and Zahle, F.: *Fluid-structure interaction computations for geometrically resolved rotor simulations using CFD*.
- 435 Wind Energy, 19:2205-2221, 2016.
- Heinz, J.C., Sørensen, N.N., Zahle, F. and Skrzypiński, W.: *Vortex-induced vibrations on a modern wind turbine blade*. Wind Energy, 19:2041-2051, 2016.
- Herráez, I., Micallef D. and van Kuik, G.A.M.: *Influence of the conservative rotor loads on the near wake of a wind turbine*. Journal of Physics: Conf. Series, 854, 2017.
- 440 Hodgkin, A., Laizet, S. and Deskos, G.: *Numerical investigation of the influence of shear and thermal stratification on the wind turbine tip-vortex stability*. Wind Energy, 1-20, 2022.
- Horcas, S.G., Sørensen, N.N., Zahle, F., Pirrung, G.R. and Barlas, T.: *Vibrations of wind turbine blades in standstill: Mapping the influence of the inflow angles*. Phys. Fluids 34, 054105, 2022.
- High Performance Cluster, University of Oldenburg: <https://uol.de/fk5/wr/hochleistungsrechnen/hpc-facilities/eddy>. Accessed: 03.2022.
- 445 Imiela, M., Wienke, F., Rautmann, C., Willberg, C., Hilmer, P. and Krumme, A.: *Towards multidisciplinary wind turbine design using high-fidelity methods*. AIAA Scitech, 33rd Wind Energy Symposium, Conference Proceedings, 1462, 2015.
- Jeong, J. and Hussain, F.: *On the identification of a vortex*. Journal of Fluid Mechanics, 285:69-94, 1995.
- Jonkman, J., Butterfield, S., Musial, W. and Scott, G.: *Definition of a 5-MW reference wind turbine for offshore system development*. NREL/TP-500-38060, 2009.
- 450 van Kuik, G.A.M., Micallef, D., Herráez, I., van Zuijlen, A.H. and Ragni, D.: *The role of conservative forces in rotor aerodynamics*. Journal of Fluid Mechanics, 750:284-315, 2014.
- Li, Y., Castro, A.M., Sinokrot, T., Prescott, W. and Carrica, P.M.: *Coupled multi-body dynamics and CFD for wind turbine simulation including explicit wind turbulence*. Renewable Energy, 76:338-361, 2015.
- Liu, Y., Xiao, Q., Incecik, A. and Peyrard, C.: *Aeroelastic analysis of a floating offshore wind turbine in platform-induced surge motion using*
- 455 *a fully coupled CFD-MBD method*. Wind Energy, 22:1-20, 2019.

- Liu, Y., Xiao, Q., Incecik, A. and Peyrard, C.: *Aeroelastic analysis of a floating offshore wind turbine in platform-induced surge motion using a fully coupled CFD-MBD method*. Wind Energy, 22:1-20, 2019.
- Manolas, D.I., Chaviaropoulos, P.K. and Riziotis, V.A.: *Assessment of Vortex Induced Vibrations on wind turbines*. Journal of Physics: Conference Series, 2257 012011, 2022.
- 460 Micallef, D., Ferreira, C.S., Sant, T. and van Bussel, G.: *Experimental and numerical investigation of tip vortex generation and evolution on horizontal axis wind turbines*. Wind Energy, 19, 2016.
- Micallef, D., Ferreira, C., Herráez, I., Höning, L., Yu, W. and Capdevila, H.: *Assessment of actuator disc models in predicting radial flow and wake expansion*. Journal of Wind Engineering & Industrial Aerodynamics, 207, 2020.
- Mühle, F., Adaramola, M.S. and Sætran, L.: *The effect of rotational direction on the wake of a wind turbine rotor-a comparison study of aligned co-and counter rotating turbine arrays*. Energy Proceedings, 238-245, 137, 2017.
- 465 Open Source Field Operation and Manipulation: <https://openfoam.org>. Accessed: 01.2022.
- Rahimi, H., Daniele, E., Stoevesandt, B. and Peinke, J.: *Development and application of a grid generation tool for aerodynamic simulations of wind turbines*. Wind Engineering, 40:148-172, 2016.
- Rahimi, H., Dose, B., Stoevesandt, B. and Peinke, J.: *Investigation of the validity of BEM for simulation of wind turbines in complex load cases and comparison with experiment and CFD*. Journal of Physics: Conference Series, 749, 2016.
- 470 Rahimi, H., Hartvelt, M., Peinke, J. and Schepers, J.G.: *Investigation of the current yaw engineering models for simulation of wind turbines in BEM and comparison with CFD and experiment*. Journal of Physics: Conference Series, 753, 2016.
- Rahimi, H., Martinez Garcia, A., Stoevesandt, B., Peinke, J. and Schepers, G.: *An engineering model for wind turbines under yawed conditions derived from high fidelity models*. Wind Energy, 21:618-633, 2018.
- 475 Rajakumar, S. and Ravindran, D.: *Computational fluid dynamics of windturbine blade at various angles of attack and low Reynolds number*. International Journal of Engineering Science and Technology, 2, 2010.
- Reissner, E.: *On one-dimensional finite-strain beam theory: the plane problem*. Z. Angew. Math. Phys. ZAMP, 23 (5) 795-804, 1972.
- Sayed, M., Lutz, T., Krämer, E., Shayegan, S. and Wüchner, R.: *Aeroelastic analysis of 10 MW wind turbine using CFD-CSF explicit FSI-coupling approach*. Journal of Fluids and Structures, 87:354-377, 2019.
- 480 Schepers, J.G., Boorsma K., Sørensen, N., Voutsinas, Sieros, G., Rahimi, H., Heisselmann, H., Jost, E., Lutz, T., Maeder, T., Gonzalez, A., Ferreira, C., Stoevesandt, B., Barakos, G., Lampropoulos, N., Croce, A. and Madsen, J.: *Final results from the EU project AVATAR: Aerodynamic modelling of 10 MW wind turbines*. The Science of Making Torque from Wind, 1037, 1-18, 2018.
- Serrano-González, J. and Lacal-Arántegui, R.: *Technological evolution of onshore wind turbines - a market-based analysis*. Wind Energy, 19:2171-2187, 2016.
- 485 Shen, W.Z., Zakkam, V.A.K., Sørensen, J.N. and Appa, K.: *Analysis of counter-rotating wind turbines*. Journal of Physics Conference Series, 75, 2007.
- J.C. Simo: *A finite strain beam formulation. The three-dimensional dynamic problem*. Part I, Comput. Meth. Appl. Mech. Eng., 49 (1) 55-70, 1985.
- Spalart, P.R., Deck, S., Shur, M.L., Squires, K.D., Strelets, M.K. and Travin, A.: *A New Version of Detached-eddy Simulation, Resistant to Ambiguous Grid Densities*. Theoretical and Computational Fluid Dynamics, 20:181-195, 2006.
- 490 U.S. Department of Energy: Office of Energy Efficiency & Renewable Energy: *Land-Based Wind Market Report: 2021 Edition*. 2021.
- WindEurope Business Intelligence: *Wind Energy in Europe. 2021 Statistics and the outlook for 2022-2026*, 02.2022.

Yu, D.O. and Kwon, O.J.: *Time-accurate aeroelastic simulations of a wind turbine in yaw and shear using a coupled CFD-CSD method*.  
Journal of Physics: The Science of Making Torque from Wind, 22:1-20, 2014.

495 Zhang, W., Markfort, C.D. and Porté-Agel, F.: *Near-wake flow structure downwind of a wind turbine in a turbulent boundary layer*. Experiments in Fluids, 1219–1235, 52(5), 2012.