

Characterization of Dynamic Stall on Wind Turbine Airfoil under High Reynolds Number

Hye Rim Kim, Jasson A. Printezis, Jan Dominik Ahrens, Joerg R. Seume, and Lars Wein

Institute of Turbomachinery and Fluid Dynamics, Leibniz University Hannover, Germany

Correspondence: kim@tfd.uni-hannover.de

Abstract. This study shows an extensive analysis of dynamic stall on wind turbine airfoils preparing the development of a reduced-order model applicable to thick airfoils ($t/c > 0.21$) in the future. Utilizing URANS simulations of a pitching FFA-W3-211 airfoil at the Reynolds number of 15×10^6 , our analysis identifies the distinct phases in the course of the evolution of dynamic stall. When the dynamic stall is conventionally categorized into the primary 5 instability transitioning to the vortex formation stage, we suggest two sub-categories in the first phase, and an intermediate stage featuring a plateau in lift prior to entering the full stall region. This delays the inception of deep stall, approximately 3° for a simulation case. This is not predictable with existing dynamic stall models, optimized for low Reynolds number applications. These features are attributed to the enhanced flow attachment near the leading-edge, restricting the stall region downstream of the position of maximum thickness. The analysis on the frequency 10 spectra of unsteady pressure confirms the distinct characteristics of the leading-edge vortex street and its interaction with large-scale mid-chord vortices to form the dynamic stall vortices (DSVs). Examination of the leading-edge suction parameter (LESP) proposed by Ramesh et al. (2014) for thin airfoils under low Reynolds numbers reveals that LESP is a valid criterion in predicting the onset of the stall for thick airfoils under high Reynolds numbers. Based on the localized separation behavior during a dynamic stall cycle, we suggest a mid-chord suction parameter 15 (MCSP) and trailing-edge suction parameter (TESP) as supplementary criteria for the identification of each stage. The MCSP exhibits a breakdown in magnitude at the onset of the dynamic stall formation stage and full stall, while TESP supports indicating the emergence of a full stall by detecting the trailing-edge vortex.

1 Introduction

Power generation of wind turbines (WTs) increases the square of their rotor diameter, driving the trend towards 20 larger WTs. The next generation of offshore megastructures will reach rated capacities of approx. 20 MW and diameters of 350 m. The elongated and flexible rotor blades of these megastructures are more prone to deformations, which along with wind speed fluctuations, turbulence, and altitude-dependent wind distribution, locally alter the blade's angle of attack (AoA). If the AoA exceeds the static stall angle, it can trigger dynamic stall. Dynamic stall introduces transient loads that potentially excite blade vibrations, which contribute to mechanical fatigue and can 25 lead to blade failure. It is, therefore, crucial to predict the onset of dynamic stall and account for the increased

dynamic loads in the design of future WT blades. Dynamic stall has long been a subject of research in helicopter aerodynamics (Leishman, 2006; Corke and Thomas, 2015), it has been investigated both experimentally (Merz et al., 2017; Schwermer et al., 2019), and numerically (Letzgus et al., 2019). Differences between dynamic stall on helicopter and WT blades are the larger diameters and chord lengths, resulting in higher Reynolds numbers ($Re \approx 15 \text{ M}$) and lower Mach numbers ($Ma < 0.3$). Additionally, WT airfoils have a higher thickness-to-chord ratio of $t/c > 0.21$ and Bangga et al. (2017) has shown that the flow around WT blades can be assumed quasi-three-dimensional (Q3D) for regions outside of the inner 30% of the span. Sharma and Visbal (2019) investigated the influence of airfoil thickness on dynamic stall and found that the influence of trailing-edge separation increases with thickness. They noted that for Q3D simulations, a span of 10% of the chord is sufficient to study the onset of dynamic stall. The stall behaviour of an airfoil gradually shifts from trailing-edge stall to leading-edge stall, and the stall angle and maximum lift increase for growing $Re > 2 \times 10^6$ (Brunner et al., 2021). Kiefer et al. (2022) found that for thick airfoils, the stall delay is characterized by a power law that is a function of the Reynolds number, kinematics of the pitching motion, and airfoil geometry parameters. Huang et al. (2020) identified the freestream's turbulence as a critical parameter that delays the onset of dynamic stall. The higher the freestream's turbulence, the later the dynamic stall vortex (DSV) forms because the turbulence increases the transport of momentum in wall normal direction and, thus, stabilizes the boundary layer. The three stages of dynamic stall according to Mulleners et al. (2012) are the primary instability stage, vortex formation stage, and deep stall. When exceeding the static stall angle α_{ss} , the boundary layer enters the primary instability stage, which is characterized by the formation of small eddies on the suction side of the airfoil and an increase in lift above the maximum of the static curve. Further increasing the angle of attack above α_* initiates the vortex formation stage. The unstable boundary layer rolls up and the DSV is formed. This vortex subsequently detaches and the airfoil reaches deep stall at α_{ds} , which leads to a sudden drop in the lift. Decreasing the angle of attack prior to exceeding α_* , prevents the formation of a DSV and keeps the airfoil in the light stall regime, which is associated with significantly lower dynamic blade loads and load oscillations (Mulleners et al., 2012; Deparday and Mulleners, 2019). The total stall delay is composed of the stall delay attributed to the primary instability stage and the stall delay attributed to the vortex formation stage. The first is known to be a function of the airfoil geometry, whereas the later depends on the freestream conditions and kinematics of the airfoil (Mulleners et al., 2012; Kiefer et al., 2022).

The operating conditions of WTs are highly unsteady and vary over the span of the airfoils. Preventing the local angle of attack from exceeding the static stall angle at every span-wise position and, thereby, avoiding dynamic stall is an impossible task with global pitch control. Changing the pitch angle locally would require expensive gear that measures the local angle of attack at multiple span-wise positions and an approach to locally reduce that angle of attack. Gerontakos and Lee (2006) and Andersen et al. (2009) investigated trailing-edge flaps to suppress dynamic stall. However, installing such devices in a WT would drastically increase the cost and the maintenance intervals. A cost-effective way of mitigating the effects of dynamic stall is to develop airfoil geometries that are inherently less prone to dynamic stall. In order to design such airfoils, the angle where the DSV forms, α_* has to be predicted

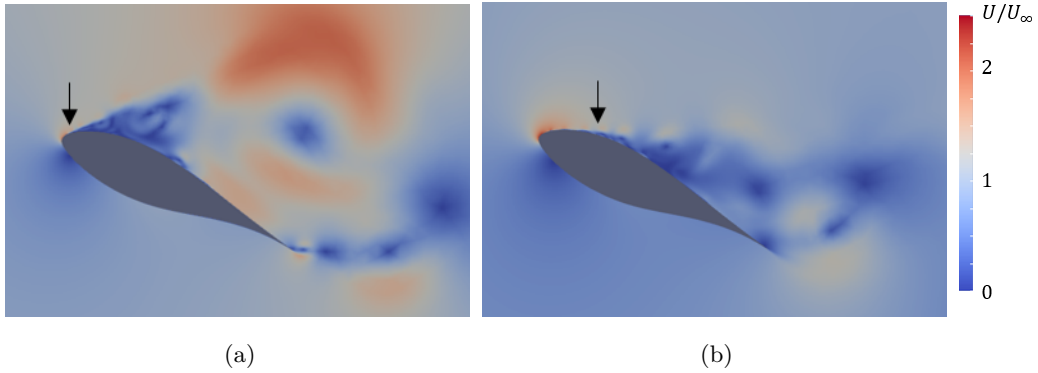


Figure 1. Instantaneous contour of velocity during a pitching motion: (a) $Re = 1.6 \times 10^6$, typical leading edge separation and large-scale dynamic stall vortex formation. (b) $Re = 16 \times 10^6$, small-scale vortices attached in leading-edge region, delaying the onset of deep stall

and maximized for new airfoil designs. This is possible because α_* is a function of the airfoil geometry and flow conditions.

The most common engineering method for predicting dynamic stall with low computational effort is by integrating dynamic stall models in blade element momentum (BEM) tools. Detailed presentations of the implementation of dynamic stall models in the BEM theory are summarized in Branlard et al. (2022). The BEM theory combines the momentum and the blade element theory to ascertain the aerodynamic characteristics and loads of WT rotor blades. The momentum theory characterizes flow dynamics within a control volume, allowing the calculation of thrust and torque. The blade element theory divides the blade into infinitesimal segments, enabling analysis of individual radial positions. By integrating these theories, BEM determines the forces and moments at different radial positions.

Current dynamic stall models in BEM theory require empirical results and rely on parameters that are derived from the static lift curve of already existing airfoils. The lift curves need to be obtained via simulations or experiments and are acquired for every combination of airfoil geometry and aerodynamic boundary conditions that are investigated in the BEM simulation. Applying these empirical results to new airfoil geometries could lead to large uncertainties in the results (Tangler, 2002; Simms et al., 2001). To increase the accuracy of dynamic models, correction models have been developed over time. The most widely applied dynamic stall model in literature for wind turbines is the Beddoes-Leishman (BL) model (Leishman and Beddoes, 1989; Gupta and Leishman, 2006). The BL model consists of four modules that are used to calculate dynamic stall effects, which are then linearly combined to obtain the resulting unsteady lift. The foundation of the BL model rests upon calculated static polar information. Recently published dynamic stall model, IAG model, shows a great improvement of prediction accuracy compared to BL models (Bangga et al., 2020, 2023). It is proven to be applicable for thick airfoils to predict characteristics of deep stall as well.

Another method to predict dynamic stall is a non-empirical ROM for predicting the onset of the vortex formation stage. An example for such an approach for thin airfoils under low Reynolds number is a discrete vortex method with a shedding criterion, which was established by Ramesh et al. (2014). They introduced the critical leading-edge suction parameter ($LESP_{crit}$) as a measure of the suction capacity at the leading edge, which is calculated by integrating the chord-wise component of local force at the airfoil surface in the interval $0 < x/c < 0.1$. They found that for any thin airfoil and Reynolds number, there exists a critical $LESP_{crit}$. When exceeded, vortex shedding occurs at the leading-edge marked by a sudden breakdown of the suction of the airfoil and its lift. $LESP_{crit}$ is a function of the airfoil geometry and Reynolds number and using thin airfoil theory, we can analytically predict it with the first term of the Fourier series of the vortex sheet strength distribution along the camber line, or ingetrating unsteady pressure distribution around the airfoil (e.g. unsteady vortex-lattice method (Konstadinopoulos et al., 1985)). Using this relationship, Deparday and Mulleners (2019) predicted the onset of the vortex formation stage for thin airfoils based on $LESP_{crit}$ and improved the method by introducing an effective angle of attack that depends on the instantaneous shear layer height at the suction side of the airfoil. Mulleners et al. (2012), Gupta and Ansell (2019), and Sharma and Visbal (2019) state that for thick airfoils the DSV does not form at the leading-edge but at mid-chord. This was experimentally confirmed by Kiefer et al. (2022).

Based on these observations, the authors explore dynamic stall of a typical wind turbine airfoil, FFA-W3-211 at $Re = 15 \times 10^6$. The vortex formation stages and deep stall are investigated, characterizing the local flow separations. Our hypothesis is, that there exists the critical mid-chord suction parameter (MCSP) and trailing-edge suction parameters (TESP), which identify the different formation phases of the dynamic stall vortices. The MCSP is a measure of the suction at mid-chord in the interval $0.3 - 0.4 c$ directly downstream of the maximum thickness at $0.3 c$, and TESP in $0.9 - 1 c$. All of the $LESP_{crit}$, $MCSP_{crit}$, and $TESP_{crit}$ are criteria that predict vortex shedding along the airfoil surface without relying on empirical static polars and coefficients as the BEM method. We test our hypothesis by conducting URANS simulations of dynamic stall at $Re = 15 \times 10^6$. This Reynolds number will be reached by future offshore WTs and, to the best of our knowledge, dynamic stall has not been comprehensively investigated at such operating conditions.

2 Methodology

2.1 Numerical Setup

OpenFOAM v2012, an open-source CFD software, is used to conduct a three-dimensional time-resolved RANS simulation for investigating dynamic stall on the FFA-W3-211 airfoil (Fig. 1). This airfoil is a commonly used geometry for WTs with a thickness-to-chord ratio of 0.21 at $0.3 c$ and the coordinates of the geometry can be found in Björck (1990). The main purpose is to predict the flow separation on the suction side of the airfoil for both, the static and the dynamic cases at $Re = 15 \times 10^6$, which is representative for future offshore WTs.

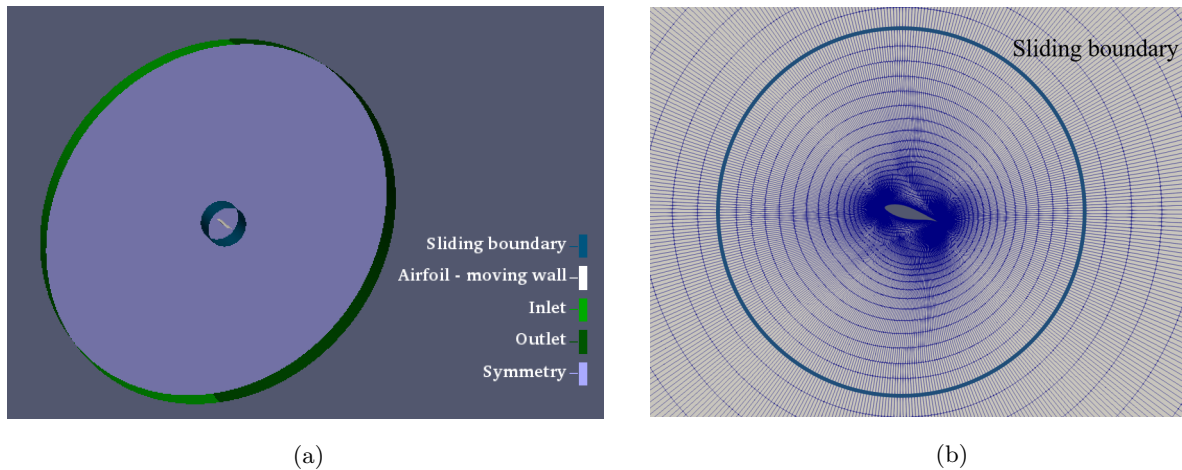


Figure 2. Numerical domain (a) boundary conditions (b) mesh around the airfoil, blue line indicating the interface between pitching and stationary domains

The computational domain and mesh are presented in Fig. 2. The Q3D domain consists of the stationary outer
 115 annulus with the diameter of $45 c$ and the pitching inner cylinder with the diameter of $5 c$, having the chord
 length of $c = 3.5$ m. The two domains are coupled at each pitching motion using cyclicAMI boundary condition in
 OpenFOAM. The span of the Q3D model is set as $2.5 c$. Boundary layers at the blade surface are fully resolved,
 i.e. the non-dimensional grid spacing in wall normal direction y^+ is smaller than 1. The cell account in the spanwise
 direction is 20, resulting in relatively high z^+ in the order of 10^3 . This is a compromise between the computational
 cost and resolving three-dimensional vortices. The influence of cell numbers in the spanwise direction is shown in
 the following section. This results in total number of cells of 0.7×10^6 for the reference case. At the inlet, a uniform
 velocity of $U_\infty = 80$ m/s and a zero gradient for the kinematic pressure are applied, while a zero gradient for the
 velocity and a uniform kinematic pressure of $p/\rho = 0$ (incompressible flow) is applied at the outlet. The turbulent
 quantities are imposed at the inlet as fixed values, which corresponds to the turbulence intensity of 0.01%. This
 125 assumption is valid for the rotor cross-sections of large WTs in laminar wind field in high altitude. The turbulent
 wind conditions should be applied for future studies as well. A periodic condition is used for all wall boundaries,
 except for the airfoil surface, where a zero-velocity condition is enforced.

The transient and incompressible pimpleFoam solver has been used for the unsteady RANS simulations. The two-
 equation shear stress transport ($k-\omega$ SST) model is applied as the turbulence model. It uses the PIMPLE (merged
 130 PISO-SIMPLE) algorithm for the pressure and velocity coupling (Issa, 1986). The correction of dominant fluxes in
 the impacted cells considers the impact of mesh movement. This correction involves substituting the velocity with a
 relative velocity in all convection terms. A comprehensive explanation of this process can be found in the reference
 Jasak (2009). The transition model is not applied in this study since the flow is mostly turbulent (Fig. 1b). Kiefer
 et al. (2022) showed that for $Re = 5 \times 10^6$, the boundary layer is expected to transition to turbulence upstream of the

135 separation point from low Reynolds number conditions and close to the leading edge of the airfoil. OpenFOAM uses
the finite volume method to discretize the differential RANS equation. The temporal discretization of implicit 2nd
order, and the spatial discretization of 2nd order Gauss linear schemes are employed with the exception of Laplacian
schemes of Gauss linear limited corrected 0.5. This setup was successfully validated by Ahrens et al. (2022) for the
140 prediction of dynamic stall of a thin blade at low Reynolds number. Therefore, it cannot be guaranteed that the
URANS setup and, in particular, the choice of the turbulence model is valid for this study. However, the error by
the turbulence model will only influence the threshold values for the different stages of the dynamic stall, but not
the principle flow features observed. Depending on the calibration of the turbulence model, the turbulent boundary
layer may be more or less stable (separation occurs at higher or smaller angle of attack). Whether the URANS
prediction are quantitatively accurate or not, can only be validated by experiments or reynolds stress resolved large
145 eddy simulation. Both are not available, yet. The prediction of static stall will be validated by the widely used
XFOIL method and we assume, that the URANS model is than valid for the prediction of dynamic stall, too. The
timestep is adjusted during the unsteady simulation with the maximum Courant number (CFL number) of 10 along
with the maximum time step of 5×10^{-4} s. Although the maximum CFL number is set to be 10, local CFL number is
equal or less than 1, except at the leading-edge nose and tailing-edge where the mesh is excessively fine and velocity
150 is high. This results in the time steps varying between 5×10^{-5} s at stable region, and 6×10^{-6} s at stall region
within a cycle.

To evaluate the static and dynamic performance of the airfoil, 200 numerical probes are located along the surface
at the mid-span, with a denser distribution near the leading-edge. The data is sampled at the frequency of 100
kHz for the spectral analysis, this is 100 – 1000 times down-sampled for the quasi-steady state analysis. The total
155 simulation time corresponds to 5-15 cycles, then the first one or two are excluded to present the fully developed
cycle behavior.

2.2 Non-dimensionalization

Comparability of the results presented in this paper is ensured by providing non-dimensional flow quantities. The
non-dimensional quantities analyzed in this work are listed in the following paragraph. The Reynolds number

$$160 \quad \text{Re} = \frac{c \cdot U_\infty}{\nu} \quad (1)$$

is based on the chord length c , the freestream velocity U_∞ , and the kinematic viscosity ν . A local Reynolds number,
 Re_x takes axial position x instead of the chord length c . Strouhal number St is given to describe characteristic
frequency of the vortex shedding f ,

$$\text{St} = \frac{f \cdot c}{U_\infty} \quad (2)$$

Table 1. Test cases at $Re = 15 \times 10^6$

Case ID		mean AoA, $\bar{\alpha}$ in $^\circ$	pitching angle, $\hat{\alpha}$ in $^\circ$	k
1	Static polar	14, 17, 20, 23, 26, 29, 32, 35	-	-
2	Dynamic stall	17	8, 15	0.137
3	Dynamic stall	20	5, 10, 15	0.137

165 The kinematic frequency, in our case the pitching frequency f_p , is non-dimensionalized as reduced frequency k following the convention:

$$k = \frac{\pi \cdot f_p \cdot c}{U_\infty} \quad (3)$$

The non-dimensional cell height at the wall

$$y^+ = \frac{y \cdot \sqrt{\tau_w / \rho}}{\nu} \quad (4)$$

170 is calculated with the cell height at the wall y , the wall shear stress τ_w and the density ρ . x^+ uses the stream-wise cell size as input and z^+ the span-wise size, respectively. The lift coefficient is based on the lift force of the airfoil l :

$$c_l = \frac{l}{\frac{1}{2} \rho U_\infty^2 c} \quad (5)$$

The drag coefficient c_d is the non-dimensionalized drag force d in the same manner.

2.3 Test Cases

175 The URANS simulation is first conducted at fixed AoA as listed in Tab. 1 to attain static polars. This is compared to XFOIL at $5^\circ < \text{AoA} < 35^\circ$. XFOIL is a widely used tool to predict the static performance of airfoils. According to Kang et al. (2018), XFOIL accurately predicts the pressure distribution of a thick profile at $Re = 2.2 \times 10^6$, including the transition point from laminar to turbulent flow. This is validated by comparing the result to a wind tunnel test. XFOIL can not yet be used for the prediction of dynamic stall, which is why we focus on URANS in this work. The URANS model on the other hand was validated based on the widely used XFOIL simulations for the prediction of static stall. We then assume, that URANS is valid for the prediction of dynamic stall, too. The dynamic stall cases are simulated by pitching AoA, α , defined by

$$\alpha(t) = \bar{\alpha} - \hat{\alpha} \cdot \cos(2\pi f_p t) \quad (6)$$

185 in Tab. 1. The dynamic conditions are chosen based on the static result to investigate light and deep stall. Although these conditions are extreme and apart from the realistic pitching operations, investigating this region is necessary to understand the characteristics of the dynamic stall and to validate or develop a comprehensive dynamic stall model

in the future. The pitching frequency is $f_p = 1$ Hz, which corresponds to a reduced frequency, $k = 0.137$. Simulations at $Re = 1.6 \times 10^6$, 16×10^6 (e.g. Fig. 1), and k in a range of $0.029 - 0.137$ have been conducted, too. For the simplicity, the results of a few representative cases are shown in the paper. The influence of Re and k on dynamic stall behavior are overall similar to the previous studies.

2.4 Blade Element Momentum Code

The model chosen for this study is the 4-states model of Hansen, Gaunaa, and Madsen (HGM Model, Hansen et al. (2004)), which is a variation of the BL Model. The HGM Model is analyzed in detail in Branlard et al. (2022). The airfoil under consideration and the boundary conditions are the same as the CFD setup. The time-step of the calculation is $\Delta t = 1 \times 10^{-2}$, which is considered adequate for convergence and stability, whereby its reduction has no effect on the results. URANS simulations in combination with XFOIL simulations were used to determine the static polars for $5^\circ < \alpha < 17^\circ$. The XFOIL polars were utilized for angles up to 10° , while the RANS polars were employed for angles ranging from $10^\circ < \alpha < 17^\circ$. The static polar data underwent a 3D correction based on the approach outlined by Du and Selig (1998). Extending the polar curve to cover a range of $-180^\circ < \alpha < 180^\circ$ allows the determination of the unsteady parameters. The unsteady parameters which are used in the HGM model can be found in Damiani and Hayman (2019). Other parameters which are set in the HGM Model are the empirical determined constants A_1 , A_2 , b_1 , b_2 , T_p , T_f , and T_v . This paper uses the values calculated by Leishman and Beddoes (1989): $A_1 = 0.3$, $A_2 = 0.7$, $b_1 = 0.14$, $b_2 = 0.53$, $T_p = 1.7$, $T_f = 3$, and $T_v = 6$.

3 Mesh and Time-Step Studies

The preliminary studies are discussed in this section prior to the main analysis. The static polar is calculated by averaging the pressure after the convergence of the non-pitching simulations. The static case is utilized as the initial solution for the pitching cases. The dynamic cases have been simulated for 5-15 cycles, the data is then phased-averaged after the convergence. Since the time increment varies at each time-step in unsteady setups, the data is resampled at a constant sampling frequency. Most of the contour figures are based on this phase-averaged data, e.g., the spatiotemporal and spatio-spectral plots, except a few instantaneous plots. Besides the phase-averaged performance, it is occasionally shown together with each cycle to represent the cycle-to-cycle variations. In this section, a maximum 4 cycles are shown from each case for the simplicity, even though the phase-average cycle is a result of averaging 5-15 cycles.

The mesh study and time-step study have been conducted to find the adequate steps of spatial and temporal discretizations. Three cases of different cell counts of 1, 10, and 20 in the span of the aspect ratio (AR) of 2.5 are simulated with the pitching angle of $17^\circ \pm 8^\circ$. Another case is AR of 1.25 with 20 cells in the span. Figure 3 shows the dynamic stall cycles from four mesh setups together with two static polars, one from time-averaged URANS of non-pitching setups of the reference mesh, the other from two-dimensional simulations in XFOIL. The error bar

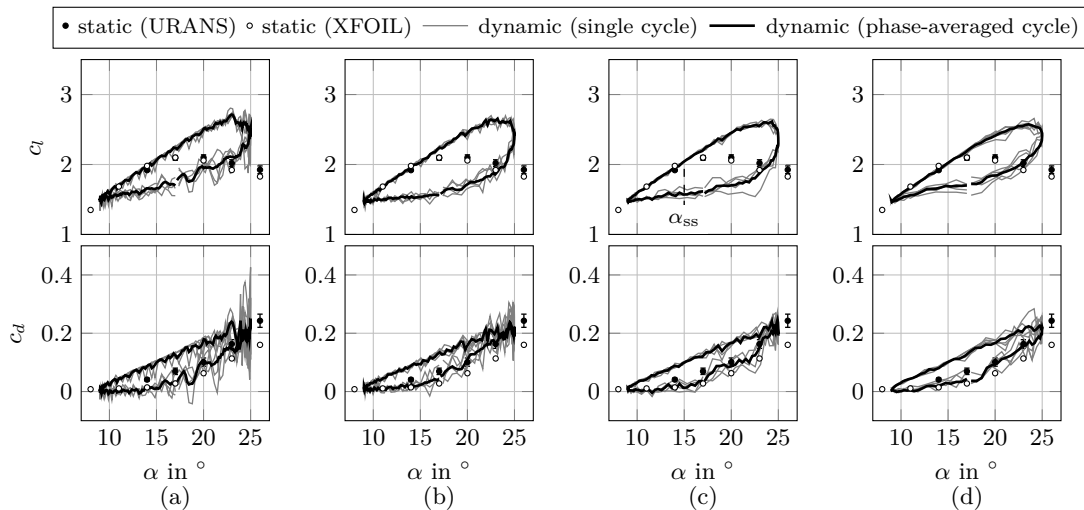


Figure 3. $17^\circ \pm 8^\circ$ dynamic case for mesh study of different cell counts in span (a) 1 cell (b) 10 cells (c) 20 cells (reference) for the airfoil aspect ratio of 2.5, (d) 20 cells for the airfoil aspect ratio of 1.25. Error bar indicates 95% confidence level.

indicates the confidence level of 95% of URANS simulations, which enlarges as the AoA increases. The calculations
 220 of c_l and c_d from XFOIL and URANS agree well up to the angle of attack of 17° , which is near the maximum c_l .
 XFOIL predicts the transition position as $x/c = 0.002$ at $\alpha = 20^\circ$, which supports the validity of the fully turbulent
 assumption in URANS setup. The deviation between static URANS and XFOIL increases as the angle increases,
 which addresses the limitation of utilizing two-dimensional tools for large WT applications. The influence of the mesh
 size on the prediction of stall cycles in c_l , c_d , and the onset of static stall at $\alpha_{ss} = 15^\circ$ is similar. Fig. 3a predicts
 225 an earlier onset of deep stall at 23° when the other setups show light stall behavior. The cycle-to-cycle variation is
 large in this case, which is not physical phenomenon, rather numerical error. Figure 3d slightly under-predicts the
 variation in c_l during DS, especially the maximum lift and lift during a down-pitching, where DSVs are developed
 into large-scale three-dimensional vortices. The conventional choice of spanwise extension as similar to or smaller
 than a chord length might not be sufficient to resolve DS of large WTs. The AR of 2.5 with 20 cells are chosen for
 230 the studies in this paper, nevertheless, the influence of the domain should continue to be investigated in the future,
 focusing on the three-dimensional aspect of DSVs.

Figure 4 shows the dynamic stall cycles from different maximum CFL number cases of 100, 50, and 10. The pitching
 angle is chosen to be $17^\circ \pm 15^\circ$ to examine the influence of the time-step during a deeper stall cycle compared to the
 mesh study. The cycle converges towards maximum CFL of 10. This setup results in CFL number of the majority
 235 of the cells under 1 at every time step. Maximum CFL number of 5 would require very high computational power.
 The prediction of $\alpha_{ss} = 15^\circ$ and maximum c_l at $29^\circ - 30^\circ$ is similar for all different CFL numbers. However, the
 difference is distinct in c_l and c_d near the maximum angle $\alpha = 30 - 32^\circ$ especially during down-pitching, which is

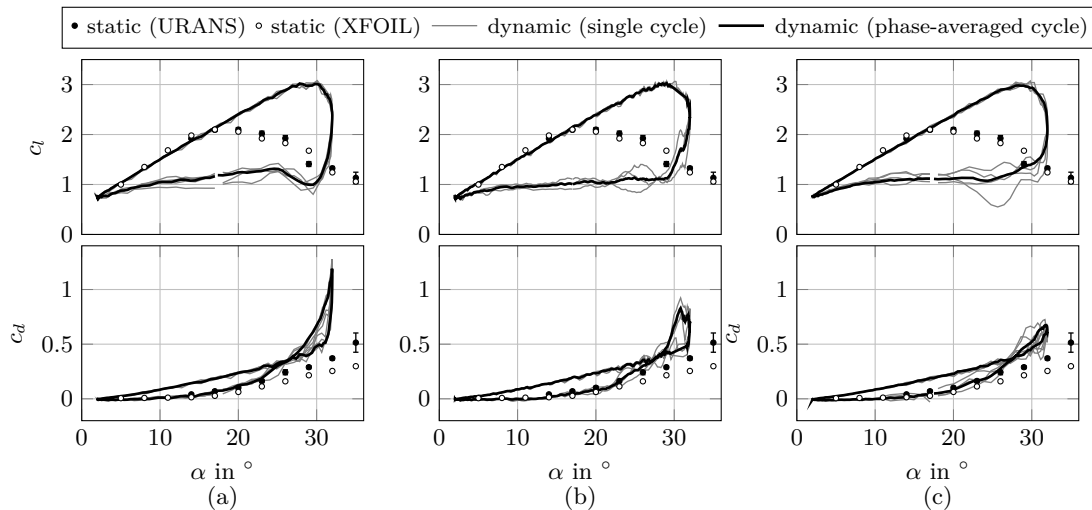


Figure 4. $17^\circ \pm 15^\circ$ pitching case for time-step study of maximum CFL number in (a) 100 (b) 50 (c) 10 (reference).

relevant estimating LESP and later developing reduced order model. Therefore, the maximum CFL number 10 is chosen for further simulations.


240 4 Features of Dynamic Stall

4.1 Sensitivity of Dynamic Stall towards Pitching Angle


The dynamic stall cycles in different mean and pitching angles are shown in Fig. 5. The onset angles of each dynamic stall phase are defined as static stall α_{ss} , local stall α_* , full stall α_{**} , and deep stall α_{ds} . The angles are introduced in this section based on the distinct characteristics of the flow separation and vortex structures on the airfoil suction
 245 side, the criteria to these will be introduced in the last section based on the suction parameters. A proper method, such as a proper orthogonal decomposition (POD) should be considered in the future to provide a measurable definition (Mulleners and Raffel, 2012).

The onset angle of the static stall is approximately at $\alpha_{ss} = 15^\circ$, which is defined as where the dynamic performance deviates from the static performance. This angle corresponds to a trailing-edge stall in static case, the complete flow
 250 separation is found approximately at 35° . This type of partial stall is known for thick airfoils in high Reynolds number (Braud et al., 2024). After exceeding $\alpha_{ss} = 15^\circ$, small fluctuations are observed in the dynamic signals of c_l and c_d as the flow becomes unsteady. The fluctuation and the cycle-to-cycle variation increase further and become distinctly more chaotic around local stall at $\alpha_* = 28^\circ$. This is also where the dynamic c_d rapidly changes during down-pitching, and the static lift abruptly decreases due to the flow separation without reattachment on the suction
 255 side. The difference in static polar between URANS and XFOIL is large at this angle. The pitching angle of $20^\circ \pm 15^\circ$

• static (URANS) ◦ static (XFOIL) — dynamic (single cycle) — dynamic (phase-averaged cycle)

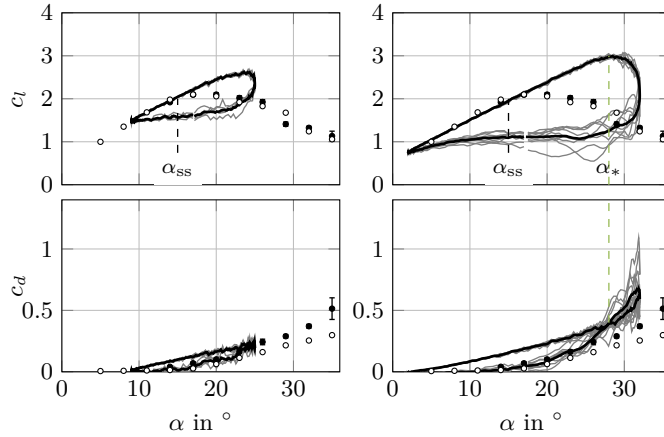

(a)

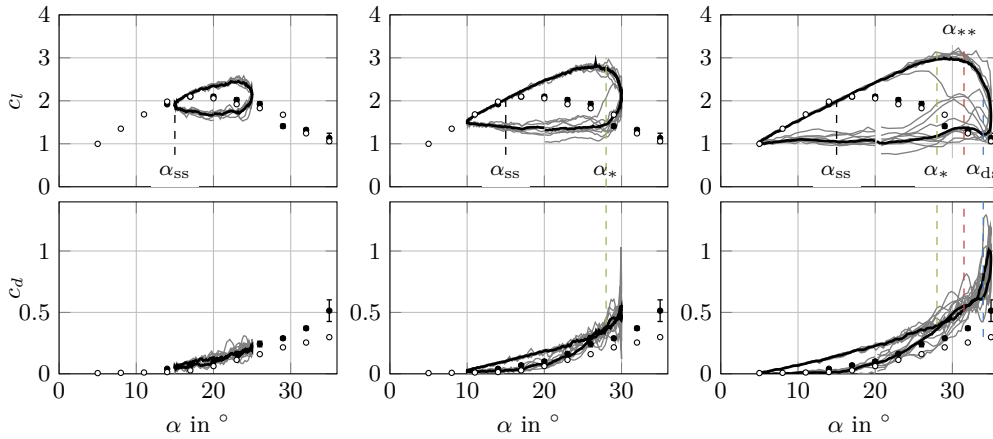

(b)

Figure 5. Lift and drag coefficients of different mean and pitching angles. (a) $\bar{\alpha} = 17^\circ \pm 8^\circ$ (left), $\pm 15^\circ$ (right). (b) $\bar{\alpha} = 20^\circ \pm 5^\circ$ (left), $\pm 10^\circ$ (middle), $\pm 15^\circ$ (right).

shows a deep stall cycle when the rest investigated in this paper are light stalls. This case experiences a sudden decrease in lift and increase in drag during dynamic stall at the full stall at $\alpha_{**} = 31.5^\circ$, and enters deep stall at $\alpha_{ds} = 34^\circ$. The static polar shows a second drop around $\alpha_{ds} = 34^\circ$, which indicates the complete stall in the leading-edge (LE) region. α_{ss} and α_* can be set as critical angles for this airfoil. However, to generalize this observation for different airfoils during a design process and to find the correlation between the airfoil parameters and the critical angles, comprehensive understanding and analysis of the flow field is necessary.

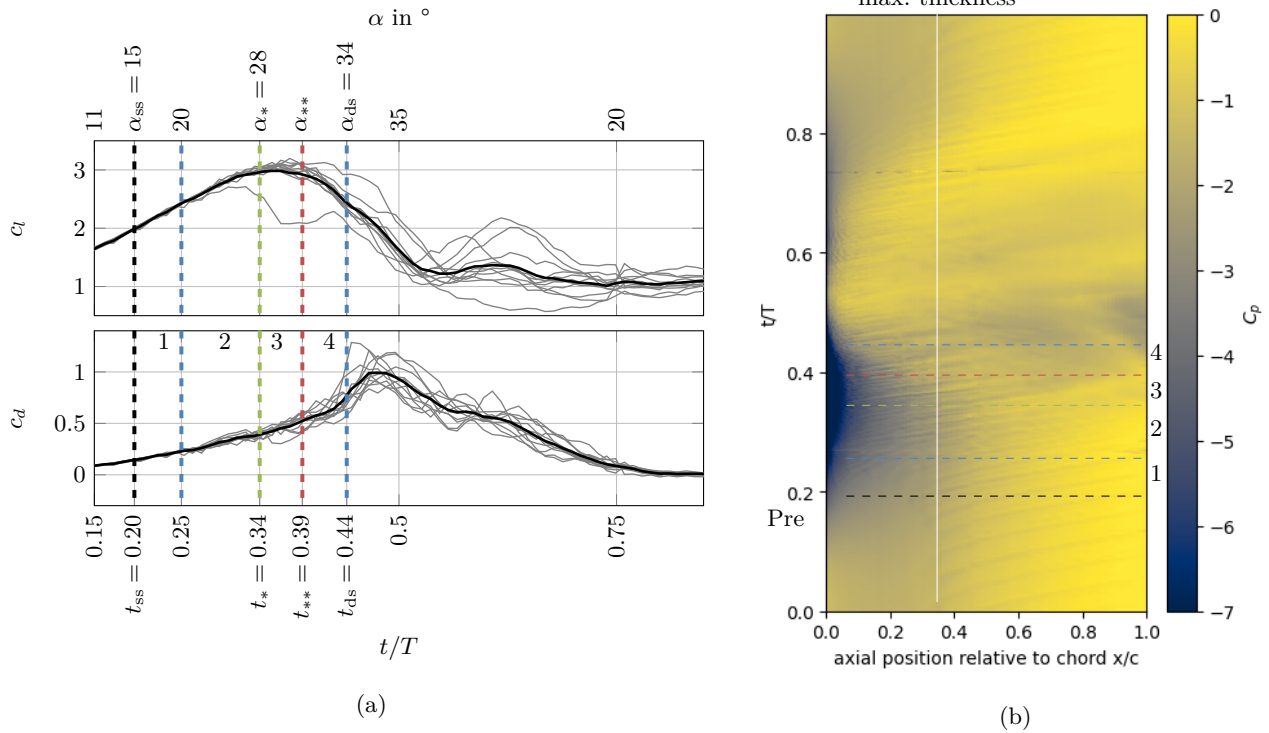


Figure 6. Evolution of dynamic stall in different phases for $20^\circ \pm 15^\circ$, static stall at t_{ss} , localized stall at t_* , full stall at t_{**} , and deep stall at t_{ds} : (a) Phase-averaged (black) and individual (gray) lift and drag coefficients, (b) Spatiotemporal plot of phase-averaged pressure coefficient c_p on the suction side.

4.2 Life Cycle of Dynamic Stall

The life cycle of dynamic stall is conventionally categorized into the primary instability stage and the vortex forming stage during an up-pitching motion. The primary instability stage is where the flow becomes unstable exceeding the static stall limit (t_{ss}). The shear layer starts rolling up forming localized vortices. During the vortex forming stage (t_*), the shear layer is rolled up together with the leading-edge separation vortex (LEV), forming a large DSV (Fig. 1a). DSVs are detached after entering this stage, leading the decrease in lift. Dynamic stall of a thick airfoil under very high Reynolds number reveals that this classification is not completely applicable due to the distinct localized characteristics. Figure 6a shows the lift and drag coefficients, and Fig. 6b the pressure coefficient c_p on the suction-side of the airfoil with the individual stages marked, while Fig. 7 shows the pressure contours at the mid-span. The definition and description of each evolution phase are as follows:

→	Initial instability/DSV formation	→	Lift peak	→	Full stall	→
	(Stage1/Stage2)		(Stage3)		(Stage4)	
α_{ss}		α_*		α_{**}		α_{ds}
static stall		local stall		LE stall		deep stall

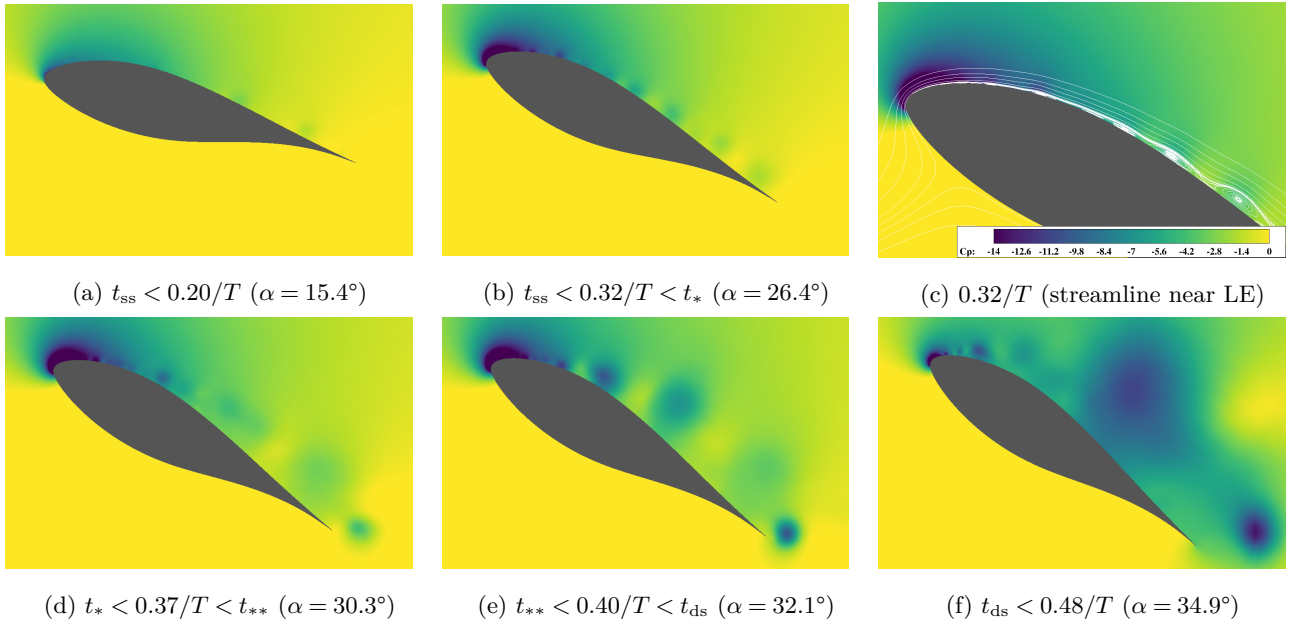


Figure 7. Instantaneous pressure coefficient C_p through during a dynamic stall (a) Initial instability (Stage1), (b)(c) Attached vortex street (Stage2), (d) Lift peak, localized stall (Stage3), (e) Full stall (Stage4), (f) Deep stall

- Pre-stall: At a low angle of attack, small separations form near $0.3 c$ where the maximum thickness of the airfoil is found. Those separations are convected downstream while the leading edge area is steady. Those are low intensity and constant vortices, which are not influenced by the pitching angle in this region.

- Initial instability, localized vortex formation (Stage1): Exceeding the static stall at $t_{ss} = 0.20$, linear increase in the lift and drag is observed. Few localized small-scale vortices form independently in the LE region ($0 - 0.3 c$) and mid-chord (MC) to trailing-edge (TE) region ($0.3 - 1 c$). Those vortices are low intensity and quickly dissipate while being convected downstream. Their traces can be seen at the spatiotemporal plot in Fig. 6b at $t = 0.20 - 0.25$. The cycle-to-cycle variation is negligible at this initial instability stage, implying a quasi-steady state.

- Dynamic stall vortex formation, attached vortex street (Stage2): Further increase in the pitch angle results in gaining lift, although the increase is decelerated compared to the previous stage. The pressure contour shows that the LE is generating small-scale vortices (Fig. 7c). These high intensity LEVs travel downstream, they develop into DSVs as a result of interaction with the mid-chord vortices. It results in multiple vortices of large to small-scales in various intensities, attached along the entire suction-side of the airfoil. The cycle-to-cycle variation is increased compared to the earlier stage.

- Lift plateau, localized stall (Stage3): Although LE suction still increases and generate stronger vortices at turbulent LE ($0 - 0.3 c$), the total lift does not increase in this stage since the stall is initiated at the rest of the region ($0.3 - 1 c$). This is apparent in Fig. 6b and Fig. 7d as detached and dissipating vortices at $0.3 - 1 c$. The

290 lift curve c_l shows a plateau at time $t_* = 0.34 < t < t_{**} = 0.39$ as a result of the balance between ever increasing LE suction and decreasing suction in the rest of the region. For the cases of thin airfoils in low Reynolds numbers, the plateau in lift might be observed for a very short period time at the beginning of vortex formation stage as a result of the balance between LEV and TEV (Deparday and Mulleners, 2019). However, the time span is relatively short for thin airfoils in low Reynolds number because the primary DSV is formed at the LE and shortly after detached, when
 295 the attached small scale vortices originated from the turbulent LE persist for an extended time for thick airfoils in high Reynolds number. Therefore, it can be concluded that this extended intermediate stage is a consequence of the earlier transition at the LE and abrupt changes of blade thickness along the chamber line. This stage functions as a delay of deep stall and is beneficial to gain further lift during a pitching motion.

- Full stall (Stage4): LE region gradually stalls after reaching its maximum capacity at $t_{**} = 0.39$. In this stage, the
 300 suction-side is fully stalled and the trailing-edge vortex starts appearing (Fig. 7e). This process results in a drastic decrease in lift c_l and increase in drag c_d .

- Deep stall, shedding of dynamic stall vortex: The airfoil is fully stalled, lift is decreased and drag is increased continuously. The beginning of this stage, $t_{ds} = 0.44$ might involve slight increase in lift due to the shedding of the large DSVs (Fig. 7).

305 - Post-stall: Leaving the stall by a down-pitching motion at $t = 0.5$, the lift usually fluctuates and is returned to the pre-stall state, featuring LE reattachment. For the current study, this returning process is slightly delayed since the LEVs are still generated at $t = 0.5 - 0.75$, preventing a rapid decrease in lift. This is related to the characteristics of delayed and stretched stall region during the up-pitching motion.

4.3 Vortex Dynamics

310 Spectral analysis reveals the spatial and temporal evolution of vortices described earlier. Figure 8 shows frequency spectra of pressure coefficient c_p along the airfoil suction-side in different time steps. The phase-averaged c_p from adjusted time-step simulations is taken to eliminate numerical errors. The axial position is in the log-scale to highlight the LE region, where the dynamic unsteady flow separation is found. The origin and evolution of small to large-scale DSVs are traced following the life cycle defined in the previous section. A few distinct peaks are observed during the
 315 dynamic stall, which correspond to the shedding of vortices.

As the angle of attack exceeds the static stall limit (Fig. 8a), the increase in unsteady pressure coefficient c_p is detected at $0.3 - 1 c$ at very low frequency. This is the result of localized separations defined earlier. The pressure gradient along the airfoil surface at this stage is small, so that the vortices are slowly convected downstream and dissipate. The LE region is at this stage still static (dark blue contour), the entire airfoil is in a quasi-steady state. As
 320 the cycle enters the Stage1 (Fig. 8b), LE separation at $0.025 c$ is initiated with discrete frequency contents. The local Reynolds number $Re_x = 3.8 \times 10^5$, indicates that this is a turbulent separation. The previously separated region at $0.3 - 1 c$ becomes slightly more unsteady. The vortices originated from LE and MC are independent, persisting their own characteristics, indicating no large-scale DSVs are formed yet. Towards Stage2 (Fig. 8c) and Stage3 (Fig. 8d),

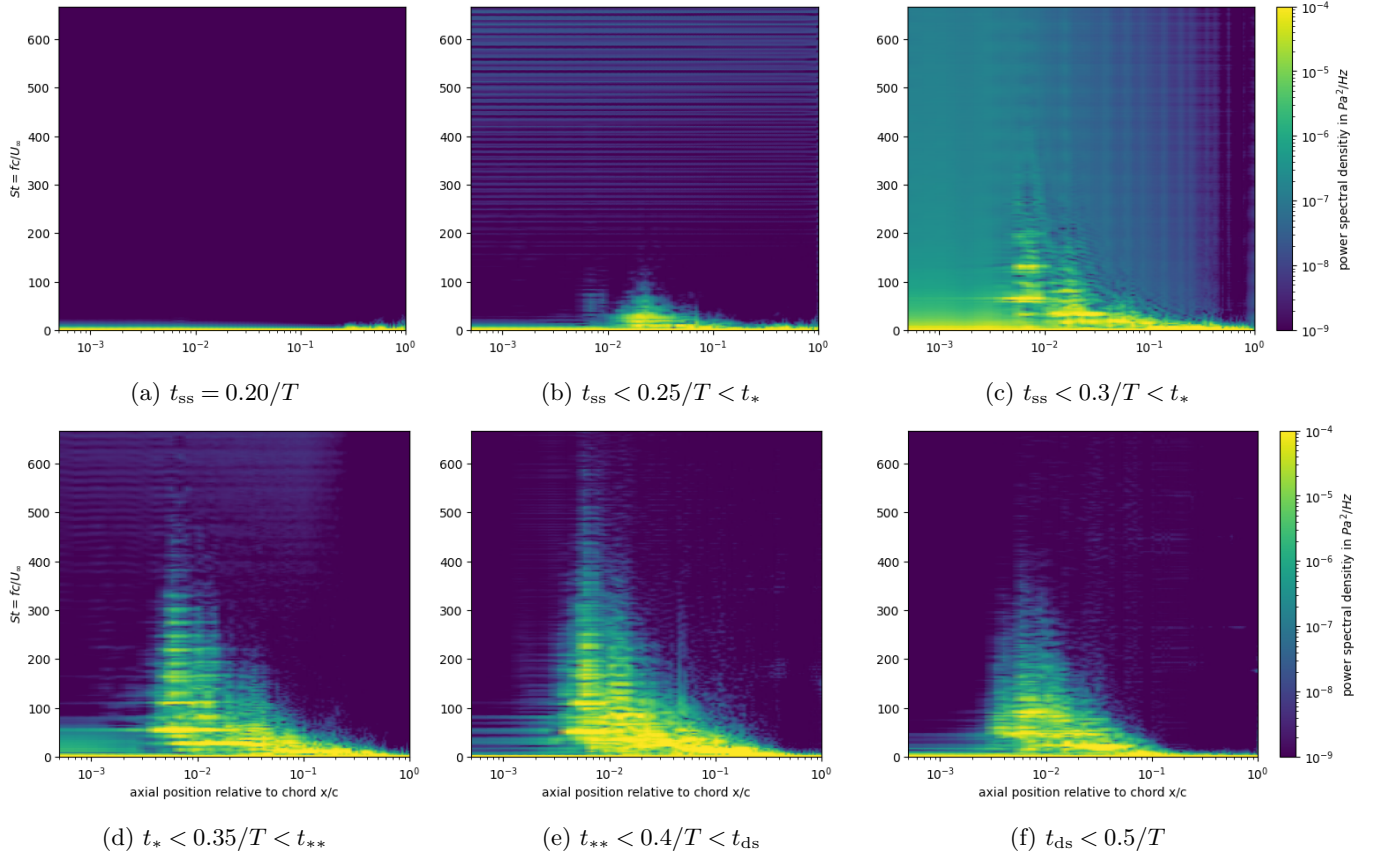


Figure 8. Power spectral density of phase-averaged pressure coefficient c_p on the suction side of the airfoil during dynamic stall, frequency non-dimensionalized as $St = fc/U_\infty$. (a) At static stall, (b) Initial instability (Stage1-2), (c) Attached vortex street (Stage2), (d) Peak lift (Stage3), (e) Full stall (Stage4), (f) Deep stall

the LE separation point is shifted to further upstream at $0.006 c$. The highest peak is observed at approximately $St = 25$, this vortex is then convected downstream with a slightly decreasing frequency. This peak corresponds to the local Reynolds number of $Re_x = 9 \times 10^4$ and Strouhal number of $St_x = 0.15$, indicating the laminar separation bubble and its shedding. Laminar separation is more abrupt compared to the previous turbulent separation. The cascade form of the spectrum can be interpreted as the relative sizes of vortices from LE to TE, the high frequency near LE means small-scale LEVs and low frequency towards TE means large-scale DSVs. This is also an indication of interaction between the convected LEVs and downstream vortices. DSVs are attached along the entire surface, achieving the maximum lift. At the full stall of the airfoil (Fig. 8e), the energy is less concentrated in specific frequencies, rather more broad-banded, as a result of mixing and dissipation. The DSVs are enlarged and detached on the suction surface. Another noticeable region is the TE, where the flow becomes more unsteady due to the

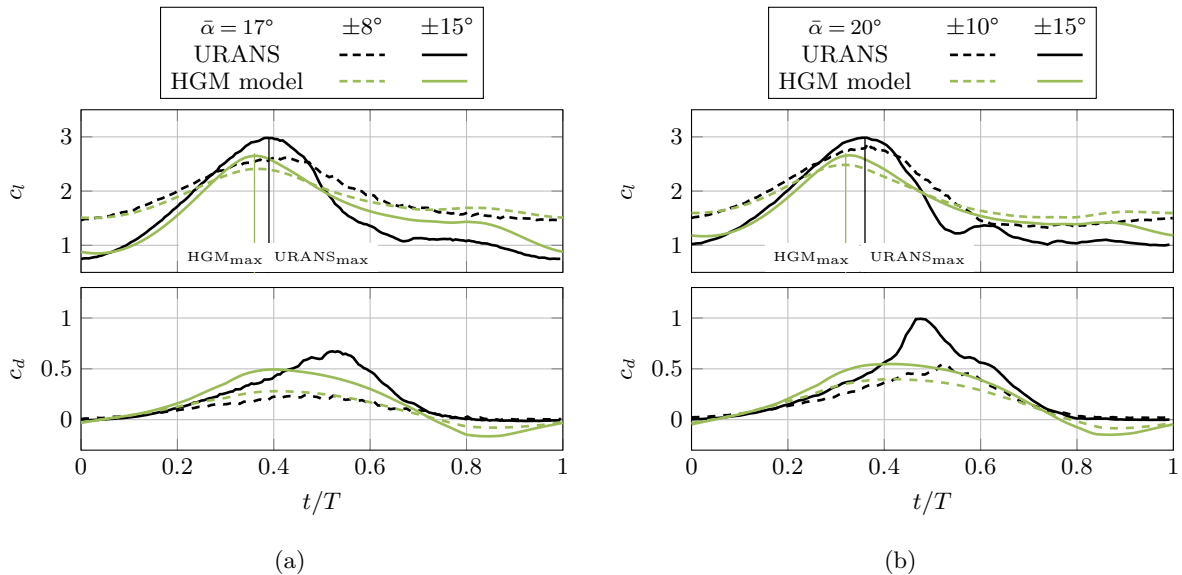


Figure 9. Comparison of lift and drag coefficients between phase-averaged URANS and BEM simulations. (a) CaseID 2, (b) CaseID 3 with mark at maximum c_l , indicating under-estimation of dynamic stall from HGM model

forming of trailing-edge vortex. During the deep stall (Fig. 8f), the unsteady energy is mostly dissipated except in
 335 the LE region, where the vortices are still generated.

This analysis not only supports the characterization of the flow around the airfoil, but also can be utilized to design
 a suppression method of the dynamic stall. The regions that are prone to flow separations can be either actively
 or passively controlled. Various methods (e.g. surface treatment, air injection, pulse generation) are conventionally
 applied near the LE to bypass the laminar separation (Visbal and Benton, 2018; De Tavernier et al., 2021). For
 340 large WTs, the mid-chord region could be additionally considered for the flow control to delay the localized flow
 separation. Considering divergent frequency spectra in different axial positions, the method has to be independently
 optimized along the airfoil chord.

5 Comparison between CFD Simulation and HGM Model

Figure 9 compares the lift and drag coefficients between URANS and HGM simulations. The HGM result agrees to
 345 URANS at the initial vortex formation stage. However, HGM model under-predicts the maximum loading by earlier
 development of dynamic stall. When URANS predicts further increasing c_l due to the delaying effect of dynamic
 stall at $t = \text{HGM}_{\max} = 0.36$, HGM model predicts the onset of dynamic stall. This is reasonable considering the
 model is optimized for thin airfoils in low Reynolds numbers. The distinct characteristic of vortex street (Stage2)
 and lift peak (Stage3), the strong localization of flow separation and vortex detachment, is not considered in the

350 current dynamic stall model. These two phases should be considered in the future reduced order models. As a next step, the coefficients of the HGM model are calibrated and IAG models will be tested.

6 Predicting Onset of Dynamic Stall

While the general feature of each stall phase during a dynamic stall cycle is described earlier, the criteria determining the initialization of each phase is discussed in this section. This can be utilized to develop a reduced-order model in the future. Besides the commonly known leading-edge suction parameter (LESP), which is defined as the chordwise component of airfoil loading at LE ($0 - 0.1 c$), MCSP at $0.3 - 0.4 c$, and TESP at $0.9 - 1 c$, are newly introduced in Eq. 7 and Fig. 10. Conventionally, LESP is sufficient to represent the onset characteristics of each stage of the dynamic stall for thin airfoils, where dynamic stall separation occurs at the leading edge. Since some stages of dynamic stall of thick profiles are dominated by the separation close to mid-chord, using LESP alone does not seem
 360 straight forward to identify all stages of dynamic stall. Due to the more detailed stages in this study, MCSP and TESP might be the supporting parameters that fully describe the onset of individual stages.

$$\mathbf{S}_L = \int_L p dl_{\perp} / \left(\frac{l}{2} \rho U_{\infty}^2 c \right) \quad (7)$$

$$SP_L = \text{sign}(\lambda_L - \alpha) \sqrt{\frac{2}{\pi}} |\mathbf{S}_L| \cos(\lambda_L - \alpha)$$

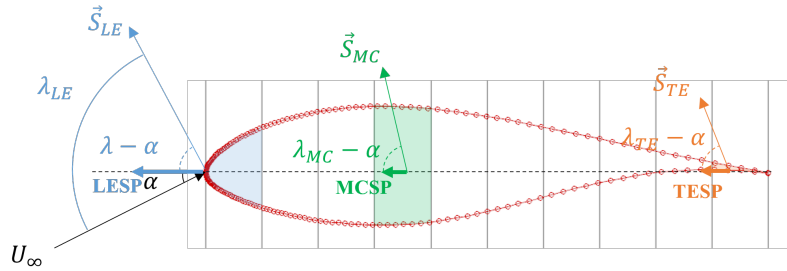


Figure 10. Positions of numerical probes and definitions of suction parameters

Figure 11 shows LESP, MCSP, and TESP for two variations of pitching angle, $20^\circ \pm 15^\circ$ and $20^\circ \pm 10^\circ$. The magnitude of MCSP and TESP are relatively low since the most of lift is gained near LE, yet a distinct trend in MCSP and TESP are observed. A critical LESP for the onset of static stall ($LESP_{ss}$) is valid as both of the cases have $LESP_{ss} = 0.2$. At the same time, the $MCSP_{ss} = 0.05$ and $TESP_{ss} = -0.06$ support the indication of onset of static stall, although the sensitivity in these parameters are low. Entering Stage2 at $t = 0.25$, MCSP abruptly decreases below zero ($MCSP_{Stage2} = 0$) due to the mid-chord region being locally separated. This is followed by high fluctuation in the suction parameter because of the traveling small vortices. $LESP_{Stage2} = 0.38$ as a criterion

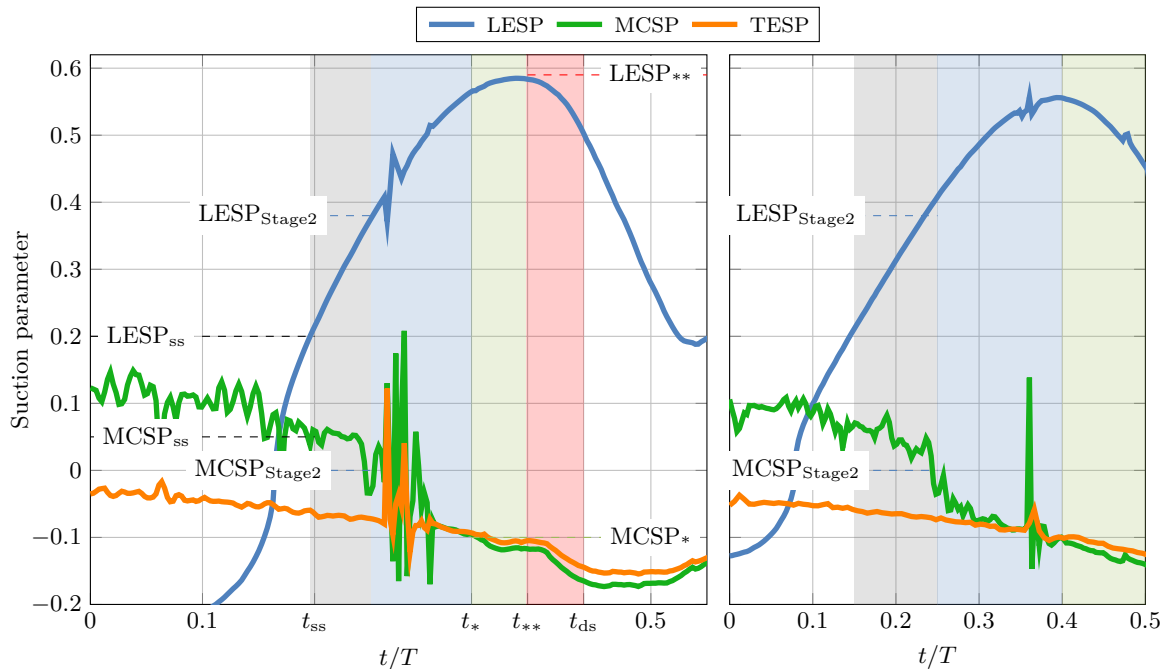


Figure 11. Leading-edge suction parameter (LESP), mid-chord suction parameter (MCSP), and trailing-edge suction parameter (TESP) from the pitching case of $20^\circ \pm 15^\circ$ (left) and $20^\circ \pm 10^\circ$ (right). The shaded regions refer to initial instability (gray), attached DSV (blue), lift peak (green), full stall (red)

370 is valid as well, although the sensitivity is smaller compared to MCSP. Reminding that Stage3 (t_*) is characterized
 by slightly increasing leading-edge suction and complete stall in the rest of the area, MCSP and TESP are better
 criteria than the LESP. LESP either increases further (case $20^\circ \pm 15^\circ$) or decreases (case $20^\circ \pm 10^\circ$) depending on
 the angle setting. $MCSP_* = TESP_* = -0.1$ are found to be valid for both cases. Whether the cycle enters Stage4
 (full stall at t_{**}) can be distinguished by all three parameters. However, $LESP_{**} = 0.59$ must be the determining
 375 parameter when $MCSP_{**}$ and $TESP_{**}$ are the consequence of the full-stall driven by the stall in the leading edge.
 During the full stall, sudden drop in MCSP and TESP are observed, which indicates a large TEV.

7 Conclusions and Outlook

Wind turbines operate in highly unsteady wind conditions, which makes avoiding dynamic stall entirely an impossible
 task. In order to design airfoils that are less prone to dynamic stall, especially deep stall, a reduced-order model
 380 that can predict the onset of the formation of the dynamic stall vortex is required. The research presented here
 contributes to the development of such a reduced-order model for wind turbine airfoils of high thickness-to-chord

ratio and long chord length by analyzing the unsteady RANS simulations of a pitching FFA-W3-211 airfoil at the Reynolds number of 15×10^6 .

The dynamic stall cycle is categorized into four phases based on the unsteady vortex dynamics along the suction-
385 side of the airfoil. The initial instability phase and attached vortex street phase fall into the conventional primary instability stage. Before the occurrence of the deep stall, the peak lift phase, where the loss due to the localized stall is compensated by strengthened leading-edge vortices, is found. Individual stages are characterized in depth from a frequency analysis, where the size and growth of dynamic stall vortices and the interaction between them are presented. The leading-edge suction parameter (LESP), introduced by Ramesh et al. (2014) for predicting the onset
390 of the vortex formation stage on thin airfoils, was analyzed to test its feasibility for thick airfoils under high Reynolds numbers. It was found that the temporal evolution of the LESP indicates the inception of full stall. Since the flow at the leading-edge remains mostly attached during the dynamic stall cycle, the supplementary parameters which can represent the suction capability at different airfoil locations are needed. For airfoils as they occur on wind turbines, the dynamic stall vortices form and separate initially at mid-chord, which illustrates that monitoring the LESP is
395 not sufficient for predicting the onset of the initial vortex formation stage for the designer of WTs. Therefore, we introduced the mid-chord suction parameter (MCSP) at $0.3 - 0.4 c$ and the trailing-edge suction parameter (TESP) at $0.9 - 1 c$, which are the same suction vector component as LESP, but on locations downstream of the leading edge. Since the MCSP is based on the pressure at the location of the initial vortex separation, it seems to be a robust supplement for the application to thick airfoils together with the LESP. Analogous to the LESP, the MCSP
400 and TESP indicate the transition points of the dynamic stall stages.

Future work should investigate the sensitivity of the airfoil camber distribution and the location of the maximum thickness to the stall delay attributed to the localized stall phases. Application of transition model and different flow and kinematic boundary conditions should be tested for the comprehensive characterization. Establishing correlations between $LESP_{crit}$, the temporal evolution of MCSP and TESP, and these airfoil parameters would allow for the
405 development of a reduced-order model that can predict dynamic stall in the design process of new airfoil geometries.

Although dynamic stall models using URANS method have been numerously validated in previous decades, the validation of the current model should be pursued in the future. Considering URANS method models turbulence terms and transition characteristics and XFOIL models the viscous layer and transition point, the validity could be different for the large wind profiles under high Reynolds numbers. It has been difficult so far due to the lack of
410 experimental data. However, recent studies promise dynamic stall experiments of large-scale wind turbine profiles in the near future. Either utilizing those results or conducting high fidelity simulations, e.g. DES, LES should support the validity of the current study.

Author contributions. HRK conducted the URANS simulations, evaluated the results, and wrote the paper except the parts regarding BEM. JAP conducted the BEM simulation and wrote the methodology and results regarding BEM. JDA wrote the majority of the introduction. HRK, JAD, and JAP worked under the supervision and review of JRS and LW.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. The authors gratefully acknowledge the computing time granted by the Resource Allocation Board and provided on the supercomputer Lise and Emmy at NHR@ZIB and NHR@Göttingen as part of the NHR infrastructure. The calculations for this research were conducted with computing resources under the project nii00172. The authors thank the cluster system at the Leibniz Universität of Hannover for the HPC resources, which have contributed to the development of the research results presented here. The present work has been carried out in the subproject A02 within the Collaborative Research Center (CRC) 1463 “Integrated design and operation methodology for offshore megastructures” which is funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation). The authors thank the DFG for the support.

References

- 425 Ahrens, J. D., Ziesse, M., Wein, L., and Seume, J. R.: A Novel And Costeffective Approach To Simulating Dynamic Stall On Rotating Wind Turbine Blades With A Changing Angle Of Attack, GPPS Chania, 2022.
- Andersen, P. B., Gaunaa, M., Bak, C., and Hansen, M. H.: A dynamic stall model for airfoils with deformable trailing edges, *Wind Energy: An International Journal for Progress and Applications in Wind Power Conversion Technology*, 12, 734–751, 2009.
- 430 Bangga, G., Weihing, P., Lutz, T., and Krämer, E.: Effect of computational grid on accurate prediction of a wind turbine rotor using delayed detached-eddy simulations, *Journal of Mechanical Science and Technology*, 31, 2359–2364, 2017.
- Bangga, G., Lutz, T., and Arnold, M.: An improved second-order dynamic stall model for wind turbine airfoils, *Wind Energy Science*, 5, 1037–1058, <https://doi.org/10.5194/wes-5-1037-2020>, 2020.
- Bangga, G., Parkinson, S., and Collier, W.: Development and Validation of the IAG Dynamic Stall Model in State-Space Representation for Wind Turbine Airfoils, *Energies*, 16, <https://doi.org/10.3390/en16103994>, 2023.
- 435 Björck, A.: Coordinates and Calculations for the FFA-W1-xxx, FFA-W2-xxx and FFA-W3-xxx Series of Airfoils for Horizontal Axis Wind Turbines, The Aeronautical Research Institute of Sweden, 1990.
- Branlard, E., Jonkman, B., Pirrung, G. R., Dixon, K., and Jonkman, J.: Dynamic inflow and unsteady aerodynamics models for modal and stability analyses in OpenFAST, *Journal of Physics: Conference Series*, 2265, 032044, <https://doi.org/10.1088/1742-6596/2265/3/032044>, 2022.
- 440 Braud, C., Podvin, B., and Deparday, J.: Study of the wall pressure variations on the stall inception of a thick cambered profile at high Reynolds number, *Physical Review Fluids*, 9, <https://doi.org/10.1103/physrevfluids.9.014605>, 2024.
- Brunner, C. E., Kiefer, J., Hansen, M. O., and Hultmark, M.: Study of Reynolds number effects on the aerodynamics of a moderately thick airfoil using a high-pressure wind tunnel, *Experiments in Fluids*, 62, 1–17, 2021.
- 445 Corke, T. C. and Thomas, F. O.: Dynamic stall in pitching airfoils: aerodynamic damping and compressibility effects, *Annual Review of Fluid Mechanics*, 47, 479–505, 2015.
- Damiani, R. R. and Hayman, G.: The Unsteady Aerodynamics Module For FAST8, <https://doi.org/10.2172/1576488>, 2019.
- De Tavernier, D., Ferreira, C., Viré, A., LeBlanc, B., and Bernardy, S.: Controlling dynamic stall using vortex generators on a wind turbine airfoil, *Renewable Energy*, 172, 1194–1211, <https://doi.org/https://doi.org/10.1016/j.renene.2021.03.019>,
- 450 2021.
- Deparday, J. and Mulleners, K.: Modeling the interplay between the shear layer and leading edge suction during dynamic stall, *Physics of Fluids*, 31, 107104, 2019.
- Du, Z. and Selig, M.: A 3-D stall-delay model for horizontal axis wind turbine performance prediction, <https://doi.org/10.2514/6.1998-21>, 1998.
- 455 Gerontakos, P. and Lee, T.: Dynamic stall flow control via a trailing-edge flap, *AIAA journal*, 44, 469–480, 2006.
- Gupta, R. and Ansell, P. J.: Unsteady flow physics of airfoil dynamic stall, *AIAA journal*, 57, 165–175, 2019.
- Gupta, S. and Leishman, J. G.: Dynamic stall modelling of the S809 aerofoil and comparison with experiments, *Wind Energy: An International Journal for Progress and Applications in Wind Power Conversion Technology*, 9, 521–547, 2006.
- Hansen, M. H., Gaunaa, M., and Aagaard Madsen, H.: A Beddoes-Leishman type dynamic stall model in state-space and indicial formulations, 2004.
- 460

- Huang, X., Albers, M., Meysonnat, P., Meinke, M., and Schröder, W.: Analysis of the effect of freestream turbulence on dynamic stall of wind turbine blades, *International Journal of Heat and Fluid Flow*, 85, 108668, 2020.
- Issa, R. I.: Solution of the implicitly discretised fluid flow equations by operator-splitting, *Journal of computational physics*, 62, 40–65, 1986.
- 465 Jasak, H.: *Dynamic Mesh Handling in OpenFOAM*, American Institute of Aeronautics and Astronautics, <https://doi.org/10.2514/6.2009-341>, 2009.
- Kang, S.-H., Ryu, K.-W., and Roh, S.-C.: Reynolds Number Extrapolation on High Thickness-Ratio Airfoil for Megawatt-Class Wind Turbine, *International Journal of Aeronautical and Space Sciences*, 19, 575–583, <https://doi.org/10.1007/s42405-018-0074-7>, 2018.
- 470 Kiefer, J., Brunner, C. E., Hansen, M. O., and Hultmark, M.: Dynamic stall at high Reynolds numbers induced by ramp-type pitching motions, *Journal of Fluid Mechanics*, 938, 2022.
- Konstadinopoulos, P., Thrasher, D., Mook, D., Nayfeh, A., and Watson, L.: A vortex-lattice method for general, unsteady aerodynamics, *Journal of aircraft*, 22, 43–49, 1985.
- Leishman, G. J.: *Principles of helicopter aerodynamics*, Cambridge university press, 2006.
- 475 Leishman, J. G. and Beddoes, T.: A Semi-Empirical model for dynamic stall, *Journal of the American Helicopter society*, 34, 3–17, 1989.
- Letzgus, J., Gardner, A. D., Schwermer, T., Keßler, M., and Krämer, E.: Numerical investigations of dynamic stall on a rotor with cyclic pitch control, *Journal of the American Helicopter Society*, 64, 1–14, 2019.
- Merz, C. B., Wolf, C., Richter, K., Kaufmann, K., Mielke, A., and Raffel, M.: Spanwise differences in static and dynamic stall
480 on a pitching rotor blade tip model, *Journal of the American Helicopter Society*, 62, 1–11, 2017.
- Mulleners, K. and Raffel, M.: The onset of dynamic stall revisited, *Experiments in Fluids*, 52, 779–793, <https://doi.org/10.1007/s00348-011-1118-y>, 2012.
- Mulleners, K., Le Pape, A., Heine, B., and Raffel, M.: The dynamics of static stall, *Proceedings of the 16th International Symposium on Applications of Laser Techniques to Fluid Mechanics*, 2012.
- 485 Ramesh, K., Gopalarathnam, A., Granlund, K., Ol, M. V., and Edwards, J. R.: Discrete-vortex method with novel shedding criterion for unsteady aerofoil flows with intermittent leading-edge vortex shedding, *Journal of Fluid Mechanics*, 751, 500–538, 2014.
- Schwermer, T., Gardner, A. D., and Raffel, M.: A novel experiment to understand the dynamic stall phenomenon in rotor axial flight, *Journal of the American Helicopter Society*, 64, 1–11, 2019.
- 490 Sharma, A. and Visbal, M.: Numerical investigation of the effect of airfoil thickness on onset of dynamic stall, *Journal of Fluid Mechanics*, 870, 870–900, 2019.
- Simms, D., Schreck, S., Hand, M., and Fingersh, L. J.: *NREL unsteady aerodynamics experiment in the NASA-Ames wind tunnel: a comparison of predictions to measurements*, Tech. rep., National Renewable Energy Lab.(NREL), Golden, CO (United States), 2001.
- 495 Tangler, J. L.: *Nebulous Art of Using Wind-Tunnel Airfoil Data for Predicting Rotor Performance- Preprint*, 2002., 2002.
- Visbal, M. R. and Benton, S. I.: Exploration of high-frequency control of dynamic stall using large-eddy simulations, *AIAA Journal*, 2018.