

Slow wake recovery and low turbulence behind wind farms parameterized in mesoscale simulations

William C. Radünz¹, Jens H. Kasper², Richard J. A. M. Stevens², and Julie K. Lundquist^{1,3}

¹Johns Hopkins University, Baltimore, MD, USA

²Physics of Fluids Group, Max Planck Center for Complex Fluid Dynamics, J. M. Burgers Center for Fluid Dynamics, University of Twente, Enschede, the Netherlands

³National Laboratory of the Rockies, Boulder, CO, USA

Correspondence: William C. Radünz (wcorreal@jh.edu)

1 **Abstract.** Numerical Weather Prediction (NWP) and climate models equipped with Wind Farm Parameterizations (WFPs)
2 can simulate cluster wake effects affecting downstream wind farms in both onshore and offshore environments. This study
3 evaluates wake recovery behind a wind farm represented by the NWP-WFP approach in the Weather Research and Forecasting
4 (WRF) model using either the Fitch et al. (2012) or Ma et al. (2022a, b) WFPs. Results are benchmarked against large-eddy
5 simulations (LES) of an idealized offshore wind farm with aligned and staggered layouts under neutral atmospheric stability.
6 Near-farm wake recovery is underestimated in NWP-WFP simulations due to its representation on a coarse mesoscale grid.
7 This limitation leads to slow wake recovery through two interconnected mechanisms: (i) spatial gradients in the wind velocity
8 field are weaker compared to LES, and (ii) turbulence kinetic energy (TKE) remains low not because of excessive dissipation,
9 but due to insufficient shear production caused by these weakened gradients. For the scenario considered here, a wind-speed
10 bias develops in the near-farm wake and persists into the far wake. Differences between the NWP-WFP simulations and LES
11 emerge within a short distance downstream of the farm exit, where the mesoscale simulations recover too slowly. This reduced
12 recovery contributes approximately $0.15\text{--}0.50\text{ m s}^{-1}$ to the near-farm wind-speed bias. The bias established in this region
13 is not subsequently compensated for downstream, but instead propagates into the far wake, where wind-speed differences of
14 approximately $0.4\text{--}0.6\text{ m s}^{-1}$ remain up to 50 km downstream. Higher-resolution mesoscale simulations partially reduce this
15 bias, and increased turbine-added TKE or subgrid wake effects provide some improvement, but neither fully addresses the
16 underlying cause. The slow wake recovery is not caused by limitations of the WFPs themselves, as it also occurs outside their
17 region of influence, and adding subgrid wake effects does not significantly impact recovery. Rather, the slow wake recovery is
18 a consequence of mesoscale flow representation. This behavior is not limited to regions downstream of the wind farm but is
19 less visible within the farm, where wake recovery occurs simultaneously with turbine-induced momentum extraction. These
20 results highlight the need for improved representations of wake recovery both within and downstream of wind farms. While
21 enhanced subgrid modeling, shear-driven TKE production, and refined WFP formulations may improve intra-farm dynamics,
22 accurately capturing near-farm wake recovery downstream remains challenging, as WFPs do not act in this region.

23 *Copyright statement.* This work was authored in part by the National Laboratory of the Rockies, operated by Alliance for Sustainable Energy,
24 LLC, for the U.S. Department of Energy (DOE) under contract no. DE-AC36-08GO28308. Funding was provided by the U.S. Department
25 of Energy Office of Critical Minerals and Energy Innovation. This work was partially supported by the U.S. Department of Energy, Office
26 of Science Energy Earthshot Initiative, as part of the Addressing Challenges in Energy—Floating Wind in a Changing Climate (ACE-
27 FWICC) Energy Earthshot Research Center. The views expressed in the article do not necessarily represent the views of the DOE or the U.S.
28 Government. The U.S. Government retains and the publisher, by accepting the article for publication, acknowledges that the U.S. Government
29 retains a nonexclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do
30 so, for U.S. Government purposes.

31 **1 Introduction**

32 The sheer scale of offshore wind farms is attracting increasing attention from the scientific community (Barthelmie et al.,
33 2007, 2009; Platis et al., 2018; Pryor et al., 2020; Cañadillas et al., 2020; Rosencrans et al., 2024; Ouro et al., 2025) largely due
34 to cluster wake effects and associated power losses. Massive wind farms (~ 1 GW) with large turbines (10–20+ MW) encounter
35 relatively low turbulence offshore (Bodini et al., 2019). This combination leads to strong, persistent wakes that can extend tens
36 of kilometers downstream of the wind farms (Platis et al., 2018). As a result, inter-farm wake effects pose challenges not only to
37 operating wind farms but also to those in planning or development stages, thus mirroring concerns already observed in onshore
38 settings (Lundquist et al., 2019). Understanding and accurately predicting the wakes that arise from atmosphere–wind farm
39 interactions is therefore of scientific and economic relevance (Veers et al., 2019, 2022). In this context, Numerical Weather
40 Prediction (NWP) models equipped with Wind Farm Parameterizations (WFPs) are proving to be a valuable tool (Fischereit
41 et al., 2022a).

42 The representation of wind farms in NWP and climate models has evolved significantly over the past two decades, mov-
43 ing from surface-based approximations to more physically realistic parameterizations. In the early 2000s, wind farms were
44 incorporated into NWP and climate models through enhanced surface roughness (z_0) or drag (Ivanova and Nadyozhina, 2000;
45 Malyshev et al., 2003; Keith et al., 2004; Wang and Prinn, 2010). However, this approach led to exaggerated surface fluxes,
46 turbulence kinetic energy (TKE), and wind speed deficits (Fitch et al., 2013b). A key conceptual shift came with Baidya Roy
47 et al. (2004), who proposed that wind farms act as an elevated momentum sink and TKE source within the rotor layer rather
48 than at the surface. The elevated momentum sink and TKE source framework remains the conceptual foundation for most
49 WFPs in use today, and for several subsequent advances (Fitch et al., 2012; Adams and Keith, 2013; Boettcher et al., 2015;
50 Abkar and Porté-Agel, 2015; Volker et al., 2015; Pan and Archer, 2018; Redfern et al., 2019; Ma et al., 2022b; Wu et al., 2023;
51 Du et al., 2025, 2026). For a comprehensive overview of WFP developments, see the review by Fischereit et al. (2022a).

52 One of the key advances in WFPs was the modification of the TKE source term, initially treated as a constant (Baidya
53 Roy et al., 2004). Blahak et al. (2010) proposed linking the added TKE to the energy extracted by the turbines via the power
54 coefficient (C_P), and Fitch et al. (2012) introduced the formulation $C_{\text{TKE}} = C_T - C_P$, where C_T is the thrust coefficient.
55 Later, Archer et al. (2020) suggested scaling C_{TKE} with a TKE factor (α) of 0.25 to avoid exaggerated TKE values. Even
56 though some studies find better performance using $\alpha = 1.00$ instead (Larsén and Fischereit, 2021), the impact of changing α

varies spatially (Ali et al., 2023; Rosencrans et al., 2024; García-Santiago et al., 2024). Most recently, large-eddy simulation (LES)-based formulations have been proposed to further improve the TKE source term (Khanjari et al., 2025).

Regarding the WFPs and the representation of atmosphere–wind farm interactions, it is useful to distinguish between grid-unresolved and grid-resolved processes. Unresolved processes include the momentum sink term, intra-grid-cell interactions between turbines (Abkar and Porté-Agel, 2015; Pan and Archer, 2018; Ma et al., 2022b; Wu et al., 2023), local wake expansion (Volker et al., 2015), and wake recovery occurring within the same grid cell. The momentum sink term creates a wind speed deficit (wake) as a grid-unresolved process. However, momentum recovery into the generated wake is a spatial process that occurs over several grid cells and depends on spatial gradients of wind speed, wind direction, TKE, in addition to planetary boundary layer (PBL) schemes. Wake recovery is therefore also a grid-resolved process. This grid-resolved wake recovery depends on multiple factors. Several studies have shown sensitivity to horizontal grid resolution (Mangara et al., 2019; Siedersleben et al., 2020; Tomaszewski and Lundquist, 2020; Peña et al., 2022; Sanchez Gomez et al., 2024) and vertical resolution (Vanderwende et al., 2016; Mangara et al., 2019; Tomaszewski and Lundquist, 2020; Siedersleben et al., 2020). The PBL scheme is also influential (Rybchuk et al., 2022; Agarwal et al., 2025), as is the tuning of the TKE addition factor α (Archer et al., 2020; Siedersleben et al., 2020; Tomaszewski and Lundquist, 2020; Larsén and Fischereit, 2021; Sanchez Gomez et al., 2024). In addition, atmospheric stability plays a key role in wake recovery and has been highlighted in several recent works (Vanderwende et al., 2016; Lundquist et al., 2019; Rosencrans et al., 2024; García-Santiago et al., 2024; Quint et al., 2025). Performance also varies between different WFPs. For instance, the Explicit Wake Parameterization (EWP) generally produces shorter wakes than the Fitch scheme (Shepherd et al., 2020; Pryor et al., 2020; Larsén and Fischereit, 2021; Fischereit et al., 2022b; García-Santiago et al., 2024; Pryor and Barthelmie, 2024).

The underestimation of wake recovery in NWP-WFP simulations is also governed by grid-resolved processes. A conceptual description of the generation and recovery of the wake in NWP-WFP, in comparison with LES, is provided in Fig. 1. Two downstream cells are used because the added TKE in the LES usually reaches its maximum in the first downstream cell (Fig. 1e), whereas the added TKE maximum occurs at the turbine grid cell for the NWP-WFP (Fig. 1d). Thus, wake recovery and TKE decrease are assessed here as streamwise changes between two consecutive downstream cells (Figs. 1b and c; e and f). The NWP-WFP ΔWS barely changes between the two panels (Figs. 1b and c), whereas the LES displays recovery. On the other hand, the ΔTKE decreases too fast for the NWP-WFP compared with the LES between panels (Figs. 1e and f). The slow wake recovery and the abrupt TKE decrease in NWP-WFP simulations occur in downstream cells without turbines and may therefore not be caused by the WFP. A slow wake recovery may also exist within the wind farm; however, because it occurs simultaneously with turbine momentum extraction, it is less discernible there.

Multiple NWP-WFP studies report good agreement of the wind speed deficit with LES within turbine or farm grid cells (Abkar and Porté-Agel, 2015; Vanderwende et al., 2016; Peña et al., 2022; García-Santiago et al., 2024; Du et al., 2026), suggesting that the momentum sink term (i.e., the grid-unresolved component) creates a wind speed deficit consistent with the LES (Fig. 1a). However, after the generation of the wind speed deficit, the downstream wind speed profiles often remain unchanged in the NWP compared to the LES (Figs. 1b and c). This discrepancy in wake recovery between NWP-WFP and LES persists across neutral, convective, and stable atmospheric stability regimes (García-Santiago et al., 2024). Ultimately,

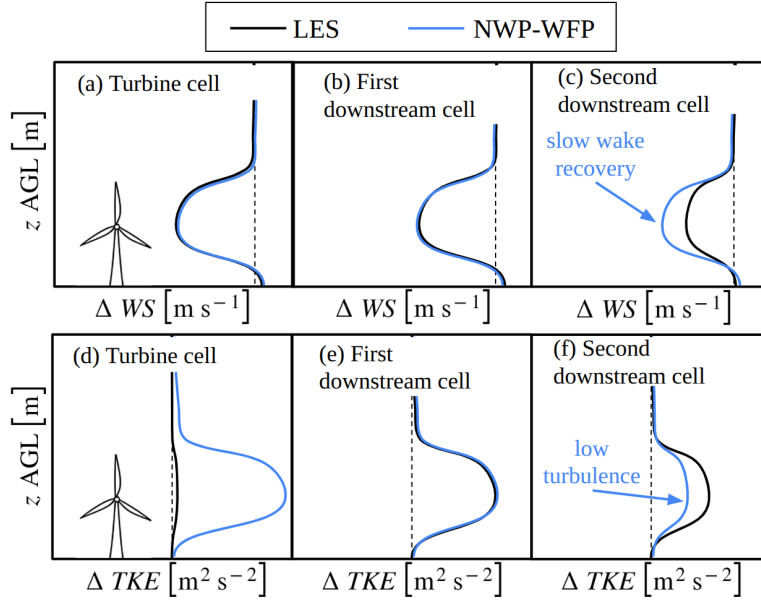


Figure 1. Conceptual description of wind turbine wake generation and recovery in a NWP-WFP simulation provided as a summary of the literature (Abkar and Porté-Agel, 2015; Vanderwende et al., 2016; Peña et al., 2022; García-Santiago et al., 2024). Time-averaged vertical profiles of wind speed deficit (ΔWS , a–c) and turbine-added TKE (ΔTKE , d–f) within the turbine grid cell (a, d), for the first (b, e) and second (c, f) downstream cells in the NWP without turbines. The wind speed deficit is defined as the difference between simulations with and without turbines ($\Delta WS = WS_T - WS_{NT}$), respectively, yielding negative values in most of the wake. The turbine-added TKE ($\Delta TKE = TKE_T - TKE_{NT}$) is similarly defined but typically yields positive values.

92 this slow recovery in NWP-WFP simulations likely contributes to the overestimation of power losses often reported when
 93 using WFPs (Lee and Lundquist, 2017; Montavon et al., 2024). In Montavon et al. (2024), additional factors affecting turbine
 94 power estimates are identified, including the absence of a turbine induction correction in the standard Fitch WFP, which was
 95 subsequently addressed by Vollmer et al. (2024). Thus, the evidence of a well-functioning momentum sink term combined
 96 with the insufficient wake recovery downstream of turbine grid cells suggests the problem could be in the grid-resolved wake
 97 recovery process.

98 However, several studies using NWP-WFP simulations driven by realistic synoptic conditions have reported reasonable
 99 agreement between simulated and observed wind speed deficits in wind farm wakes. Such agreement has been demonstrated
 100 using aircraft measurements (Siedersleben et al., 2018a, b, 2020; Larsén and Fischereit, 2021; van Stratum et al., 2022; Ali
 101 et al., 2023) as well as SCADA data (Sanchez Gomez et al., 2024) in offshore wind farms. The contrast between idealized
 102 NWP-WFP simulations evaluated against LES, which can exhibit slower wake recovery, and realistic NWP-WFP simulations
 103 validated against observations motivates further investigation. It remains unclear whether the slower wake recovery in idealized
 104 configurations arises from limitations of the WFP itself or from deficiencies in the representation of wake recovery on a

mesoscale grid. Clarifying this distinction is essential for assessing when NWP-WFP simulations can reliably represent wake evolution and associated power losses, and constitutes the central motivation of this study.

Another issue, less frequently discussed, is the rapid decrease of farm-induced TKE in NWP-WFP simulations. While less obvious, this problem is evident when closely examining the spatial evolution of TKE profiles downstream of turbine grid cells. In NWP-WFP simulations, TKE decreases more rapidly than in LES, as conceptually illustrated in Figs. 1e and f, and supported by evidence from the literature (Figs. 5a–d in Vanderwende et al. (2016); Figs. 11–13 in Peña et al. (2022); Figs. 4 and 9 in García-Santiago et al. (2024)). As more studies focus on wake recovery in large farms, this issue is becoming more visible. For example, Rosencrans et al. (2024) found that the amount of TKE added by the farm influences near-farm wake deficits but not the overall wake length. Similarly, Sanchez Gomez et al. (2024) noted that wake losses at an offshore wind farm located approximately 15 km downstream of an upstream wind farm were largely unaffected by the TKE factor. However, omitting the TKE factor ($\alpha = 0$) resulted in the largest biases when compared with SCADA data. Furthermore, aircraft observations have shown that TKE is overestimated in the first half of the farm by NWP-WFP, while in reality, TKE peaks further downstream (Siedersleben et al., 2020).

These two interrelated issues (the underestimated wake recovery and the fast decrease of the farm-added TKE) need a closer examination. While introduced here as two separate problems, turbulent mixing is a key driver for wake recovery (Vermeer et al., 2003; Abkar and Porté-Agel, 2015; van der Laan et al., 2023; Kasper and Stevens, 2026). Unrealistic rapid decrease of the TKE can slow down wake recovery in NWP-WFP simulations. Therefore, these two issues raise a few important questions. For instance, why does the farm-added TKE decrease more quickly in NWP-WFP simulations than in the LES? How much does this rapid decrease contribute to the underestimated wake recovery? What other physical or numerical factors are involved? To address these questions, we evaluate the representation of wind farm wake recovery in the NWP-WFP approach. Specifically, we aim to quantify the magnitude and spatial variability of the recovery process behind a wind farm. This effort requires a large-domain LES to evaluate wake recovery within, immediately downstream, and in the far wake of the wind farm. To our knowledge, there are no NWP-WFP vs. LES comparisons over downstream distances of ~ 40 km.

The remainder of this article is structured as follows. Section 2 describes the numerical setups, including the WRF simulations with the Fitch et al. (2012) and MAV (Ma et al., 2022a, b) wind farm parameterizations (NWP-WFP), and the reference LES with actuator disks (Kasper et al., 2024). The idealized simulations consider a 600 MW offshore wind farm with aligned and staggered layouts under westerly flow and near-neutral atmospheric conditions. Section 3 first compares the undisturbed inflow conditions across models, followed by an assessment of wind farm performance and wake recovery in the streamwise direction. Section 4 examines two key consequences of representing wind farm wakes on a coarse mesoscale grid: (i) reduced TKE and (ii) weakened spatial gradients in wind speed. Finally, Section 5 summarizes the main findings and their implications for simulating wind farm cluster wakes with NWP-WFP models.

137 To benchmark the NWP simulations with the WFP, we compare the results against LES by Kasper et al. (2024), who studied
 138 atmosphere–wind farm interactions under idealized conditions. Specifically, we consider the Barotropic (BT) case of their
 139 study, which here serves as the reference case that the mesoscale NWP simulations are designed to replicate. The simulation
 140 setup for this LES is briefly covered in Section 2.1, while a thorough discussion on the numerical framework can be found in
 141 Kasper et al. (2024). The subsequent Section 2.2 details the NWP-WFP framework, and the adaptations required to represent
 142 the LES conditions within a mesoscale model.

143 **2.1 Setup for the LES**

144 The reference simulation uses a modified version of the LES code developed by Albertson and Parlange (1999), later validated
 145 in Gadde et al. (2021). The model solves the incompressible filtered mass conservation, Navier–Stokes, and potential temper-
 146 ature transport equations. The subgrid-scale stresses and heat fluxes are modeled using the anisotropic minimum dissipation
 147 (AMD) scheme (Rozema et al., 2015; Abkar et al., 2016a), suitable for stratified boundary layers and wind farm wakes.

148 In the horizontal directions, the code employs pseudo-spectral differentiation and periodic boundary conditions, while
 149 second-order finite differencing is used in the vertical direction. A free-slip boundary condition is imposed at the top, with
 150 a Rayleigh damping layer to minimize gravity wave reflections. At the surface, a zero heat flux condition enforces neutral
 151 stratification, and shear stresses are parameterized using Monin–Obukhov similarity theory. Time integration uses a third-
 152 order Adams–Bashforth scheme. The simulation domain spans $102.4 \times 10.24 \times 10 \text{ km}^3$ in the streamwise, spanwise, and
 153 vertical directions, respectively. It is discretized using a rectilinear grid that consists of $2048 \times 512 \times 384$ points, with
 154 horizontal resolutions of $\Delta x = 50 \text{ m}$ and $\Delta y = 20 \text{ m}$. In the vertical, the resolution is uniform with $\Delta z = 10 \text{ m}$ up to
 155 $z_u = 1.5 \text{ km}$ above ground level (AGL), and stretched above using a hyperbolic tangent profile up to a maximum spacing
 156 of 62 m .

157 The simulated atmosphere represents an idealized offshore environment based on North Sea conditions. The geostrophic
 158 wind vector is prescribed with a magnitude $|\mathbf{U}_g| \approx 10 \text{ m s}^{-1}$, and the Coriolis frequency equals $f_c = 1.159 \times 10^{-4} \text{ s}^{-1}$.
 159 The surface roughness is set to $z_0 = 0.002 \text{ m}$, typical for open-sea conditions. The background stratification is neutral up
 160 to 1 km AGL, with a potential temperature of $\theta = 286 \text{ K}$. The boundary layer is capped by a 3 K inversion over 200 m ,
 161 followed by a free-atmosphere lapse rate of 5 K km^{-1} .

162 Two LES are considered, representing aligned and staggered wind-farm layouts. Wind turbines are represented using the
 163 actuator disk model (Jimenez et al., 2008; Calaf et al., 2010). The simulated wind farm consists of ten rows and six columns
 164 of turbines arranged in an aligned layout configuration, spaced by $s_x = 7D$ and $s_y = 5D$ in the streamwise and spanwise
 165 directions, respectively. A staggered layout configuration is also considered, with an additional spanwise displacement of $2.5D$
 166 between successive rows. The turbine diameter equals $D = 178 \text{ m}$ and the hub-height $z_h = 119 \text{ m}$ AGL, corresponding to the
 167 DTU 10-MW reference turbine (Bak et al., 2013). A uniform thrust coefficient $C_T = 0.75$ is used, and turbines yaw to face the
 168 local incoming wind.

Each LES is run for a total of 11 hours and comprises two stages. First, a 7-hour spin-up simulation is run on a coarser grid with a resolution of $2\Delta_x \times 2\Delta_y \times \Delta_z$. Second, once the boundary layer reaches quasi-equilibrium (the mean wind and turbulence statistics display small variations over time), it is interpolated to the full resolution and the LES proceeds as a precursor-successor simulation (Stevens et al., 2014). The precursor provides realistic turbulent inflow to the successor domain containing the wind farm, preventing contamination of the inflow by remnants of the wakes via the periodic boundary conditions. Statistics are then collected over the final 3 hours of the simulation.

2.2 Setup for the NWP-WFP simulations

The NWP simulations use the Advanced-Research WRF model version 4.4 (Skamarock et al., 2019), which solves the compressible Euler equations in three spatial dimensions and time. The solver uses a time-split integration scheme. The low-frequency modes are integrated with a third-order Runge–Kutta scheme, whereas higher-frequency acoustic modes are integrated over smaller time steps. Advective terms are discretized using a fifth-order scheme in the horizontal and a third-order scheme in the vertical directions. The model applies Arakawa C-grid staggering in the horizontal direction, with a hydrostatic pressure-based coordinate in the vertical direction.

Idealized simulations are employed, omitting cloud microphysics, radiation, moisture, and surface heterogeneity, which are standard simplifications in studies targeting canonical boundary layers over flat terrain (Fitch et al., 2012; Volker et al., 2015; Vanderwende et al., 2016; Peña et al., 2022; García-Santiago et al., 2024). In the multiscale framework of the WRF model, turbulence is entirely parameterized by the PBL scheme for mesoscale grid spacings ($\Delta X \sim 1$ km). Vertical turbulent mixing is represented by the MYNN PBL scheme (Nakanishi and Niino, 2009; Olson et al., 2026), while horizontal mixing is treated using a two-dimensional first-order Smagorinsky closure with constant eddy diffusivity (Skamarock et al., 2019). In MYNN, TKE is prognosed from a budget equation that includes shear production, buoyancy production or destruction, vertical turbulent transport, and dissipation (Nakanishi and Niino, 2009; Olson et al., 2026). The diagnosed TKE is then used to compute eddy diffusivities through stability-dependent mixing-length formulations, which directly control the vertical transport of momentum and scalars in the PBL. Since vertical turbulent transport dominates near-farm wake recovery (Lanzilao and Meyers, 2025; Kasper and Stevens, 2026), the discussion here primarily reflects the role of the PBL scheme and grid-resolved dynamics in governing vertical mixing and shear-driven entrainment.

A two-domain nesting configuration is adopted (Fig. 2), with one-way coupling from a parent domain to an inner nest. The outer domain generates nearly steady boundary-layer inflow characteristics, which are passed to the nested domain. Both domains use a constant horizontal resolution ($\Delta X = \Delta Y$), hereafter referred to simply as ΔX , as specified in Table 1, ranging from 346 m to 1246 m for the sets of simulations considered here. Simulations with the finest horizontal grid resolutions ($\Delta X = 2D$, or 346 m, DX2D and DX2DTKE100) use a coarser resolution ($\Delta X = 5D$, 890 m) for the outer domain, with a parent grid aspect ratio of 3. Vertically, a fine 10-m resolution is used below 400 m AGL for all domains, resolving the turbine rotor layer with multiple grid points. The computational domain is larger than in the LES to further minimize the influence of lateral boundaries, as the added computational cost is relatively small for the NWP-WFP simulations. For most cases (except DX2D and DX2DTKE100) the innermost domain spans approximately 188 km streamwise and 63 km spanwise. In the finest-

203 resolution cases (DX2D and DX2DTKE100), it spans about 100 km and 40 km in the streamwise and spanwise directions,
 204 respectively. All domains extend 5 km vertically.

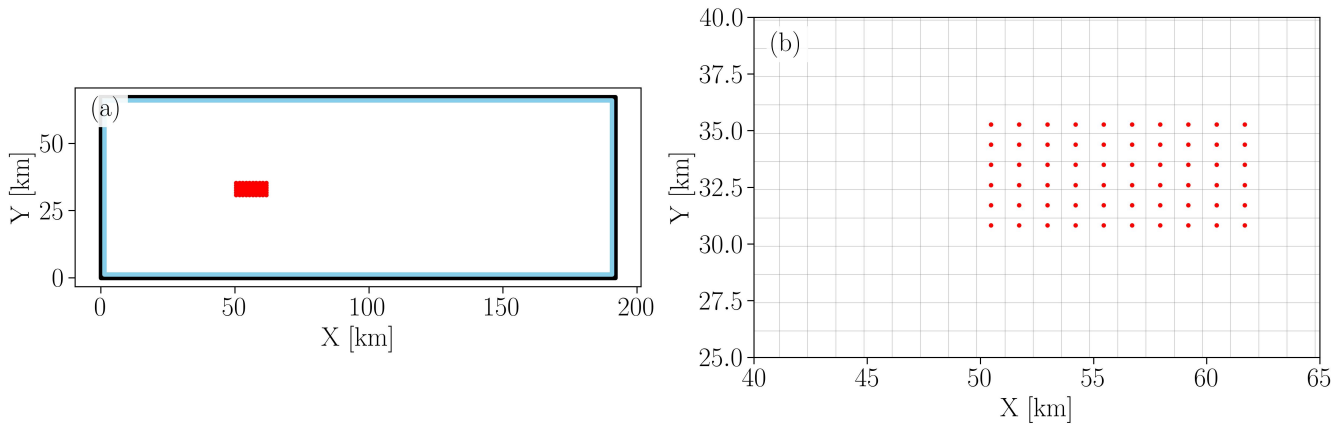


Figure 2. Two computational domains are used in the WRF-WFP simulations, illustrated here for the baseline (BASE) case (a). The outer parent domain (D1, black rectangle), which uses periodic lateral boundary conditions and does not include a wind farm, provides inflow to the inner nested domain (D2, blue rectangle) via one-way nesting. The inner domain includes the wind farm, with turbines represented as red dots. In the BASE setup shown in panel (b), each grid cell contains one turbine, except for the cells between $Y = 32\text{--}34$ km, which contain two.

Table 1. Summary of the NWP-WFP simulations, their subsets and key parameters: horizontal grid resolution (ΔX), TKE addition coefficient (α), WFP and turbine thrust coefficient (C_T).

Case	Subset	ΔX [m]	α	C_T
BASE	Baseline	1246 (7D)	0.25	0.75
TKE000	TKE	1246 (7D)	0.00	0.75
TKE050	TKE	1246 (7D)	0.50	0.75
TKE075	TKE	1246 (7D)	0.75	0.75
TKE100	TKE	1246 (7D)	1.00	0.75
DX5D	Grid	890 (5D)	0.25	0.75
DX2D	Grid	346 (2D)	0.25	0.75
DX2DTKE100	Grid	346 (2D)	1.00	0.75
MAV	WFP	1246 (7D)	0.25	0.75
MAVDX12D	WFP	2076 (11.6D)	0.25	0.75
CT050	Thrust	1246 (7D)	0.25	0.50
CT081	Thrust	1246 (7D)	0.25	0.81
CTTC	Thrust	1246 (7D)	0.25	Thrust Curve (TC)

205 The wind farm is represented using the Fitch et al. (2012) and MAV (Ma et al., 2022a, b) WFPs with TKE advection enabled
 206 (Archer et al., 2020). The Fitch WFP includes an axial induction modification following Vollmer et al. (2024). The wind farm

consists of 60 DTU 10-MW turbines (Bak et al., 2013), configured identically to Kasper et al. (2024). Each turbine has a rotor diameter $D = 178$ m and a hub height $z_h = 119$ m AGL. A constant thrust coefficient of $C_T = 0.75$ is used in all cases, except for those included in the C_T sensitivity study. Details on the turbine model and the sensitivity analysis are provided in Appendix A. The NWP-WFP simulations consider only the aligned wind farm layout. Because the coarser-resolution Fitch cases (BASE, TKE100) spatially over-distribute the wind speed deficit, the aligned configuration represents the worst-case scenario in terms of wake effects; accordingly, the staggered LES is also used as a reference for comparison with these coarser Fitch simulations.

The wind farm occupies a region starting around $X = 50$ km and $Y = 30$ km from the western and southern boundaries. The wind farm spans 11 km streamwise and 4.4 km spanwise, with turbine spacing of $7D$ (1246 m) in the streamwise and $5D$ (890 m) in the spanwise directions. Uniform turbine spacing in the coarse NWP-WFP grid is only achieved when grid spacing matches the physical turbine spacing. For instance, the BASE case has a horizontal spacing which ensures uniform representation of turbine spacing in the streamwise direction ($\Delta X = S_x = 7D$), but not in the spanwise direction where turbines are more closely spaced ($\Delta X = 7D$ but $S_y = 5D$).

To investigate the role of subgrid wake effects on wake recovery, we additionally implemented the “MAV” wind farm parameterizations (Ma et al., 2022a, b), ported from the standard release of WRF v4.6. The MAV WFP is based on the analytical wake model of Xie and Archer (2015) and represents wake overlap through a superposition of hub-height wind speed deficits (Ma et al., 2022a). In contrast to the Fitch scheme, which relies on grid-cell-averaged momentum extraction, MAV explicitly accounts for subgrid wake interactions and has been shown to improve turbine power predictions when compared against offshore SCADA data (Ma et al., 2022a). Similarly to the Fitch-based simulations, the MAV-based simulations only consider the aligned layout scenario.

Surface boundary conditions assume flat, homogeneous terrain with roughness length $z_0 = 0.002$ m and zero surface heat flux (neutral stability). The surface-layer scheme applies Monin-Obukhov Similarity Theory (MOST)-based drag using near-surface wind speeds. The Coriolis parameter corresponds to a latitude of 52.65° . The upper boundary enforces zero vertical velocity and free-slip horizontal flow. A Rayleigh damping layer (coefficient 0.2 s^{-1}) occupies the top 2 km of the domain to absorb gravity waves.

Initial conditions prescribe a uniform westerly flow from 282° at 10.93 m s^{-1} . The initial potential temperature is uniform at 286 K below 1000 m AGL, then increases with lapse rates of 15 K km^{-1} (1000–1200 m AGL) and 5 K km^{-1} (above 1200 m to the 5-km AGL domain top) to match the LES. Simulations run for 27 hours, with the final hour used for analysis after a 26-hour spin-up. The initial forcing is fine-tuned to ensure post-spin-up conditions match target values, a standard approach in idealized WRF setups (Mirocha et al., 2018; Peña et al., 2021; Hsieh et al., 2025). Inertial oscillations driven by Coriolis effects also influence boundary-layer winds during spin-up. The chosen spin-up time ensures minimal residual oscillations in the analysis period.

Three simulation sets and a baseline case are run (Table 1). The baseline (BASE) case uses a horizontal resolution equal to the turbine streamwise spacing ($7D$) to avoid subgrid wake effects from multiple turbines within one cell in the streamwise direction. It applies a thrust coefficient of $C_T = 0.75$ (such as in (Kasper et al., 2024)) and a TKE addition coefficient of

242 $\alpha = 0.25$ (Archer et al., 2020). The TKE subset includes $\alpha = 0.00, 0.50, 0.75$ and 1.00 . The grid subset varies ΔX between
 243 346 m ($2D$) and 890 m ($5D$). The thrust subset applies constant C_T values of 0.50 and 0.81, and also includes a wind-speed-
 244 dependent thrust case (see Appendix A). This subset serves to assess the sensitivity of the wake generation and recovery relative
 245 to the choice of $C_T = 0.75$ in the LES. The high-resolution cases DX2D and DX2DTKE100 are used to assess the impact of
 246 sharper wake gradients on power and recovery, acknowledging limitations of the application of traditional PBL schemes at
 247 sub-kilometer resolutions due to the *terra incognita* (Wyngaard, 2004; Rai et al., 2019; Haupt et al., 2019, 2023).

248 3 Results

249 3.1 Undisturbed inflow profiles

250 Before delving into modeling differences and similarities between NWP-WFP and LES in terms of power production and
 251 wake recovery, it is necessary to evaluate inflow variability to ensure inflow profiles are sufficiently similar so that downstream
 252 differences are not attributed to inflow variability (Peña et al., 2022; Hsieh et al., 2025). There is excellent agreement between
 253 NWP-WFP and LES inflow profiles for all variables (Fig. 3). The differences in hub-height (WS_{119}) and rotor-averaged (WS_r)
 254 wind speed compared to the LES are approximately 0.03 and -0.01 m s $^{-1}$, respectively, as shown in Table 2.

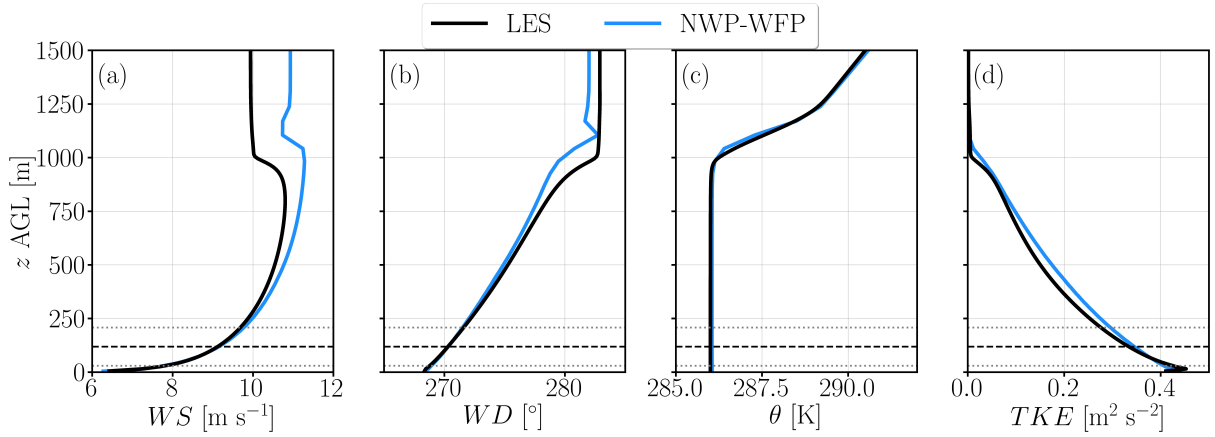


Figure 3. Time- and horizontally-averaged profiles of wind speed (a), wind direction (b), potential temperature (c), and TKE (d) during the analysis window for LES (black line) and NWP-WFP (blue line) in the simulation without turbines. The horizontal dashed and dotted gray lines denote rotor hub height and bottom/top tips, respectively.

255 Not only do the hub-height and rotor-averaged values match well, but so do the wind shear (α_r) and veer (β_r) across the
 256 rotor (Figs. 3a, b). This is important because under near-neutral conditions, turbulence production is governed primarily by
 257 mechanical shear, both in wind speed and direction (Stull, 1988). The fact that similar wind speed and direction profiles result
 258 in similar TKE profiles (Fig. 3d) reinforces the physical consistency between the models. The NWP-WFP wind speed profile

exhibits slightly greater shear between 300 and 800 m AGL, which leads to marginally higher TKE values in that layer. Surface boundary conditions are also consistent, as indicated by the good agreement in friction velocity (u_* , Table 2).

Table 2. Time-averaged inflow properties from the precursor simulations and their differences. Subscripts 119 and r denote hub-height (in m AGL) and rotor-averaged values, respectively. For wind shear (ΔWS_r) and veer (ΔWD_r), values represent the difference between the top and bottom rotor tips.

Source	WS_{119} [m s ⁻¹]	WD_{119} [°]	TKE_{119} [m ² s ⁻²]	WS_r [m s ⁻¹]	WD_r [°]	TKE_r [m ² s ⁻²]	u_* [m s ⁻¹]	ΔWS_r [m s ⁻¹]	ΔWD_r [°]
NWP-WFP	9.15	270.3	0.35	9.02	270.3	0.35	0.32	1.98	2.58
LES	9.12	270.3	0.33	9.03	270.3	0.34	0.33	1.87	2.81
Difference	0.03	0.0	0.01	-0.01	0.0	0.01	-0.01	0.12	-0.23

3.2 Wind farm wake flow field and spatial average

In this section, we compare the representations of hub-height wind speed and TKE by the LES and NWP-WFP simulations. The goal is to quantify the differences in wind farm wake structure and recovery between the aligned and staggered LES, spatially averaged to the grid of the BASE case (Fig. 4), and selected NWP-WFP cases (Fig. 5). The coarsened LES results for both aligned and staggered cases are obtained by spatially averaging the native-resolution LES data located within individual grid cells of the BASE case, enabling a direct comparison between the two (Figs. 4k–n), as in previous studies (Vanderwende et al., 2016; Peña et al., 2022; García-Santiago et al., 2024). The origin of the coordinate system is shifted to the southwest corner of the wind farm. Throughout the text, we divide the wind farm wake into three distinct regions: the intra-farm wake ($0 \text{ km} < X < 11.2 \text{ km}$), the near-farm wake ($11.2 \text{ km} < X < 15 \text{ km}$), and the far wake of the farm ($X > 15 \text{ km}$). The wind farm exit separates the intra-farm and near-farm wake regions. The thick black rectangle shows the wind farm perimeter as defined by the WFP. In the case DX2D (Fig. 5e,f), the finer resolution results in a smaller represented perimeter compared to the BASE case.

The full-resolution aligned LES case (Figs. 4a,b) exhibits sharp streaks of alternating low and high wind speed and TKE due to the aligned turbine layout (Stieren and Stevens, 2022; Stipa et al., 2024). These streaks extend approximately 3–5 km downstream before merging into a single and broader structure (Fig. 4a). For the staggered layout (Figs. 4e), the streaks are more broadly distributed in the spanwise direction. In contrast, the coarsened LES aggregates and smooths out these microscale variabilities (Fig. 4c,g), producing more homogeneous flow and turbulence fields within the farm. In the far wake region ($X > 15 \text{ km}$), the LES and coarsened LES fields become similar, as turbulent mixing has reduced the spatial gradients in wind speed and TKE.

A persistent feature in the coarsened aligned LES, BASE and TKE100 cases (Figs. 4c,i and 5c) is a narrow band of reduced wind speed around $Y = 2.5 \text{ km}$. This more intense wake results from the Y -direction turbine spacing ($s_y = 5D$) being finer than the grid spacing ($\Delta X = 7D$), such that two turbine columns fall within a single grid cell. This aggregation produces a locally stronger momentum sink and TKE source (Fitch et al., 2012). Although the total momentum sink in DX2D is comparable to

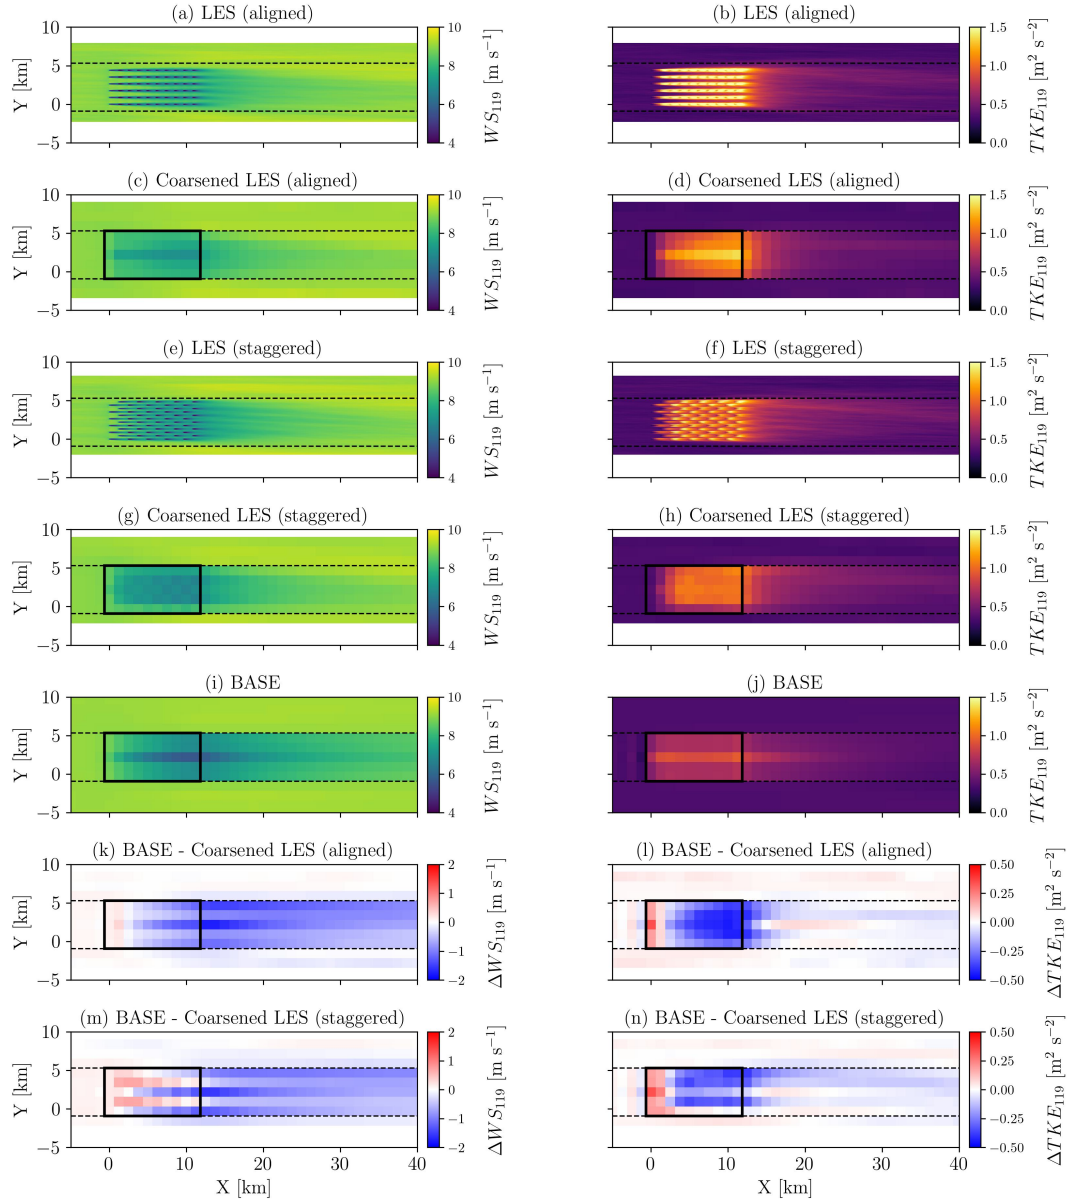


Figure 4. Time-averaged wind speed (WS_{119}) and TKE (TKE_{119}) at hub height for the aligned LES (a, b), coarsened aligned LES (c, d), staggered LES (e, f), coarsened staggered LES (g, h), NWP-WFP case BASE (i, j). The last two rows show the difference between the BASE case and the coarsened aligned (k, l) and staggered LES (m, n). The black rectangles indicate the wind farm perimeter as represented in the NWP-WFP simulation. Horizontal dashed lines mark the spanwise extent of the region used for averaging.

284 BASE and TKE100, the local wind speed deficits are larger due to the finer resolution, which produces more concentrated

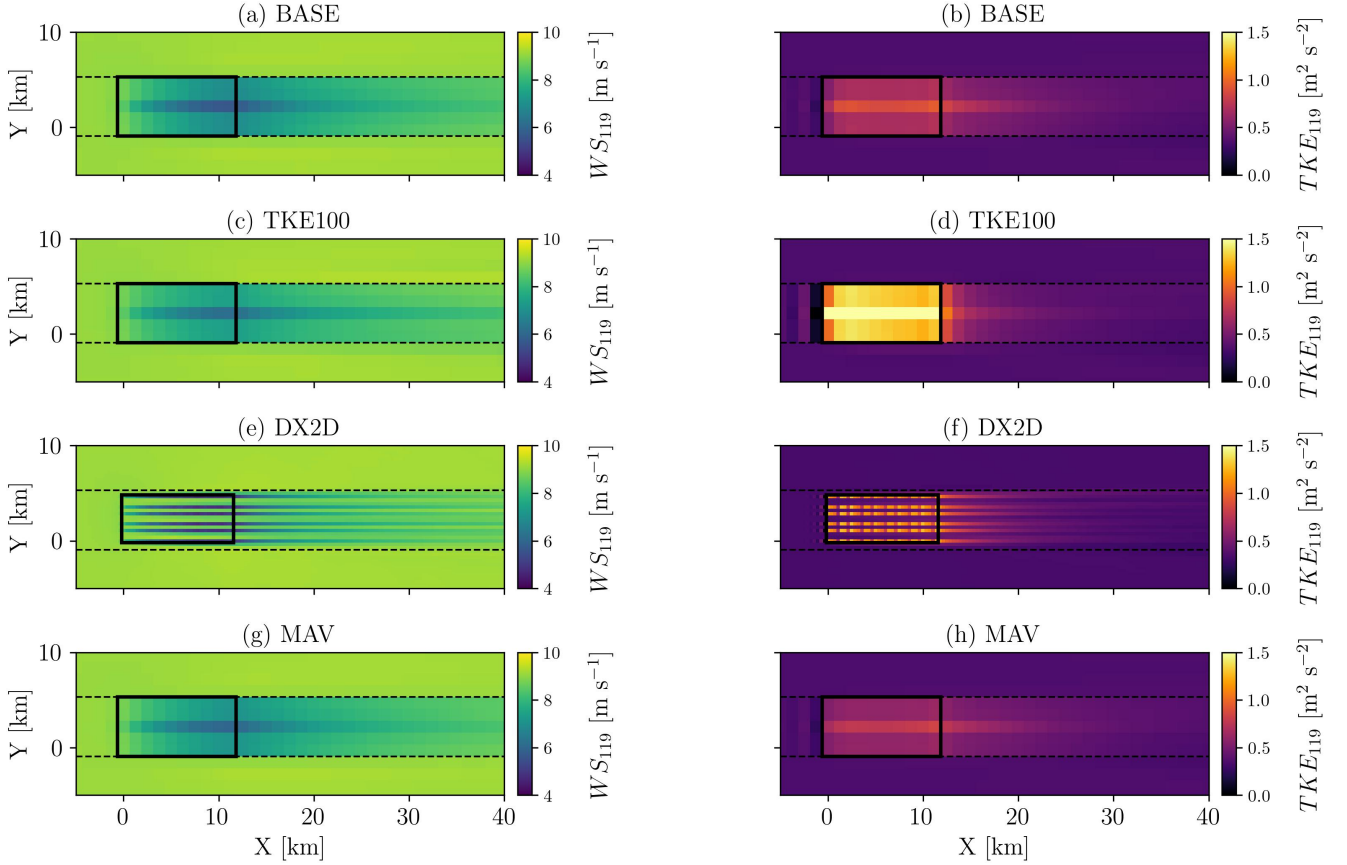


Figure 5. Time-averaged wind speed (WS_{119}) and TKE (TKE_{119}) at hub height for the NWP-WFP cases BASE (a, b), TKE100 (c, d) and DX2D (e, f) and MAV (g, h). The black rectangles indicate the wind farm perimeter as represented in the NWP-WFP simulation. Horizontal dashed lines mark the spanwise extent of the region used for averaging.

wakes (Figs. 5e). This localization of the wind speed deficits explains the improved agreement with the aligned LES regarding the second-row power losses for cases DX2D and DX2DTKE100 (Fig. 6b).

The wind speed (ΔWS_{119}) and TKE (ΔTKE_{119}) differences, calculated as the BASE case minus the coarsened LES (Figs. 4k–n), are small upstream and beside the wind farm for both aligned and staggered layouts. Faint blue bands of negative ΔWS_{119} appear outside the spanwise averaging region, caused by stronger acceleration around the wind farm in the LES. Within the farm, ΔWS_{119} transitions from slightly positive in the first few rows, to near-zero at row 4, and then to negative further downstream. The strongest negative wind speed differences occur in the near-farm wake ($11.2 \text{ km} < X < 15 \text{ km}$), followed by a modest recovery, but remain between -0.5 and -1 m s^{-1} in the far wake of the farm ($X > 20 \text{ km}$) for the aligned layout (Fig. 4k). The BASE case overestimates TKE compared to the aligned LES in the first turbine row and underestimates it in rows 3 and further downstream. In the near-farm wake ($11.2 \text{ km} < X < 15 \text{ km}$), the TKE remains underestimated but

recovers further downstream ($X > 20$ km) where the agreement with the LES is excellent. Wind speed differences are smaller for the staggered layout (Fig. 4m) owing to its stronger momentum extraction, which produces a larger wind speed deficit.

3.3 Row-averaged streamwise power patterns

This section evaluates streamwise changes in row-averaged power (i.e., averaged across turbines within the same row) for the TKE (Fig. 6a) and grid resolution (Fig. 6b) simulation subsets. These results reflect both the magnitude of wake effects owing to momentum extraction by the turbines and the ability of this waked flow to recover momentum within the wind farm.

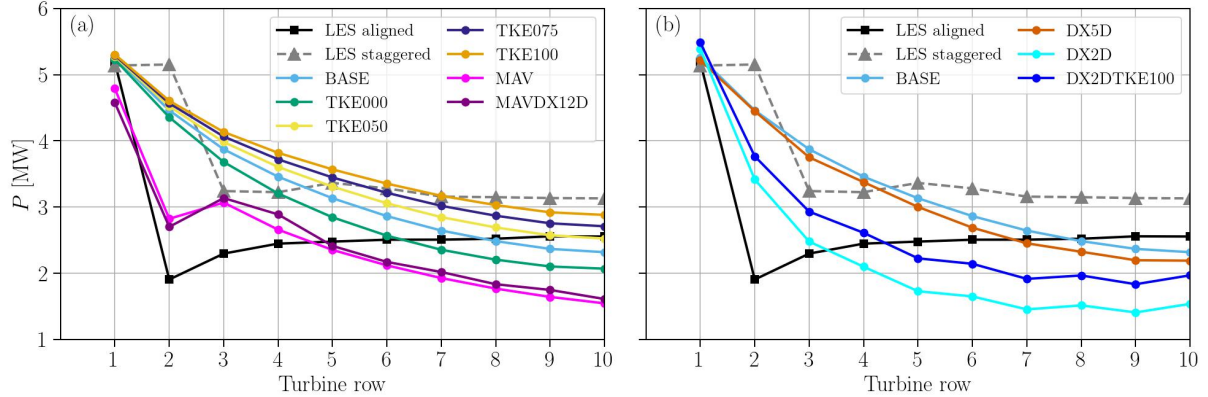


Figure 6. Row-averaged power in the NWP-WFP set of simulations with different wind farm added TKE and WFP (a) and grid resolutions (b) compared with the LES.

Compared to both the aligned and staggered LES, there is excellent agreement in the first-row averaged power output (~ 5 MW; Fig. 6a), which stems from the matched inflow profiles (Fig. 3) and the implementation of the Fitch WFP correction (Vollmer et al., 2024). This agreement indicates that turbine power is consistently modeled across both simulation frameworks, enabling a meaningful evaluation of model-specific biases. The MAV and MAVDX12D cases exhibit lower power due to the absence of an induction correction, while the DX2D and DX2DTKE100 cases slightly overestimate first-row power (Fig. 6b) as a result of marginally stronger inflow wind. Additionally, increasing the farm-added TKE enhances row-averaged power output by promoting more efficient wake recovery via momentum transport into the farm.

In the aligned LES, the power drops sharply in the second row (to ~ 2 MW) and is followed by a gradual power recovery downstream (Figs. 6a,b), as is often observed in LES studies of dense offshore wind farms with an aligned layout (Allaerts and Meyers, 2017; Stevens and Meneveau, 2017; Stieren and Stevens, 2022; Stipa et al., 2024). For the staggered layout, the power decrease is smaller because the effective streamwise distance between turbine rows doubles compared to the aligned layout (Stieren and Stevens, 2022). None of the NWP-WFP simulations using Fitch capture the sharp drop in power, instead displaying a more gradual pattern of power decrease. The MAV and MAVDX12D cases (Fig. 6a) show agreement with the aligned LES due to a more accurate representation of subgrid wake effects, while only the DX2D and DX2DTKE100 cases (Fig. 6b) achieve similar agreement through their finer spatial resolution ($\Delta X = 2D$). Coarser-resolution Fitch cases, regardless

of the added TKE (Figs. 6a), tend to overestimate power in the upstream half of the farm when considering the aligned LES the reference. This power overestimation results from weaker wake losses, as the coarse NWP-WFP grid ($\Delta X = 1$ km) dilutes wake structures spatially. This limitation has been previously documented (Archer et al., 2020; Sanchez Gomez et al., 2024).

At finer resolution (cases DX2D and DX2DTKE100), wakes become sharper and induce more realistic power deficits in turbine rows 2–4 (Fig. 6b) compared with the aligned LES. The absence of power recovery beyond the second row in the NWP-WFP simulations, compared to the LES (Figs. 6a,b), likely stems from insufficient wake recovery, an aspect discussed further in Section 3.4.

Variations in turbine power are explainable by understanding the energy balance within the wind farm. The kinetic energy of the wind that is converted into turbine power (momentum extraction) is resupplied by turbulent transport towards the wind farm and its wake in the vertical and lateral directions (momentum/wake recovery) (Vermeer et al., 2003; Stieren et al., 2022). The relation between momentum extraction and wake recovery within the wind farm thus dictates how much kinetic energy is available at the wind farm exit.

In coarser NWP-WFP simulations, the WFPs apply the turbine-induced momentum sink over the grid cell volume, which effectively smooths the wind speed deficit within the cell. This representation leads to weaker local deficits at downstream turbines and consequently to higher power production. The associated increase in turbine-induced momentum extraction influences the wind speed at the wind farm exit. The MAV scheme mitigates overestimated momentum extraction by accounting for subgrid turbine–turbine wake interactions, resulting in more realistic power levels and wind farm exit wind speeds. As a result, the inflow to the near-farm wake is more accurately represented when subgrid wake effects are included.

3.4 Intra-farm, near-farm, and far wake recovery

Here, we assess how the streamwise evolution of the wind farm wake is affected by changing the added TKE coefficient and WFP (Fig. 7) and the grid resolution (Fig. 8). The time-averaged wind speed and TKE are evaluated at hub height and averaged in the spanwise direction within the bounds ($Y = -0.923$ and 5.307 km) of the horizontal dashed lines represented in Fig. 4, the lateral extent of the wind farm in the reference BASE case. Furthermore, to mitigate averaging errors from the coarse mesoscale resolution near the spanwise boundaries, all results are first interpolated to a higher-resolution grid ($\Delta X = 50$ m).

From a control-volume perspective of the wind farm, momentum extraction and wake recovery act simultaneously within the intra-farm region, although at the turbine scale extraction is localized at the rotor and recovery occurs downstream. The coarse Fitch simulations slightly underestimate the wind speed deficit in the first three turbine rows of the wind farm but overestimate the deficit further downstream (Figs. 7a) relative to the aligned LES. However, the staggered LES produces a stronger wind speed deficit that is closer to the NWP-WFP cases than the aligned LES. This result demonstrates that the performance of NWP-WFP simulations is sensitive to wind-farm layout and wind direction. Notably, the cases with α values of 75% and 100% show clear improvement at the wind farm exit and in the near-wake region ($X < 15$ km) due to the enhanced momentum entrainment into the wake associated with the larger TKE.

The MAV cases are superior to the BASE Fitch case because the improved representation of subgrid wake effects leads to better turbine power and momentum extraction predictions (Ma et al., 2022a). Because of the smaller momentum extraction

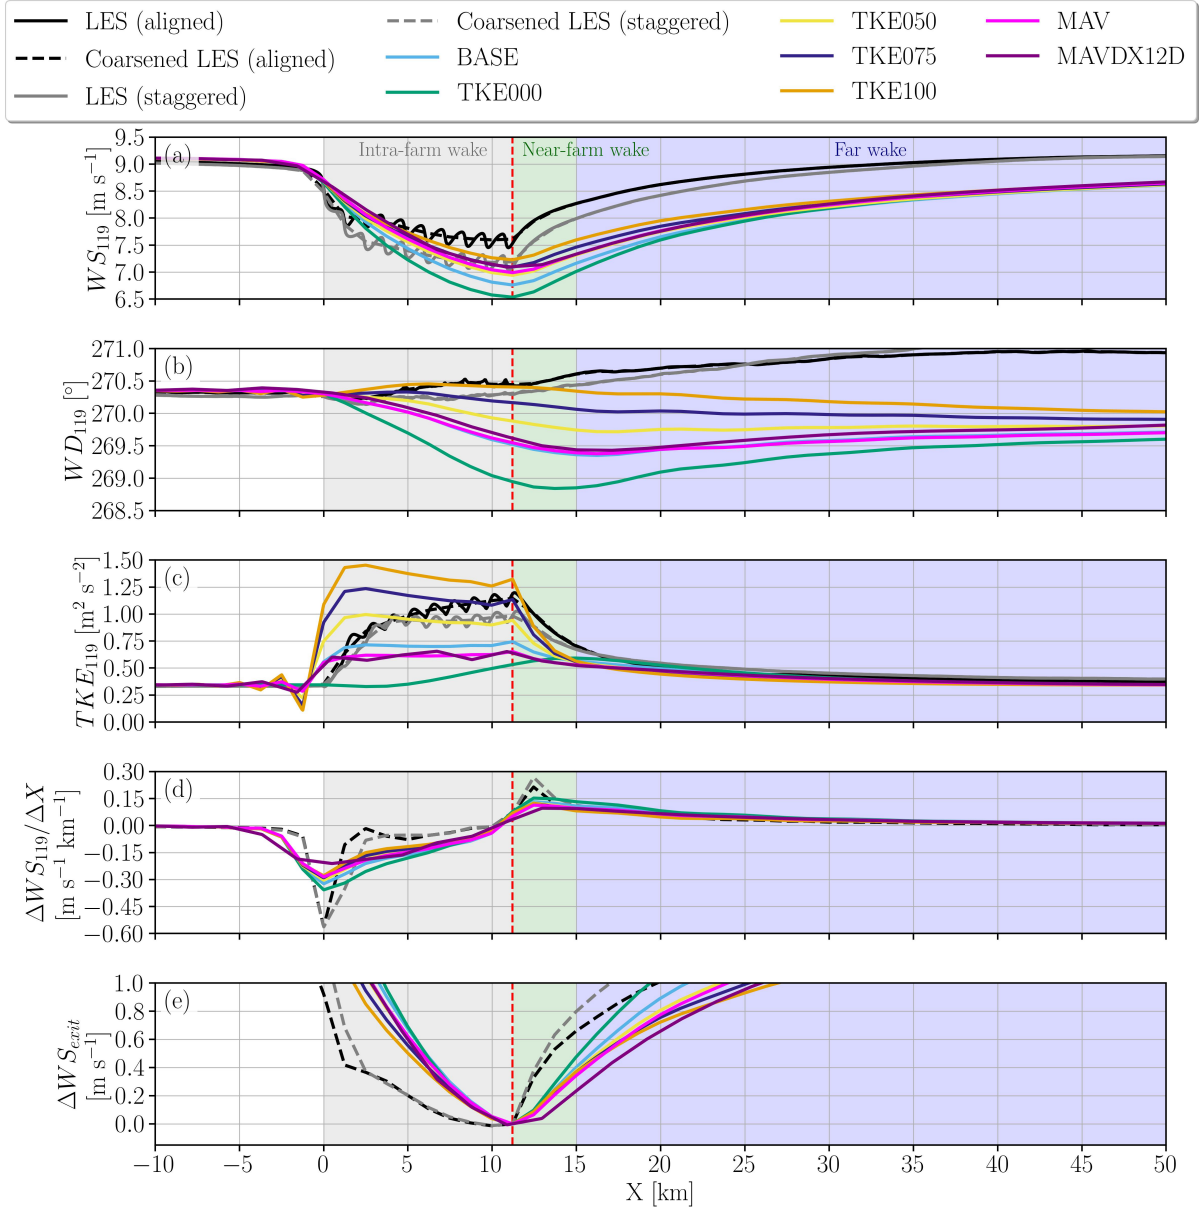


Figure 7. Streamwise variation of spanwise averages over the wind farm area of hub-height wind speed (a), wind direction (b), TKE (c), streamwise gradient of wind speed (d) and wind speed change relative to the wind farm exit (e) for the aligned and staggered LES at full resolution, coarsened LES, and NWP-WFP cases. The colored background areas indicate the streamwise extent of the intra-farm wake (gray), near-farm wake (green), and far wake of the farm (blue). The red vertical dashed line marks the wind farm exit.

relative to the BASE case, the added TKE is also smaller. The similar trends in most variables (Figs. 7a–c) between the coarser
MAVDX12D and the finer MAV demonstrate the consistency of this WFP across different spatial resolutions.

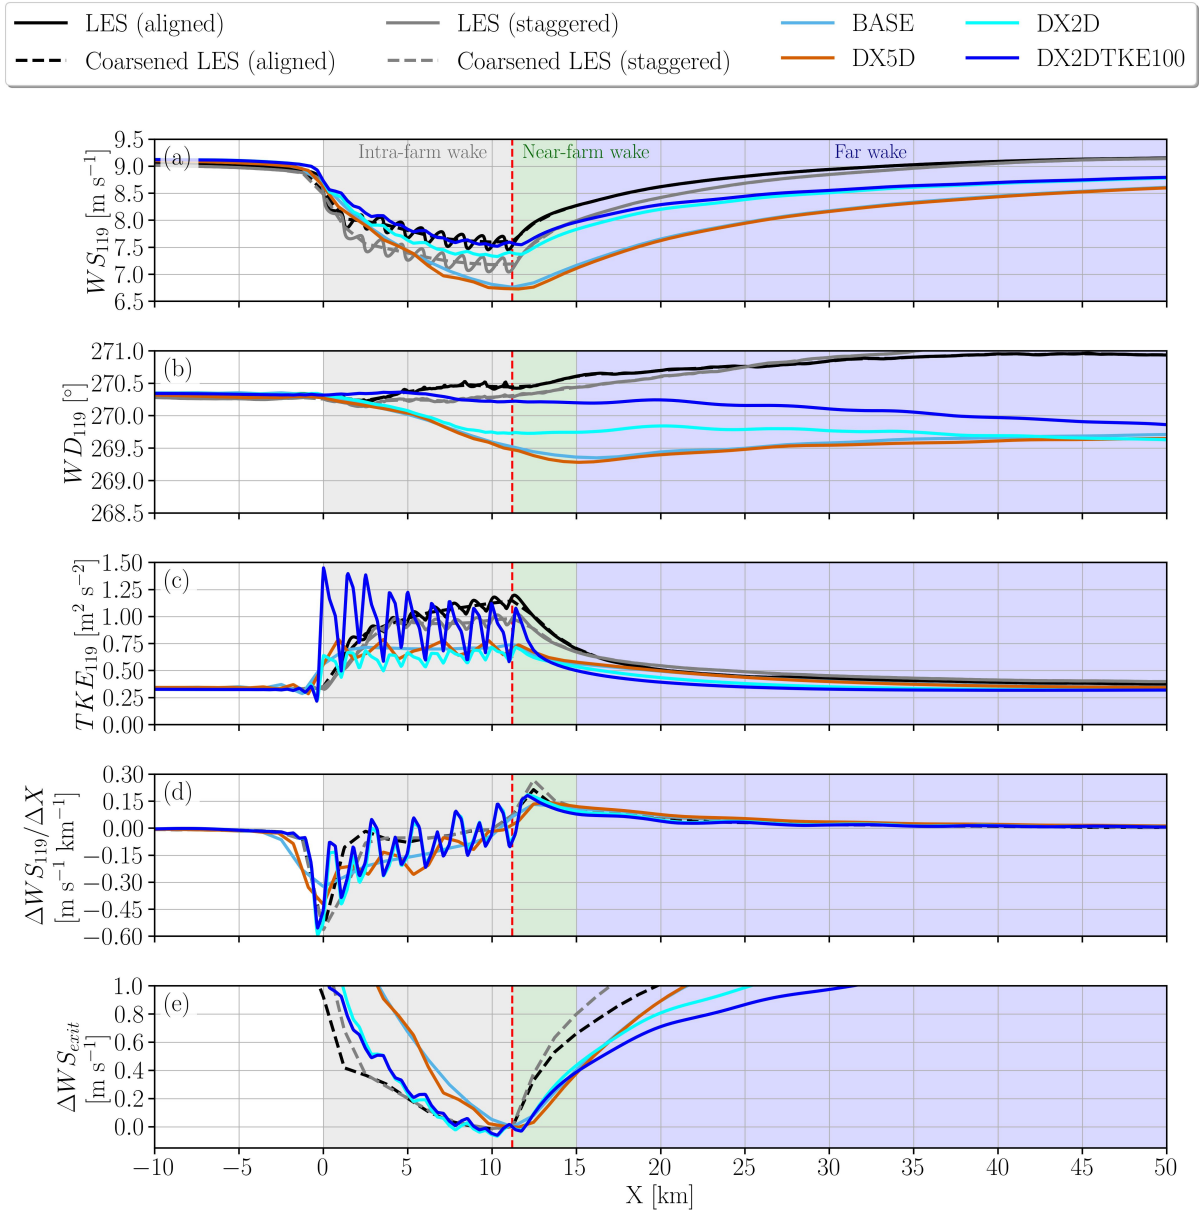


Figure 8. Same as Fig. 7, but for Fitch cases with different grid resolutions.

352 Simulations with the finest grid resolution (DX2D and DX2DTKE100) improve the representation of wind speed in the
 353 intra-farm and near-farm wake regions (Figs. 8a,d). This improvement is first attributed to the more realistic predictions of
 354 turbine power in these cases (Fig. 6b), which imply a more accurate extraction of momentum by the wind farm. As a result,
 355 the generated wake exhibits a wind speed deficit that more closely matches the aligned LES near the wind farm exit.

356 The combination of momentum extraction and wake recovery inside the wind farm creates the wind speed and TKE con-
 357 ditions at the farm exit (the red vertical dashed line in Fig. 7). This condition at the farm exit is relevant for the subsequent
 358 recovery of the near-farm wake. Among the cases varying the TKE coefficient (Fig. 7a), TKE100 most closely approximates
 359 the aligned LES at the farm exit. The TKE000 case is the worst performing because the momentum extraction is not counter-
 360 balanced by the wake recovery within the farm. The MAV cases perform better than Fitch’s BASE case and would possibly
 361 perform even better with more added TKE considering the aligned LES.

362 The momentum extraction by the turbines ceases in the near-farm wake region so that the wake recovery rates can be
 363 evaluated in isolation. The streamwise gradient of wind speed ($\Delta WS_{119}/\Delta X$) and the wind speed change relative to the
 364 wind farm exit (ΔWS_{exit}) quantify the near-farm wake recovery (Fig. 7d,e). The greatest divergence between the NWP-WFP
 365 simulations and the LES cases occurs in the near-farm wake ($11.2 < X < 15$ km), where the NWP-WFP simulations all fail to
 366 capture a peak in the recovery rate (Fig. 7d). Thus, the wake recovery in the LES is faster immediately after the wind farm exit,
 367 which is also noticeable in the shape of the streamwise wind speed curvature (Fig. 7a). Even cases TKE100 and MAV, which
 368 most closely approximate the LES wind speed in the near-farm wake, underestimates the wake recovery rate downstream. This
 369 discrepancy suggests that a key mechanism for wake recovery is not adequately captured by the NWP-WFP simulations in the
 370 near-farm wake.

371 The near-farm wake recovers slightly faster in finer-resolution cases, as evident in both the wind speed (Fig. 8a) and the
 372 streamwise gradients in wind speed (Fig. 8d), which now reproduce the peak displayed by the LES. Finally, adding more TKE
 373 ($\alpha = 100\%$) in the high-resolution simulation mostly influences the momentum extraction within the farm but has a weak
 374 influence on wake recovery rates.

375 Even though the difference in near-farm wake recovery rates between the NWP-WFP simulations and the LES occurs over
 376 a relatively short distance (~ 1 – 2 km), it produces measurable bias in wind speeds. Even if some cases match the wind speed
 377 (TKE100 and aligned LES) at the farm exit (Fig. 7a), a departure between the two wind speed curves occurs downstream.
 378 Between the wind farm exit at 11.2 km and 15 km, the gain in wind speed is of about 0.65 m s^{-1} and 0.8 m s^{-1} for the aligned
 379 and staggered LES (Fig. 7e), respectively. The change in wind speed is much smaller for the coarser-resolution NWP-WFP
 380 cases, in the range between 0.2 and 0.5 m s^{-1} (Fig. 7e). Among the NWP-WFP simulations, case TKE000 displays the fastest
 381 near-farm wake recovery rate because of the largest wind speed deficit. On the other hand, the higher resolution cases gain
 382 about 0.4 m s^{-1} (Fig. 8e). Subtracting the wind speed change of the aligned LES with both the coarse and fine NWP-WFP
 383 cases, a difference of 0.15 – 0.50 m s^{-1} is found. These values represent the bias in wind speed associated with the slower
 384 near-farm wake recovery in the NWP-WFP simulations.

385 The bias created in the near-farm wake persists far downstream. Thus, none of the NWP-WFP simulations matches the
 386 LES wind speed in the far wake (Figs. 7a and 8a), despite the similar wake recovery rates in that region (Figs. 7d and 8d).
 387 The bias in wind speed decreases in the far wake for cases with strong deficit, such as BASE and TKE000. However, the
 388 bias remains mostly unchanged for cases with weaker deficit at the farm exit, such as TKE100, DX2D and DX2DTKE100.
 389 Overall, regardless of the TKE coefficient, all the mesoscale simulations display a consistent negative wind speed bias ranging
 390 from approximately -0.7 m s^{-1} (TKE000) to -1.3 m s^{-1} (TKE100) in the near-farm wake at $X = 15$ km. Despite some

391 case-dependent reduction with downstream distance, by $X = 50$ km the bias converges to approximately -0.6 m s^{-1} across
392 all cases, indicating that errors introduced near the farm are not recovered further downstream.

393 In the LES, TKE builds up gradually, row by row, whereas in the NWP-WFP cases with a TKE source ($\alpha > 0$), the TKE
394 peaks near the first few turbine rows and then decreases monotonically downstream (Fig. 7c). The TKE remains nearly constant
395 within the farm in case BASE, and is small throughout in case TKE000, which lacks an explicit TKE source. Interestingly,
396 cases with α values of 25% and 50% better match the TKE levels near the first turbine rows, consistent with results from
397 Archer et al. (2020), while those with higher α (75%, 100%) better match the TKE in the latter half of the farm, in line with
398 other findings (Larsén and Fischereit, 2021; Ali et al., 2023).

399 A crucial insight is that turbine-added TKE does not evolve properly within the wind farm in the NWP-WFP simulations,
400 even when its magnitude matches or exceeds that of the LES in the first few turbine rows. The underlying issue therefore
401 lies not only in the amount of turbine-added TKE, as a gradual reduction of intra-farm TKE persists across several cases
402 (TKE050–TKE100). More importantly, TKE decreases more rapidly than in the LES in the near-farm wake (Fig. 7c). While
403 this behavior in the NWP-WFP simulations could in principle be attributed to excessive dissipation, Section 4.1.2 provides
404 additional evidence that insufficient shear production of TKE, rather than dissipation, plays the dominant role.

405 Lastly, the underestimation of the subtle anti-clockwise turning of the wake depends on turbulent mixing (Fig. 7b). For the
406 wake turning, this behavior results from downward turbulent momentum entrainment, which transports more veered wind from
407 aloft into the wake (van der Laan and Sørensen, 2017; Gadde and Stevens, 2019; Englberger et al., 2020; Stieren et al., 2022;
408 Kasper et al., 2024). Accordingly, cases with weaker entrainment, such as TKE000 and BASE, show a stronger directional bias.
409 Although the absolute differences in wind direction are small (about 1° between TKE000 and TKE100), over long distances
410 these differences may accumulate into downstream power losses for adjacent wind farms.

411 3.5 Coarse-grid effects on wind-farm wake spatial gradients

412 In this section, we examine two aspects of the comparison between the LES and the NWP-WFP BASE and TKE100 cases. First,
413 we evaluate how the non-averaged spatial gradients in the LES influence wake recovery, and how the horizontal and vertical
414 gradients in the non-averaged LES compare with those from the NWP-WFP simulations. Second, the coarsened (averaged)
415 LES is used to evaluate the streamwise evolution of wind speed and TKE in the wind farm wake and compare it with the
416 NWP-WFP cases. The wake recovery physics observed in the coarsened LES still correspond to the gradients and momentum
417 fluxes in the LES at its native, non-averaged resolution. The coarsened LES is only used as a diagnostic for comparison and
418 does not represent the actual dynamics driving wake recovery.

419 Figures 9 and 10 intentionally focus on localized profiles at specific turbine-aligned grid cells to highlight differences in
420 resolved gradients between the NWP-WFP simulations and the non-averaged LES. While spanwise averaging would yield
421 different absolute TKE levels, such averaging would obscure the local shear and turbulence structures that directly control
422 wake recovery in the near-farm region. These figures are therefore not intended to represent farm-averaged behavior, but rather
423 to diagnose the structural deficiencies of mesoscale simulations at the grid-cell scale.

424 The discrepancy between the coarsened aligned LES wind speed profile and those from the BASE and TKE100 cases
425 increases with downstream distance. Stronger momentum extraction occurs in the staggered LES than in the aligned LES,
426 highlighting the sensitivity of wake generation to wind-farm layout and wind direction. Figure 9 shows hub-height profiles
427 of wind speed (Figs. 9a–e) and TKE (Figs. 9f–j) along the spanwise (Y) direction at selected streamwise distances: the wind
428 farm entrance ($X = 0$ km), middle ($X = 5$ km), exit ($X = 11.2$ km), and two downstream locations ($X = 15$ and 20 km).
429 At the entrance ($X = 0$ km), the spatially averaged LES gradients in wind speed (both coarsened LES) agree reasonably well
430 with both NWP-WFP cases (Figs. 9a). However, deviations become noticeable at $X = 5$ km (Figs. 9b), especially between the
431 coarsened aligned LES and the BASE case, and grow progressively larger through $X = 11.2$ and 15 km (Figs. 9c and d). At
432 $X = 20$ km (Figs. 9e), the discrepancy remains large. The narrow band of reduced wind speed and increased TKE near the
433 center of the wind farm in the Y direction is created by the existence of two turbines within that grid cell (Fig. 2b), as discussed
434 in Section 3.2.

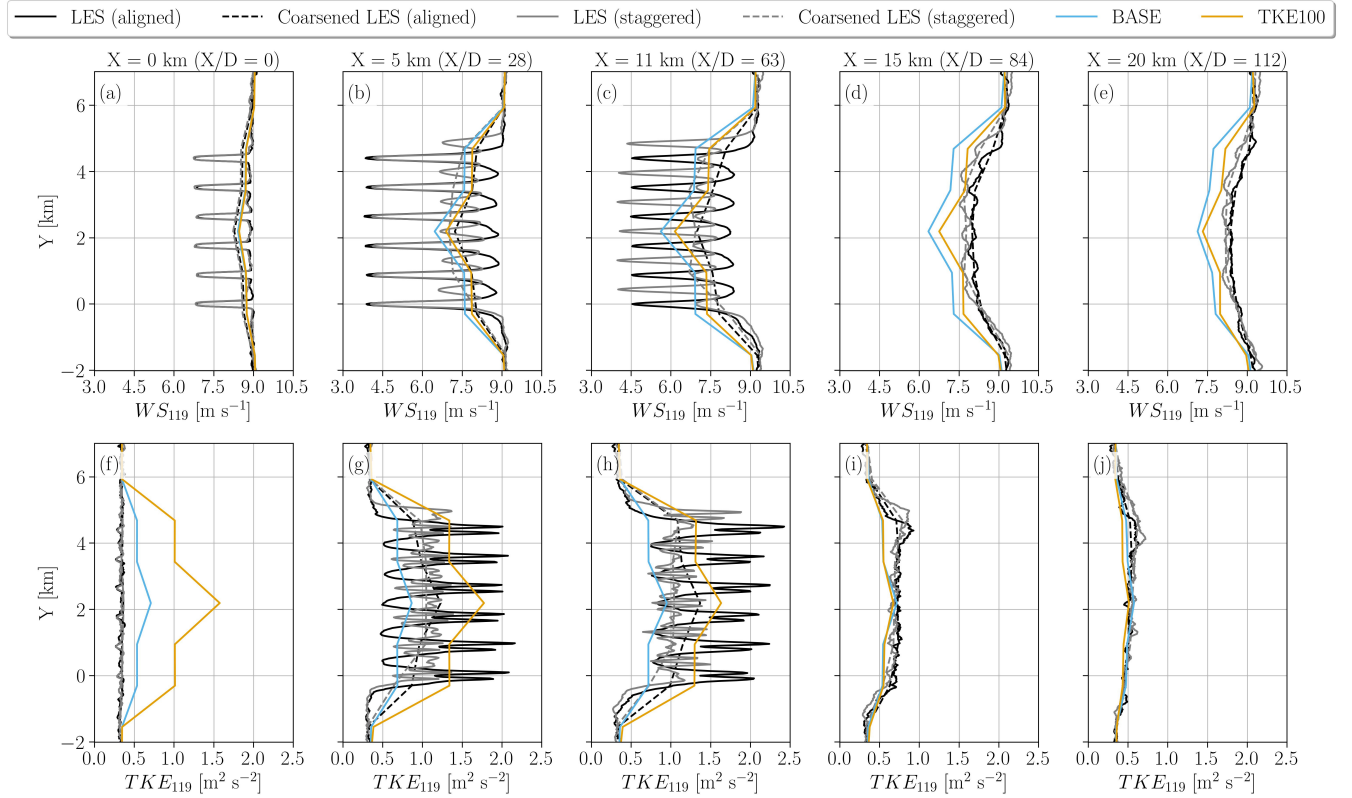


Figure 9. Time-averaged wind speed (a–e) and TKE (f–j) at hub height (119 m AGL) along spanwise Y lines at specific streamwise distances X (expressed as X/D in parentheses) for the aligned and staggered layout LES, coarsened LES, and NWP-WFP BASE and TKE100 cases.

435 From the standpoint of spatial wind speed gradients, differences between both the aligned and staggered layout LES and
436 the NWP-WFP cases are striking. While the coarsened LES profile appears similar to those of the NWP-WFP cases within the

437 wind farm ($0 \leq X \leq 11.2$ km, $0 \leq X/D \leq 63$), this similarity hides strong localized gradients in the wakes that only appear
438 in the non-averaged LES (Figs. 9a–c). These strong localized gradients are expected with a fine-resolution grid and facilitate
439 faster wake recovery in the LES. Notably, model discrepancies in wind speed profiles grow with streamwise distance while
440 these strong localized gradients persist ($0 \leq X \leq 11.2$ km, $0 \leq X/D \leq 63$), but no longer increase between $X = 15$ and
441 20 km ($X/D = 84$ and 112, respectively), where the LES gradients become smoother and more comparable to those in the
442 NWP-WFP cases.

443 This behavior suggests the problem lies upstream, within the intra-farm and near-farm wake regions. Once the strong lo-
444 calized gradients in the wakes disappear in the LES, the differences between models stabilize. Therefore, the persistent lower
445 wind speeds in NWP-WFP simulations in the far wake of the farm (Figs. 9d,e) are not caused by conditions there, but rather
446 reflect limitations in representing spatial gradients and turbulent mixing within the intra-farm and near-farm wake regions. As
447 conceptually illustrated in the Introduction, the slow wake recovery (Figs. 1b,c) and TKE decrease (Figs. 1e,f) are evident in
448 the results shown in Figs. 9c,d and h,i, respectively.

449 Vertical profiles reveal how wind farm effects modify wind speed (Figs. 10a–f) and TKE (Figs. 10g–l) gradients in each
450 simulation. Vertical profiles are sampled along the southernmost turbine column (near $Y = 0$ km) at selected streamwise
451 locations to examine how each simulation resolves local vertical gradients. The data are not spatially averaged, allowing direct
452 assessment of the gradients resolved by each grid. Upstream of the farm, wind speed (Fig. 10a) and TKE (Fig. 10g) profiles
453 are nearly identical across simulations. Within and downstream of the farm, momentum extraction (Figs. 10b–d) and TKE
454 production (Figs. 10h–j) alter these profiles. In the LES, the stronger wind speed deficit enhances vertical shear, especially near
455 the rotor top tip, by $X/D = 28$ (Figs. 10b–d), leading to intense TKE generation in the same region (Figs. 10i–j). Combined,
456 the stronger vertical wind speed gradient and enhanced TKE in the LES contribute to a faster intra-farm and near-farm wake
457 recovery. Mesoscale simulations consistently reproduce the streamwise evolution of the wind speed and TKE profiles relative
458 to the coarse LES for the aligned layout. The TKE100 case agrees more closely with the coarse LES than the BASE case,
459 particularly for TKE. Nonetheless, negative biases in wind speed and TKE increase downstream.

460 Both LES show a much sharper local wind speed deficit (Figs. 10b–d), while in the NWP-WFP simulations the deficit is
461 diluted due to spatial averaging over the coarser horizontal grid ($\Delta X \sim 1$ km). This horizontal averaging dilutes the momentum
462 sink effect, weakening both horizontal and vertical gradients. As a result, even with sufficient vertical resolution ($\Delta z \sim 10$ m),
463 the vertical structure of the wake is poorly captured in the NWP-WFP simulations due to the coupling between horizontal and
464 vertical gradients. Similar to the mesoscale simulations, the coarse LES exhibits weaker vertical gradients owing to horizontal
465 averaging.

466 Further evidence of the critical role of the weaker spatial gradients in intra-farm and near-farm wake recovery emerges when
467 evaluating the effect of TKE. From a turbulent mixing perspective, increased TKE accelerates wake recovery: for instance,
468 the TKE100 case displays faster recovery than the BASE case, as also shown by Rosencrans et al. (2024). However, despite
469 exhibiting more TKE than both the coarsened LES throughout much of the wind farm ($0 \leq X \leq 11.2$ km), including earlier
470 onset of added TKE (Fig. 9f), the TKE100 wake still recovers slower than that of the LES. These findings highlight that
471 enhancing farm-added TKE alone is insufficient to compensate for the weaker spatial gradients governing wake recovery.

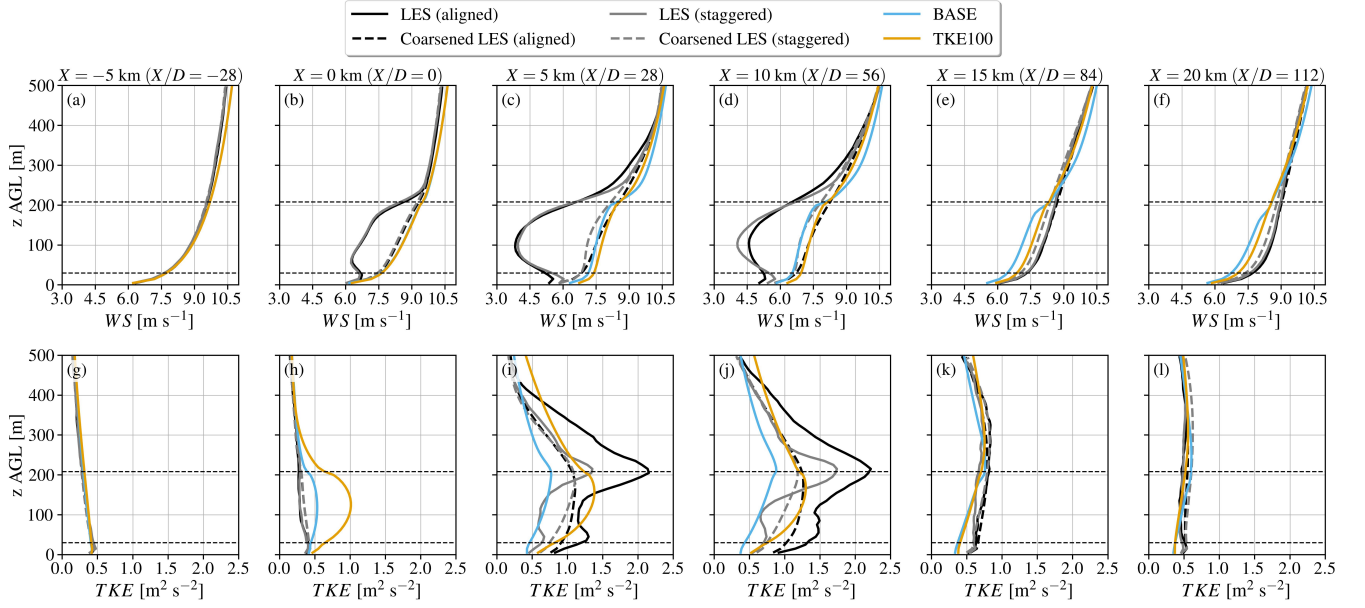


Figure 10. Vertical profiles of time-averaged wind speed (a–f) and TKE (g–l) at specific streamwise distances X (expressed as X/D in parentheses) probed over the southernmost column of turbines near $Y = 0$ km. The aligned and staggered layout LES and NWP-WFP cases BASE and TKE100 are shown. The dashed horizontal lines represent the rotor top and bottom tips.

472 4 Discussion

473 4.1 Mechanisms through which mesoscale resolution affects wake recovery

474 Two mechanisms associated with mesoscale grid coarseness directly affect wake recovery through (i) turbulent mixing and (ii)
475 spatial gradients in the wind velocity field.

476 The recovery of momentum in wind turbine and near-farm wakes occurs through lateral and vertical turbulent entrainment
477 of momentum, expressed as divergences of $\overline{u'v'}$ and $\overline{u'w'}$, respectively (Vermeer et al., 2003; Cal et al., 2010; Calaf et al.,
478 2010; Abkar and Porté-Agel, 2015; Porté-Agel et al., 2020; Stieren and Stevens, 2022; van der Laan et al., 2023). Here, u' , v' ,
479 and w' denote fluctuations relative to the time-averaged wind velocity components U , V , and W in the streamwise, spanwise,
480 and vertical directions, respectively. These momentum fluxes are commonly approximated using the Boussinesq hypothesis
481 (Boussinesq, 1897; van der Laan et al., 2023) or equivalently the K-theory (Stull, 1988):

$$482 \quad \overline{u'v'} = K_m \frac{\partial U}{\partial y} \quad (1)$$

$$483 \quad \overline{u'w'} = K_m \frac{\partial U}{\partial z}. \quad (2)$$

Here, K_m is the eddy viscosity, which depends on turbulence and atmospheric stability (Stull, 1988), and $\frac{\partial U}{\partial y}$ and $\frac{\partial U}{\partial z}$ are the spanwise and vertical gradients of wind speed (for convenience, we assume the mean flow aligns with the x -direction). The eddy viscosity K_m increases with TKE, and therefore wakes tend to recover more rapidly under convective conditions compared to neutral or stable conditions (Magnusson and Smedman, 1994; Iungo et al., 2013; Fitch et al., 2013a; Mirocha et al., 2015; Abkar and Porté-Agel, 2015; Stevens and Meneveau, 2017; Bodini et al., 2017; Lundquist et al., 2019; Rosencrans et al., 2024; García-Santiago et al., 2024).

The two mechanisms identified above affect wake recovery as described by Eqs. (1) and (2). Weaker spatial gradients directly limit wake recovery through the $\frac{\partial U}{\partial y}$ and $\frac{\partial U}{\partial z}$ terms, while low turbulence indirectly reduces wake recovery by decreasing the eddy viscosity K_m .

Next, we discuss these two issues in more detail. We begin with the role of the weaker wind speed gradients and their consequences for wake recovery, followed by the impact of artificially low TKE in the farm region.

4.1.1 Coarse-grid resolution weakens spatial wind speed gradients

The first and perhaps most critical problem is that NWP-WFP simulations cannot accurately represent the spatial wind speed gradients that drive intra-farm and near-farm wake recovery because of the coarse grid. Many studies have shown that WFPs can reproduce wind speed deficits at turbine grid cells that generally resemble those from LES (Vanderwende et al., 2016; Abkar and Porté-Agel, 2015; Archer et al., 2020; Peña et al., 2022; García-Santiago et al., 2024). However, a closer look at the downstream regions reveals a slower wake recovery in NWP-WFP simulations compared to LES (e.g., Figs. 4a,c in Vanderwende et al. (2016); Fig. 7 in Archer et al. (2020); Figs. 11–13 in Peña et al. (2022); Figs. 4 and 7 in García-Santiago et al. (2024)). Here, we demonstrate that this discrepancy arises because the momentum sink term in WFPs is not resolved by the grid, and thus is not severely affected by its coarseness, whereas the wake recovery is fundamentally resolved by the grid. Specifically, the NWP-WFP simulations exhibit inherently weaker horizontal (Figs. 9a–c) and vertical (Figs. 10b–d) gradients in the wind velocity field within the intra-farm and near-farm wake regions, i.e. $\frac{\partial U}{\partial y}|_{\text{NWP-WFP}} \ll \frac{\partial U}{\partial y}|_{\text{LES}}$ and $\frac{\partial U}{\partial z}|_{\text{NWP-WFP}} \ll \frac{\partial U}{\partial z}|_{\text{LES}}$, respectively. While discrete velocity differences evaluated at WRF grid resolution can locally yield gradients comparable to or even exceeding those in a coarsened LES (Fig. 9d), they do not organize into shear structures comparable to those present in the native-resolution LES. In contrast, the LES at native resolution exhibits spatially coherent and persistent shear layers that extend downstream and continuously drive turbulence production and wake recovery, a structural feature that is not maintained in the mesoscale representation.

As a result, even when farm-added TKE levels are comparable to or exceed those in the LES, the intra-farm and near-farm wake recovery (driven by the weaker gradients) remains underestimated in the NWP-WFP simulations (Sections 3.4 and 3.5). The fact that simulations with the finest grid resolution (DX2D and DX2DTKE100), which better resolve spatial gradients, improve the representation of the near-farm wake recovery (Figs. 8a,d,e) supports this argument. Weaker spatial gradients in NWP-WFP simulations have also been noticed by others (Fischereit et al., 2022b). Related, in another study using WRF and the Fitch WFP (Pryor et al., 2020), shorter wind farm wakes result from finer grid resolutions, which could in part be explained by the impact of the spatial gradients on wake recovery.

518 4.1.2 Insufficient shear production causes low TKE

519 The second problem is the relatively fast decrease of farm-added TKE in the NWP-WFP simulations compared to the LES.
520 This comparatively low TKE in the near-farm wake reduces turbulent mixing, effectively lowering the eddy viscosity K_m , and
521 further slowing wake recovery. Even when large amounts of turbine-added TKE are injected (e.g., $\alpha = 75\%$ or 100%), the TKE
522 fails to accumulate row-by-row as it does in the LES (Fig. 7c). Across all tested TKE enhancement levels ($\alpha = 25\%–100\%$),
523 the NWP-WFP TKE returns to near-ambient levels within 5 km downstream, almost twice as fast as in the LES.

524 A compelling hypothesis is that the rapid reduction of TKE is not merely a dissipation artifact, but instead a consequence of
525 weaker spatial gradients in the mesoscale simulations. This interpretation is supported by the close agreement between NWP-
526 WFP and LES TKE levels in the inflow (Fig. 3d) and in the far wake (Fig. 7c), indicating that the mesoscale model does not
527 inherently over-dissipate TKE. Rather, the limitation emerges in the intra- and near-farm wake, where TKE is insufficiently
528 generated because shear production depends on spatial gradients (Mellor and Yamada, 1982; Nakanishi and Niino, 2009) that
529 are weaker at mesoscale resolution. The coupling between TKE, shear production, and dissipation is illustrated in Appendix B.
530 While this limitation can be partially offset within the wind farm through turbine-added TKE, it becomes evident downstream,
531 where the WFP is inactive and TKE levels fall below those of the LES. This mechanism is therefore intrinsic to NWP-WFP
532 frameworks and has implications for studies that focus on modifying turbine-added TKE formulations (Fitch et al., 2012;
533 Archer et al., 2020; Khanjari et al., 2025).

534 4.2 Implications

535 Because both problems – slow wake recovery and insufficient shear production of TKE – are linked to grid resolution, they are
536 likely to affect wake recovery not only in WRF with the Fitch or MAV WFPs but also in other NWP and climate models that use
537 WFPs. As such, these findings underscore the need for improved representation of both spatial gradients and turbulent mixing
538 if WFPs are to accurately simulate wind farm wakes and their downstream impacts. Building on this, we present implications
539 of our work for studies of real wind farm wake effects, where environmental and observational aspects increase the complexity
540 of the analysis. We highlight the importance of separating wake generation (momentum extraction) from its recovery when
541 evaluating model performance.

542 Some NWP-WFP simulations driven by realistic synoptic conditions have demonstrated reasonable agreement with observed
543 wind speed deficits in wind farm wakes, based on aircraft measurements (Siedersleben et al., 2018a, b, 2020; Larsén and
544 Fischereit, 2021; Ali et al., 2023; van Stratum et al., 2022) and SCADA data (Sanchez Gomez et al., 2024) from offshore
545 sites. However, discrepancies in inflow conditions between simulations and observations remain a major challenge, as they can
546 obscure the evaluation of wake recovery. Despite this, several case studies have achieved good correspondence with observed
547 wind speed profiles along wind farm transects. Given the inherent spatio-temporal variability and limited control over inflow
548 in realistic configurations, such results are promising. In our idealized setup, excellent agreement is ensured in the inflow,
549 allowing a more direct assessment of WFP performance and limitations. These controlled conditions provide valuable guidance
550 for improving their representation in more complex, operational scenarios.

Another important issue is the separation between wake generation and recovery for modeling evaluation. The wind speed bias between the NWP-WFP simulation and the LES within the wind farm is not exclusively caused by a difference in wake recovery, but also by a difference in momentum extraction. For instance, in Fig. 6b, the coarser-resolution cases BASE and DX5D have larger row-averaged power (extract more momentum) than the finer-resolution cases DX2D and DX2DTKE100. As a result, in combination with differences in wake recovery between the simulations, cases BASE and DX5D have stronger wind speed deficits (Fig. 8a). Matching the wind speed deficit predicted by LES or observations does not necessarily mean the dynamics of wake recovery are well represented in NWP-WFP simulations. For instance, a seemingly faster wake recovery was attributed to the NWP-WFP simulation in comparison with the LES, when in fact the NWP-WFP simulation generated a much weaker wake in the first place (Eriksson et al., 2015). As the stronger wake of the LES recovers momentum, it eventually matches the wind speed deficit of the weaker wake of the NWP-WFP simulation downstream. Thus, wake generation and recovery are two important aspects of wind farm flows that need to be considered simultaneously.

The degree of wake recovery underestimation is likely sensitive to inflow wind speed, direction and atmospheric stability. For instance, the weaker ambient turbulence in stable conditions promotes longer individual turbine wakes (and thus stronger spatial gradients in wind speed) in comparison with neutral or convective conditions (Abkar and Porté-Agel, 2015; Abkar et al., 2016b). Hypothetically, these unmixed wind speed gradients could further slow wake recovery in NWP-WFP simulations, which requires more research. Evaluating wake recovery in stable conditions is important because it is exactly when wakes are most pronounced (Magnusson and Smedman, 1994; Iungo et al., 2013; Fitch et al., 2013a; Mirocha et al., 2015; Abkar and Porté-Agel, 2015; Bodini et al., 2017; Lundquist et al., 2019; Rosencrans et al., 2024; García-Santiago et al., 2024).

5 Conclusions

Numerical Weather Prediction (NWP) and climate models equipped with Wind Farm Parameterizations (WFPs) provide a powerful framework for simulating wind farm cluster wakes, both onshore and offshore. In this paper, we assess the strengths and limitations of the NWP-WFP approach using the Weather Research and Forecasting (WRF) model with the Fitch et al. (2012) and MAV (Ma et al., 2022a, b) WFPs, in comparison to neutrally-stratified large-eddy simulations (LES). We find that near-farm wake recovery is underestimated in NWP-WFP simulations due to its representation on a coarse mesoscale grid. This limitation leads to slow wake recovery through two interconnected mechanisms: (i) weaker spatial gradients in the wind velocity field and (ii) insufficient shear production of turbulence kinetic energy (TKE), resulting in TKE levels that decay too rapidly in the near-farm wake.

The first mechanism arises because near-farm wake recovery in the LES is driven by sharp local velocity gradients and enhanced turbulent mixing that replenishes momentum. In contrast, NWP-WFP simulations underestimate horizontal and vertical gradients due to spatial smearing at mesoscale resolution, which limits wake recovery. Differences between NWP-WFP and LES emerge within a short downstream distance of $\sim 1\text{--}2$ km of the farm exit, and the bias established there persists into the far wake. Between the farm exit (11.2 km) and $X = 15$ km, the LES recovers approximately $0.65\text{--}0.8\text{ m s}^{-1}$, whereas NWP-WFP simulations recover only $0.2\text{--}0.5\text{ m s}^{-1}$, yielding a wind-speed bias of $0.15\text{--}0.50\text{ m s}^{-1}$. This near-farm bias is not subse-

584 quently recovered: it propagates downstream largely unchanged, reaching approximately -0.6 m s^{-1} at $X = 50 \text{ km}$ across all
585 cases. Higher-resolution mesoscale simulations partially reduce this bias, and increased turbine-added TKE or subgrid wake
586 effects offer some improvement, but neither addresses the underlying cause.

587 The second mechanism involves insufficient shear production of TKE. While TKE in the LES increases along the wind
588 farm and peaks near the farm exit, NWP-WFP simulations show an early maximum followed by a monotonic decrease. In the
589 near-farm wake, TKE returns to ambient levels more rapidly than in the LES, further limiting wake recovery. This behavior is
590 consistent with the reduced magnitude of velocity gradients, which weakens local shear production.

591 A key insight is that slow near-farm wake recovery, although confined to a relatively short downstream distance, has lasting
592 impacts on the far wake. Simulations that better resolve gradients and improve near-farm recovery also exhibit reduced far-wake
593 wind speed biases, highlighting the importance of accurately capturing this region.

594 These findings stem from the mesoscale representation of wake dynamics rather than deficiencies in the WFPs themselves.
595 The near-farm wake lies outside the direct influence of the WFPs and is governed by grid-resolved dynamics and planetary
596 boundary layer (PBL) schemes. Within the wind farm, wake recovery and turbine-induced momentum extraction occur simul-
597 taneously and cannot be distinguished in the current analysis.

598 Therefore, improving wake recovery requires advances beyond current WFP formulations. While refined subgrid wakes
599 and TKE parameterizations may improve intra-farm dynamics, addressing slow near-farm wake recovery downstream remains
600 challenging, as WFPs do not act in this region. Future efforts should focus on improving the representation of shear-driven
601 TKE production and developing approaches that better capture spatial variations in wake recovery across grid cells within and
602 behind the wind farm, as recently demonstrated by García-santiago et al. (2026). Future work should also assess wake recovery
603 under varying atmospheric stability regimes, as smoother, more mesoscale-resolvable gradients such as in convective boundary
604 layers may improve agreement with LES. Additionally, investigating whether the 3DPBL scheme can better represent spatial
605 gradients and turbulent mixing at finer grid resolutions (Kosović et al., 2020; Juliano et al., 2022).

606 *Code and data availability.* The WRF model version 4.4 with the axial induction correction (Vollmer et al., 2024) and the MAV WFP (Ma
607 et al., 2022a, b) is available at https://github.com/wradunz/WRFv4.4-DRM_GAD.git. The WRF setup files for the NWP-WFP simulations
608 can be accessed at Radünz (2025).

609 **Appendix A: DTU 10-MW turbine power and thrust curves**

610 This section evaluates the sensitivity of wake recovery to the thrust coefficient (C_T), as outlined in Table 1. The power and
611 thrust coefficient curves for the DTU 10-MW wind turbine are shown in Figs. A1a,b, respectively. For an inflow wind speed of
612 approximately 9 m s^{-1} , the turbine produces slightly over 5 MW of power, and the corresponding C_T is approximately 0.81.

613 The value of $C_T = 0.75$ adopted in the LES (Section 2.1) yields wind speed deficits similar to those obtained with a fixed
614 C_T of 0.81 or with a wind-speed-dependent C_T (Fig. A2a). In contrast, using a lower C_T value of 0.50 results in a weaker

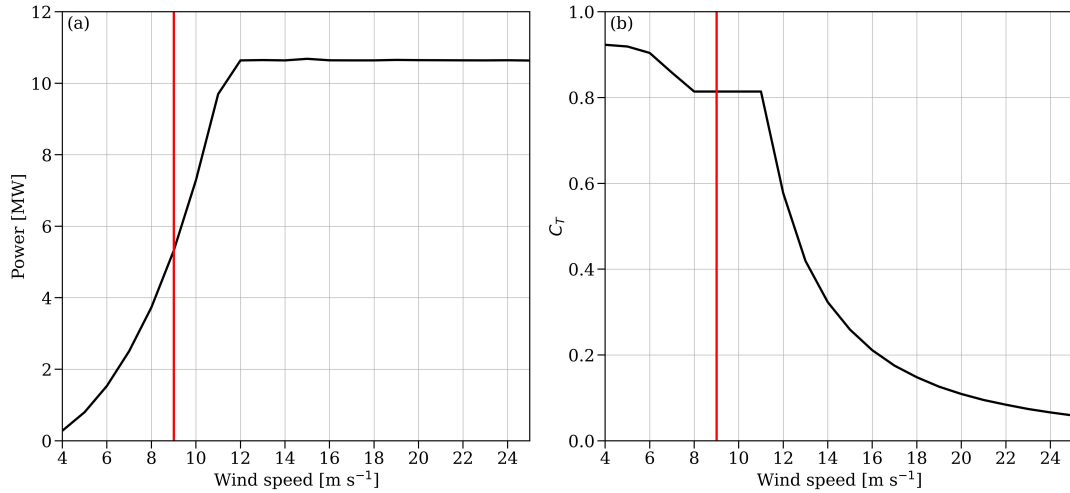


Figure A1. Power (a) and thrust coefficient (b) curves as function of wind speed for the wind turbine of the DTU 10-MW model. The red vertical line denotes the point of operation based on the hub height wind speed of approximately 9 m s^{-1} considered in this study.

615 wake and reduced TKE generation (Fig. A2c), since the TKE source term is proportional to the difference $C_T - C_P$. Therefore,
 616 whether C_T is set to 0.81, 0.75, or dynamically determined based on wind speed, the main conclusions of our investigation
 617 remain unchanged.

618 Appendix B: Streamwise TKE budget in NWP-WFP simulations

619 To support the interpretation presented in Section 4.1, we examine the streamwise evolution of selected MYNN TKE budget
 620 terms at hub height for the mesoscale NWP-WFP simulations (BASE, TKE100, and MAV), shown in Fig. B1. The budget
 621 terms are computed using the same spanwise averaging applied in Figs. 7 and 8, ensuring consistency with the bulk wake
 622 diagnostics used to characterize intra-farm, near-farm, and far-wake behavior. Buoyancy production and vertical transport are
 623 omitted, as their contributions are small relative to the dominant terms and do not influence the conclusions discussed below.

624 Figure B1a shows that the TKE is highest within the wind farm due to direct addition by the WFPs, with dissipation
 625 (Fig. B1c) closely following the TKE magnitude. Shear production (Fig. B1b) increases through the intra-farm region as the
 626 wind speed deficit builds across successive turbine rows (Fig. 7a). In the near-farm wake, where the WFPs are inactive, shear
 627 production in the BASE and MAV cases exceeds that of the TKE100 case, despite similar TKE and dissipation levels at the
 628 wind-farm exit. This difference is critical: the reduced shear production in TKE100 leads to a reduced TKE in the near-farm
 629 wake compared to BASE and MAV. Consistently, cases with larger wind speed deficits exhibit stronger shear production, with
 630 the ordering at the farm exit being BASE, followed by MAV and TKE100. These results reinforce the conclusion from Sec-
 631 tion 4.1 that insufficiently sustained shear production limits TKE levels and eddy viscosity in the near-farm wake of mesoscale
 632 NWP-WFP simulations.

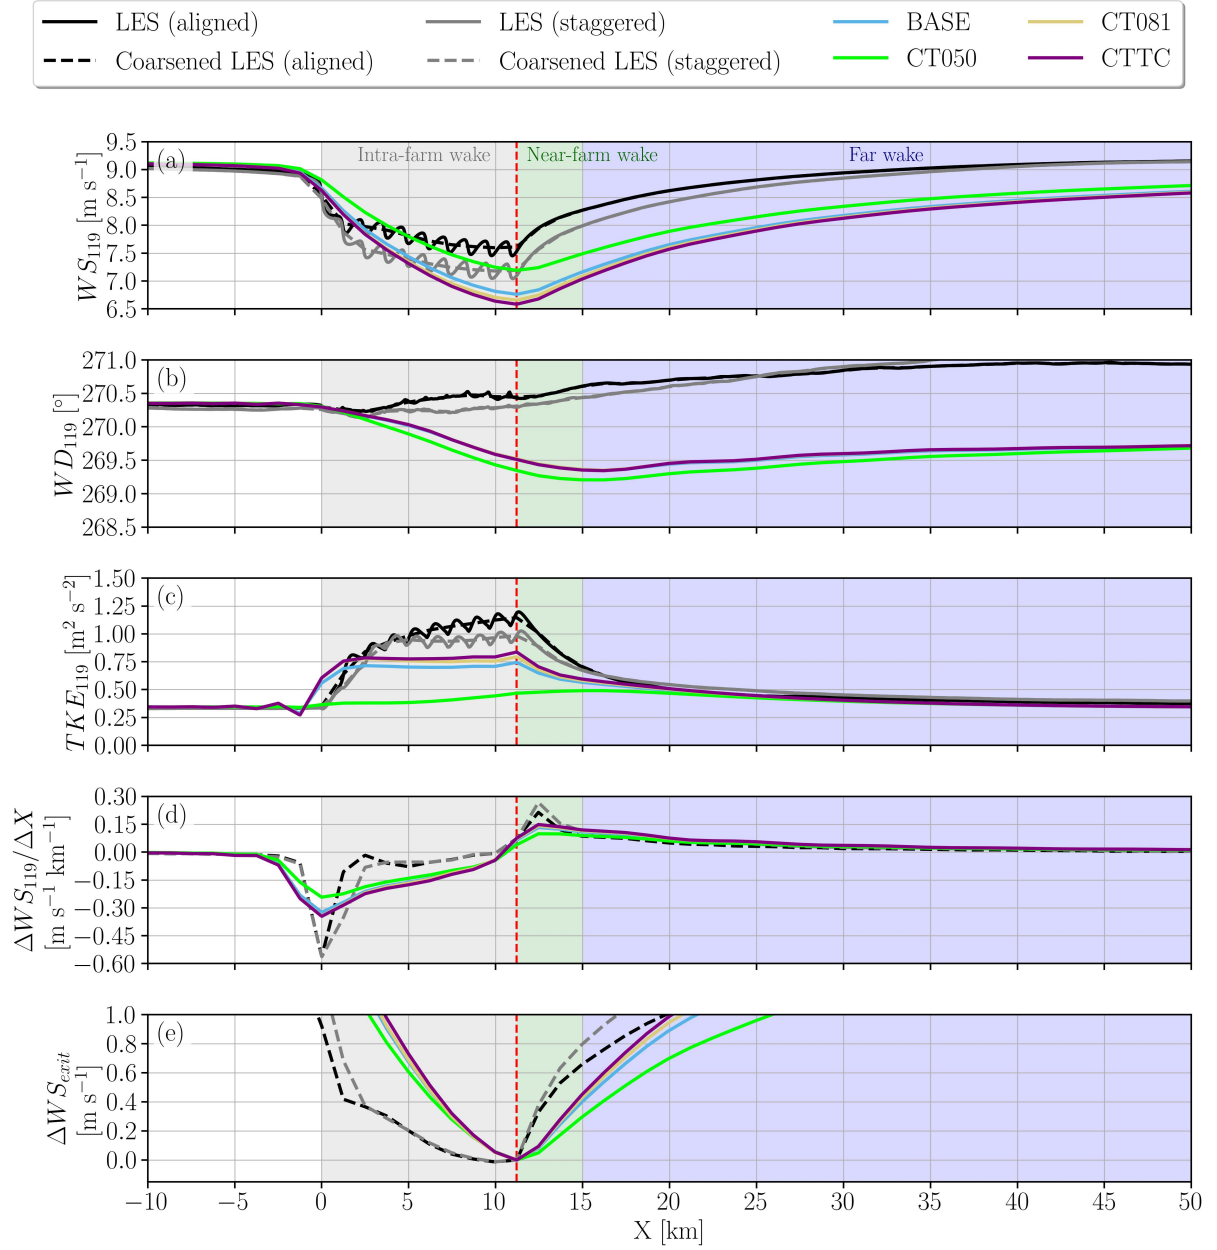


Figure A2. Streamwise variation of spanwise averages over the wind farm area of hub-height wind speed (a), wind direction (b), TKE (c), streamwise gradient of wind speed (d) and wind speed change relative to the wind farm exit (e) for the aligned and staggered LES at full resolution, coarsened LES, and NWP-WFP cases with different C_T . In the CTTC case, the thrust coefficient C_T varies with wind speed according to the turbine's thrust curve. The colored background areas indicate the streamwise extent of the intra-farm wake (gray), near-farm wake (green), and far wake of the farm (blue). The red vertical dashed line marks the wind farm exit.

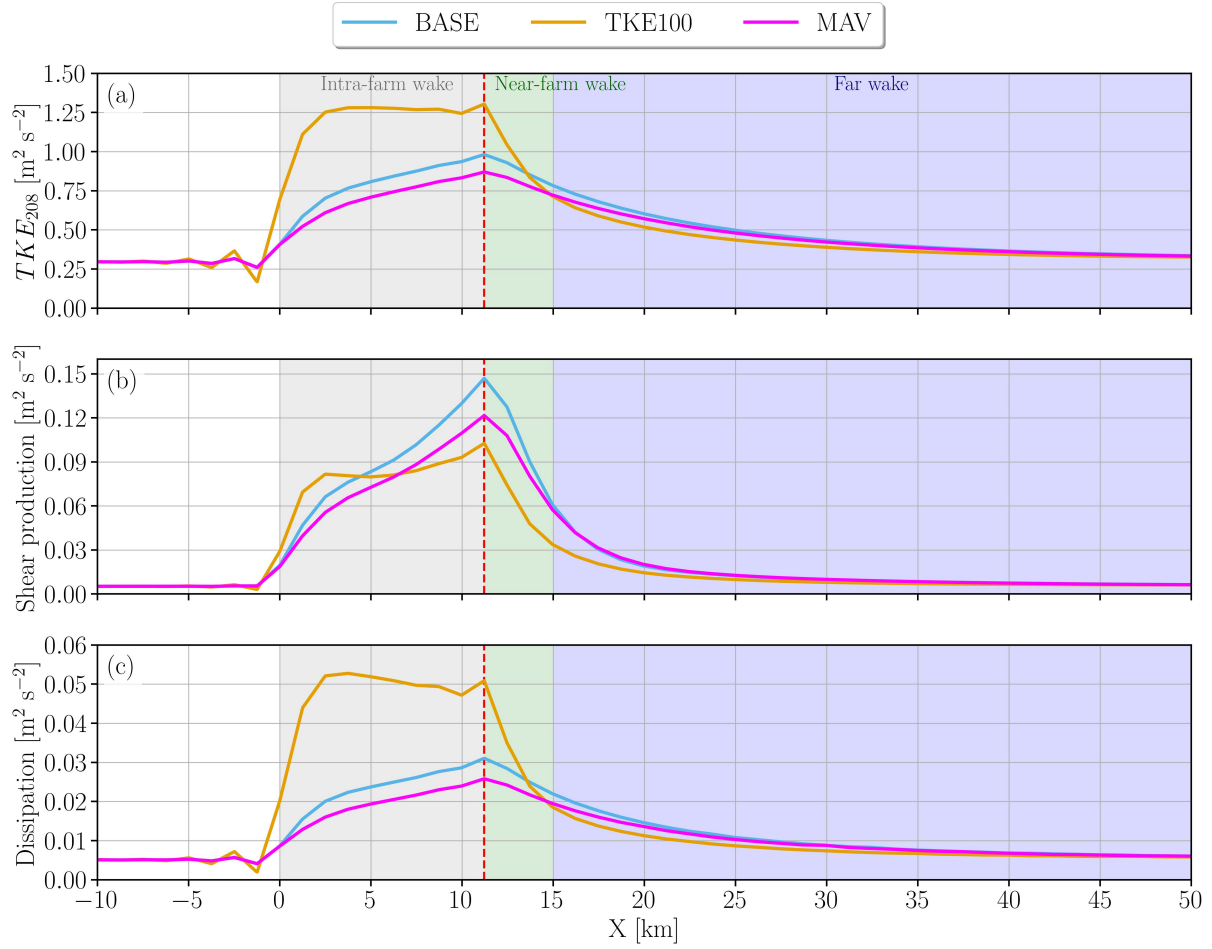


Figure B1. Streamwise variation of spanwise averages over the wind farm area of rotor top tip TKE (a), shear production (b), and dissipation (c) for the BASE, TKE100 and MAV cases. The colored background areas indicate the streamwise extent of the intra-farm wake (gray), near-farm wake (green), and far wake of the farm (blue). The red vertical dashed line marks the wind farm exit.

633 *Author contributions.* Conceptualization: WCR and JKL. Methodology: WCR. Data curation: WCR and JHK. Formal analysis: WCR. In-
634 vestigation: WCR and JKL. Writing (original draft): WCR and JKL. Writing (review and editing): all authors. All authors contributed to the
635 discussion and interpretation of results.

636 *Competing interests.* At least one of the (co-)authors is a member of the editorial board of *Wind Energy Science*.

637 *Acknowledgements.* This work was partially supported by the U.S. Department of Energy, Office of Science Energy Earthshot Initiative, as
638 part of the Addressing Challenges in Energy—Floating Wind in a Changing Climate (ACE-FWICC) Energy Earthshot Research Center. A
639 portion of the research (WRF simulations) was performed using computational resources sponsored by the Department of Energy’s Office
640 of Critical Minerals and Energy Innovation Wind Energy Technologies Office and located at the National Laboratory of the Rockies. This
641 work was authored in part by the National Laboratory of the Rockies operated for the U.S. Department of Energy (DOE) under Contract
642 No. DE-AC36-08GO28308. This project has received funding from the European Research Council Horizon Europe program (Grant No.
643 101124815).

644 References

- 645 Abkar, M. and Porté-Agel, F.: Influence of atmospheric stability on wind-turbine wakes: A large-eddy simulation study, *Phys. Fluids*, 27,
646 <https://doi.org/10.1063/1.4913695>, 2015.
- 647 Abkar, M. and Porté-Agel, F.: A new wind-farm parameterization for large-scale atmospheric models, *J. Renew. Sustain. Energy*, 7, 1–13,
648 <https://doi.org/10.1063/1.4907600>, 2015.
- 649 Abkar, M., Bae, H. J., and Moin, P.: Minimum-dissipation scalar transport model for large-eddy simulation of turbulent flows, *Phys. Rev.*
650 *Fluids*, 1, 041 701, <https://doi.org/10.1103/PhysRevFluids.1.041701>, 2016a.
- 651 Abkar, M., Sharifi, A., and Porté-Agel, F.: Wake flow in a wind farm during a diurnal cycle, *J. Turb.*, 17, 420–441,
652 <https://doi.org/10.1080/14685248.2015.1127379>, 2016b.
- 653 Adams, A. S. and Keith, D. W.: Are global wind power resource estimates overstated?, *Environ. Res. Lett.*, 8, <https://doi.org/10.1088/1748->
654 9326/8/1/015021, 2013.
- 655 Agarwal, N. J., Lundquist, J. K., Juliano, T. W., and Rybchuk, A.: A North Sea in situ evaluation of the Fitch wind farm parametrization
656 within the Mellor – Yamada – Nakanishi – Niino and 3D planetary boundary layer schemes, *Wind Energ. Sci.*, <https://doi.org/10.5194/wes->
657 2025-16, 2025.
- 658 Albertson, J. D. and Parlange, M. B.: Surface length scales and shear stress: Implications for land-atmosphere interaction over complex
659 terrain, *Water Resources Research*, 35, 2121–2132, <https://doi.org/10.1029/1999WR900094>, 1999.
- 660 Ali, K., Schultz, D. M., Revell, A., Stallard, T., and Ouro, P.: Assessment of Five Wind-Farm Parameterizations in the Weather Research and
661 Forecasting Model: A Case Study of Wind Farms in the North Sea, *Mon. Weather Rev.*, 151, 2333–2359, <https://doi.org/10.1175/MWR->
662 D-23-0006.1, 2023.
- 663 Allaerts, D. and Meyers, J.: Boundary-layer development and gravity waves in conventionally neutral wind farms, *J. Fluid Mech.*, 814,
664 95–130, <https://doi.org/10.1017/jfm.2017.11>, 2017.
- 665 Archer, C. L., Wu, S., Ma, Y., and Jiménez, P. A.: Two corrections for turbulent kinetic energy generated by wind farms in the WRF model,
666 *Mon. Weather Rev.*, 148, 4823–4835, <https://doi.org/10.1175/MWR-D-20-0097.1>, 2020.
- 667 Baidya Roy, S., Pacala, S. W., and Walko, R. L.: Can large wind farms affect local meteorology?, *J. Geophys. Res. Atmos.*, 109, 1–6,
668 <https://doi.org/10.1029/2004JD004763>, 2004.
- 669 Bak, C., Zahle, F., Bitsche, R., Kim, T., Yde, A., Henriksen, L. C., Hansen, M. H., Blasques, J. P. A. A., Gaunaa, M., and Natarajan, A.: The
670 DTU 10-MW Reference Wind Turbine, in: *Danish Wind Power Research*, Roskilde, Denmark, 2013.
- 671 Barthelmie, R. J., Frandsen, S. T., Nielsen, M. N., Pryor, S. C., Rethore, P. E., and Jørgensen, H. E.: Modelling and measurements
672 of power losses and turbulence intensity in wind turbine wakes at Middelgrunden offshore wind farm, *Wind Energy*, 10, 517–528,
673 <https://doi.org/10.1002/we.238>, 2007.
- 674 Barthelmie, R. J., Hansen, K., Frandsen, S. T., Rathmann, O., Schepers, J. G., Schlez, W., Phillips, J., Rados, K., Zervos, A., Politis, E. S.,
675 and Chaviaropoulos, P. K.: Modelling and Measuring Flow and Wind Turbine Wakes in Large Wind Farms Offshore, *Wind Energy*, 12,
676 431–444, <https://doi.org/10.1002/we.348>, 2009.
- 677 Blahak, U., Goretzki, B., and Meis, J.: A simple parameterization of drag forces induced by large wind farms for numerical weather prediction
678 models, in: *Proceedings of European wind energy conference and exhibition*, 1, pp. 4577–4585, 2010.
- 679 Bodini, N., Zardi, D., and Lundquist, J. K.: Three-dimensional structure of wind turbine wakes as measured by scanning LiDAR, *Atmos.*
680 *Meas. Tech.*, 10, 2881–2896, <https://doi.org/10.5194/amt-10-2881-2017>, 2017.

681 Bodini, N., Lundquist, J. K., and Kirincich, A.: U.S. East coast LiDAR measurements show offshore wind turbines will encounter very low
682 atmospheric turbulence, *Geophys. Res. Lett.*, 46, 5582–5591, <https://doi.org/10.1029/2019GL082636>, 2019.

683 Boettcher, M., Hoffmann, P., Lenhart, H. J., Schlünzen, K. H., and Schoetter, R.: Influence of large offshore wind farms on North German
684 climate, *Meteorol. Z.*, 24, 465–480, <https://doi.org/10.1127/metz/2015/0652>, 2015.

685 Boussinesq, M. J.: *Théorie de l'écoulement tourbillonnant et tumultueux des liquides*, Gauthier-Villars et fils, Paris, France, [https://archive.](https://archive.org/details/thbeoriedelbeco01bousrich/page/1/)
686 [org/details/thbeoriedelbeco01bousrich/page/1/](https://archive.org/details/thbeoriedelbeco01bousrich/page/1/), 1897.

687 Cal, R. B., Lebrón, J., Castillo, L., Kang, H. S., and Meneveau, C.: Experimental study of the horizontally averaged flow structure in a model
688 wind-turbine array boundary layer, *J. Renew. Sustain. Energy*, 2, 0–25, <https://doi.org/10.1063/1.3289735>, 2010.

689 Calaf, M., Meneveau, C., and Meyers, J.: Large eddy simulations of fully developed wind-turbine array boundary layers, *Phys. Fluids*, 22,
690 015 110, <https://doi.org/10.1063/1.3291077>, 2010.

691 Cañadillas, B., Foreman, R., Barth, V., Siedersleben, S., Lampert, A., Platis, A., Djath, B., Schulz-Stellenfleth, J., Bange, J., Emeis, S., and
692 Neumann, T.: Offshore wind farm wake recovery: Airborne measurements and its representation in engineering models, *Wind Energy*, 23,
693 1249–1265, <https://doi.org/10.1002/we.2484>, 2020.

694 Du, B., Ge, M., Li, X., and Liu, Y.: A Meso-Microscale Coupled Wind Farm Parameterization, *Boundary-Layer Meteorology*, 191, 35,
695 <https://doi.org/10.1007/s10546-025-00928-7>, 2025.

696 Du, B., Li, Q., Ge, M., Li, X., and Liu, Y.: Gaussian-based multicolumn spatial distribution method for wind farm parameterizations, *Physical*
697 *Review Fluids*, 11, 023 801, <https://doi.org/10.1103/PhysRevFluids.11.023801>, 2026.

698 Englberger, A., Lundquist, J. K., and Dörnbrack, A.: Changing the rotational direction of a wind turbine under veering inflow: a parameter
699 study, *Wind Energ. Sci.*, 5, 1623–1644, <https://doi.org/10.5194/wes-5-1623-2020>, 2020.

700 Eriksson, O., Lindvall, J., Breton, S. P., and Ivanell, S.: Wake downstream of the Lillgrund wind farm - A comparison between LES using the
701 actuator disc method and a wind farm parametrization in WRF, *J. Phys. Conf. Ser.*, 625, <https://doi.org/10.1088/1742-6596/625/1/012028>,
702 2015.

703 Fischereit, J., Brown, R., Larsén, X. G., Badger, J., and Hawkes, G.: Review of mesoscale Wind-Farm Parametrizations and their applications,
704 *Bound.-Layer Meteorol.*, 182, 175–224, <https://doi.org/10.1007/s10546-021-00652-y>, 2022a.

705 Fischereit, J., Schaldemose Hansen, K., Larsén, X. G., van der Laan, M. P., Réthoré, P. E., and Murcia Leon, J. P.: Comparing and vali-
706 dating intra-farm and farm-to-farm wakes across different mesoscale and high-resolution wake models, *Wind Energ. Sci.*, 7, 1069–1091,
707 <https://doi.org/10.5194/wes-7-1069-2022>, 2022b.

708 Fitch, A. C., Olson, J. B., Lundquist, J. K., Dudhia, J., Gupta, A. K., Michalakes, J., and Barstad, I.: Local and mesoscale impacts of wind
709 farms as parameterized in a mesoscale NWP model, *Mon. Weather Rev.*, 140, 3017–3038, <https://doi.org/10.1175/MWR-D-11-00352.1>,
710 2012.

711 Fitch, A. C., Lundquist, J. K., and Olson, J. B.: Mesoscale influences of wind farms throughout a diurnal cycle, *Mon. Weather Rev.*, 141,
712 2173–2198, <https://doi.org/10.1175/MWR-D-12-00185.1>, 2013a.

713 Fitch, A. C., Olson, J. B., and Lundquist, J. K.: Parameterization of Wind Farms in Climate Models, *J. Climate*, 26, 6439–6458,
714 <https://doi.org/10.1175/JCLI-D-12-00376.1>, 2013b.

715 Gadde, S. N. and Stevens, R. J. A. M.: Effect of Coriolis force on a wind farm wake, *J. Phys. Conf. Ser.*, 1256, 012 026,
716 <https://doi.org/10.1088/1742-6596/1256/1/012026>, 2019.

717 Gadde, S. N., Stieren, A., and Stevens, R. J. A. M.: Large-Eddy Simulations of Stratified Atmospheric Boundary Layers: Comparison of
718 Different Subgrid Models, *Bound.-Layer Meteorol.*, 178, 363–382, <https://doi.org/10.1007/s10546-020-00570-5>, 2021.

719 García-santiago, O., Badger, J., Hahmann, A. N., Volker, P. J. H., Ott, S., Laan, P. V. D., and Kelly, M.: A wind-farm wake-turbulence
720 parameterization for the WRF model, EGU sphere (preprint repository), pp. 1–34, [https://doi.org/https://doi.org/10.5194/egusphere-2026-](https://doi.org/https://doi.org/10.5194/egusphere-2026-2144)
721 2144, 2026.

722 García-Santiago, O., Hahmann, A. N., Badger, J., and Peña, A.: Evaluation of wind farm parameterizations in the WRF model under different
723 atmospheric stability conditions with high-resolution wake simulations, *Wind Energ. Sci.*, 9, 963–979, [https://doi.org/10.5194/wes-9-963-](https://doi.org/10.5194/wes-9-963-2024)
724 2024, 2024.

725 Haupt, S. E., Kosovic, B., Shaw, W., Berg, L. K., Churchfield, M., Cline, J., Draxl, C., Ennis, B., Koo, E., Kotamarthi, R., Mazzaro, L.,
726 Mirocha, J., Moriarty, P., Muñoz-Esparza, D., Quon, E., Rai, R. K., Robinson, M., and Sever, G.: On bridging a modeling scale gap:
727 mesoscale to microscale coupling for wind energy, *Bull. Am. Meteorol. Soc.*, 100, 2533–2550, <https://doi.org/10.1175/bams-d-18-0033.1>,
728 2019.

729 Haupt, S. E., Kosović, B., Berg, L. K., Kaul, C. M., Churchfield, M., Mirocha, J., Allaerts, D., Brummet, T., Davis, S., DeCastro, A., Dettling,
730 S., Draxl, C., Gagne, D. J., Hawbecker, P., Jha, P., Julianio, T., Lassman, W., Quon, E., Rai, R. K., Robinson, M., Shaw, W., and Thedin,
731 R.: Lessons learned in coupling atmospheric models across scales for onshore and offshore wind energy, *Wind Energ. Sci.*, 8, 1251–1275,
732 <https://doi.org/10.5194/wes-8-1251-2023>, 2023.

733 Hsieh, A. S., Cheung, L. C., Blaylock, M. L., Brown, K. A., Houck, D. R., Herges, T. G., DeVelder, N. B., Maniaci, D. C., Yalla, G. R.,
734 Sakievich, P. J., Radunz, W. C., and Carmo, B. S.: Model intercomparison of the ABL, turbines, and wakes within the AWAKEN wind
735 farms under neutral stability conditions, *J. Renew. Sustain. Energy*, 17, <https://doi.org/10.1063/5.0211729>, 2025.

736 Iungo, G. V., Wu, Y. T., and Porté-Agel, F.: Field measurements of wind turbine wakes with LiDARs, *J. Atmos. Ocean. Technol.*, 30, 274–287,
737 <https://doi.org/10.1175/JTECH-D-12-00051.1>, 2013.

738 Ivanova, L. A. and Nadyozhina, E. D.: Numerical simulation of wind farm influence on wind flow, *Wind Engineering*, 24, 257–269,
739 <https://doi.org/10.1260/0309524001495620>, 2000.

740 Jimenez, A., Crespo, A., Migoya, E., and Garcia, J.: Large-eddy simulation of spectral coherence in a wind turbine wake, *Environ. Res. Lett.*,
741 3, 015 004, <https://doi.org/10.1088/1748-9326/3/1/015004>, 2008.

742 Julianio, T. W., Kosović, B., Jiménez, P. A., Eghdami, M., Haupt, S. E., and Martilli, A.: “Gray Zone” simulations using a three-dimensional
743 planetary boundary layer parameterization in the Weather Research and Forecasting model, *Mon. Weather Rev.*, 150, 1585–1619,
744 <https://doi.org/10.1175/MWR-D-21-0164.1>, 2022.

745 Kasper, J. H. and Stevens, R. J. A. M.: From turbine-scale to wind farm-scale wake recovery: Understanding the transition, *J. Renew. Sustain.*
746 *Energy*, 18, 1–21, <https://doi.org/10.1063/5.0285347>, 2026.

747 Kasper, J. H., Stieren, A., and Stevens, R. J. A. M.: Simulation and modeling of wind farms in baroclinic atmospheric boundary layers, *J.*
748 *Renew. Sustain. Energy*, 16, 1–15, <https://doi.org/10.1063/5.0220322>, 2024.

749 Keith, D. W., DeCarolis, J. F., Denkenberger, D. C., Lenschow, D. H., Malyshev, S. L., Pacala, S., and Rasch, P. J.: The influence of large-scale
750 wind power on global climate, *Proc. Natl. Acad. Sci. U.S.A.*, 101, 16 115–16 120, <https://doi.org/10.1073/pnas.0406930101>, 2004.

751 Khanjari, A., Feroz, A., and Archer, C. L.: An analytical formulation for turbulent kinetic energy added by wind turbines based on large-eddy
752 simulation, *Wind Energ. Sci.*, 10, 887–905, <https://doi.org/10.5194/wes-10-887-2025>, 2025.

753 Kosović, B., Munoz, P. J., Julianio, T. W., Martilli, A., Eghdami, M., Barros, A. P., and Haupt, S. E.: Three-dimensional planetary bound-
754 ary layer parameterization for high-resolution mesoscale simulations, *J. Phys. Conf. Ser.*, 1452, 012 080, [https://doi.org/10.1088/1742-](https://doi.org/10.1088/1742-6596/1452/1/012080)
755 6596/1452/1/012080, 2020.

756 Lanzilao, L. and Meyers, J.: Wind-farm wake recovery mechanisms in conventionally neutral boundary layers, *Journal of Fluid Mechanics*,
 757 1015, A5, <https://doi.org/10.1017/jfm.2025.10320>, 2025.

758 Larsén, X. G. and Fischereit, J.: A case study of wind farm effects using two wake parameterizations in the Weather Research and Forecasting
 759 (WRF) model (V3.7.1) in the presence of low-level jets, *Geosci. Model Dev.*, 14, 3141–3158, <https://doi.org/10.5194/gmd-14-3141-2021>,
 760 2021.

761 Lee, J. C. Y. and Lundquist, J. K.: Evaluation of the wind farm parameterization in the Weather Research and Forecasting model (version
 762 3.8.1) with meteorological and turbine power data, *Geosci. Model Dev.*, 10, 4229–4244, <https://doi.org/10.5194/gmd-10-4229-2017>, 2017.

763 Lundquist, J. K., DuVivier, K. K., Kaffine, D., and Tomaszewski, J. M.: Costs and consequences of wind turbine wake effects arising from
 764 uncoordinated wind energy development, *Nat. Energy*, 4, 26–34, <https://doi.org/10.1038/s41560-018-0281-2>, 2019.

765 Ma, Y., Archer, C. L., and Vassel-Be-Hagh, A.: The Jensen wind farm parameterization, *Wind Energy Science*, 7, 2407–2431,
 766 <https://doi.org/10.5194/wes-7-2407-2022>, 2022a.

767 Ma, Y., Archer, C. L., and Vassel-Be-Hagh, A.: Comparison of individual versus ensemble wind farm parameterizations inclusive of sub-grid
 768 wakes for the WRF model, *Wind Energy*, 25, 1573–1595, <https://doi.org/10.1002/we.2758>, 2022b.

769 Magnusson, M. and Smedman, A. S.: Influence of atmospheric stability on wind turbine wakes, *Wind Eng.*, 18, 139–152, [http://www.jstor.](http://www.jstor.org/stable/43749538)
 770 [org/stable/43749538](http://www.jstor.org/stable/43749538), 1994.

771 Malyshev, S. L., Pacala, S. W., Keith, D. W., Denkenberger, D. C., Baidya Roy, S., and Shevliakova, E.: Climate response to large-scale wind
 772 farms, in: *AGU Fall Meeting Abstracts*, vol. 2003, pp. A31E–0104, 2003.

773 Mangara, R. J., Guo, Z., and Li, S.: Performance of the wind farm parameterization scheme coupled with the weather research
 774 and forecasting model under multiple resolution regimes for simulating an onshore wind farm, *Adv. Atmos. Sci.*, 36, 119–132,
 775 <https://doi.org/10.1007/s00376-018-8028-3>, 2019.

776 Mellor, G. L. and Yamada, T.: Development of a turbulence closure model for geophysical fluid problems, *Rev. Geophys.*, 20, 851–875,
 777 <https://doi.org/10.1029/RG020i004p00851>, 1982.

778 Mirocha, J. D., Rajewski, D. A., Marjanovic, N., Lundquist, J. K., Kosović, B., Draxl, C., and Churchfield, M. J.: Investigating wind turbine
 779 impacts on near-wake flow using profiling LiDAR data and large-eddy simulations with an actuator disk model, *J. Renew. Sustain. Energy*,
 780 7, <https://doi.org/10.1063/1.4928873>, 2015.

781 Mirocha, J. D., Churchfield, M. J., Muñoz-Esparza, D., Rai, R. K., Feng, Y., Kosović, B., Haupt, S. E., Brown, B., Ennis, B. L., Draxl, C.,
 782 Rodrigo, J. S., Shaw, W. J., Berg, L. K., Moriarty, P. J., Linn, R. R., Kotamarthi, V. R., Balakrishnan, R., Cline, J. W., Robinson, M. C.,
 783 and Ananthan, S.: Large-eddy simulation sensitivities to variations of configuration and forcing parameters in canonical boundary-layer
 784 flows for wind energy applications, *Wind Energ. Sci.*, 3, 589–613, <https://doi.org/10.5194/wes-3-589-2018>, 2018.

785 Montavon, C., Rodaway, C., Gunn, K., Smith, G., Dunsmore, D., Hoyo, M. D., and Sinclair, K.: Cluster wakes and their effect on a wind
 786 farm annual energy production, *Tech. Rep. 1, DNV-RWE, Whitepaper*, 2024.

787 Nakanishi, M. and Niino, H.: Development of an Improved Turbulence Closure Model for the Atmospheric Boundary Layer, *J. Meteorol.*
 788 *Soc. Jpn.*, 87, 895–912, <https://doi.org/10.2151/jmsj.87.895>, 2009.

789 Olson, J. B., Angevine, W. M., Turner, D. D., Sun, X., Simonson, J. M., Evans, C., Kenyon, J. S., Li, H., Schnell, J., Puhales, F. S., Cherubini,
 790 T., Li, W., and Zhang, M.: A Description of the MYNN-EDMF Turbulence Scheme, *Tech. Rep. NOAA Technical Memorandum OAR*
 791 *GSL-77*, NOAA Global Systems Laboratory, <https://doi.org/10.25923/rahr-sj70>, 2026.

792 Ouro, P., Ghobrial, M., Ali, K., and Stallard, T.: Numerical modelling of offshore wind farm cluster wakes, *Renew. Sustain. Energy Rev.*,
 793 215, 115 526, <https://doi.org/10.1016/j.rser.2025.115526>, 2025.

794 Pan, Y. and Archer, C. L.: A hybrid wind-farm parametrization for mesoscale and climate models, *Bound.-Layer Meteorol.*, 168, 469–495,
795 <https://doi.org/10.1007/s10546-018-0351-9>, 2018.

796 Peña, A., Mirocha, J. D., and van der Laan, M. P.: Evaluation of the Fitch Wind-Farm Wake Parameterization with Large-Eddy Simulations
797 of Wakes Using the Weather Research and Forecasting Model, *Mon. Weather Rev.*, 150, 3051–3064, <https://doi.org/10.1175/MWR-D-22->
798 0118.1, 2022.

799 Peña, A., Kosović, B., and Mirocha, J. D.: Evaluation of idealized large-eddy simulations performed with the Weather Research and Forecast-
800 ing model using turbulence measurements from a 250 m meteorological mast, *Wind Energ. Sci.*, 6, 645–661, <https://doi.org/10.5194/wes->
801 6-645-2021, 2021.

802 Platis, A., Siedersleben, S. K., Bange, J., Lampert, A., Bärfuss, K., Hankers, R., Cañadillas, B., Foreman, R., Schulz-Stellenfleth, J., Djath,
803 B., Neumann, T., and Emeis, S.: First in situ evidence of wakes in the far field behind offshore wind farms, *Scientific Reports*, 8, 1–10,
804 <https://doi.org/10.1038/s41598-018-20389-y>, 2018.

805 Porté-Agel, F., Bastankhah, M., and Shamsoddin, S.: Wind-Turbine and Wind-Farm Flows: A Review, *Bound.-Layer Meteorol.*, 174, 1–59,
806 <https://doi.org/10.1007/s10546-019-00473-0>, 2020.

807 Pryor, S. C. and Barthelmie, R. J.: Power production, inter- and intra-array wake losses from the U.S. East coast offshore wind energy lease
808 areas, *Energies*, 17, <https://doi.org/10.3390/en17051063>, 2024.

809 Pryor, S. C., Shepherd, T. J., Volker, P. J., Hahmann, A. N., and Barthelmie, R. J.: "Wind Theft" from onshore wind turbine arrays: Sensitivity
810 to wind farm parameterization and resolution, *J. Appl. Meteorol. Climatol.*, 59, 153–174, <https://doi.org/10.1175/JAMC-D-19-0235.1>,
811 2020.

812 Quint, D., Lundquist, J. K., Bodini, N., and Rosencrans, D.: Simulated meteorological impacts of offshore wind turbines and sensitivity to
813 the amount of added turbulence kinetic energy, *Wind Energ. Sci.*, 10, 1269–1301, <https://doi.org/10.5194/wes-10-1269-2025>, 2025.

814 Radünz, W. C.: NWP-WFP simulation setup of an idealized offshore wind farm in near-neutral conditions,
815 <https://doi.org/10.5281/zenodo.15925137>, 2025.

816 Rai, R. K., Berg, L. K., Kosović, B., Haupt, S. E., Mirocha, J. D., Ennis, B. L., and Draxl, C.: Evaluation of the impact of horizontal grid
817 spacing in terra incognita on coupled mesoscale-microscale simulations using the WRF framework, *Mon. Weather Rev.*, 147, 1007–1027,
818 <https://doi.org/10.1175/MWR-D-18-0282.1>, 2019.

819 Redfern, S., Olson, J. B., Lundquist, J. K., and Clack, C. T. M.: Incorporation of the rotor-equivalent wind speed into the weather research
820 and forecasting model's wind farm parameterization, *Mon. Weather Rev.*, 147, 1029–1046, <https://doi.org/10.1175/MWR-D-18-0194.1>,
821 2019.

822 Rosencrans, D., Lundquist, J. K., Optis, M., Rybchuk, A., Bodini, N., and Rossol, M.: Seasonal variability of wake impacts on US mid-
823 Atlantic offshore wind plant power production, *Wind Energ. Sci.*, 9, 555–583, <https://doi.org/10.5194/wes-9-555-2024>, 2024.

824 Rozema, W., Bae, H. J., Moin, P., and Verstappen, R.: Minimum-dissipation models for large-eddy simulation, *Phys. Fluids*, 27,
825 <https://doi.org/10.1063/1.4928700>, 2015.

826 Rybchuk, A., Juliano, T. W., Lundquist, J. K., Rosencrans, D., Bodini, N., and Optis, M.: The sensitivity of the Fitch wind farm parameteriza-
827 tion to a three-dimensional planetary boundary layer scheme, *Wind Energ. Sci.*, 7, 2085–2098, <https://doi.org/10.5194/wes-7-2085-2022>,
828 2022.

829 Sanchez Gomez, M., Deskos, G., Lundquist, J. K., and Juliano, T. W.: Can mesoscale models capture the effect from cluster wakes offshore?,
830 *J. Phys. Conf. Ser.*, 2767, <https://doi.org/10.1088/1742-6596/2767/6/062013>, 2024.

831 Shepherd, T. J., Barthelmie, R. J., and Pryor, S. C.: Sensitivity of wind turbine array downstream effects to the parameterization used in
832 WRF, *J. Appl. Meteorol. Climatol.*, 59, 333–361, <https://doi.org/10.1175/JAMC-D-19-0135.1>, 2020.

833 Siedersleben, S. K., Lundquist, J. K., Platis, A., Bange, J., Bärfuss, K., Lampert, A., Cañadillas, B., Neumann, T., and Emeis, S.: Micromete-
834 orological impacts of offshore wind farms as seen in observations and simulations, *Environ. Res. Lett.*, 13, [https://doi.org/10.1088/1748-](https://doi.org/10.1088/1748-9326/aaea0b)
835 9326/aaea0b, 2018a.

836 Siedersleben, S. K., Platis, A., Lundquist, J. K., Lampert, A., Bärfuss, K., Cañadillas, B., Djath, B., Schulz-Stellenfleth, J., Bange, J.,
837 Neumann, T., and Emeis, S.: Evaluation of a Wind Farm Parametrization for Mesoscale Atmospheric Flow Models with Aircraft Mea-
838 surements, *Meteorol. Z.*, 27, 401–415, <https://doi.org/10.1127/metz/2018/0900>, 2018b.

839 Siedersleben, S. K., Platis, A., Lundquist, J. K., Djath, B., Lampert, A., Bärfuss, K., Cañadillas, B., Schulz-Stellenfleth, J., Bange, J.,
840 Neumann, T., and Emeis, S.: Turbulent kinetic energy over large offshore wind farms observed and simulated by the mesoscale model
841 WRF (3.8.1), *Geosci. Model Dev.*, 13, 249–268, <https://doi.org/10.5194/gmd-13-249-2020>, 2020.

842 Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Barker, D. M., Duda, M. G., Huang, X.-Y., Wang, W., and Powers, J. G.: A Descrip-
843 tion of the Advanced Research WRF Version 4. Tech. Note NCAR TN-475+STR, Tech. rep., University Corporation for Atmospheric
844 Research, ISBN NCAR/TN-468+STR, <https://doi.org/10.5065/D6DZ069T>, 2019.

845 Stevens, R. J. A. M. and Meneveau, C.: Flow structure and turbulence in wind farms, *Annu. Rev. Fluid Mech.*, 49, 311–339,
846 <https://doi.org/10.1146/annurev-fluid-010816-060206>, 2017.

847 Stevens, R. J. A. M., Graham, J., and Meneveau, C.: A concurrent precursor inflow method for Large Eddy Simulations and applications to
848 finite length wind farms, *Renewable Energy*, 68, 46–50, <https://doi.org/10.1016/j.renene.2014.01.024>, 2014.

849 Stieren, A. and Stevens, R. J. A. M.: Impact of wind farm wakes on flow structures in and around downstream wind farms, *Flow*, 2,
850 <https://doi.org/10.1017/flo.2022.15>, 2022.

851 Stieren, A., Kasper, J. H., Gadde, S. N., and Stevens, R. J. A. M.: Impact of negative geostrophic wind shear on wind farm performance,
852 *PRX Energy*, 1, 1, <https://doi.org/10.1103/prxenergy.1.023007>, 2022.

853 Stipa, S., Ajay, A., and Brinkerhoff, J.: The actuator farm model for large eddy simulation (LES) of wind-farm-induced atmospheric gravity
854 waves and farm-farm interaction, *Wind Energ. Sci.*, 9, 2301–2332, <https://doi.org/10.5194/wes-9-2301-2024>, 2024.

855 Stull, R. B.: An introduction to boundary layer meteorology, Kluwer Academic Publishers, The Netherlands, 1988.

856 Tomaszewski, J. M. and Lundquist, J. K.: Simulated wind farm wake sensitivity to configuration choices in the Weather Research and
857 Forecasting model version 3.8.1, *Geosci. Model Dev.*, 13, 2645–2662, <https://doi.org/10.5194/gmd-13-2645-2020>, 2020.

858 van der Laan, M. P. and Sørensen, N. N.: Why the Coriolis force turns a wind farm wake clockwise in the Northern Hemisphere, *Wind Energ.*
859 *Sci.*, 2, 285–294, <https://doi.org/10.5194/wes-2-285-2017>, 2017.

860 van der Laan, M. P., Baungaard, M., and Kelly, M.: Brief communication: A clarification of wake recovery mechanisms, *Wind Energ. Sci.*,
861 8, 247–254, <https://doi.org/10.5194/wes-8-247-2023>, 2023.

862 van Stratum, B., Theeuwes, N., Barkmeijer, J., van Uft, B., and Wijnant, I.: A One-Year-Long Evaluation of a Wind-Farm Parameterization
863 in HARMONIE-AROME, *Journal of Advances in Modeling Earth Systems*, 14, <https://doi.org/10.1029/2021MS002947>, 2022.

864 Vanderwende, B. J., Kosović, B., Lundquist, J. K., and Mirocha, J. D.: Simulating effects of a wind-turbine array using LES and RANS, *J.*
865 *Adv. Model. Earth Syst.*, 8, 1376–1390, <https://doi.org/10.1002/2016MS000652>, 2016.

866 Veers, P., Dykes, K., Lantz, E., Barth, S., Bottasso, C. L., Carlson, O., Clifton, A., Green, J., Green, P., Holttinen, H., Laird, D., Lehtomäki,
867 V., Lundquist, J. K., Manwell, J., Marquis, M., Meneveau, C., Moriarty, P., Munduate, X., Muskulus, M., Naughton, J., Pao, L., Paquette,

868 J., Peinke, J., Robertson, A., Rodrigo, J. S., Sempreviva, A. M., Smith, J. C., Tuohy, A., and Wiser, R.: Grand challenges in the science of
869 wind energy, *Science*, 366, <https://doi.org/10.1126/science.aau2027>, 2019.

870 Veers, P., Dykes, K., Basu, S., Bianchini, A., Clifton, A., Green, P., Holttinen, H., Kitzing, L., Kosovic, B., Lundquist, J. K., Meyers, J.,
871 O'Malley, M., Shaw, W. J., and Straw, B.: Grand Challenges: wind energy research needs for a global energy transition, *Wind Energ. Sci.*,
872 7, 2491–2496, <https://doi.org/10.5194/wes-7-2491-2022>, 2022.

873 Vermeer, L. J., Sørensen, J. N., and Crespo, A.: Wind turbine wake aerodynamics, *Prog. Aerosp. Sci.*, 39, 467–510,
874 [https://doi.org/10.1016/S0376-0421\(03\)00078-2](https://doi.org/10.1016/S0376-0421(03)00078-2), 2003.

875 Volker, P. J. H., Badger, J., Hahmann, A. N., and Ott, S.: The explicit wake parametrisation V1.0: A wind farm parametrisation in the
876 mesoscale model WRF, *Geosci. Model Dev.*, 8, 3715–3731, <https://doi.org/10.5194/gmd-8-3715-2015>, 2015.

877 Vollmer, L., Sengers, B. A. M., and Dörenkämper, M.: Brief communication: A simple axial induction modification to the Weather Research
878 and Forecasting Fitch wind farm parameterization, *Wind Energ. Sci.*, 9, 1689–1693, <https://doi.org/10.5194/wes-9-1689-2024>, 2024.

879 Wang, C. and Prinn, R. G.: Potential climatic impacts and reliability of very large-scale wind farms, *Atmos. Chem. Phys.*, 10, 2053–2061,
880 <https://doi.org/10.5194/acp-10-2053-2010>, 2010.

881 Wu, C., Wang, Q., Luo, K., and Fan, J.: A coupled turbine-interaction wind farm parameterization in the Weather Research and Forecasting
882 model, *Energy Conversion and Management*, 283, 116 919, <https://doi.org/10.1016/j.enconman.2023.116919>, 2023.

883 Wyngaard, J. C.: Toward numerical modeling in the "Terra Incognita", *J. Atmos. Sci.*, 61, 1816–1826, [https://doi.org/10.1175/1520-0469\(2004\)061<1816:TNMITT>2.0.CO;2](https://doi.org/10.1175/1520-0469(2004)061<1816:TNMITT>2.0.CO;2), 2004.

885 Xie, S. and Archer, C.: Self-similarity and turbulence characteristics of wind turbine wakes via large-eddy simulation, *Wind Energy*, 18,
886 1815–1838, <https://doi.org/10.1002/we.1792>, 2015.