

Reply to Reviewer's Comments

Thank you for the suggestions regarding these key issues. The reviewer's comments have all been taken into consideration in this revised manuscript. The **newly added parts in the original manuscript, the corresponding changes in section titles**, and **operations** are marked in blue, red, and green respectively. The authors believe that these suggestions significantly improve the quality of this paper in many ways. Following is a detailed list of our replies to this reviewer's comments. In the following, we will respond to each of your comments and suggestions point by point, and have revised the manuscript accordingly, as detailed below:

Reply to Associate editor's Comments

Thank you for submitting your manuscript. This study presents a finite element framework based on the co-rotational formulation for the geometrically nonlinear analysis of variable cross-section Timoshenko beams under large displacements, and validates the proposed approach through numerical examples and comparisons with experimental data reported in the literature. The topic is of practical engineering relevance and has potential application value. Based on the reviewers' comments, the reviewers generally recognize the research direction and methodological approach, while also recommending further improvements in several key aspects:

- **(1) Providing a clearer presentation of the core derivations and the scope of applicability.**

Reply:

Thank you for your helpful suggestion. We have revised Section 2 accordingly. **A detailed derivation and explanation of the analytical displacement shape functions for the spatial Timoshenko beam have been added**, and **the assumptions and applicable range for variable cross-section beams have been clarified**. These additions appear on pages 5-7

- **(2) Adding more detail on certain numerical implementation issues.**

Reply:

We agree that implementation details are crucial for reproducibility. To this end, **we have added more information on the derivation process of the shape functions and the case-by-case discussion in the latter part of Section 2**, and **have included relevant references in Section 3 to demonstrate the correctness of the related formula derivations**.

- **(3) Strengthening the demonstration of computational efficiency through additional comparisons.**

Reply:

Following the reviewer's suggestion, we have performed additional comparative studies. We now **include a new benchmark example in Section 4.5**, where we compare our proposed framework against the conventional finite element method for variable cross-section beams. The results demonstrate that our method achieves high computational accuracy even with a coarser element discretization. This new analysis is presented in Table 5.

● **(4) Improving the clarity of some equations and the overall presentation.**

Reply:

We have carefully revised the entire manuscript to improve clarity. All equations have been rechecked and re-numbered. A supplementary explanation has been incorporated into the relevant section of the main text. Such as Eqs.(1-3).

Reply to Reviewer #1's Comments

This paper addresses the geometrically nonlinear analysis of Timoshenko beam structures with variable cross-sections, which remains a challenging problem in computational structural mechanics. The authors propose a co-rotational finite element framework that incorporates an analytically derived displacement-based Timoshenko beam element for variable cross-sections, with the aim of improving both accuracy and computational efficiency in modeling large-deformation behavior.

The work is generally well developed and addresses a relevant research topic, with references that are consistent with the adopted methodology. Nonetheless, some concerns remain and should be adequately addressed.

- **(1) Although the modeling of Timoshenko co-rotational beams with tapered or variable cross-sections has been addressed in previous studies using multiple successful approaches, it remains unclear what constitutes the specific novelty or methodological advancement in the present work. Could the authors clarify how their formulation provides a substantive improvement or development over existing models?**

Reply:

Thank you for your comment. Our improvements to the large-deformation calculation method for variable-cross-section beams are primarily reflected in the following three aspects:

Improvement 1:

We propose a variable-cross-section Timoshenko beam element based on analytical displacement shape functions, which replaces traditional interpolation shape functions. This significantly enhances the computational accuracy of the element in geometrically nonlinear analysis.

Improvement 2:

Within the corotational framework, Gaussian integration is introduced to compute the stiffness and mass matrices of variable-cross-section beams. This avoids the repeated calculation of the moment of inertia for each cross-section required in conventional approaches, thereby improving computational efficiency. The method provides accurate and efficient solutions for beams with linearly varying width or thickness. For problems with pronounced taper—such as nonlinear variations in both width and thickness—additional section information is required to determine the additional unknown coefficients.

Improvement 3:

We propose a coordinate transformation method between local and global systems tailored for variable-cross-section beams. This approach can handle irregular sections and proportionally graded sections, extending the applicability of the corotational formulation.

- **(2) What is the practical advantage of incorporating analytically derived displacement shape functions within the co-rotational Timoshenko beam formulation, and how does this choice improve accuracy, computational efficiency, or overall performance compared to existing approaches?**

Reply:

We thank the reviewer for the insightful comment. Compared with conventional interpolation-based shape functions, the analytically derived displacement shape functions—rigorously obtained from the equilibrium equations of the Timoshenko beam—offer the following three practical advantages:

(1)Improved Accuracy: Conventional interpolated shape functions introduce truncation errors, whereas the analytical shape functions can more accurately capture the actual bending deformation of the beam, thereby significantly enhancing computational accuracy in geometrically nonlinear analysis.

(2)Higher Computational Efficiency: The analytical shape functions can be directly incorporated into Gaussian quadrature, which reduces the required number of integration points and increases the efficiency in computing the element stiffness and mass matrices.

(3)Enhanced Numerical Stability: When dealing with problems involving large deformations and large rotations, the analytical shape functions better preserve the internal force equilibrium within the element, leading to improved overall numerical stability.

To further validate these points, we have added a new numerical example to demonstrate the reasonableness of the approach. The specific example is provided in the following reply.

- **(3) While the methodology presented in Section 2 attempts to account for geometric variability through Gaussian integration (Equation 16), there is a fundamental concern regarding the mathematical consistency of the local stiffness matrix derivation. The formulation in Equations(14 and 15) utilizes analytical shape functions originally developed for prismatic members; however, applying these functions to non-prismatic elements without incorporating the spatial derivatives of the sectional properties ($EI'(x)$ and $GA'(x)$) introduces a known field inconsistency. For elements with significant tapering, the omission of these gradient terms may lead to an inaccurate representation of the internal equilibrium, potentially affecting the overall robustness of this co-rotational framework.**

Reply:

Thank you for the reviewer insightful comments. Following your suggestion, we have added explanatory text in the corresponding section of the paper. The details are provided below.

In the reference by Friedman and Kosmatka (1993), the variation of the moment of inertia and area of a non-uniform beam is linearly interpolated using a taper coefficient. Building on this, Nguyen (2013) further employs higher-order interpolation of area and moment of inertia based on the taper coefficient to calculate the deformation of tapered beams. In this paper, we reduce the number of unknowns by assuming linear variations in width and thickness. The corresponding unknown coefficients are determined using **Eq. 19** and then substituted into **Eq. 18** to compute the area and moment of inertia of the varying cross-sections. This approach provides relatively accurate results for beams with simple taper.

When addressing large deformations of beams with significant taper, however, higher-order interpolation of width and thickness becomes necessary. Each additional interpolation order introduces two more unknowns, which means that additional known conditions—such as other cross-sectional dimensions or explicit expressions for thickness and diameter along the beam length—are required. Only with such information can the shape function expressions accurately describe the large deformation behavior of beams with pronounced taper.

- **(4) While the tangent stiffness formulation in Section 3 explicitly identifies the K_m and K_g matrices (as seen in Equation 42), the derivation lacks a detailed discussion on how these components are specifically adapted to the element's variable cross-section.**

Reply:

We appreciate the reviewer's comment. The global stiffness matrix K_g in the overall coordinate system is

composed of two parts: the linear stiffness K_a and the nonlinear stiffness K_m . The linear stiffness K_a is formed from the element stiffness matrix K_e in the local coordinate system, and K_e inherently contains cross-section variation information. The nonlinear stiffness term is related to the internal forces at the current iteration step and the transformation matrix. The transformation matrix depends only on the degrees of freedom at the element's end nodes, which has the same effect for both variable and constant cross-sections. The internal force vector is related to the element stiffness matrix K_e in the local coordinate system and the nodal displacements, and this K_e also inherently contains cross-section variation information.

- **(5) Although the proposed formulation is applied to six numerical examples, the study does not provide a comparative assessment against existing methods for variable cross-section beams, which limits the demonstration of the approach's relative effectiveness and advantages.**

Reply:

Thank you for your comment. As per your suggestion, the corresponding section has been revised. This paper primarily compares the proposed calculation method for large deformation of variable-cross-section beams through three typical numerical examples (Examples 3–5), as detailed below:

Example 3 examines a uniformly tapered variable-cross-section beam. The traditional method used in the references divides the beam into segments of uniform cross-sections for analysis. Compared to this approach, when the same number of elements is used, the results obtained by the method proposed in this paper are more accurate.

Example 4 refers to the large deformation solution for variable-cross-section beams proposed by Nguyen et al., which combines the corotational formulation. In their approach, the cross-sectional area and moment of inertia are treated as linear functions of the taper coefficient. The results from this example show that the method proposed in this paper achieves higher computational accuracy compared to Nguyen's method.

Example 5 involves the large deformation analysis of a non-uniformly tapered variable-cross-section frame. In the reference (Araujo et al., [2017](#)), at the element level, a flexibility system of equations based on the principle of virtual forces (PVF) is established to calculate the tangent stiffness matrix and the equivalent nodal loads. The example results indicate that the method proposed in this paper achieves comparable computational accuracy to that of the referenced method.

- **(6) In Section 4, while the first two examples address 3D configurations, they are limited to constant cross-sections, whereas the subsequent four examples that account for variable sections are restricted to 2D analyses. The absence of a 3D example with a variable cross-section represents a significant gap, as it leaves the element's performance unverified in cases where spatial geometric nonlinearity and sectional tapering are coupled. Consequently, the authors must explicitly define the intended scope of this formulation and specify the categories of structural problems it is reliably applicable to, as the current results do not yet justify its robustness for complex, non-prismatic 3D applications.**

Reply:

We thank the reviewer for the constructive comment. To verify the correctness of the proposed method for spatial deformation analysis of variable-cross-section beams and to demonstrate the robustness of the algorithm, the numerical example presented in the reference by Murín and Kutiš ([2002](#)) has been computed and validated. The corresponding results have been added to the **Section 4.5 in Applications** of the paper.

Figure 1 shows a 3D frame, with beams of varying circular cross-sections, loaded by concentrated loads F at node 1. The displacements of nodes 1 to 4 were founded. Variation of the cross-sectional area of the beams a is defined by the following diameter quadratic function $d(y) = 0.04 + 0.04y^2$. The beams b and c have constant diameters through lengths of elements. Detailed parameters can be found in (Murín et al. [2002](#)). Only one exact beam element was used to model each beam (a , b , c). In the Hermite beam element model, only one

element was used to represent the beams b and c in all cases, but beams a were modelled with 1, 2 and 3 elements in models 1, 2 and 3 respectively.

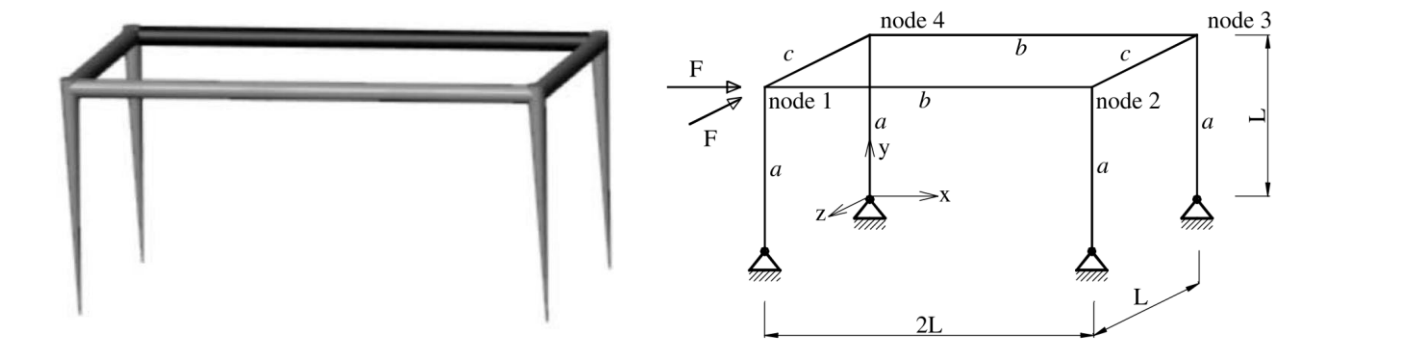


Figure 1. Frame displacement at node 13 (Murín et al. 2002)

The numerical results obtained by the present method are compared against those from the method proposed by Murín et al. (2002) and the solutions from classical Hermite beam elements, as presented in Table 1. It can be observed from the table that compared to the reference method, the displacement solutions of the present method at all nodes and under all loading cases are consistently closer to the exact solution, demonstrating a significant enhancement in computational accuracy. Furthermore, when the number of elements is varied, the present method exhibits a narrower and more stable variation range in its solutions, highlighting its superior numerical robustness.

Table 1. Comparison of results

	Node1 (errors %)		Node2 (errors %)		Node3 (errors %)		Node4 (errors %)	
	$U_x(\text{mm})$	$U_z(\text{mm})$	$U_x(\text{mm})$	$U_z(\text{mm})$	$U_x(\text{mm})$	$U_z(\text{mm})$	$U_x(\text{mm})$	$U_z(\text{mm})$
Exact solution	0.775	-1.098	0.774	-0.428	0.945	-0.428	0.945	-1.098
Model1 ref	0.651(16.0)	-0.882(19.7)	0.650	-0.336(21.5)	0.763(19.3)	-0.336	0.763	-0.882
Model1 this paper	0.745(3.9)	-0.981(10.7)	0.745	-0.427(0.2)	0.859(9.1)	-0.427	0.859	-0.981
Model2 ref	0.743(4.1)	-1.008(8.2)	0.722	-0.390(8.9)	0.869(8.0)	-0.390	0.869	-1.008
Model2 this paper	0.767(1.0)	-1.085(1.2)	0.766	-0.423(1.2)	0.933(1.3)	-0.423	0.933	-1.086
Model3 ref	0.749(3.4)	-1.054(4.0)	0.748	-0.409(4.4)	0.908(3.9)	-0.409	0.908	-1.054
Model3 this paper	0.772(0.4)	-1.093(0.5)	0.771	-0.426(0.5)	0.940(0.5)	-0.426	0.940	-1.093

Ref:
[1] Murín, Justín, and Vladimír Kutíš. "3D-beam element with continuous variation of the cross-sectional area." Computers & structures 80.3-4 (2002): 329-338.

- (7) The abstract and introduction must explicitly define the research's novel contribution, clearly justifying the necessity of the proposed method instead of overemphasizing well-established classical theories

Reply:

Thank you for your comment. The abstract, introduction, and conclusion sections of the manuscript have been revised accordingly to better highlight the contributions of this study. The specific modifications are as follows:
Abstract. The geometrically nonlinear analysis of Timoshenko beams with variable cross-sections remains a challenging task in engineering practice, particularly for structures subjected to large deformations. While co-rotational (CR) formulations have been widely adopted for geometric nonlinear analysis, most existing CR-based beam models assume constant cross-sectional properties, limiting their applicability to beams with variable geometries. To overcome this limitation, this study introduces a novel co-

rotational formulation specifically tailored for variable cross-section Timoshenko beams. The proposed approach integrates two key innovations: (1) the development of an improved spatial Timoshenko beam element employing analytical displacement shape functions to accurately capture bending deformation in variable cross-sections, and (2) the introduction of an efficient Gaussian integration scheme for computing stiffness and mass matrices, eliminating the need for explicit moment of-inertia evaluations at each cross-section. The tangent stiffness matrix is systematically derived within the co-rotational framework. The method is validated through five benchmark examples, including comparisons with experimental data and numerical results from the literature. Results demonstrate that the proposed model achieves superior computational accuracy and efficiency in handling large deformations, dynamic responses, and nonlinear behaviors of beams with irregular or proportionally graded cross-sections, offering a robust alternative to existing variable cross-section beam formulations

Introduction

Nevertheless, most existing CR formulations assume uniform cross sectional properties, which significantly restricts their applicability to modern designs employing tapered or functionally graded beams. Although a few studies have attempted to incorporate cross sectional variations within the CR framework, they often suffer from inadequate accuracy or computational inefficiency, especially when the cross section changes abruptly or the beam undergoes large rotations.

To overcome these persisting challenges, this paper presents a refined co rotational beam model specifically designed for variable cross sections, with three principal contributions:

A novel variable cross section Timoshenko beam element is formulated using analytical displacement shape functions derived from the equilibrium equations of a Timoshenko beam. This approach eliminates the truncation errors associated with standard polynomial interpolations and provides a more accurate description of the bending deformation, thereby enhancing the overall precision of the co rotational procedure.

An efficient numerical integration strategy based on Gaussian quadrature is introduced to compute the element stiffness and mass matrices. This strategy avoids the need to explicitly evaluate the moment of inertia at each cross section, leading to a substantial reduction in computational cost while maintaining accuracy.

A consistent tangent stiffness matrix is derived within the co rotational framework, explicitly accounting for the geometric nonlinearities induced by large displacements and rotations. The formulation is general enough to accommodate both irregular and proportionally tapered cross sections, extending the applicability of CR methods to a broader class of engineering structures.

The remainder of this paper is structured as follows: Section 2 develops the improved stiffness and mass matrices for the variable cross section beam element. Section 3 describes the co rotational formulation for geometric nonlinear analysis. Section 4 validates the proposed model through a series of benchmark examples, including constant and variable cross section beams, a tapered frame, and a dynamic frequency analysis. Finally, the main conclusions of this investigation are thereafter summarized in Section 5.

Conclusions

This study proposes a novel co-rotational finite element framework for the geometrically nonlinear analysis of variable cross section Timoshenko beams, which significantly enhances computational accuracy, efficiency, and robustness through the introduction of analytical displacement shape functions and a Gaussian integration strategy.

Case 1: A variable cross-section beam element based on analytical displacement shape functions is proposed, replacing traditional interpolation functions and significantly enhancing computational accuracy in geometrically nonlinear analysis. Example 1 (large deformation of a uniform cross-section cantilever beam) and Example 3 (beam with constant taper) validate the accuracy of this element in capturing bending deformation, especially under variable cross-section conditions where it demonstrates higher convergence accuracy compared to conventional piecewise uniform cross-section approaches.

Case 2: Gaussian integration is introduced within the corotational framework to compute element matrices, eliminating the need for repeated moment-of-inertia calculations at each cross-section and thereby improving computational efficiency. Example 4 (large deformation of a linearly tapered beam) shows that the method maintains accuracy while outperforms existing variable cross-section corotational methods in computational efficiency; for cases with pronounced nonlinear taper, the method can be extended flexibly by incorporating additional sectional information.

Case 3: A local-to-global coordinate transformation method tailored for variable cross-section beams is developed, capable of handling irregular and proportionally graded sections, thus extending the applicability of the corotational formulation. Example 2 (spatial beam large-deformation experiment) and Example 5 (frame structure with varying taper) demonstrate that the method retains good numerical stability and robustness in three-dimensional large-deformation analysis and complex geometric nonlinear problems. Example 6 further confirms the framework's suitability for spatially tapered beam analysis.

In summary, the proposed corotational model for variable cross-section beams exhibits clear advantages in accuracy, efficiency, and generality, providing a reliable and efficient computational tool for predicting geometrically nonlinear responses of variable-section structures in engineering practice. Future work may focus on higher-order variable cross-section models, treatment of abruptly changing sections, and multiphysics coupling problems.

Reply to Reviewer #2's Comments

The authors formulate a co-rotational Timoshenko beam element for large displacement analysis of 3D frames, considering the influence of variable cross-section. The solution of the equilibrium equations is used to interpolate the lateral displacements and rotations for improving the element efficiency. Numerical examples and experiments are carried out to confirm the accuracy of the element. The topic is of interest, but many issues should be clarified for further evaluation of the paper.

- **(1) Primarily, the solution of the equilibrium equations of a Timoshenko beam with variable cross-section is difficult to derive. The author should provide more details on the derivation of the solution and the considered section profile. I believe that a solution for a general section cannot be derived. Additionally, the number of Gauss points used to evaluate the element tangent stiffness and mass matrices depends on the profile of the beam section. It is difficult to evaluate the element without knowing this information.**

Reply:

Thank you for the suggestions regarding these two key issues. In fact, Friedman, Zack, and J. B. Kosmatka et al. ([1993](#)) studied the solution method for the equilibrium equations of tapered Timoshenko beams. They performed linear interpolation for the variations of the beam's moment of inertia and cross-sectional area using a taper coefficient. For details, please refer to the paper (Le et al., 2011) exceeding "Exact stiffness matrix of a nonuniform beam—II. Bending of a Timoshenko beam." *Computers & structures* 49.3 ([1993](#)): 545–555. Building on this, Nguyen et al. ([2013](#)) calculated the deformation of tapered beams using higher-order interpolation of area and moment of inertia.

In this paper, the calculation of the cross-sectional variation follows two specific approaches:

(1) When only the moments of inertia and cross-sectional areas at certain sections are known. This paper reduces the number of undetermined coefficients by assuming linear variations in width and thickness, which is relatively accurate for simple tapered beams. However, when calculating large deformations of beams with significantly tapered cross-sections, higher-order interpolation for width and thickness is required. Each additional order introduces two more undetermined coefficients, meaning additional known conditions (such as cross-sectional areas and moments of inertia in the y and z directions at other sections) are necessary. Only then can the shape function expressions accurately represent large deformations of beams with significant

taper.

(2) When the specific expressions for cross-sectional dimension variations (such as width or diameter) are known. This paper directly calculates the cross-sectional characteristics at the corresponding Gaussian integration points of the element using these expressions, followed by solution via Gaussian integration. In this case, the method achieves high accuracy and good robustness even for nonlinearly varying cross-sectional dimensions. Following your suggestion, relevant validation examples have been added in **Section 4.5 (Applications)** of the paper.

Regarding the number of Gaussian integration points depending on the variation of the beam cross-section, we have conducted extensive research. For example, in the five examples in the paper, we tested with 2, 4, 6, and 8 integration points, covering cases such as uniform cross-sections, uniformly tapered cross-sections, complex tapered cross-sections, and spatial deformations of tapered beams. The results showed little difference. Therefore, all examples in this paper were computed using four Gaussian integration points.

- (2) The authors claim that “the proposed method achieves both high computational efficiency and accuracy in handling large deformations and nonlinear behavior”, but the efficiency is not demonstrated in the paper.

Reply:

Thank you for your comment. This is indeed a crucial issue. The computational process within each element in the proposed method differs only in the formulation of the relevant matrices, with no significant change in the computational efficiency of a single element. However, the proposed method can achieve relatively accurate results even with fewer element divisions, thereby improving the overall computational efficiency of the algorithm to some extent. To validate this conclusion, a numerical example from the reference Murin, J., Justin, V., & Kutiš, V. (2002). "3D-beam element with continuous variation of the cross-sectional area." Computers & structures, 80(3-4), 329-338, was calculated and added to the Applications section of the paper. The results show that using only one element can achieve computational accuracy comparable to that obtained with three elements in the referenced study. The corresponding results have been added to the **Section 4.5 in Applications** of the paper.

Figure 1 shows a 3D frame, with beams of varying circular cross-sections, loaded by concentrated loads F at node 1. The displacements of nodes 1 to 4 were founded. Variation of the cross-sectional area of the beams a is defined by the following diameter quadratic function $d(y) = 0.04 + 0.04y^2$. The beams b and c have constant diameters through lengths of elements. Detailed parameters can be found in (Murin et al. 2002). Only one exact beam element was used to model each beam (a , b , c). In the Hermite beam element model, only one element was used to represent the beams b and c in all cases, but beams a were modelled with 1, 2 and 3 elements in models 1, 2 and 3 respectively.

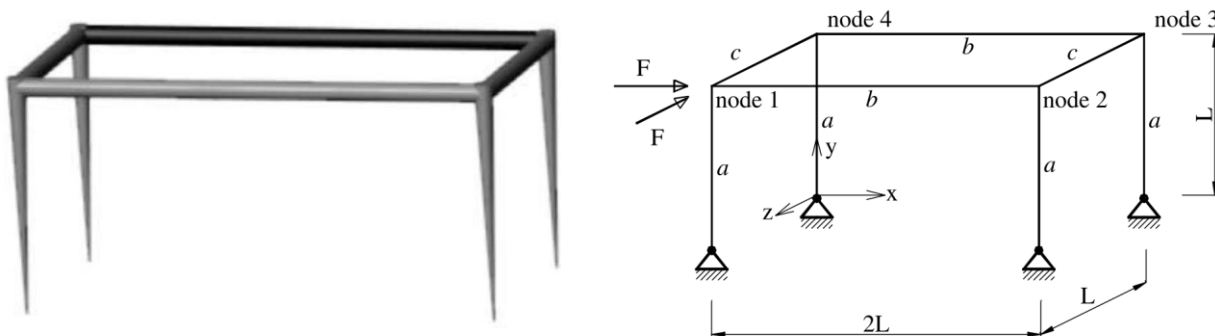


Figure 1. Frame displacement at node 13 (Murin et al. 2002)

The numerical results obtained by the present method are compared against those from the method proposed by Murin et al. (2002) and the solutions from classical Hermite beam elements, as presented in **Table 1**. It can be observed from the table that compared to the reference method, the displacement solutions of the present

method at all nodes and under all loading cases are consistently closer to the exact solution, demonstrating a significant enhancement in computational accuracy. Furthermore, when the number of elements is varied, the present method exhibits a narrower and more stable variation range in its solutions, highlighting its superior numerical robustness.

Table 1. Comparison of results

	Node1 (errors %)		Node2 (errors %)		Node3 (errors %)		Node4 (errors %)	
	$U_x(\text{mm})$	$U_z(\text{mm})$	$U_x(\text{mm})$	$U_z(\text{mm})$	$U_x(\text{mm})$	$U_z(\text{mm})$	$U_x(\text{mm})$	$U_z(\text{mm})$
Exact solution	0.775	-1.098	0.774	-0.428	0.945	-0.428	0.945	-1.098
Model1 ref	0.651(16.0)	-0.882(19.7)	0.650	-0.336(21.5)	0.763(19.3)	-0.336	0.763	-0.882
Model1 this paper	0.745(3.9)	-0.981(10.7)	0.745	-0.427(0.2)	0.859(9.1)	-0.427	0.859	-0.981
Model2 ref	0.743(4.1)	-1.008(8.2)	0.722	-0.390(8.9)	0.869(8.0)	-0.390	0.869	-1.008
Model2 this paper	0.767(1.0)	-1.085(1.2)	0.766	-0.423(1.2)	0.933(1.3)	-0.423	0.933	-1.086
Model3 ref	0.749(3.4)	-1.054(4.0)	0.748	-0.409(4.4)	0.908(3.9)	-0.409	0.908	-1.054
Model3 this paper	0.772(0.4)	-1.093(0.5)	0.771	-0.426(0.5)	0.940(0.5)	-0.426	0.940	-1.093

- **(3) The presentation should be improved. Section 3 presents the co-rotational framework, which is well-known in the literature, but no references are cited. A 3D beam is considered, but the equilibrium equation (1) is written for a 2D beam. An explanation for Eqs. (1)-(3) should be given.**

Reply:

Thank you for your valuable suggestions. Citations have been added to the co-rotational formulation derivation section in the manuscript as recommended, with the corresponding references provided below. Regarding the three-dimensional beam problem, the expressions for the y-direction and z-direction in Equations (1-3) are analogous. A supplementary explanation has been incorporated into the relevant section of the main text.

Ref:

- [1] Crisfield MA.: A consistent co-rotational formulation for non-linear, three-dimensional, beam-elements[J]. Comput Method Appl M 1990;81(2):131-150.
- [2] Crisfield MA, Moita GF.: A unified co-rotational framework for solids, shells and beams[J]. Int J Solids Struct 1996;33(20-22):2969-2992.

- **(4) More information on the large deformation behavior of the structure, such as snap-through and snap-back, is required to show the efficiency of the element and numerical algorithm.**

Reply:

Thank you for your suggestion. The issue you raised is of significant research value. Analyzing complex post-buckling behaviors involving snap-through and snap-back indeed serves as a rigorous benchmark for evaluating the robustness of nonlinear beam elements and algorithms.

In this paper, our primary objective is to develop an efficient co-rotational formulation for three-dimensional variable cross-section Timoshenko beams and to validate its accuracy and convergence on a series of fundamental yet critical large-displacement and large-rotation problems. We believe these results establish a reliable foundation for the proposed method.

The type of strongly nonlinear problems involving limit points and unstable paths that you highlighted indeed represents a very important and natural extension of this method's application. As demonstrated in the

reference Battini, J.-M. (2008), similar problems have also been analyzed using the co-rotational method. We also plan to dedicate future work to specifically investigate and demonstrate the application of this method for full-path tracking of post-buckling behavior in structures such as arches and domes. Once again, we appreciate this constructive suggestion, which has helped clarify the key directions for our future research.

Ref:

[3] Battini, Jean-Marc. "A non-linear corotational 4-node plane element." *Mechanics research communications* 35.6 (2008): 408-413.