

Combining ~~Multi-strategy~~ wind farm control: ~~alternating~~ wake steering and ~~active~~ ~~helix~~ wake mixing on a large-scale wind farm

Matteo Baricchio¹, Daan van der Hoek¹, Tim Dammann¹, Pieter M. O. Gebraad², Jenna Iori³, and Jan-Willem van Wingerden¹

¹Faculty of Mechanical Engineering, Delft University of Technology, Delft, the Netherlands

²Youwind, Barcelona, Spain

³Faculty of Aerospace Engineering, Delft University of Technology, Delft, the Netherlands

Correspondence: Matteo Baricchio (m.baricchio@tudelft.nl)

Abstract. Wind farm flow control mitigates wake effects ~~within a wind farm by adjusting the~~ by adjusting turbine settings to improve ~~the~~ overall farm performance rather than the output of each turbine. Wake steering is an established ~~approach while~~ active wake mixing wind farm flow control approach, while the helix method has recently emerged as a promising solution that enhances wake recovery by increasing mixing with the free-stream flow. This study quantifies the value of a combined strategy, in which each turbine can apply wake steering or the helix method. The analysis is performed considering different ~~degrees~~ levels of uncertainty in wind direction, using engineering wake models ~~which that~~ enable the simulation of these techniques on large-scale wind farms. A novel optimization algorithm, called Multi-strategy Serial-Refine (MSR), is developed in this study, extending the state-of-the-art ~~method for yaw optimization~~ yaw optimization method to multiple control strategies and a generalized objective. A scaled version of an offshore wind farm in the Netherlands is selected as the case study, consisting of 69 IEA 22MW turbines. The proposed combined strategy ~~yields a 1.98% results in a greater~~ increase in annual energy production ~~compared to the baseline scenario, in contrast to the 1.68% and 1.15% gains obtained by applying only wake steering or the helix, respectively~~ than either individual strategy, leveraging the effectiveness of the helix method when multiple misaligned downstream turbines are present. This trend persists even under wind direction uncertainty. ~~Given the pronounced~~ Due to the high sensitivity of wake steering to such uncertainty, the combined strategy ~~takes advantage of~~ benefits from the superior robustness of the helix ~~under these circumstances~~ method under these conditions.

1 Introduction

Wind farm flow control (WFFC) ~~provides a valid and offers a~~ promising solution to mitigate wake losses within a wind farm and enhance power production (Meyers et al., 2022). It consists of optimizing the performance of the entire farm collectively, in contrast to a greedy operation ~~where in which~~ the power production of the turbines is maximized individually (van Wingerden et al., 2020). In recent years, different WFFC techniques have been developed. These can be divided into two main categories, namely quasi-static and dynamic WFFC (Meyers et al., 2022), where the latter are often referred to as active wake mixing techniques.

Among the quasi-static strategies, wake steering has emerged as ~~one of~~ the most effective ~~solutions~~ solution (Doekemeijer et al., 2021). It consists of diverting the wakes from the downstream rotors by intentionally misaligning the turbines with the
25 wind direction, hence using the yaw angle as a control variable. The efficacy of this technique has been widely demonstrated through ~~large-eddy~~ large-eddy simulations (LES), wind tunnel tests, and field experiments (Fleming et al., 2014; Gebraad et al., 2016; Campagnolo et al., 2020; Doekemeijer et al., 2021).

Conversely, dynamic WFFC techniques have not yet achieved a similar ~~degree of maturity~~ technology readiness level. The underlying principle of these strategies is to enhance ~~the~~ wake recovery through ~~an~~ improved mixing with the surrounding
30 ~~free-stream flow, thus~~ free-stream flow, thereby increasing the energy extraction of the downstream turbines (Meyers et al., 2022). In recent years, ~~different~~ various concepts have been explored to achieve this effect, ~~hence~~ collectively referred to as active wake mixing techniques. Munters and Meyers (2018) applied a sinusoidal signal to the thrust of the turbines, obtaining a pulsating wake. This method is referred to as dynamic induction control (DIC) or the pulse technique. Another promising technique ~~named~~, the helix approach, was proposed by Frederik et al. (2020), who ~~obtained~~ achieved considerable power gains
35 by applying individual pitch control signals, ~~obtaining to produce~~ a helical wake shape. ~~These concepts have been proved~~ This concept has been proven through several LES studies (Taschner et al., 2023) and wind tunnel experiments (van der Hoek et al., 2024; Mühle et al., 2024), which have highlighted significant gains in power production but also increased structural loading on the turbines (Frederik and van Wingerden, 2022; van Vondelen et al., 2023).

Recent research has ~~investigated the comparison between static~~ compared quasi-static and dynamic WFFC techniques
40 through LES simulations, aiming to ~~understand which solution ensures~~ determine which solution yields higher power production ~~depending on the~~ under different inflow conditions and ~~the farm configuration~~ farm configurations. Taschner et al. (2024) have observed that the helix method is favorable with respect to wake steering only in case of full wake overlap and up to six diameters of distance from the upstream turbine. However, they suggest that ~~the combination between~~ combining these methods could increase the robustness of the wind farm controller. This aspect is a consequence of the abrupt change
45 in the ~~turbine yaw angle that occurs around the condition of~~ yaw angle of the turbine that occurs at full alignment with the downstream turbine. Frederik et al. (2025) and Brown et al. (2025) have shown that wake steering exhibits higher performance than wake mixing methods, except for inflow conditions characterized by low veer. Therefore, these studies have shown that wake mixing techniques seem to outperform the more mature wake steering method only in limited scenarios. However, their analysis has been limited to the effects within a ~~two-turbines~~ two-turbine array and, therefore, these conclusions cannot be di-
50 rectly extended to large-scale wind farms. The main obstacle for the extension of such studies is the significant computational cost ~~associated with~~ of multi-turbine LES simulations.

Large-scale wind farm simulations are usually performed ~~through using~~ lower-fidelity steady-state wake models that ~~allow~~ provide a fast approximation of the wake ~~characterization~~ characteristics. These are often referred to as engineering wake models. In recent years, a wide variety of these models have been proposed and implemented in the popular software tools FLORIS
55 (National Renewable Energy Laboratory, 2024a) and PyWake (Pedersen et al., 2023). Specifically, wake deficit models are combined with wake deflection models, such as the model of Jimenez et al. (2010), to simulate the wind farm operation under yaw misalignment. Therefore, the low computational requirements of these models enable the optimization of the yaw angles

for each turbine in large-scale wind farms, allowing the calculation of the increase in annual energy production (AEP) from wake steering. For instance, Simley et al. (2024) have applied these models to 15 different wind farms, calculating an AEP gain between 0.4 % and 1.7 % when wake steering is applied. Conversely, the literature lacks a comparable range of engineering models capable of simulating active wake mixing techniques. This is due not only to the lower ~~technological-maturity~~ technology readiness level of these methods but also to the inherent difficulty of capturing their dynamic effects using steady-state models. Recently, ~~National Renewable Energy Laboratory (2024a) has released a model named an~~ Empirical Gaussian wake deficit and deflection model has been added to the FLORIS tool (National Renewable Energy Laboratory, 2024a), which can simulate the ~~effect-effects~~ of active wake mixing strategies by enhancing the wake recovery ~~through-via~~ a mixing factor. Dammann et al. (2025) have presented a model with similar capabilities using a Super Gaussian wake deficit model. Although these models enable ~~a-broader-comparison-and-a~~ broader comparisons and the potential integration of wake steering and active wake mixing, such a study has not yet been conducted on large-scale wind farms.

Another relevant aspect to consider when comparing and/or combining wake steering with active wake mixing is the uncertainty in the wind direction. This arises from different effects, such as the presence of turbulence and sensor errors (Quick et al., 2017), but also the spatial variation of wind direction in large wind farms, which is neglected by engineering wake models (von Brandis et al., 2023). Brown et al. (2025) have shown that wake mixing techniques outperform wake steering in the case of imperfect knowledge of the exact wake overlap position on the downstream turbine. ~~Although-However~~, the effect of such uncertainty on large-scale wind farms remains unclear for active wake mixing techniques. In contrast, this aspect has been studied extensively ~~with-respect-to-in the context of~~ wake steering. Hodgson and Andersen (2025) demonstrated, through an LES study, that uncertainty in wind direction leads to a notable reduction in power gains. Quick et al. (2017) proposed an optimization under uncertainty to find the optimal yaw ~~set-points~~ setpoints. Rott et al. (2018) have evaluated a control strategy ~~where-that integrates~~ wind direction uncertainty ~~is-integrated-within-the-into~~ yaw optimization using realistic timeseries. In this case, a Gaussian probability density function is used to model ~~the-wind direction deviationsand-is~~, obtained by fitting real ~~measurements data. A similar approachhas been adopted by Simley et al. (2020)~~ measurement data. Simley et al. (2020) have adopted a similar approach. The uncertainty in wind direction and ~~its-the~~ consequential unintentional yaw misalignments have ~~been-considered-also-for-AEP-calculation-by-some-also~~ been considered in AEP calculations by recent studies (Quick et al., 2020; van der Hoek et al., 2020). In general, wake steering energy gains have been shown to drop significantly when uncertainties in input conditions are considered (van Beek et al., 2021). For instance, van der Hoek et al. (2020) have estimated an AEP gain between 0.34 % and 0.60 % considering a standard deviation in the wind direction of 3° for a ~~60-turbines~~ 60-turbine wind farm. However, including such uncertainty ~~into-in~~ the yaw angle optimization problem can yield more robust AEP gains, thereby mitigating its detrimental effects.

Lastly, a critical aspect of ~~the-application-of-applying~~ WFFC in large-scale wind farms is ~~the-choice-of-the-selecting the~~ optimization algorithm to determine the ~~control-setpoints-for-the-turbines~~ turbine control setpoints. General gradient-based methods available in the SciPy (Virtanen et al., 2020) or OpenMDAO (Gray et al., 2019) libraries can require ~~extensive~~ substantial computational time as the number of turbines increases, ~~or-they-could-even-encounter-difficulties-in-reaching-the~~ global optimumsince the problem dimensionality scales with the number of turbines. Fleming et al. (2022) have developed an

algorithm for yaw angles optimization named Serial-Refine (SR). It is based on serial iterations from upstream to downstream turbines and represents a faster solution than traditional gradient-based methods. However, the SR algorithm has been developed specifically for wake steering,~~hence;~~ therefore, it cannot be directly applied when ~~also~~-active wake mixing techniques are also considered.

In summary, previous studies have compared wake steering with active wake mixing techniques only for a limited number of turbines, while ~~such-comparison-comparisons~~ for large wind farms and the ~~effect-effects~~ of a combined control strategy remain unexplored. This study addresses this problem by analyzing the ~~effect-effects~~ of three different control methods: wake steering, the helix method, and a combined strategy that allows each turbine to apply ~~one-of-these-two-techniques~~either technique. It investigates the added value of adopting such a combined strategy for a large-scale wind farm, especially when ~~uncertainty-in-wind-direction-wind direction uncertainty~~ is present.

The main contributions of this work are outlined as follows:

- ~~Comparison-between-A comparison of~~ different WFFC strategies in terms of potential AEP increase for a large-scale wind farm is provided.
- ~~Sensitivity analysis for-A sensitivity analysis with respect to~~ different degrees of wind direction uncertainty –
~~Other additional contributions of this study can be summarized as follows:~~ is performed.
- ~~Development-of-a-tailored-algorithm-to-optimize-A tailored algorithm for optimizing~~ the control setpoints of a combined control strategy is developed, applicable to a generalized objective formulation.
- ~~Analysis-of-trade-off-solutions-Trade-off solutions are investigated~~ through a multi-objective optimization approach ~~based-on-an-added~~ that incorporates a penalty on the control effort.

The remainder of this paper is structured as follows. Section 2 outlines the methodology adopted in this study. ~~Then, the results are~~ The results are then presented in Sect. 3 and discussed in Sect. 4. Lastly, the conclusion and recommendations for future research are included in Sect. 5.

115 2 Methodology

This section describes the methodology employed in this study, first explaining the wind farm model and the performance metrics selected as objectives. ~~Then, the optimization problem to determine~~ The optimization problem for determining the control strategies is ~~described, together~~ then described, along with the optimization algorithm developed in this work. Lastly, the case studies chosen to showcase this framework are outlined.

120 2.1 Wind farm model

The turbines in the wind farm are modeled with their power and thrust curves. Dynamic effects are ignored, and it is assumed that a change in wind speed is instantaneously transmitted to the power production. The effect of wake steering on the actuating

turbine is modeled by reducing the incoming wind speed by $\cos \gamma$, with γ indicating the yaw misalignment. The power is then obtained from the corresponding power curve using the updated wind speed value. Similarly, the thrust coefficient C_T is also recalculated based on the updated wind speed value. However, it is further reduced by $\cos^2 \gamma$ as defined by *Simple Yaw Model* implemented in the ~~software PyWake (Pedersen et al., 2023). Among the different techniques for PyWake software (version 2.6.11) (Pedersen et al., 2023). The helix method is the strategy selected for this study among the different~~ active wake mixing ~~only the helix approach has been modeled and considered in this study~~ techniques. Consisting of a sinusoidal signal, the main control variables of ~~such technique this strategy~~ are the excitation frequency, expressed through the Strouhal number St , and the blade pitch amplitude β (Frederik et al., 2020). The power P and thrust coefficient C_T are modeled as a function of their values during baseline operation, denoted by P_{BL} and $C_{T,BL}$, as

$$P(\beta) = P_{BL} \cdot [1 - (b_P + c_P \cdot P_{BL}) \cdot \beta^a] \quad , \quad (1)$$

and

$$C_T(\beta) = C_{T,BL} \cdot [1 - (b_T + c_T \cdot C_{T,BL}) \cdot \beta^a] \quad , \quad (2)$$

where a , b_P , c_P , b_T , and c_T are ~~tuning~~ coefficients that require proper tuning. In this study, the baseline operation is defined as the condition when WFFC is not applied. These equations follow the approach implemented in FLORIS (National Renewable Energy Laboratory, 2024a), where only the effect of a varying amplitude is considered while St is assumed to be optimal.

The wake deficit model used in this study is the *Empirical Gaussian* model implemented in FLORIS (National Renewable Energy Laboratory, 2024a) ~~since it includes the effect~~, as it accounts for of the added mixing induced by the helix control. The equations ~~that describe~~ describing the model are included in Appendix A and available in the FLORIS documentation, where an extensive explanation is provided. A unique characteristic of this model is the introduction of the “wake-induced mixing factor”. This non-physical term is used instead of an explicit dependence on the turbulence intensity, and is affected when the helix method is activated, enhancing the wake recovery depending on β . For consistency, the *Empirical Gaussian* model is also adopted to determine the wake deflection caused by yaw or tilt misalignment. These models include several coefficients that have been tuned ~~based on~~ using high-fidelity simulations to match the conditions that characterize the site of the selected case study. A detailed description of this process is included in Appendix A. Both the wake deficit and deflection models have been integrated ~~within~~ into the software PyWake to conduct this study.

The wake deficits caused by multiple turbines are added in quadrature while the inflow wind speed over the rotor a turbine is calculated through numerical integration, following the approach of Pedersen et al. (2022). These methods are directly available in PyWake, designated as *Squared Sum* and *Gaussian Overlap*, respectively.

2.2 Performance metrics

The AEP of the wind farm is selected as the main performance metric. To provide a realistic AEP ~~estimation~~estimate, the calculation ~~is performed considering the uncertainty in the~~accounts for uncertainty in wind direction. Specifically, this aspect is modeled by introducing ~~some~~ deviations from each ~~value of wind direction that is simulated, without adapting simulated~~wind direction, without adjusting the yaw angle of the turbines. This is achieved by including some offsets denoted by $\Delta\theta$ to the nominal wind direction, indicated with θ , and by weighting the power obtained for these multiple values of wind direction, ~~i.e.~~ $\theta + \Delta\theta$, using a probability distribution p_θ . In this case, a Gaussian function is used, defined by its standard deviation σ_θ and centered on the nominal wind direction. Then, the power P correspondent to a nominal flow condition (u, θ) , with u indicating the wind speed, is obtained through the integration over the wind direction deviations, as indicated in Eq. (3). Based on this definition, σ_θ indicates both the variability of wind direction on timescales shorter than the control system reaction time or uncertainty due to sensor errors. In the equation, f_P denotes the function that calculates the total power of the wind farm assuming $(u, \theta + \Delta\theta)$ as free-stream flow condition. Specifically, f_P performs the summation of the power outputs of the individual turbines, which are calculated based on the turbine and wake models described previously. Each nominal flow condition (u, θ) is associated with different values of control variables, denoted by γ and β , which contain the yaw angles and helix amplitudes of each turbine. These are ~~given~~provided as input to f_P , affecting the power production of the wind farm. Since the yaw angles are defined relative to the input wind direction, which in this case is $\theta + \Delta\theta$, they are adjusted by adding $\Delta\theta$ before being provided as input to f_P , simulating the unintentional misalignment.

$$P(\theta, u, \gamma, \beta, \sigma_\theta) = \int p_\theta(\Delta\theta, \sigma_\theta) \cdot f_P(\theta + \Delta\theta, u, \gamma + \Delta\theta, \beta) d\Delta\theta \quad (3)$$

Lastly, the AEP is calculated by integrating the power P over the different values of wind speed u and direction θ weighted by their probability of occurrence $p(u, \theta)$, as shown in Eq. (4). The term $p(u, \theta)$ is derived from Weibull distributions specified for each wind direction at each turbine location. The spatial variability of these distributions captures the heterogeneous wind resources across the wind farm. The arguments γ_{LUT} and β_{LUT} included in the equation refer to the lookup tables (LUTs) containing the values of γ and β for each flow case (u, θ) .

$$\text{AEP}(\gamma_{\text{LUT}}, \beta_{\text{LUT}}) = 8760 \text{ h yr}^{-1} \cdot \iint p(u, \theta) \cdot P(\theta, u, \gamma, \beta, \sigma_\theta) du d\theta \quad (4)$$

To gain insights on the control effort experienced by the turbines during their yearly operation, another performance metric is introduced in this work, named *control operation time* and denoted by COT. It quantifies the period during which each turbine operates under a WFFC strategy, i.e. yawing or applying the helix method, and is ~~is~~ defined as follows. First, the control effort of turbine i , denoted with $c_{E,i}$, is defined for each flow case as a binary variable that specifies whether the turbine i operates under a WFFC strategy; ~~therefore, as~~ ;

$$c_{E,i} = \begin{cases} 1 & \text{if } \gamma_i \neq 0 \text{ or } \beta_i \neq 0 \\ 0 & \text{otherwise,} \end{cases} \quad (5)$$

where γ_i and β_i are the yaw angle and the helix amplitude of turbine i , respectively, for the specific flow case. Second, the control operation time of turbine i , indicated by COT_i , which expresses the operation under a WFFC strategy in terms of percentage of its total operating time, is defined as

$$\text{COT}_i(\gamma_{\text{LUT},i}, \beta_{\text{LUT},i}) = 100 \cdot \iint p(u, \theta) \cdot c_{E,i}(\gamma_i, \beta_i) \, du \, d\theta \quad (6)$$

where $\gamma_{\text{LUT},i}$ and $\beta_{\text{LUT},i}$ refer to the values of γ_{LUT} and β_{LUT} of turbine i . Lastly, the control operation time of the wind farm, denoted by COT , indicates the average control operation time between the different turbines; hence defined as

$$\text{COT}(\gamma_{\text{LUT}}, \beta_{\text{LUT}}) = \frac{1}{N_{\text{wt}}} \cdot \sum_{i=1}^{N_{\text{wt}}} \text{COT}_i(\gamma_{\text{LUT},i}, \beta_{\text{LUT},i}) \quad (7)$$

While a high COT can guarantee a larger AEP, it also increases the complexity of the control strategy, which may limit its practical feasibility or raise concerns about higher structural loads. This issue is particularly relevant for the helix technique, as its operation is often associated with increased loads on several critical wind turbine components (Frederik and van Wingerden, 2022).

2.3 Wind farm flow control optimization problem

The control set points of each WFFC control strategy are calculated by solving an optimization problem. The results are the optimal yaw angles and helix amplitudes for each turbine and flow condition, indicated by γ_{LUT} and β_{LUT} , respectively. This problem is divided into multiple sub-problems ~~that are solved independently, each,~~ each solved independently and referring to a different flow condition (u, θ) . The design variables of each sub-problem are the yaw angles γ and the helix amplitudes β of the turbines in the farm for the given flow condition (u, θ) . Their values are limited within the bounds $[\gamma_{\min}, \gamma_{\max}]$ and $[\beta_{\min}, \beta_{\max}]$. In this study, each turbine operation is limited to ~~use~~ either wake steering or the helix method, while different strategies are allowed ~~for across~~ different turbines under the same flow conditions. This modeling choice is due to the lack of ~~previous prior~~ research and validation for cases ~~where in which~~ wake steering and ~~helix are implemented~~ the helix method are implemented simultaneously on the same turbines ~~simultaneously~~.

In this work, two different optimization problems are solved, differing ~~by in~~ their objective function. The first problem is defined in Eq. (8), whose objective is to maximize the power production P , which considers the effect of wind direction uncertainty.

$$\begin{aligned}
& \underset{\gamma, \beta}{\text{maximize}} && P(\theta, u, \gamma, \beta, \sigma_\theta) \\
& \text{subject to} && \gamma \in [\gamma_{\min}, \gamma_{\max}] \\
& && \beta \in [\beta_{\min}, \beta_{\max}]
\end{aligned} \tag{8}$$

The second problem aims to ~~both maximize the power production and minimize the~~ maximize power production while minimizing control effort, hence adopting a multi-objective approach. The problem is described in Eq. (9), where the two objectives are combined through the weight w , which represents the relative importance of the two objectives.

$$\begin{aligned}
& \underset{\gamma, \beta}{\text{maximize}} && P(\theta, u, \gamma, \beta, \sigma_\theta) - w \cdot \sum_{i=1}^{N_{\text{wt}}} c_{E,i}(\gamma_i, \beta_i) \\
& \text{subject to} && \gamma \in [\gamma_{\min}, \gamma_{\max}] \\
& && \beta \in [\beta_{\min}, \beta_{\max}]
\end{aligned} \tag{9}$$

The problems described so far refer to the combined control strategy. In case of individual wake steering and helix strategies, the corresponding optimization problems differ only by the definition of the design variables, which in the former case are limited to γ and in the latter to β .

2.4 Multi-strategy Serial-Refine (MSR) optimization algorithm

To solve the wind farm flow control optimization problems described in the previous section, a tailored optimization algorithm is developed, called Multi-strategy Serial-Refine (MSR) optimization algorithm. The algorithm aims to find the control strategy ~~of for~~ a wind farm ~~combining that combines~~ wake steering and ~~active wake mixing the helix method~~ to maximize a generic objective function. This algorithm ~~is an extension of~~ extends the SR optimizer developed by Fleming et al. (2022). The design variables are extended to ~~consider~~ include several control strategies within a wind farm ~~instead of only~~, rather than just wake steering. Furthermore, the algorithm is ~~adapted~~ designed to allow an arbitrary ~~objective function defined by the user~~ user-defined objective function.

Analogous to the SR method, the MSR algorithm iterates over each turbine from the most upstream to the most downstream for each flow condition. At each iteration, a set of candidate control values is assessed for every turbine, and the best value is selected. The subsequent iteration is then initialized by perturbing the previously selected control variables with decreasing offsets, thereby refining the solution space. Therefore, the algorithm is characterized primarily by two hyperparameters: the total number of iterations, N_{step} , and the number of candidate values evaluated per turbine, N_{values} . The main distinction from SR is the procedure applied at each turbine iteration. In this extended version, multiple control strategies are tested in parallel, and the best-performing one is selected. The exclusivity of the control strategy is enforced at the perturbation step: for each turbine, if a perturbation is applied for a given strategy, the control set point for the other strategy is set to zero. This feature is enabled through the hyperparameter *exclusivity*.

Table 1. Settings and Hyperparameters of the MSR.

Number of values (N_{values})	5
Number of steps (N_{step})	3
Exclusivity	True
Bounds for yaw angle ($\gamma_{\min}, \gamma_{\max}$)	$[-30^\circ, 30^\circ]$
Bounds for helix amplitude ($\beta_{\min}, \beta_{\max}$)	$[0^\circ, 5^\circ]$

The settings and hyperparameters of MSR adopted for this study are included in Table 1, while a more detailed description of the optimization algorithm can be found in the Appendix B.

2.5 Case studies

Two case studies are considered to test the potential of a combined WFFC strategy. The first case study is a two-turbine wind farm ~~where in which~~ the wind direction and ~~wind speed are kept constant, set to~~ speed are maintained constant at 270° and 8 m s^{-1} , respectively. Whereas the ~~position of the upstream turbine~~ upstream turbine position is fixed, different downstream and cross-stream distances are tested for the second turbine. This simple example is used to provide an intuitive understanding of the model and algorithm used in this work. The second case study is a large-scale offshore wind farm consisting of 69 ~~turbine~~ turbines. This is a scaled version of the Hollandse Kust Noord (HKN) wind farm, obtained by preserving the ~~distances~~ between the turbines when normalized with turbine spacing when normalized by their rotor diameter (D). The wind resources of the site are defined by the wind rose included in Fig. 1 and the heterogeneous wind speed field shown in Fig. 2 (Vortex FDC, 2024), ~~where the~~ which are scaled to the turbine hub height using a power law exponent equal to 0.1. Figure 2 also reports the layout of the wind farm is also reported. In this farm, the minimum distance between the turbines and the power density are $4.48 D$ and 6.03 W m^{-2} , respectively. For both case studies, the ambient turbulence intensity is set to 4% , and the IEA 22 MW reference turbine (Zahle et al., 2024) is used, characterized by a diameter D of 283.2 m .

The computation of ~~the~~ LUTs and the calculation of ~~the~~ performance metrics require the ~~flow conditions to be discretized~~ discretization of the flow conditions. Specifically, the wind speed and directions are discretized into bins of 1 m s^{-1} and 1° , respectively. In addition, a bin size of 1.25° is used to solve the integral related to the wind direction uncertainty, shown in Eq. (3), calculated within the interval $[-2\sigma_\theta, 2\sigma_\theta]$. Table 2 summarizes the main characteristics of the second case study.

In this work, three ~~selected~~ values of σ_θ are used to test the effectiveness of the WFFC strategies under various conditions: ~~These are:~~ 0° , i.e. no uncertainty, 2.5° , and 5° . ~~In the literature, standard deviation values up to 5.25° have been utilized, often extracted~~ These choices are based on values reported in previous studies. For instance, Gaumond et al. (2014) obtained a $\sigma_\theta = 2.67^\circ$ from measurement data (Rott et al., 2018) 10-min interval in the Horns Rev wind farm. Mittelmeier et al. (2017) extracted a $\sigma_\theta = 3.6^\circ$ from wind turbine sensor data. Quick et al. (2017) adopted $\sigma_\theta = 5^\circ$ in their work and (Rott et al., 2018) reported values around 5.25° .

Table 2. Main characteristics of the scaled HKN case study.

Number of turbines	69
Turbine type	IEA 22 MW
Minimum distance	4.48 D
Power density	6.03 W m^{-2}
Wind direction bin size	1°
Wind speed bin size	1 ms^{-1}

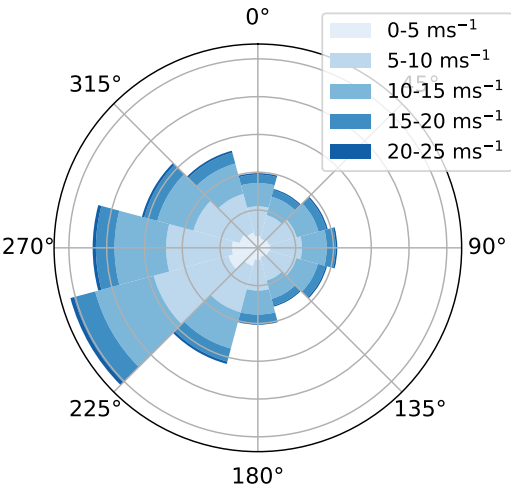


Figure 1. Wind rose of Hollandse Kust Noord site (Vortex FDC, 2024).

~~Within~~In this study, the effects of ~~the~~ different WFFC strategies are evaluated ~~in comparison~~relative to a baseline case, defined as the condition in which all control variables ~~included~~ in the LUTs are set to zero, corresponding to a greedy operation of the wind farm.

3 Results

260 This section describes the results of the analysis conducted in this study. First, the engineering wake model used in this work is validated against LES data. ~~Second, the~~ capabilities of the combined control strategy are shown for the ~~two-turbines-example~~. ~~Second~~two-turbine example. ~~Third~~, the results of the scaled HKN case study are ~~described~~presented in terms of an increase in AEP, the description of the optimal control variables, the impact on COT, and the trade-offs obtained with the multi-objective approach.

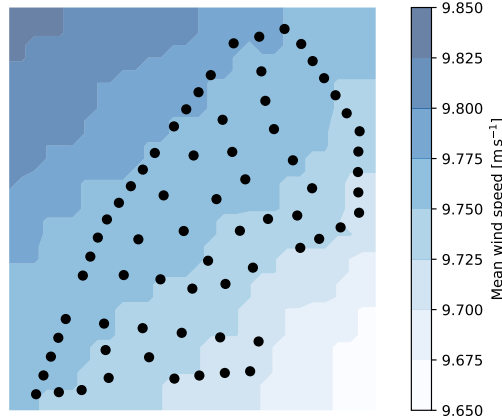


Figure 2. Location of the turbines and heterogeneous mean wind speed map at [the](#) Hollandse Kust Noord site.

265 3.1 [Model validation](#)

[This section compares the engineering wake model adopted in this study with LES data obtained under the same configuration. The specifications of the LES are detailed in Appendix A, specifically in Table A1.](#)

3.1.1 [Validation of the wake deficit and deflection models](#)

270 [Figure 3 shows the power gains for a two-turbine wind farm, resulting from both the engineering wake model and the LES data. The first turbine is positioned at the origin of each plot, \(0,0\). The second turbine is placed at varying downstream and cross-stream distances, denoted by \$dx\$ and \$dy\$, respectively. These distances are normalized by \$D\$ and shown on the axes. A WFFC strategy is applied only on the first turbine and its control setpoint varies depending on the position of the second turbine, as illustrated in Fig. 3. These control variables are chosen based on the insights described by Taschner et al. \(2024\).](#)

275 [The farm power gain values are computed as follows. First, the effective wind speed is obtained for the different downstream positions of the second turbine. These values are obtained through the wake deficit and deflection models mentioned in Sect. 2.1 and can be directly extracted from the LES. Second, the effective wind speed values are converted into rotor average values using the same method for both the engineering wake model and the LES data, i.e. using the *Gaussian Overlap* mentioned in Sect. 2.1. This enables us to assess the accuracy of the wake deficit and deflection models, which have been re-tuned in this study, rather than the accuracy of the widely used rotor-average method available in PyWake, which has not been modified](#)

280 [here. Lastly, these values are converted into power through the turbine model described in Sect. 2.1 for both cases.](#)

[It can be observed that the engineering wake model reproduces the LES results well in this simplified case, with only minor discrepancies. When wake steering is applied, the engineering wake model tends to underestimate the gains from wake steering.](#)

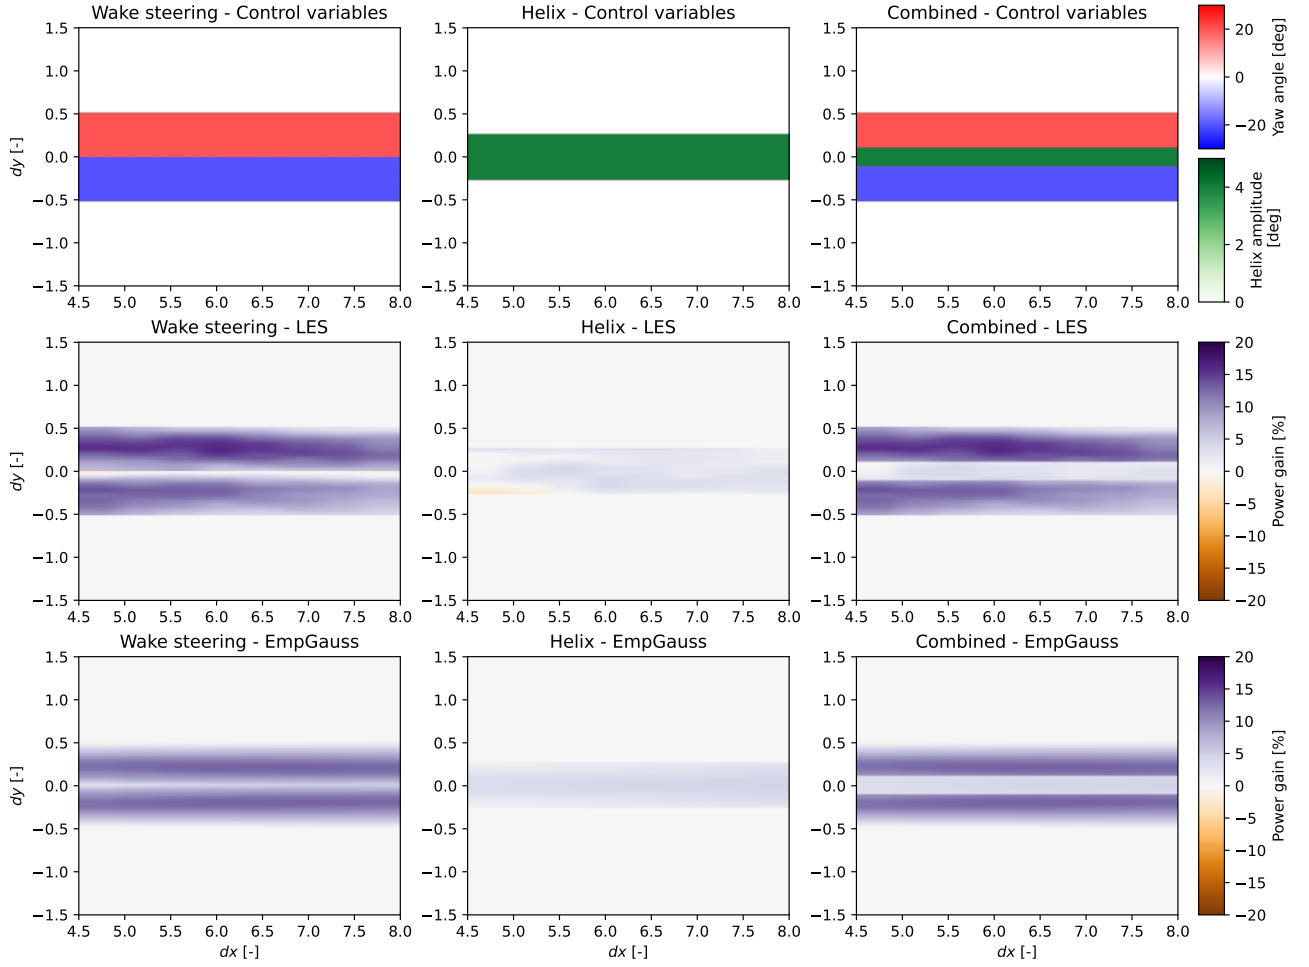


Figure 3. Comparison between power gains obtained from the LES (second row) and the engineering wake model (third row) for a two-turbine wind farm. The control setpoint of the upstream turbine (shown in the first row) varies with the position of the downstream turbine, expressed in terms of streamwise and cross-stream distances from the upstream turbine, normalized with D . The wind speed and direction are 10 ms^{-1} and 270° , respectively.

It cannot capture the mild spatial heterogeneity observed in LES when the helix method is simulated. These behaviors are also inherited by the combined strategy.

285 3.1.2 Validation of the overall power increase for a three-turbine array

In the previous section, the validation focused exclusively on the wake models that were re-tuned for this study. In this section, we extend the analysis by comparing the full model toolchain adopted here with the results obtained from LES.

Table 3. Three-turbine array validation cases

Validation case	Wake steering setpoints	Helix setpoints
Full alignment	$\gamma_i = [15^\circ, 18^\circ, 0^\circ]$	$\beta_i = [4^\circ, 0^\circ, 0^\circ]$
Partial misalignment	$\gamma_i = [14^\circ, 16^\circ, 0^\circ]$	$\beta_i = [4^\circ, 0^\circ, 0^\circ]$

In this case, a three-turbine wind farm is studied with $4.5D$ spacing between the three aligned turbines. Two different validation cases are considered, as described in Table 3. These cases differ in the wind direction, which is aligned with the turbine array in the first scenario and misaligned by 5° in the second scenario. This enables us to validate the model for both full and partial wake overlap conditions. For each case, both wake steering and helix operation are simulated, with the control setpoints included in Table 3.

The results are shown in Fig. 4, where the power gains obtained from both the LES and the engineering wake model are plotted for each turbine and for the entire farm. The main trends observed in the LES results are reproduced by the engineering wake model; however, a moderate discrepancy can be observed in some cases.

A significant gap is evident between the total power gain when wake steering is applied for the full alignment case. This is mainly due to a larger drop in power production from the actuating turbines. This aspect is related to the *Simple Yaw Model* mentioned in Sect. 2.1 and used to simulate power reduction when turbines are yawing. However, this model has not been modified from its default implementation available in PyWake. This effect is also present for the partial misalignment case, for which is less pronounced due to a more balanced spread in the power production between the three turbines.


When the helix method is simulated, the largest errors are observed for the first downstream turbines, i.e. T2. The discrepancy in power gain observed here does not match the results shown in Fig. 3, whose power values were calculated from the flow field instead of taken from the LES. This indicates that the mismatch is generated within the rotor-average process, for which the *Gaussian Overlap* model has not been modified from its default implementation available in PyWake.

Overall, even though these validation cases highlight a discrepancy between the engineering wake model and LES, the former always underestimates the power gains obtained through WFFC, demonstrating the conservative nature of this study.


3.2 Two turbines example

This section outlines the results for the case study consisting of two turbines. The optimal control variables of the front turbine are calculated for different positions of the downstream turbine and are shown in Fig. 5. These are obtained by solving the optimization problem depicted in Eq. (8), based on power maximization. The As in the case shown in Fig. 3, the first turbine is positioned at the origin of each plot, $(0,0)$. The and the second turbine is placed at varying downstream and cross-stream distances, denoted by dx and dy , respectively. These distances are normalized by D and shown on the axes.

Nine different cases are presented, namely: the three WFFC strategies, wake steering, helix method, and combined, for three values of uncertainty in wind direction, i.e. $\sigma_\theta \in [0^\circ, 2.5^\circ, 5^\circ]$. It can be observed that, as the uncertainty in the wind direction

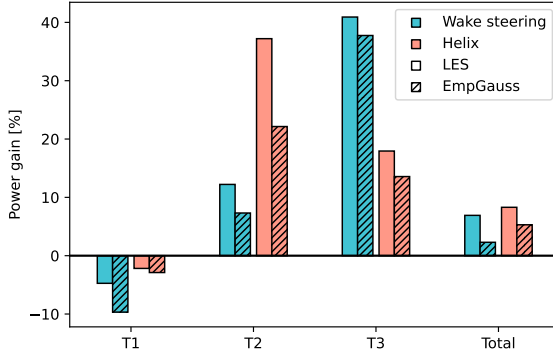

(a) Full alignment case

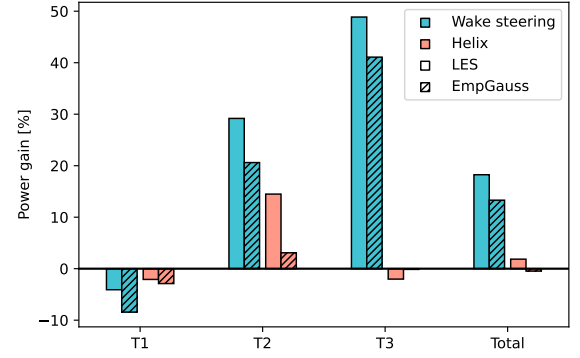

(b) Partial misalignment case

Figure 4. Comparison between the power gains obtained from the LES and from the engineering wake model of a three-turbine array at 10ms^{-1} .

increases, the downstream area for which the control is activated gets larger. However, the magnitude of the control variable diminishes, leading to a less aggressive strategy. This happens irrespective of the type of the WFFC strategy.

Analyzing the combined control strategy, for $\sigma_\theta = 0^\circ$, there is only a very narrow region where the helix ~~is superior than~~ method is superior to wake steering. This condition only occurs in the case of perfect alignment between the two turbines and up to a limited distance, as demonstrated also by Taschner et al. (2024). Therefore, ~~for in~~ this simplified example ~~and in case~~ the uncertainty in the, if uncertainty in wind direction is neglected, a combined control strategy would not differ significantly from only using wake steering. However, as the uncertainty in the wind direction increases, the region where the helix method outperforms wake steering becomes larger, showing added value of the combined strategy.

Figure 6 shows the power gains corresponding to the optimal control strategy depicted in Fig. 5. These are defined as the percentage difference in wind farm power production between the case when WFFC is activated and the baseline operation. From Fig. 6, it can be observed that the power gains achieved through WFFC decrease as the uncertainty in wind direction increases. This detrimental effect appears to be more pronounced for wake steering than for the helix strategy. In most cases, the power gains ~~obtained with from~~ obtained with from wake steering are higher than those achieved with the helix ~~in most cases~~ method. Furthermore, the plots ~~corresponding to for~~ corresponding to for the combined control strategy closely resemble those obtained ~~by using with~~ by using with wake steering alone. Overall, ~~from these results, it can be concluded these results indicate~~ these results indicate that wake steering significantly outperforms the helix method in the partial-overlap case. Conversely, the helix method yields slightly higher power gains under fully aligned conditions; however, this difference remains marginal.

3.3 Large-scale wind farm

This section outlines the results concerning the large-scale wind farm case study, for which the different WFFC strategies are applied to a scaled version of the HKN wind farm.

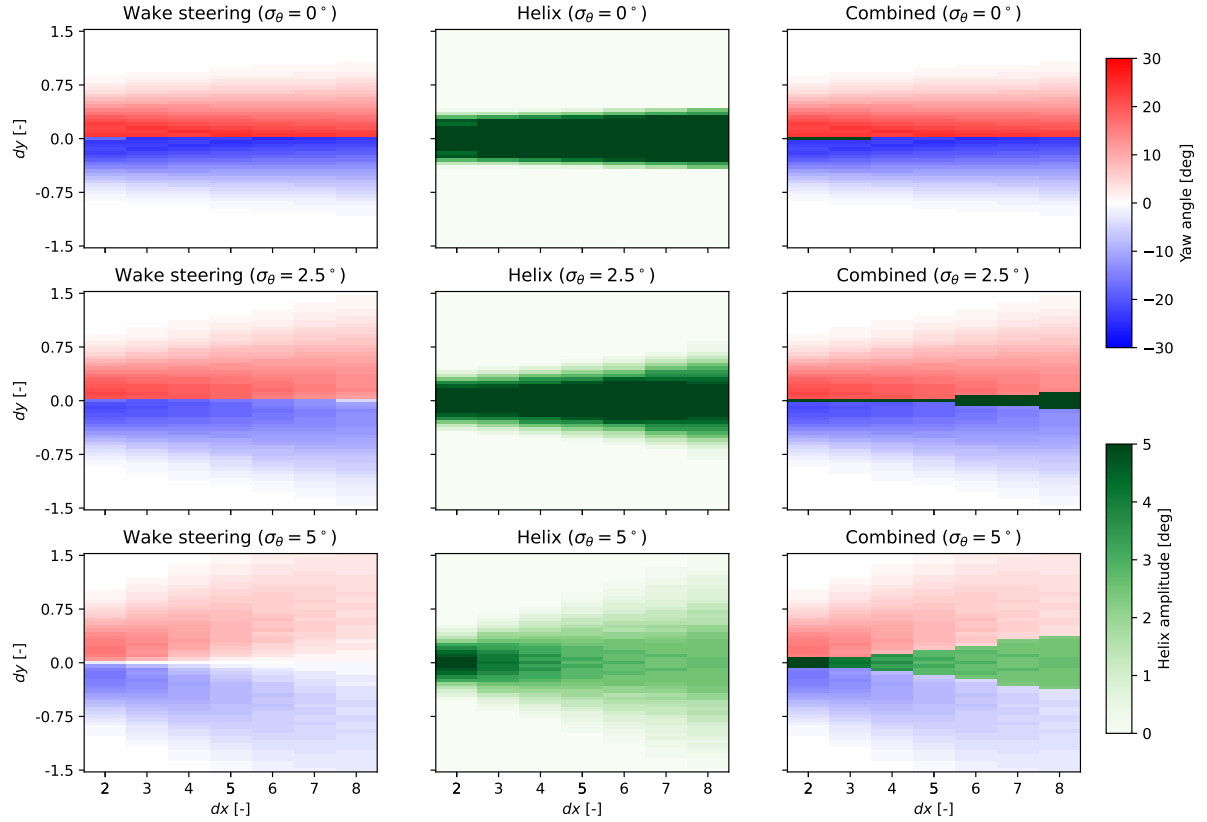


Figure 5. Optimal yaw angle and helix amplitude of the upstream turbine for different positions of the downstream turbine in a farm consisting of two turbines. The position of the downstream turbine is expressed in terms of streamwise and cross-stream distances from the upstream turbine, normalized with D . The wind speed and direction are 8 ms^{-1} and 270° , respectively. Each subplot is characterized by a different control strategy and a different level of uncertainty in wind direction, both specified in the subtitles.

335 3.3.1 Increase in annual energy production

This section focuses on the impact of the combined strategy on the AEP of the wind farm. For this case study as well, the LUTs of optimal control variables are calculated to maximize the power production, as represented by Eq. (8). Different LUTs are obtained for three levels of wind direction uncertainty, namely $\sigma_\theta \in [0^\circ, 2.5^\circ, 5^\circ]$. The results presented in this section show the increase in power production and AEP obtained by applying wake steering, the helix method, and the combined strategy.

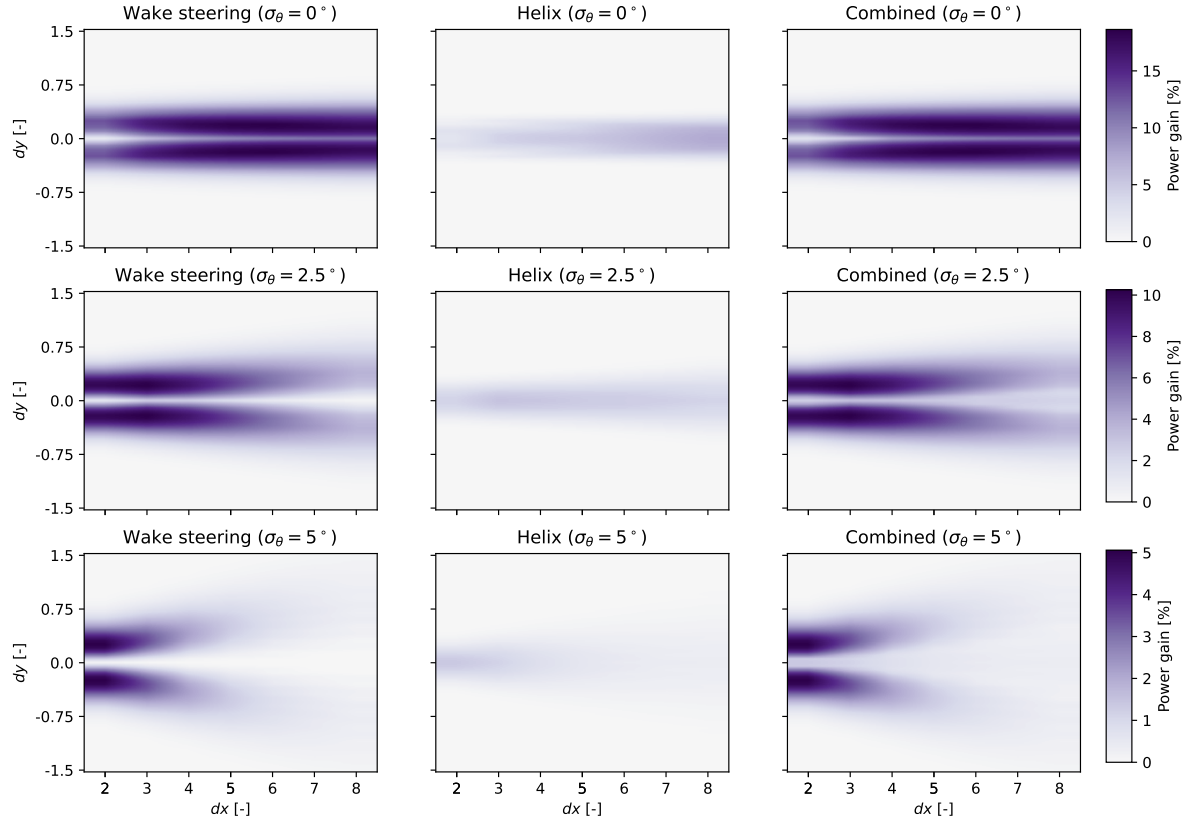


Figure 6. Power gains of the ~~two-turbines~~two-turbine wind farm for different positions of the downstream turbine. The wind speed and direction are 8 m s^{-1} and 270° , respectively. Each subplot is characterized by a different control strategy and ~~degree~~a different level of ~~uncertainty in~~uncertainty, both specified in ~~each subtitle~~the subtitles.

Figure 7 shows the power gains of the wind farm for each control strategy as a function of the wind direction, for a wind speed of 8 m s^{-1} . It can be observed that the magnitude of the power gains ~~vary~~varies across the strategies, with the combined strategy showing the highest power gains for all cases. When the wind direction uncertainty is neglected ($\sigma_\theta = 0^\circ$), Fig. 7 shows that wake steering provides higher gains with respect to the helix method, similarly to the ~~two-turbines~~two-turbine case study. As a consequence, wake steering is adopted by most of the turbines also for the combined strategy. Therefore, the gains ~~of~~from the combined strategy are almost aligned with ~~the values provided by those from~~ wake steering. However, a different behavior is observed as σ_θ increases. For $\sigma_\theta = 2.5^\circ$, the situation is reversed, namely the helix method outperforms wake steering. Therefore, the power increase provided by the combined control strategy is closer to the values obtained by the

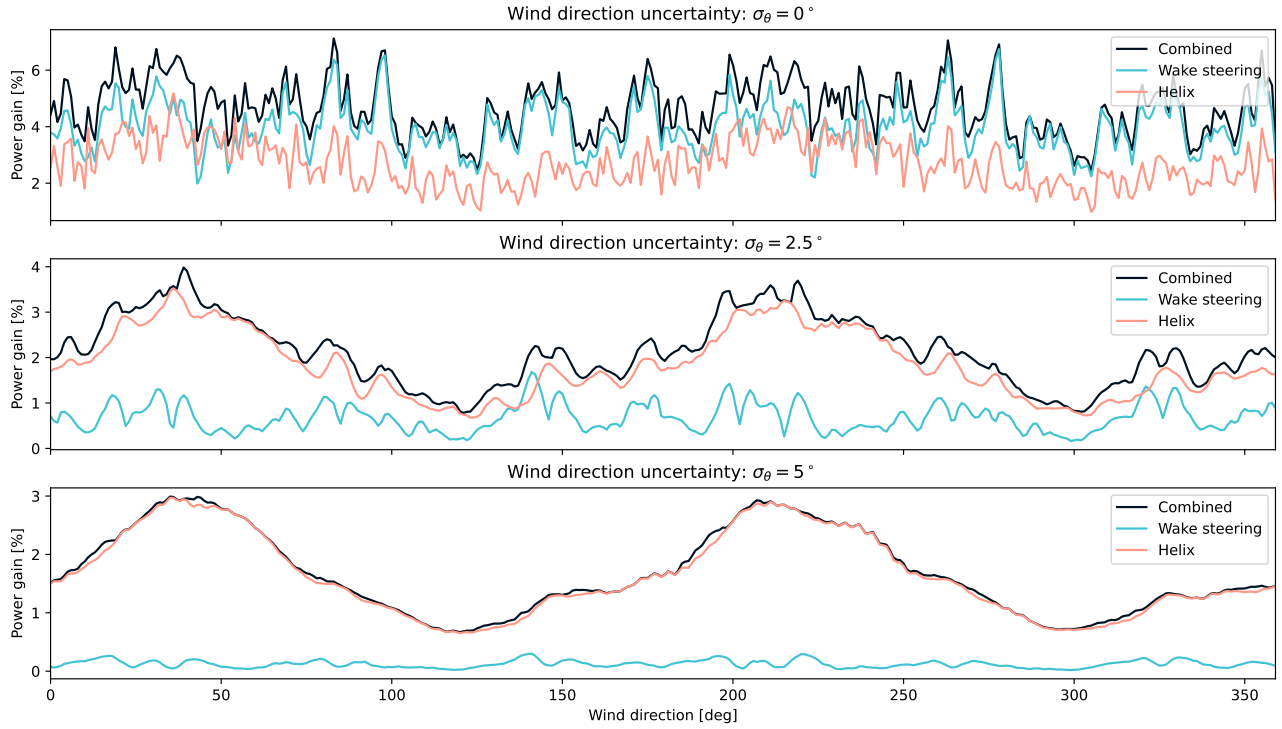


Figure 7. Power gains with respect to baseline operation of the scaled HKN wind farm for different wind directions. The figure includes different control strategies (indicated by different colors) and different degrees of uncertainty (specified in the subtitle of each plot). These values refer to a wind speed of 8 m s^{-1} .

helix operation. This trend further increases when $\sigma_\theta = 5^\circ$, for which the benefits of wake steering are significantly lower with respect to the helix [method](#).

Lastly, to assess the performance of the different control strategies, the AEP values are calculated. Their values are expressed ~~in terms of percentage difference with respect to~~ [as percentage differences relative](#) to the baseline operation, thereby providing a quantitative estimate of the benefits of the WFFC strategies over the lifetime of the wind farm. The results are reported in Fig. 8. As ~~observed previously, the~~ [previously observed](#), wind direction uncertainty has a substantial unfavorable impact on the effectiveness of WFFC, regardless of the control strategy. This effect is highly pronounced for wake steering, where the AEP gain drops from ~~1.68% to 0.30%~~ [1.57% to 0.28%](#) and 0.07%, corresponding to values of σ_θ equal to 0° , 2.5° , and 5° , respectively. Conversely, Fig. 8 demonstrates that the AEP gains ~~obtained applying the helix from the helix method~~ are more robust with respect to wind direction uncertainty. Despite a lower AEP gain (~~1.15%~~ [1.07%](#)) for $\sigma_\theta = 0^\circ$, it diminishes to ~~0.73% and 0.63%~~ [0.68% and 0.59%](#). Lastly, the combined strategy exhibits a high AEP gain (~~1.98%~~ [1.85%](#)) if $\sigma_\theta = 0^\circ$, relying mostly on wake steering, while limiting the drop to ~~0.88% and 0.67%~~ [0.82% and 0.62%](#) by exploiting the robustness of the helix [method](#).

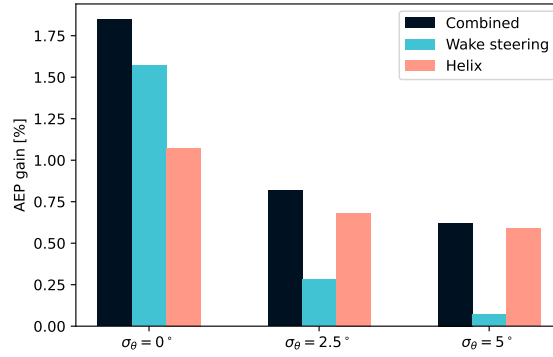


Figure 8. AEP gains with respect to baseline operation of the scaled HKN wind farm. The figure includes different control strategies (indicated by different colors) and different degrees of uncertainty (specified in-on the x-axis).

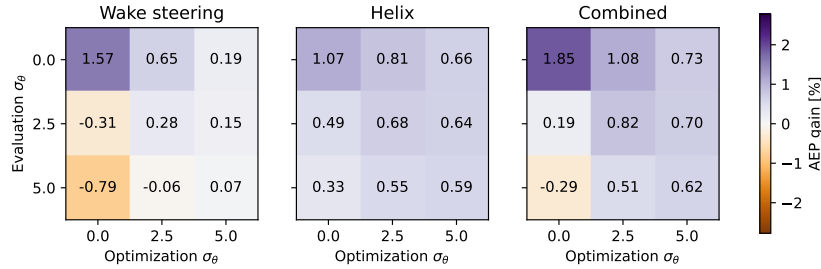


Figure 9. Cross-comparison of the AEP gains obtained for different σ_θ used for the optimization of the control variables and the evaluation of the strategy.

Up to this point, the same values of σ_θ have been adopted for both the optimization of the control variables and the evaluation of the strategy, assuming perfect knowledge of the wind direction uncertainty. However, since in practice the values of σ_θ can be difficult to predict, this assumption is unlikely to be satisfied in reality. Therefore, a cross-comparison of the AEP gains obtained with different σ_θ used during optimization and evaluation enables us to assess the robustness of the different WFFC strategies under more realistic scenarios. These results are shown in Fig. 9. It can be observed that wake steering is highly affected by a mismatch between the σ_θ values. Overpredicting σ_θ significantly decreases the achievable AEP gains, while an underprediction even results in negative values. The helix strategy exhibits higher robustness with respect to an incorrect prediction of σ_θ , registering positive AEP gains for all the considered cases. Lastly, the robustness of the combined strategy lies between those of the two individual strategies.

3.3.2 Lookup tables of the combined strategy

This section examines the control variables in the LUTs that yielded the power and AEP gains reported in the previous section. The plots ~~are presented to~~ show the optimal control settings required to achieve these gains, ~~in order to reveal~~ revealing general trends and ~~to evaluate~~ evaluating the practical feasibility of implementing ~~such these~~ control strategies. The results are shown
375 for two representative cases: a turbine located at the farm boundary and one situated at its center. The optimal control values are depicted using a “control rose”, which displays the control variables as ~~a function~~ functions of wind speed and direction.

Figure 10a shows the control rose of one turbine in the front row facing the dominant wind direction, whose position is highlighted in the same figure. This refers to the LUTs of the combined control strategy, obtained for $\sigma_\theta = 2.5^\circ$. It can be observed that this turbine applies wake steering only when the wind direction is oriented with the wind farm boundaries, where
380 many turbines are aligned. Therefore, wake steering is activated only when the turbine ~~is able to~~ can deviate its wake away from the majority of ~~the~~ downstream turbines, and this condition cannot be achieved ~~if~~ when the wake is facing the central region of the wind farm. Conversely, the helix operation is activated when the ~~wake of the turbine impacts exactly~~ turbine wake impacts this region, where multiple turbines are present but not aligned ~~along one specific in a single~~ direction. This occurs because, rather than redirecting the wake toward other turbines, the wind speed deficit is reduced ~~due to~~ by enhanced mixing.
385 Therefore, the two control strategies are used ~~for on~~ this turbine to mitigate ~~the wake effect for~~ wake effects under different flow conditions, ~~showing good complementarity~~ demonstrating that they complement each other well.

Figure 10b illustrates the control rose of a turbine that is placed in the central region of the wind farm. The results indicate that the control strategy of this ~~turbines~~ turbine mainly consists of applying the helix technique, with wake steering being activated for a few limited cases. Specifically, it can be observed that the helix method is activated on this turbine for an even
390 broader set of conditions with respect to the turbine located on the boundaries of the farm. The same explanation provided for the previous turbine still holds, i.e. helix control is favorable when multiple misaligned turbines are present in the wake. However, the aggressive control strategy of this turbine would probably not contribute significantly to the increase in AEP observed for the wind farm. This motivates a deeper analysis ~~on of~~ the COT of the turbines, described in the next sections.

3.3.3 Impact on the control operation time

This section investigates the impact of ~~the~~ different control strategies ~~in terms of~~ on control operation time. Figure 11 reports the control operation time of each individual turbine, i.e. COT_i . The values are shown using boxplots, which summarize the main trends across the turbines for each condition. It can be observed that the values of COT_i can differ significantly depending on the turbine, as highlighted by the vertical length of each “box”. Moreover, different values of COT_i are obtained depending ~~both on on both~~ the control strategy and the level of uncertainty. However, the main observation from Fig. 11 is
400 that some ~~turbine~~ turbines would operate under either wake steering or helix mode for more than 60% of the time. In the case of the helix method, this could lead to a significant increase in ~~the~~ structural loading, ~~preventing the feasibility of such control strategy~~ rendering the control strategy infeasible. These results can be explained based on the problem statement in Eq. (8), where the use of control is not penalized. As a result, the use of WFFC is encouraged even if only a minimal gain in

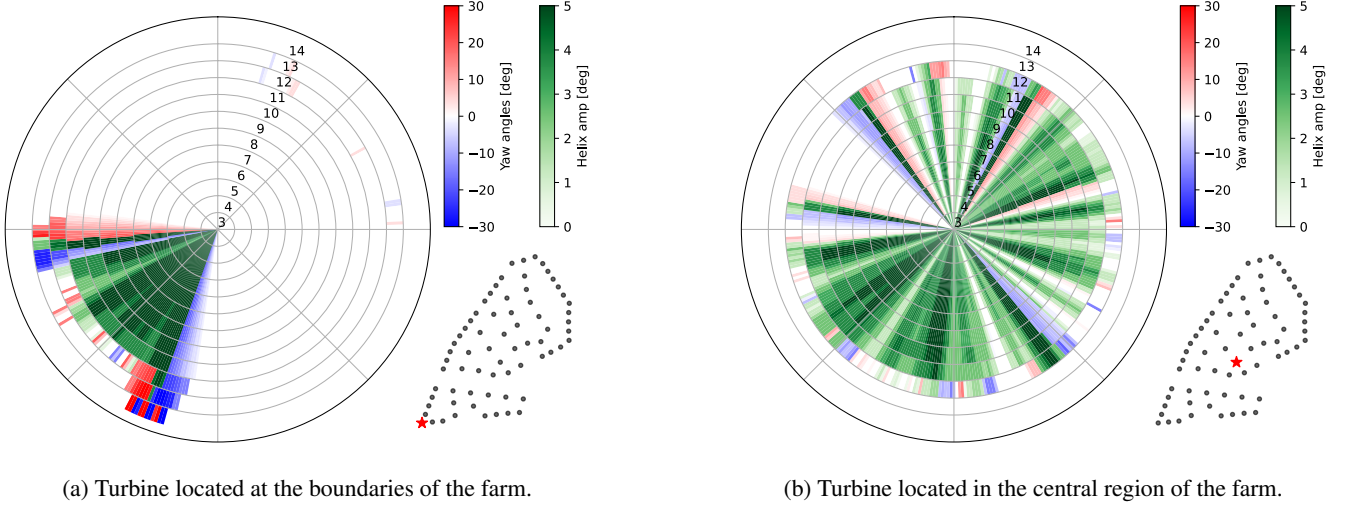


Figure 10. Control rose for the combined strategy of two different turbines. The exact position of the turbines ~~are~~is highlighted in the wind farm layout included in each subplot. Each subplot includes the values of the control variables ~~present~~present in the LUT for each wind speed and direction, obtained ~~for~~with a wind direction uncertainty of $\sigma_\theta = 2.5^\circ$.

power production is obtained. Moreover, two additional aspects can be observed in Fig. 11. First, the effect of wind direction uncertainty on COT_i depends on the control strategy. Figure 11 highlights a direct correlation with σ_θ for the helix ~~method~~method and the combined strategy, while an inverse trend is observed for wake steering. Second, the values of COT_i related to the helix ~~method~~method and the combined strategy are significantly higher than for wake steering when uncertainty in wind direction is considered. An explanation to this result can be provided by assuming that several turbines present a LUT similar to the one depicted in Fig. 10b. In this case, the turbines ~~apply~~use either wake steering or the helix ~~for most of the method for most~~flow conditions below ~~the~~the rated wind speed, which represent a significant fraction of ~~the total operation~~total operating time.

3.3.4 Multi-objective

A multi-objective approach is ~~conducted~~used to balance the gains in power production ~~provided by~~from the different control strategies and their associated control effort, as described in Eq. (9). The results are shown in Fig. 12, where the effect of different LUTs ~~are~~is included in terms of AEP gain and COT. Each ~~data-point-in~~data point on the Pareto front corresponds to a different LUT, with its associated performance metrics. The different values that determine each curve are obtained by increasing the ~~weighting of the penalty~~penalty weight on the control effort ~~present~~present in the objective function. Specifically, the Pareto fronts have been obtained by varying the weight w from 0 to 10^6 . The results are shown for the three different control options investigated in this study, assuming $\sigma_\theta = 2.5^\circ$. Moreover, two additional cases have been included, where $\beta_{\max}$ in the helix ~~method~~method and the combined strategies ~~has~~have been limited to 2.5° , in contrast to the value of 5° adopted in the rest of the study. This provides a wider overview ~~on~~of the potential of these techniques, quantifying the impact of a less aggressive

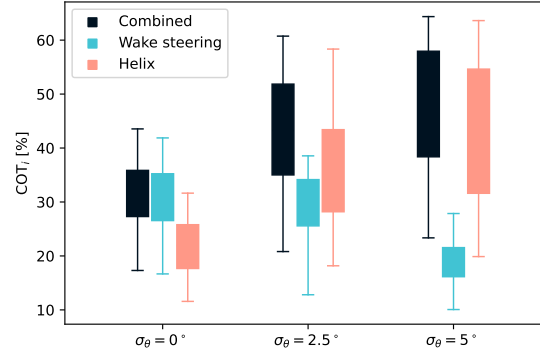


Figure 11. Control operation time for different control strategies (indicated by the color) and wind direction uncertainty (specified in the x-axis). Each boxplot summarizes the values of all the turbines in the wind farm for the specific condition.

helix operation, for instance, due to constraints on the structural loads (Frederik and van Wingerden, 2022; van Vondelen et al., 2023).

All the Pareto fronts represented in Fig. 12 show the presence of a trade-off between AEP and COT. The AEP gains are higher for the combined strategy ~~compared to~~ than for the individual strategies, ~~in alignment~~ consistent with previous results. However, the ~~high~~ steepness of the Pareto fronts in proximity ~~of~~ to the largest AEP gains indicates that beneficial trade-offs can be achieved. For instance, the COT of the combined can be limited to ~~22.0%~~ 21.4% while keeping the AEP gain equal to ~~0.80%~~ 0.74%, obtained for $w = 10^5$. When $\beta_{\max}$ is limited to 2.5° , a shift in the Pareto curve is observed. In this case, a combined control strategy that aims a favorable trade-off between the two objectives can increase the AEP by ~~0.65%~~ 0.61% while keeping COT to ~~20.73%~~ 20.2%. Similar trends can also be observed for wake steering and the helix method. Overall, this analysis shows that a significant reduction in the COT can be achieved at the expense of only a marginal decrease in the AEP gain, and that even in this case, the combined strategy outperforms the individual techniques.

4 Discussion

This section provides a more detailed interpretation of the results obtained in this study, highlighting both their significance and limitations.

4.1 Insights on the comparison between different strategies

The comparison between wake steering and the helix ~~has proved~~ method has proven the superiority of the former when perfect inflow knowledge is used. However, the latter becomes ~~favorable if~~ more favorable when uncertainty in wind direction is introduced, ~~hence i.e.~~ when more realistic conditions are simulated. This is a consequence of the asymmetric profile of optimal yaw angles with respect to the direction of full alignment with the downstream turbine, which ~~represents~~ constitutes a point

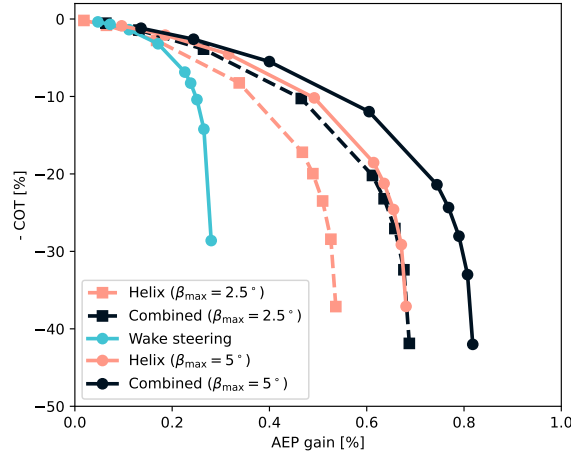


Figure 12. Trade-off between AEP gains and COT, for wake steering, helix [method](#) and combined strategy, and for a maximum helix amplitude $\beta_{\max}$ of 5° and 2.5° . The results refer to a wind direction uncertainty of 2.5° .

of discontinuity. In the proximity of this condition, the optimal yaw angles [oscillate-switch](#) from positive to negative large values, as clearly shown in Fig. 5. Therefore, in the absence of a well-defined misalignment direction, wake steering may be detrimental to power production. Conversely, such behaviour is not present for the helix operation, where a symmetric profile is observed.

This effect is amplified as the size of the wind farm increases. In many cases, having multiple downstream turbines prevents the upstream turbine to effectively steer the wake away from them. This condition occurs when the wake of the upstream turbine affects the central region of the farm, [while the use of whereas](#) wake steering remains extremely fruitful when the upstream [manages to redirect the wake towards turbine redirects the wake](#) outside the entire farm. In contrast, the helix technique does not exhibit this effect, as it reduces the wind speed deficit rather than displacing it. Therefore, the advantages of the helix approach [emerge more clearly-become clearer](#) when a large-scale wind farm is considered [instead-of-rather than](#) a limited number of turbines. These insights are expected to hold for wind farms [characterized-by-with](#) a similar number of turbines, layout, and power density to our case [ease-study](#); however, these trends may vary [for-across](#) other types of wind [farmfarms](#).

In this study, [only](#) the helix technique is [used-chosen](#) as active wake mixing strategy. However, the same framework can be used to study the impact of other techniques such as the pulse [method](#), for which Frederik et al. (2025) have demonstrated superior performance for some flow cases. This would only involve minor changes in the turbine model and the re-tuning of some coefficients that characterize the wake model. However, since the steady-state effects are expected to be similar to those observed for the helix [method](#), similar trends are also expected irrespective of the specific active wake mixing technique employed.

4.2 Reliability of low-fidelity wind farm models

The magnitude of the AEP gains ~~mentioned-reported~~ in this study is highly dependent on the low-fidelity models ~~that-are-used~~, especially ~~on~~ their coefficients. For instance, the power–yaw loss exponent, which is ~~usually-adopted-to-calculate-often used to estimate~~ the drop in power production ~~due-to-an-operation~~ under yaw misalignment (Liew et al., 2020), can significantly affect the effectiveness of wake steering and its ~~use-within-integration into~~ the combined strategy. In this study, the default method ~~available~~ in PyWake is used, based on the ~~cosine-loss-law-for-the-wind-speed-cosine-loss law to recalculate the effective wind speed,~~ and the extraction of the updated power from the power curve ~~of-the-turbine-based-on-using~~ this wind speed value. In our case, this results in a power–yaw loss exponent between 2.5 and 3.1, depending on the wind speed. Conversely, Liew et al. (2020) have ~~proved-proven~~ that the actual power–yaw loss exponent can be lower. Consequently, ~~decreasing-such-reducing this~~ value would lead to higher power gains for wake steering. As a ~~results-result~~, wake steering would be adopted for a higher number of cases within the combined strategy, increasing the overall AEP gain. However, this would not affect the general trends presented in this work.

~~Overall, the-The~~ coefficients adopted for these models have been tuned through aeroelastic simulations and LES to replicate the conditions of a realistic site. ~~Nevertheless, the recent models used to consider the effect of~~ ~~However, due to~~ the ~~active wake mixing technique require additional validation to ensure reliability.~~ Specifically, ~~the scale of the LES simulations used for validation should be extended from a few turbines to larger wind farms to investigate the deep array effects and avoid extrapolation beyond validated conditions~~ ~~significant computational resources required for LES, this study considers only a~~ ~~limited set of conditions for the model calibration and validation.~~ These are restricted to a single atmospheric boundary layer condition and to a fixed value of the free-stream wind speed and the turbulence intensity. More importantly, ~~the analysis is limited to configurations with up to three turbines at fixed spacing.~~ An example of these limitations is the synchronization concept for the helix operation in multiple turbines. In this regard, recent studies have highlighted that synchronizing the wake dynamics of multiple turbines ~~performing the helix may affect significantly-using the helix method may affect~~ the power production ~~significantly~~ (van Vondelen et al., 2025). As of now, this aspect is ~~neglected-by-the-not considered by the available~~ low-fidelity models ~~currently available and, therefore, not considered in this study.~~ Lastly, ~~data from field experiments are needed to further,~~ including the model used in this study. The impact of this assumption is analyzed in Sect. C1.

Another limitation is that the operation of the WFFC strategies is not explicitly constrained in the below-rated region, where they are typically tested or simulated using higher-fidelity models. However, as shown in the LUTs in Fig. 10, this operation occurs only in a limited number of cases. Moreover, for the helix method, it has been verified that this assumption yields negligible differences compared to the presented results.

In conclusion, ~~the application of the engineering wake model in this study extends beyond the conditions for which it has been originally tuned.~~ This may lead to some uncertainty in the reported AEP gains obtained with this method; however, we do not expect this to affect the main trends observed in the present work. To increase the reliability of results from WFFC on large-scale wind farms, the scale of the LES used for validation should be extended from a few turbines to larger wind farms to investigate deep-array effects and avoid extrapolation beyond the validated conditions. Lastly, since

LES is a numerical modeling approach, experimental field data are essential to improve the reliability of low-fidelity models in simulating-representing wake mixing effects and to prove-validate the effectiveness of active wake mixing strategies on large-scale wind farms.

495 4.3 Implications of estimating the AEP using LUTs

In this study, the benefits of the different control strategies is-are estimated using LUTs, which contain the optimal control variables for each specific flow condition. Such estimation is typically performed under the assumption of a perfect knowledge of the wind direction ($\sigma_\theta = 0$), thereby simulating the exact flow conditions for which the control variables in the LUTs were derived. Such assumptions could lead to an overestimation of the AEP gains provided by the control strategies, due to the
500 dynamic inflow conditions under which the turbines operate. Specifically, this assumption would require the control settings to be updated-continuously-continuously updated to match the values contained in the LUTs. In this work, such-the assumption is relaxed by increasing the-value-of σ_θ , thereby simulating more realistic conditions.

The use of LUTs for estimating the AEP does not imply that they are employed in the actual operation of the wind farm. In the context of AEP estimation, the LUTs assume that the operator applies the optimal control variables are-applied-by-the
505 operator under each flow condition defined by u and θ , subject to an error margin determined by the wind direction uncertainty. However, the manner in which these control settings are implemented in response to dynamic flow conditions does not need to match the way the AEP is calculated to keep-the-estimation-valid maintain the validity of the estimation. For instance, the control setpoints may be applied through a combination of LUTs and a low-pass filter, or via more advanced closed-loop control strategies (Becker et al., 2025b).

510 In this context, the interpretation of the wind direction uncertainty is twofold. First, it estimates the impact of undesired effects such as sensor errors or rapid changes in wind conditions. Second, it reflects the behavior of a control approach designed to minimize actuator interventions, maintaining unaltered the control settings across a wider range of inflow conditions (Becker et al., 2025a).

While the decoupling between AEP estimation and the implementation of the actual operational strategy ensures the broad
515 applicability of the proposed method, it also raises concerns regarding the practical feasibility of deploying the combined control strategy. As previously noted, this strategy entails that certain turbines operate under wake steering, while others apply use the helix technique, excluding-the-simultaneous-application-of-both-methods-on with neither method applied simultaneously to a single turbine. This study has highlighted that switching between these two strategies for different inflow conditions can lead to a substantial increase in power production. However, how this transition can be executed under-the-during actual
520 operation remains unexplored and requires validation based-on-through LES and wind tunnel experiments. Lastly, the helix's performance performance of the helix method under yaw misalignment remains largely unexplored, yet it may offer further AEP improvements and thus merits detailed investigation.

4.4 Impact of the flow characteristics

In this work, the flow characteristics have been selected to replicate the site conditions of the case study. However, Frederik et al. (2025) have shown that the veer has a significant impact on selecting the best control strategy. Therefore, a sensitivity analysis on the veer value would provide a wider overview on the comparison between the different control options tested in this study.

The turbulence intensity is also expected to play a major role in ~~the comparison and combination of comparing and combining~~ different WFFC techniques. ~~However, the~~ In this study, the LES data used to tune the engineering wake model were run with an ambient TI of 4%, which lies toward the lower bound of the typical range of 4–6% observed in the North Sea (Türk and Emeis, 2010). Lower TI is generally associated with larger wake deficits and slower wake recovery. Consequently, this may lead to a slight overestimation of the AEP gains achieved by WFFC strategies.

Moreover, the Empirical Gaussian wake model adopted in this study does not ~~present any explicit dependencies explicitly depend~~ on such parameters, relying ~~completely solely~~ on the tuning process. Therefore, the ~~coefficients of the model model coefficients~~ would need to be re-tuned for each ~~value of turbulence intensity that is investigated investigated turbulence intensity~~, requiring an extensive dataset of LES simulations ~~representing that cover~~ all these conditions. Therefore, ~~the development of~~ a wake model for active wake mixing with a direct dependence on ~~the turbulence intensity turbulence intensity, such as that recently published by ?~~, would facilitate this analysis.

After completing all these sensitivity studies, multi-dimensional LUTs ~~could can~~ be obtained by applying the framework developed in this work, ~~where in which~~ the optimal control variables are selected for all ~~the~~ possible combinations of ~~the~~ flow parameters.

4.5 Towards a value-centered wind farm flow control

The framework and the algorithm developed in this study have been ~~devised to guarantee~~ designed to ensure high flexibility in ~~terms of~~ the objective function used to determine the optimal control strategy. Therefore, the optimization of the WFFC strategy can be extended beyond the traditional power production, exploring different value-based metrics (Meyers et al., 2022).

In this study, this concept has been ~~showcased by balancing the~~ demonstrated by balancing annual energy production with ~~the~~ control operation time. In case of the helix operation, this variable can be directly related to an increased structural loading (Frederik and van Wingerden, 2022), while for wake steering, the relation between these two aspects is more complex. A first attempt to better capture the information about the increased loads can be to penalize the control operation depending on the effective wind speed value and the magnitude of the control variable, i.e. yaw angle and helix amplitude values. Alternatively, load surrogate models can be integrated in this framework to provide better results with respect to power-loads trade-off strategies. For instance, Guilloiré et al. (2024) proposed a surrogate model based on an artificial neural network that enables a rapid load estimation, while Anand et al. (2025) adopted this model to demonstrate the use of WFFC including lifetime-aware considerations. However, this model does not yet support active wake mixing control strategies ~~yet~~.

555 Although most of this work has focused on maximizing the power production, the main objective could be shifted to the revenues generated by the wind farm using the same method and algorithm. This is expected to further increase the benefits of WFFC when wind speed and electricity prices are negatively correlated (Bechmann and Quick, 2025). This is a consequence of the fact that WFFC is mostly applied in the below-rated region, i.e. for low values of wind speed that are often associated ~~to~~ with higher electricity prices.

560 Lastly, the proposed methodology and the developed algorithms can be applied to study the impact of WFFC beyond commercial metrics, including environmental, ecological, and/or social objectives within the wind farm flow control optimization problem (Meyers et al., 2022; Kainz et al., 2025).

5 Conclusions

This study has analyzed the added value of ~~using~~ a wind farm flow control strategy that combines wake steering with the helix active wake mixing ~~, with a specific focus on the helix technique~~ method. This combined strategy has demonstrated to increase substantially the power production of large-scale wind farms, achieving ~~an AEP gain up to 1.98%, which exceeds the gains of 1.68% and 1.15%~~ AEP gains higher than those obtained individually for wake steering and the helix ~~, respectively~~ method.

~~An increase in wind direction uncertainty has resulted in a significant drop in performance for all the different control strategies~~ When the number of turbines is limited and perfect knowledge of wind direction is assumed, wake steering has been shown to outperform the helix method in terms of power gains. However, ~~this detrimental effect is more evident for wake steering, whose gains in AEP decrease to 0.30% and 0.07%, corresponding to an uncertainty of 2.5° and 5°, respectively. On the other hand, the helix has registered a drop to 0.73% and 0.63% for the same values of uncertainty. The uncertainty in wind direction also affects~~ as wind direction uncertainty increases, helix control has been shown to be more robust, exhibiting smaller reductions in power gain than wake steering. Moreover, as the number of turbines increases, the helix method has shown greater effectiveness in reducing wake losses in scenarios with multiple downstream turbines. This can be explained by the fact that when a turbine applies wake steering, redirecting the wake away from the nearest downstream turbine may inadvertently deflect it toward other turbines further downstream.

Overall, the combined strategy ~~, resulting in AEP gains of 0.88% and 0.67%, depending on the magnitude of the uncertainty~~ has achieved the largest power increase by leveraging the complementary benefits of the individual strategies. This outcome ~~is a consequence of~~ stems from the high gains provided by wake steering ~~for few favorable conditions and the high~~ under specific favorable conditions, the greater robustness of the helix method with respect to wind direction uncertainty ~~together with its applicability, and its effectiveness~~ when multiple misaligned downstream turbines are present. However, such performance would require some turbines to operate under a WFFC strategy up to 60 % of their operation time, raising concerns on its actual feasibility. A multi-objective approach that balances the control effort with ~~the increase in the~~ increased power production has been adopted for the optimization of the optimizing the control variables. ~~For a wind direction uncertainty of 2.5°, the control operation time can be reduced to 22.0% while keeping the AEP gain to 0.80%.~~

This has enabled us to find a strategy that limits control actuation while still ensuring a significant power increase. This analysis has been enabled by the development of a tailored algorithm named MSR, which has been developed with the scope of providing MSR, designed to provide high flexibility to the user, both in terms of control strategies and optimization objectives.

590 However, these results are based on recent wake models used for wind farm simulation, which are associated with notable uncertainties, as they are applied beyond the range of conditions for which they have been validated. Future research could diminish such uncertainty through a more extensive reduce such uncertainty by extending validation of the engineering models for active wake mixing, performing LES for large-scale wind farms, performing wind tunnel tests, and for conducting field experiments. Moreover, a wider variety range of flow conditions could be simulated, providing comprehensive lookup tables
 595 of optimal control settings, depending also that also depend on parameters such as turbulence intensity or veer. Lastly, the full potential of this framework could be exploited by extending the analysis to the combination of more control strategies, e.g. including turbine derating, and more objectives, for instance, related to structural, financial, environmental, ecological, and/or social aspects.

Code and data availability. The software used in this study is available at <https://doi.org/10.5281/zenodo.20486120>.

600 **Appendix A: Description and tuning of the turbine and wake models**

This appendix provides a description descriptions of the *Empirical Gaussian* wake deficit and deflection models, as well as the tuning procedure used for the turbine and wake models.

A1 Description of the Empirical Gaussian model

The *Empirical Gaussian* model adopted in this study is extensively described in FLORIS documentation (National Renewable
 605 Energy Laboratory, 2024a), however, the main equations are reported here as well.

The normalized wind speed at the point (x, y, z) is expressed as

$$\frac{u}{U_\infty} = 1 - C \cdot \exp \left[-\frac{(y - \delta_y)^2}{2\sigma_y^2} - \frac{(z - \delta_z)^2}{2\sigma_z^2} \right] \quad (A1)$$

where the scaling factor C of the Gaussian curve and the lateral wake width σ_y depend on the downstream position x of the point at which the wind speed is evaluated, and are modeled as

$$610 \quad C = \frac{1}{\sigma_{0,D}^2} \cdot \left(1 - \sqrt{1 - \frac{\sigma_{y,0}\sigma_{z,0}C_T}{\sigma_y\sigma_z}} \right) \quad , \quad (A2)$$

and

$$\sigma_y(x) = \sigma_{y,0} + \int_0^x \left[\sum_{i=0}^n k_i \cdot l_{[b_i, b_{i+1})}(x') + w_v \cdot M_j(x') \right] dx' \quad , \quad (\text{A3})$$

respectively. The vertical wake width σ_z is defined similarly to σ_y , hence following Eq. (A3). δ_y and δ_z indicate the lateral and horizontal wake deflection, respectively, and depend on the downstream position x . C_T indicates the thrust coefficient, whereas $\sigma_{0,y}$ and $\sigma_{z,0}$ represent the initial wake widths at the turbine location. A feature of this model ~~consists of assigning~~ is the use of multiple wake expansion coefficients k_i at different downstream positions defined by the breakpoints b_i . The transition between different k_i values is smoothed using the function l .

The wake-induced mixing factor M is modeled as

$$M_j = \sum_{i \in T^{up}(j)} \frac{A_{ij} a_i}{\frac{x_j - x_i}{D}} + \frac{\beta^p}{d} \quad , \quad (\text{A4})$$

dependent on the induction factor a , the area overlap A between turbine wakes and their relative downstream distances normalized with the rotor diameter D , but also by the helix amplitude β and the tunable coefficients p and d . Yaw-added mixing is neglected in this study.

Lastly, the wake deflection caused by the yaw misalignment γ is modeled as

$$\delta_y = \frac{k_{\text{def}} \cdot C_T \cdot \gamma}{1 + w_d \cdot M_j} \ln \left(\frac{\frac{x}{D} - c}{\frac{x}{D} + c} \right) \quad , \quad (\text{A5})$$

with k_{def} , w_d , and c indicating tunable coefficients.

A2 Tuning of the turbine and wake models

This section describes the tuning process ~~adopted-used~~ to determine the ~~values of the several coefficients mentioned in the description of the coefficients present in the~~ turbine and wake models.

The tuning procedure is based on a dataset obtained through multiple simulations performed with the LES solver AMR-Wind (Kuhn et al., 2025), which has been coupled with the aeroelastic simulator OpenFAST (National Renewable Energy Laboratory, 2024b) to model a wind turbine's response. The simulations were run with a conventionally neutral boundary layer at turbulence levels similar to those ~~found at~~ observed in the North Sea. Multiple cases were simulated, covering different control strategies and layouts. An overview of the LES settings and the simulation cases are provided in Tables A1 and A2.

The tuning process has been decomposed into six sequential steps to improve its efficiency. Each of them ~~involved~~ involves a specific component of the wind farm model ~~and~~, a limited number of coefficients, and is based on a specific LES/OpenFAST simulation reported in Table A2. These tuning phases have been executed in the following order:

1. Turbine model (coefficients: a, b_P, c_P, b_T, c_T , N. simulation: 1)

Table A1. LES settings adopted for the tuning process.

Domain settings	
Domain size	$\cancel{L_x \times L_y \times L_z = 4.48 \times 4.48 \times 1.28 \text{ km}^3}$ $\underline{L_x \times L_y \times L_z = 4.48 \text{ km} \times 4.48 \text{ km} \times 1.28 \text{ km}}$
Cell size (base)	$\cancel{\Delta x \times \Delta y \times \Delta z = 10 \times 10 \times 10 \text{ m}^3}$ $\underline{\Delta x \times \Delta y \times \Delta z = 10 \text{ m} \times 10 \text{ m} \times 10 \text{ m}}$
Cell size (refined)	$\cancel{\Delta x_r \times \Delta y_r \times \Delta z_r = 5 \times 5 \times 5 \text{ m}^3}$ $\underline{\Delta x_r \times \Delta y_r \times \Delta z_r = 5 \text{ m} \times 5 \text{ m} \times 5 \text{ m}}$
Refinement size	$\cancel{L_{x,r} \times L_{y,r} \times L_{z,r} = 2.8 \times 1.12 \times 0.6 \text{ km}^3}$ $\underline{L_{x,r} \times L_{y,r} \times L_{z,r} = 2.8 \text{ km} \times 1.12 \text{ km} \times 0.6 \text{ km}}$
Precursor settings	
Inflow - <u>Inflow</u> wind speed	$U_\infty = 10 \text{ m s}^{-1}$
Inflow - <u>Inflow</u> wind direction	$\phi = 240^\circ$ (south-west)
Simulation length	$t_{LES} = 36000 \text{ s}$
Time step	$\Delta t = 0.5 \text{ s}$
Surface roughness	$z_0 = 0.001 \underline{\text{m}}$
Turbulence intensity	$I = 3\text{--}6\%$
Shear coefficient	$\alpha = 0.1$
Wind veer	$\phi = 5^\circ$
Inversion height	$z_i = 700 \text{ m}$
Inversion strength	$\Delta\theta = 2.5 \text{ K}$
Inversion thickness	$\Delta h = 100 \text{ m}$
Lapse rate	$\Gamma = 1 \text{ K km}^{-1}$
Wind turbine simulations	
Simulation length	$t_{LES} = 4200 \text{ s}$
Time step LES	$\Delta t_{LES} = 0.05 \text{ s}$
Time step OpenFAST	$\Delta t_{OF} = 0.01 \text{ s}$
Turbine diameter	$D = 283 \text{ m}$
Blade epsilon	$\epsilon = 2\Delta x_r = 10 \text{ m}$
Rotor approximation	Actuator Line Method
Turbine spacing	$d = 4.5 D$

2. Wake deficit model: one turbine (coefficients: $\sigma_{0,D}, k_1, k_2$; N. simulation: 2)

3. Wake deficit model: multiple turbines (coefficient: w_v ; N. simulation: 8)

Table A2. LES cases adopted for the tuning process, specifying the number of turbines (N_{WT}), control settings (γ, β), and whether they were used for tuning the turbine or the wake model.

<u>N.</u>	Simulation case	N_{WT}	Control settings	Tuning purpose
<u>1</u>	Loss coefficients	1	$\beta = \{0^\circ : 0.5^\circ : 5.5^\circ\}$	Turbine model
<u>2</u>	Baseline	1	$\gamma = 0^\circ, \beta = 0^\circ$	Wake model
<u>3</u>	Helix A2	1	$\gamma = 0^\circ, \beta = 2^\circ$	Wake model
<u>4</u>	Helix A3	1	$\gamma = 0^\circ, \beta = 3^\circ$	Wake model
<u>5</u>	Helix A4	1	$\gamma = 0^\circ, \beta = 4^\circ$	Wake model
<u>6</u>	Wake steering (+)	1	$\gamma = 20^\circ, \beta = 0^\circ$	Wake model
<u>7</u>	Wake steering (-)	1	$\gamma = -20^\circ, \beta = 0^\circ$	Wake model
<u>8</u>	Baseline array	3	$\gamma_i = [0^\circ, 0^\circ, 0^\circ], \beta_i = [0^\circ, 0^\circ, 0^\circ]$	Wake model
<u>9</u>	Helix array A3	3	$\gamma_i = [0^\circ, 0^\circ, 0^\circ], \beta_i = [3^\circ, 0^\circ, 0^\circ]$	Wake model
<u>10</u>	Helix array A4	3	$\gamma_i = [0^\circ, 0^\circ, 0^\circ], \beta_i = [4^\circ, 0^\circ, 0^\circ]$	Wake model
<u>11</u>	Wake steering array	3	$\gamma_i = [15^\circ, 18^\circ, 0^\circ], \beta_i = [0^\circ, 0^\circ, 0^\circ]$	Wake model

- 640 4. Wake deficit model: active wake mixing (coefficient: p, d ; N. simulations: 3, 4, 5, 9, 10)
5. Wake deflection model: one turbine (coefficients: k_{def}, c ; N. simulations: 6, 7)
6. Wake deflection model: multiple turbines (coefficient: w_d ; N. simulation: 11)

The results of the tuning process, i.e. the obtained values of the coefficients introduced by these models, are summarized in Table A3.


- 645 The turbine model is tuned by fitting the thrust and power loss ratios, defined as $C_T/C_{T,BL}$ and P/P_{BL} , respectively, to the corresponding data for different values of β , using the scipy function `curve_fit`. The results of this tuning phase are included in Fig. A1. ~~The well-established~~ A well-established decreasing trend is observed as the amplitude increases, in alignment with the data obtained ~~agreement with data~~ from OpenFAST/LES. In these plots, the curve obtained using with the default coefficients available in FLORIS is also included, highlighting the importance of repeating the tuning process ~~of these models for~~ for these models in the specific case study.
- 650

- For the tuning of the wake deficit and deflection models, the horizontal velocity profiles at hub height and multiple down-stream ~~distances~~ positions are considered. Considering different cross-stream positions enables us to calibrate the model for both cases of full alignment and partial wake overlap. While the streamwise discretization of the flow field depends on each case, the cross-stream bounds are set to $[-2D, 2D]$. Specifically, the scipy function `least_squares` is used to minimize the residuals between the cube values of the velocities, as a proxy of the power.
- 655


Figures A2 and A3 describe the fit of the wake model with the LES data. Whereas Fig. A2 refers to the wake of only one turbine, Fig. A3 demonstrates the ability of the model to estimate the wake caused by multiple turbines. In both cases, different operation modes are shown, including baseline, wake steering, and helix control. Whereas the wake characteristics of a single

Table A3. Tuning coefficients of turbine and wake models.

Name	Symbol	Value	Unit
Helix amplitude exponent	a	1.907	$[-]$
Helix b coefficient (power)	b_P	$1.376 \cdot 10^{-3}$	$[-]$
Helix c coefficient (power)	c_P	$4.02 \cdot 10^{-11}$	$[\text{kW}^{-1}]$
Helix b coefficient (thrust)	b_T	$8.371 \cdot 10^{-4}$	$[-]$
Helix c coefficient (thrust)	c_T	$5.084 \cdot 10^{-4}$	$[-]$
Initial wake width	$\sigma_{0,D}$	0.3042	$[\text{m}]$
Wake expansion coeff. ($x \leq 10 D$)	k_1	0.01213	$[-]$
Wake expansion coeff. ($x > 10 D$)	k_2	0.008	$[-]$
Mixing gain velocity	w_v	0.2119	$[-]$
Active wake control exponent	p	1.119	$[-]$
Active wake control denominator	d	137.2	$[-]$
Deflection gain	k_{def}	2.098	$[\text{m deg}^{-1}]$
Deflection rate	c	12.02	$[-]$
Mixing gain deflection	w_d	0.0	$[-]$

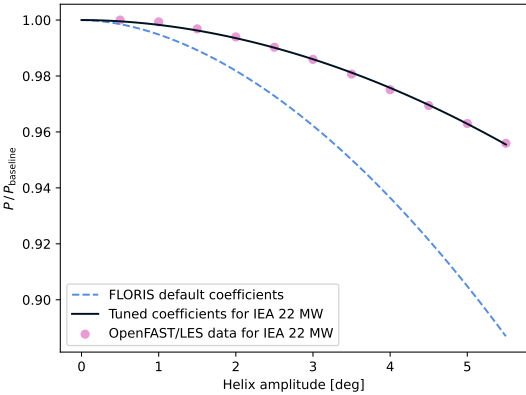

(a) Power loss comparison.

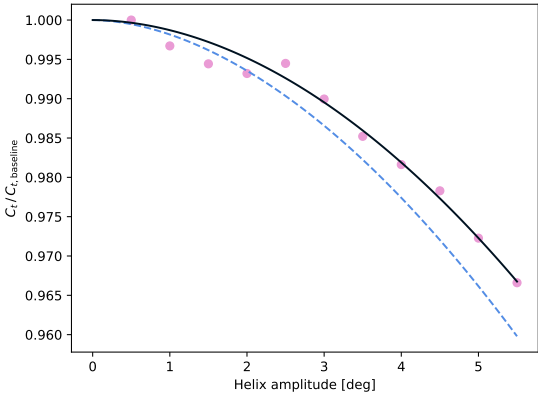

(b) Thrust loss comparison.

Figure A1. Comparison between the tuned turbine model and the OpenFAST/LES data for both (a) power loss and (b) thrust loss for different helix amplitudes. The functions obtained with the default coefficients available in FLORIS are also included.

turbine can be fairly well replicated by the model, in case of for multiple turbines the error with relative to the higher-fidelity data increases. Overall, the main trends can be captured by the engineering wake model, enabling a realistic estimation estimate of the effect caused by of the control strategy.

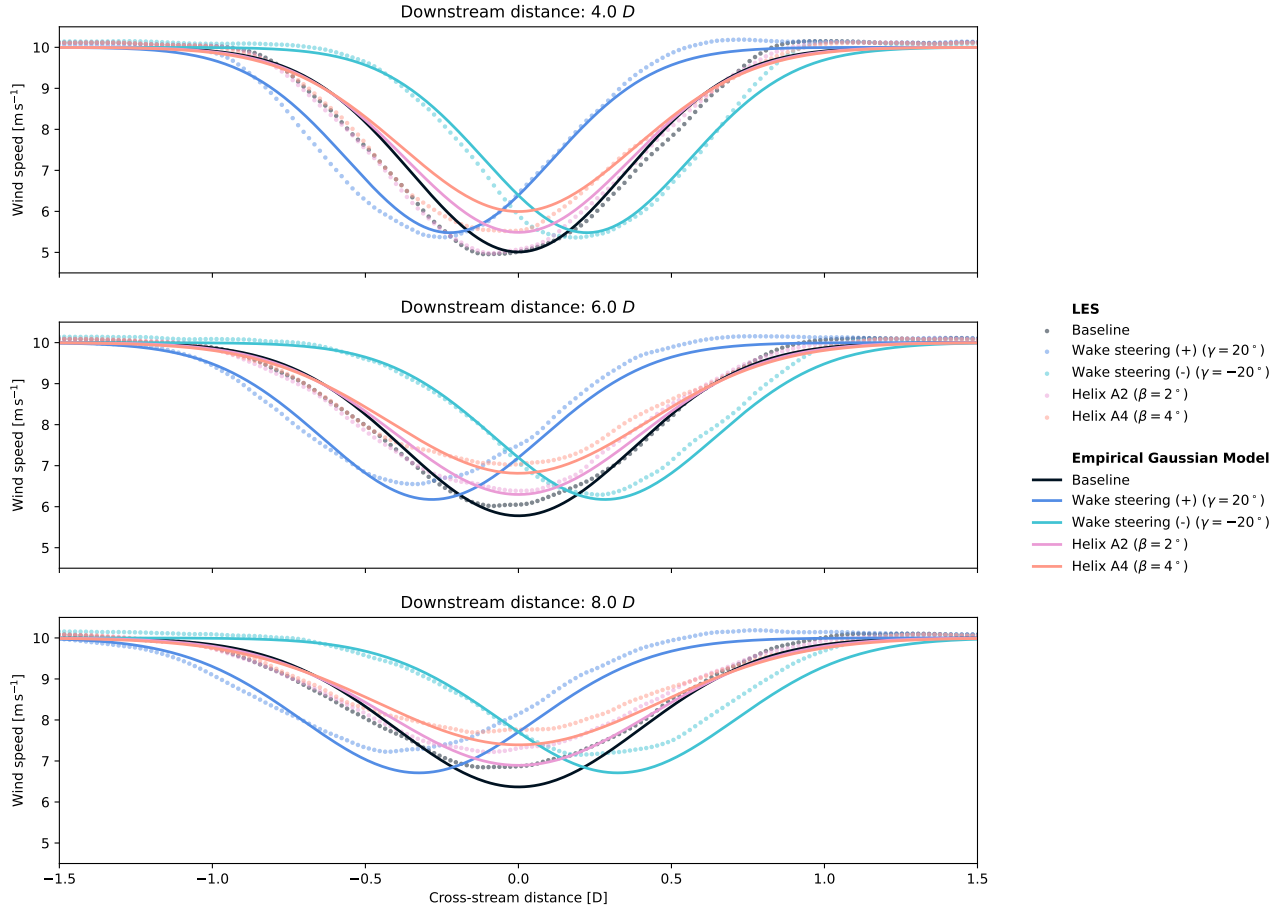


Figure A2. Wind speed deficit modeled using the Empirical Gaussian model and LES data, considering no control (“baseline”), wake steering, and helix control, shown for down-stream distances of $4D$, $6D$, and $8D$. The plots refer to one-turbine simulations.

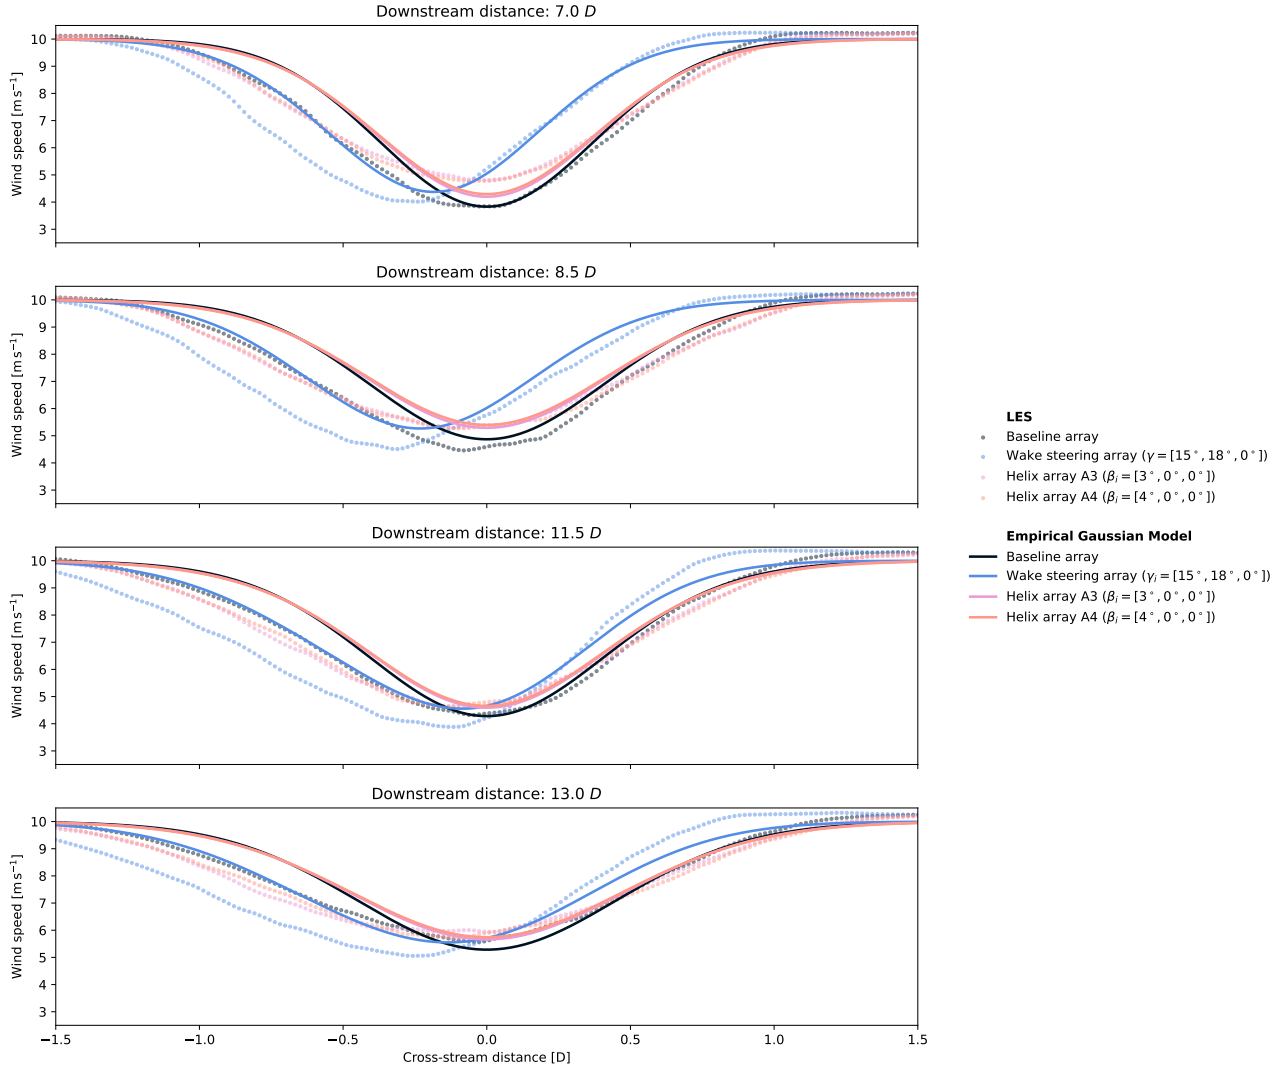


Figure A3. Wind speed deficit modeled using the Empirical Gaussian model and LES data, considering no control (“baseline”), wake steering, and helix control, shown for down-stream distances of $7D$, $8.5D$, and $11.5D$. The plots refer to the simulations of three aligned turbines, with a spacing of $4.5D$.

Appendix B: Description of the Multi-strategy Serial-Refine (MSR) optimization algorithm

This appendix ~~gives~~ provides a comprehensive description of the optimization algorithm ~~named~~ , Multi-strategy Serial-Refine (MSR), developed during this study. As mentioned in Sect. 2, the MSR has been designed to optimize multiple control strategies within a wind farm, aiming to maximize a generic objective function. The structure of the MSR is described in Fig. B1, where different blocks are highlighted.

First, an objective function f to ~~maximize~~ be maximized is defined. This is treated by the MSR as a black-box function that depends on the control variables ~~contained~~ in the two-dimensional control matrix C , where the dimensions ~~represent~~ correspond to the different turbines and control strategies, respectively. The black-box nature of this function ensures that the algorithm remains entirely independent of specific solvers such as PyWake or FLORIS, thereby providing the user with a high degree of flexibility. Moreover, multiple objectives can be combined within this function, as implemented in this study. Overall, the goal of the algorithm is to find the optimal control matrix, denoted by C_{opt} , which provides the objective function value f_{opt} .

As mentioned in Sect. 2, the N_{wt} wind turbines are sorted in downstream order based on the wind direction, and the algorithm iterates over each turbine N_{step} times. These iterations are indicated by the for loops included in Fig. B1. Compared to SR, where only the yaw angles are optimized at each turbine iteration, in the MSR the N different control strategies are optimized through parallel separated optimization blocks. The outputs of these modules are then processed by a coordination block after each turbine iteration, and by a refinement block after the termination of each step.

Algorithm B1 describes an example of an optimization block for turbine i and strategy j , which produces as output a temporary objective function value $f_{\text{opt},j}$ and a temporary optimal control matrix $C_{\text{opt},j}$. Moreover, this block updates the ij -th element of the selected control matrix C_{sel} , which is the matrix that stores the optimal control values for all turbines

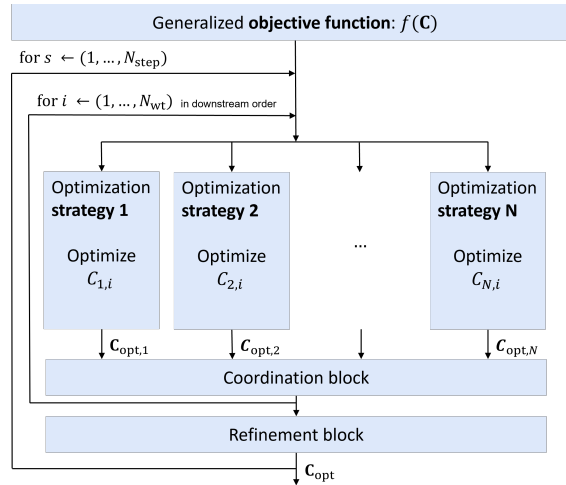


Figure B1. Structure of the Multi-strategy Serial-Refine (MSR) optimization algorithm.

and strategies, neglecting any constraints of exclusivity between the strategies. First, the value of the objective function f_{opt} obtained from the previous iteration is copied into a temporary copy $f_{\text{opt},j}$. Second, the control values $C_{\text{values,test}}$ of the strategy j that will be tested in this iteration are calculated. The vector $C_{\text{values,test}}$ is computed by adding the offset values $C_{\text{offset},j}$ obtained from the refinement block to the selected control value of strategy j obtained in the previous iteration for turbine i , i.e. the ij -th term of C_{sel} . The values of $C_{\text{values,test}}$ are then constrained by enforcing the lower and upper bounds $[c_{\text{min},j}, c_{\text{max},j}]$ provided by the user. Analogous to the SR, the values contained in $C_{\text{values,test}}$ are used to update the ij -th term of the control matrix C_{opt} , obtaining a new control matrix C_{test} . In case the strategy j is appointed as exclusive, the control values of any other strategy contained in the i -th row of C_{test} are set to 0. This step has been expressed through the Kronecker delta in Algorithm B1. Then, the objective function value f_{test} is calculated based on C_{test} and if it guarantees better performance, the algorithm updates $C_{\text{opt},j}$, $f_{\text{opt},j}$, and the ij -th element of C_{sel}

Repeating this procedure for all the different control strategies, N temporary objective function values $f_{\text{opt},j}$ and optimal control matrices $C_{\text{opt},j}$ are obtained. These are processed by the coordination block, which selects the best-performing $C_{\text{opt},j}$ by comparing the $f_{\text{opt},j}$ values and then updates f_{opt} and C_{opt} accordingly. Lastly, the refinement block updates the offset values $C_{\text{offset},j}$ for each strategy. Specifically, after each step, the search space ~~of for~~ the optimal control variables is restricted to values around the temporary values ~~found in from~~ the previous iteration. This is achieved by ~~decreasing-reducing~~ the range of ~~the~~-offsets that determine the value adopted for each turbine, similar to the traditional ~~implementation-of-the-SR-SR~~ implementation.

A key feature of the algorithm is the use of the selected control matrix C_{sel} , rather than C_{opt} , i.e. the output of the coordination block. This choice improves the optimization process by retaining temporary optimal control values, preventing them from being lost when control strategies are exclusive. Specifically, when strategies are exclusive, all elements of the i -th row of C_{opt} are zeros except for the element corresponding to the best-performing strategy at that iteration. Therefore, if the refinement stage were based directly on C_{opt} , the $C_{\text{values},j}$ of the other strategies would remain clustered around zero during the next steps. This would make the first iteration extremely influential. By instead relying on the selected control values ~~of for~~ each strategy during ~~the~~-refinement, the algorithm ~~is able to can~~ explore the design space more thoroughly, especially when two local optima correspond to different strategies, without prematurely converging to the strategy that ~~guaranteed-achieved~~ the best performance in the first iteration.

An example is ~~depicted in Fig~~ shown in Fig B2 to facilitate ~~the-comprehension-understanding~~ of the MSR algorithm. The example refers to a wind farm consisting of three turbines, for which the MSR algorithm is used to optimize the WFFC operation when the wind direction is set to 270° , i.e. wind coming from the left of the plot. Wake steering and the helix method are the control strategies considered in this example, ~~namely i.e.~~ $N = 2$, and they are considered to be exclusive. The number of steps N_{step} and N_{values} are set to 2 and 3, respectively. The bounds for the yaw angles are $[-30^\circ, 30^\circ]$ while the helix amplitude is limited in the range $[0^\circ, 5^\circ]$.

The algorithm sorts the turbines in downstream order, thus identifying turbines 1, 2, and 3, as shown in the figure. Then, the algorithm iterates over turbine 1, testing 3 values of yaw angles, namely $[-30^\circ, 0^\circ, 30^\circ]$. The bounds $[-30^\circ, 30^\circ]$ are enforced, but in this case, no modification is required. The value 30° yields the best performance, hence it is assigned to the selected

Algorithm B1 MSR: Optimization of the strategy j and the turbine i .

```
 $f_{\text{opt},j} \leftarrow f_{\text{opt}}$ 
 $C_{\text{values,test}} \leftarrow C_{\text{sel}}[i,j] + C_{\text{offset},j}$ 
 $C_{\text{values,test}} \leftarrow C_{\text{values,test}}$  constrained to  $[c_{\text{min},j}, c_{\text{max},j}]$ 
for  $c_{\text{value}} \leftarrow C_{\text{values,test}}$  do
   $C_{\text{test}} \leftarrow C_{\text{opt}}$ 
   $C_{\text{test}}[i,j] \leftarrow c_{\text{value}}$ 
  if strategy  $j$  is exclusive then
    for  $j' \leftarrow 1$  to  $N$  do
       $C_{\text{test}}[i,j'] \leftarrow C_{\text{test}}[i,j'] \cdot \delta_{jj'}$ 
    end for
  end if
   $f_{\text{test}} \leftarrow f(C_{\text{test}})$ 
  if  $f_{\text{test}} > f_{\text{opt},j}$  then
     $f_{\text{opt},j} \leftarrow f_{\text{test}}$ 
     $C_{\text{opt},j} \leftarrow C_{\text{test}}$ 
     $C_{\text{sel}}[i,j] \leftarrow c_{\text{value}}$ 
  end if
end for
```

control matrix C_{sel} . Similarly, the values $[0^\circ, 2.5^\circ, 5^\circ]$ are tested for the helix [method](#). After checking that the bounds are satisfied, the value 5° is selected as the best-performing, thus assigned to C_{sel} . The selected yaw angles and helix amplitude are indicated in the figure by the underline. Since the two strategies are exclusive, either wake steering or the helix [method](#) can
720 be applied to turbine 1. The objective function values obtained from the best-performing control variables, i.e. yaw angle of 30° and helix amplitude of 5° , are compared. In this case, the yaw angle of 30° outperforms the helix [method](#) with an amplitude of 5° , as indicated by the arrow in the figure. Therefore, the optimal control matrix C_{opt} is updated by setting the yaw angle to 30° and the helix amplitude to 0° . Then, the algorithm proceeds to ~~turbines~~-[turbine](#) 2 applying the same procedure. In this case, the same values of optimal yaw angle and helix amplitude are found, thus C_{sel} and C_{opt} are updated accordingly. Lastly,
725 the first step of the algorithm is completed by applying the same procedure to turbine 3, yielding optimal values of 0° for both yaw angle and helix amplitude.

The second step starts by refining the control values of turbine 1. Specifically, the values $[15^\circ, 30^\circ, 30^\circ]$ and $[3.75^\circ, 5^\circ, 5^\circ]$ are tested for the yaw angle and the helix amplitude, respectively. These are obtained by applying an offset to the values contained in C_{sel} for turbine 1, and by enforcing the corresponding bounds of each strategy. This last operation ~~causes some values to~~
730 ~~be~~-[results in some values being](#) repeated. In this case, a yaw angle of 15° and a helix amplitude of 3.75° are selected, with the latter outperforming the former. Therefore, the first rows of C_{sel} and C_{opt} are set to $[15^\circ \ 3.75^\circ]$ and $[0^\circ \ 3.75^\circ]$, respectively. Then, the same procedure is applied to turbine 2. The same values of control variables are selected, setting also the second row

of C_{sel} to $[15^\circ \ 3.75^\circ]$. However, the objective function value is higher when a yaw angle of 15° is applied to turbine 2 than a helix amplitude of 3.75° , thus the second row of C_{opt} is set to $[15^\circ \ 0^\circ]$. Lastly, the algorithm iterates over turbine 3, whose
735 selected and optimal control values are all equal to 0° for both strategies. Therefore, the optimal control strategy yielded by the MSR algorithm in this example consists of:

- Turbine 1 operating the helix method with an amplitude of 3.75°
- Turbine 2 applying wake steering with a yaw angle of 15°
- Turbine 3 executes ~~none~~ neither of the two strategies

740 This example highlights the importance of using C_{sel} instead of C_{opt} to calculate the values of the control variables tested at each iteration. In the first step, the optimal control variables obtained for turbine 1 are a yaw angle of 30° and a helix amplitude of 0° , due to the better performance of wake steering with respect to the helix method for the tested values. In the second step, the situation for turbine 1 is reversed: the helix method with an amplitude of 3.75° outperforms wake steering for the tested values. However, in case the values of C_{opt} obtained after the first step were used to refine the helix amplitudes
745 tested in the second step, that would have resulted in testing $[-1.25^\circ, 0^\circ, 1.25^\circ]$. Therefore, the optimal helix amplitude value of 3.75° would not have been tested, thus probably obtaining the yaw angle of 15° as the final decision for turbine 1, leading to a sub-optimal solution.

Appendix C: Additional analysis on the control setpoint optimization

C1 Impact of actuating the helix strategy on downstream turbines


750 The WFFC optimization conducted in this study allows any turbine in the wind farm to apply the helix method whenever an increase in the objective function is obtained. However, as mentioned in Sect. 4.2, applying the helix method across multiple turbines requires appropriate synchronization between upstream and downstream turbines, a concept that remains unexplored for large-scale wind farms. To understand the impact of this assumption, an additional scenario is evaluated, which prevents downstream turbines from applying the helix method.

755 The new control setpoints β_{fil} are obtained by filtering the results of the previous WFFC optimization, i.e. setting the helix amplitude to zero of all turbines located within the wake of an upstream turbine applying the helix method. An example of this filtering phase is provided in Fig. C1a. Specifically, a turbine is considered waked if it lies within the trapezoidal wake shape of an upstream turbine, obtained with an expansion coefficient of 0.01.

The results expressed in terms of AEP gains are shown in Fig. C1b. It can be observed that the difference between the two
760 cases, filtered and unfiltered, is limited, demonstrating that this assumption does not affect the main conclusions of this study.

C2 Lookup tables of the combined strategy for a balanced objective

STEP 1

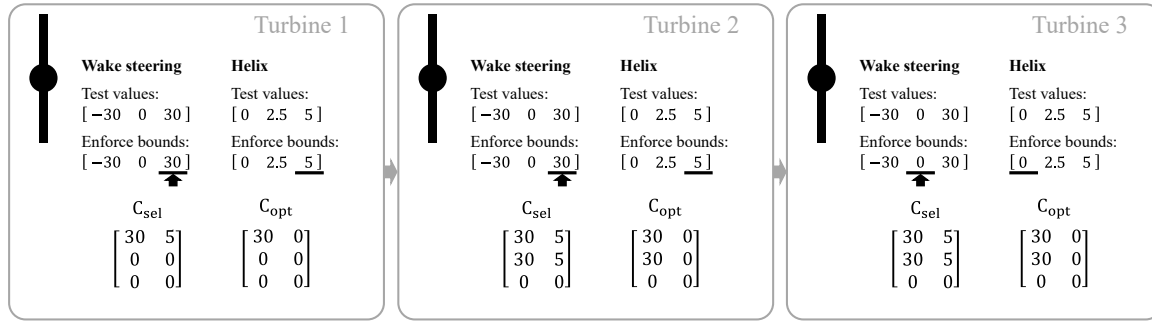

STEP 2


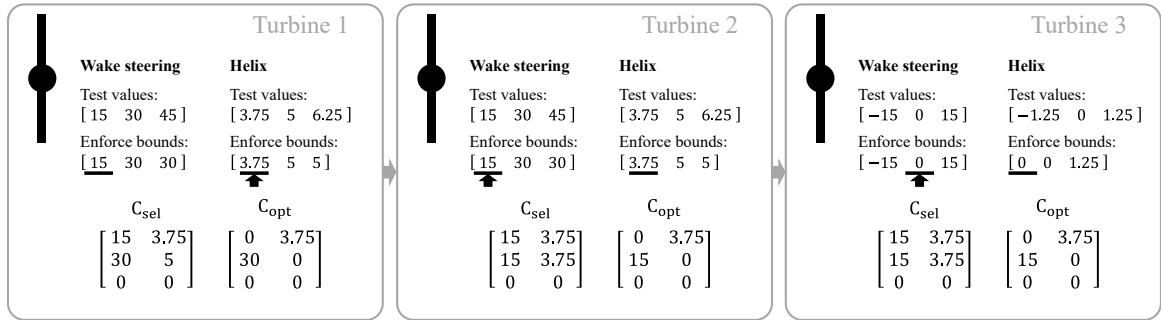


Figure B2. Example of the MSR working principle for three turbines with a wind direction of 270° , i.e. wind coming from the left of the figure. At each step and turbine, the underline indicates the selected control value for every strategy, while the arrow shows the best-performing control value among different strategies.


This section analyzes how the LUTs obtained from WFFC optimization change when the penalty on the COT is introduced. Figure C2 shows the control setpoints of the same turbines examined in Fig. 10. Comparing these LUTs with those shown in Fig. 10, it can be observed that the actuation of the turbine located in the central region of the farm is significantly reduced when the penalty is considered. On the other hand, the LUTs of the turbine on the perimeter remain almost unchanged.

Author contributions. Matteo Baricchio: conceptualisation, methodology, software, validation, investigation, writing – original draft, visualisation. Daan van der Hoek: writing – review & editing, methodology, software, validation. Tim Dammann: writing – review & editing, software, validation. Pieter M.O. Gebraad: writing – review & editing, conceptualisation, supervision. Jenna Iori: writing – review & editing, conceptualisation, supervision. Jan-Willem van Wingerden: writing – review & editing, conceptualisation, supervision, resources, funding acquisition.

Competing interests. At least one of the (co-)authors is an Associate editor of Wind Energy Science.

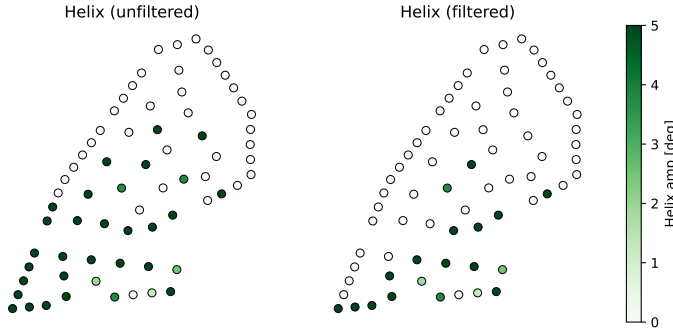


(a) Effect of the filter to avoid the application of the helix method on downstream turbines. The example refers to a wind direction of 201° and speed of 8 ms^{-1} .

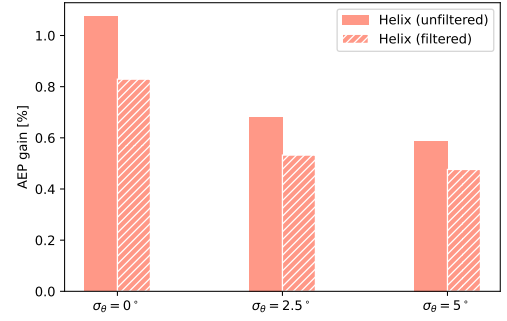


(b) AEP gains comparison between filtered and unfiltered helix control setpoints.

Figure C1. Impact of the assumption of actuating the helix method on downstream turbines.

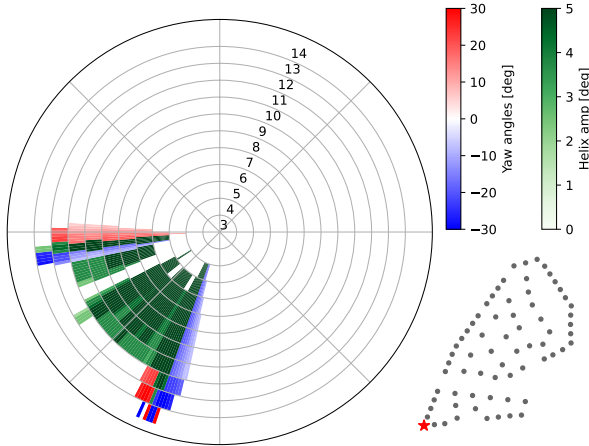

(a) Turbine located at the boundaries of the farm.

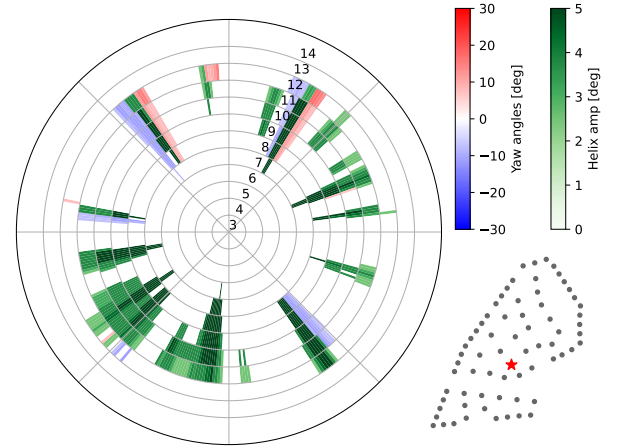

(b) Turbine located in the central region of the farm.

Figure C2. Control rose for the combined strategy of two different turbines obtained applying the penalty on COT with a weight $w = 2.5 \cdot 10^5$. Each subplot shows the values of the control variables in the LUT for each wind speed and direction, obtained with a wind direction uncertainty of $\sigma_\theta = 2.5^\circ$.

Financial support. This work has been supported by the SUDOCO project, which receives the funding from the European Union's Horizon Europe Programme under the grant No. 101122256.

References

- 775 Anand, A., Braunbehrens, R., Guilloiré, A., and Bottasso, C. L.: Economic lifetime-aware wind farm control, *Wind Energy Science Discussions*, 2025, 1–39, <https://doi.org/10.5194/wes-2025-67>, 2025.
- Bechmann, A. and Quick, J.: Market-Driven Wind Resource Assessment, in: *WindEurope Annual Event 2025*, no. 1 in *Journal of Physics: Conference Series*, IOP Publishing, United Kingdom, <https://doi.org/10.1088/1742-6596/3025/1/012001>, *windEurope Annual Event 2025*, *WindEurope* ; Conference date: 08-04-2025 Through 10-04-2025, 2025.
- 780 Becker, M., Lejeune, M., Chatelain, P., Allaerts, D., Mudafort, R., and van Wingerden, J. W.: A dynamic open-source model to investigate wake dynamics in response to wind farm flow control strategies, *Wind Energy Science*, 10, 1055–1075, <https://doi.org/10.5194/wes-10-1055-2025>, 2025a.
- Becker, M., van den Broek, M. J., Allaerts, D., and van Wingerden, J. W.: Closed-loop model-predictive wind farm flow control under time-varying inflow using FLORIDyn, <https://arxiv.org/abs/2503.02790>, 2025b.
- 785 Brown, K., Yalla, G., Cheung, L., Frederik, J., Houck, D., deVelder, N., Simley, E., and Fleming, P.: Comparison of wind-farm control strategies under realistic offshore wind conditions: wake quantities of interest, *Wind Energy Science Discussions*, 2025, 1–39, <https://doi.org/10.5194/wes-2024-191>, 2025.
- Campagnolo, F., Weber, R., Schreiber, J., and Bottasso, C. L.: Wind tunnel testing of wake steering with dynamic wind direction changes, *Wind Energy Science*, 5, 1273–1295, <https://doi.org/10.5194/wes-5-1273-2020>, 2020.
- 790 Dammann, T., van der Hoek, D., Yu, W., and van Wingerden, J.-W.: Enhanced Wind Farm Performance via Active Wake Control: A Steady-State Approach, in: *2025 American Control Conference (ACC)*, pp. 2856–2861, <https://doi.org/10.23919/ACC63710.2025.11107695>, 2025.
- Doekemeijer, B. M., Kern, S., Maturu, S., Kanev, S., Salbert, B., Schreiber, J., Campagnolo, F., Bottasso, C. L., Schuler, S., Wilts, F., Neumann, T., Potenza, G., Calabretta, F., Fioretti, F., and van Wingerden, J. W.: Field experiment for open-loop yaw-based wake steering at a commercial onshore wind farm in Italy, *Wind Energy Science*, 6, 159–176, <https://doi.org/10.5194/wes-6-159-2021>, 2021.
- 795 Fleming, P. A., Gebraad, P. M., Lee, S., van Wingerden, J. W., Johnson, K., Churchfield, M., Michalakes, J., Spalart, P., and Moriarty, P.: Evaluating techniques for redirecting turbine wakes using SOWFA, *Renewable Energy*, 70, 211–218, <https://doi.org/https://doi.org/10.1016/j.renene.2014.02.015>, special issue on aerodynamics of offshore wind energy systems and wakes, 2014.
- 800 Fleming, P. A., Stanley, A. P. J., Bay, C. J., King, J., Simley, E., Doekemeijer, B. M., and Mudafort, R.: Serial-Refine Method for Fast Wake-Steering Yaw Optimization, *Journal of Physics: Conference Series*, 2265, 032 109, <https://doi.org/10.1088/1742-6596/2265/3/032109>, 2022.
- Frederik, J. A. and van Wingerden, J.-W.: On the load impact of dynamic wind farm wake mixing strategies, *Renewable Energy*, 194, 582–595, <https://doi.org/https://doi.org/10.1016/j.renene.2022.05.110>, 2022.
- 805 Frederik, J. A., Doekemeijer, B. M., Mulders, S. P., and van Wingerden, J. W.: The helix approach: Using dynamic individual pitch control to enhance wake mixing in wind farms, *Wind Energy*, 23, 1739–1751, <https://doi.org/https://doi.org/10.1002/we.2513>, 2020.
- Frederik, J. A., Simley, E., Brown, K. A., Yalla, G. R., Cheung, L. C., and Fleming, P. A.: Comparison of wind farm control strategies under realistic offshore wind conditions: turbine quantities of interest, *Wind Energy Science*, 10, 755–777, <https://doi.org/10.5194/wes-10-755-2025>, 2025.

- 810 Gaumond, M., Réthoré, P.-E., Ott, S., Peña, A., Bechmann, A., and Hansen, K. S.: Evaluation of the wind direction uncertainty and its impact on wake modeling at the Horns Rev offshore wind farm, *Wind Energy*, 17, 1169–1178, <https://doi.org/https://doi.org/10.1002/we.1625>, 2014.
- Gebraad, P. M. O., Teeuwisse, F. W., van Wingerden, J. W., Fleming, P. A., Ruben, S. D., Marden, J. R., and Pao, L. Y.: Wind plant power optimization through yaw control using a parametric model for wake effects—a CFD simulation study, *Wind Energy*, 19, 95–114, <https://doi.org/https://doi.org/10.1002/we.1822>, 2016.
- 815 Gray, J. S., Hwang, J. T., Martins, J. R. R. A., Moore, K. T., and Naylor, B. A.: OpenMDAO: An open-source framework for multidisciplinary design, analysis, and optimization, *Structural and Multidisciplinary Optimization*, 59, 1075–1104, <https://doi.org/10.1007/s00158-019-02211-z>, 2019.
- Guilloré, A., Campagnolo, F., and Bottasso, C. L.: A control-oriented load surrogate model based on sector-averaged inflow quantities: capturing damage for unwaked, waked, wake-steering and curtailed wind turbines, *Journal of Physics: Conference Series*, 2767, 032019, <https://doi.org/10.1088/1742-6596/2767/3/032019>, 2024.
- 820 Hodgson, E. L. and Andersen, S. J.: Wake steering under inflow wind direction uncertainty: an LES study, *Wind Energy Science Discussions*, 2025, 1–26, <https://doi.org/10.5194/wes-2025-243>, 2025.
- Jimenez, A., Crespo, A., and Migoya, E.: Application of a LES technique to characterize the wake deflection of a wind turbine in yaw, *Wind Energy*, 13, 559–572, <https://doi.org/https://doi.org/10.1002/we.380>, 2010.
- 825 Kainz, S., Scherzl, A., Guilloré, A., Anand, A., and Bottasso, C. L.: An initial study on the environmental value of wind farm control, *Journal of Physics: Conference Series*, 3131, 012044, <https://doi.org/10.1088/1742-6596/3131/1/012044>, 2025.
- Kuhn, M. B., Henry de Frahan, M. T., Mohan, P., Deskos, G., Churchfield, M., Cheung, L., Sharma, A., Almgren, A., Ananthan, S., Brazell, M. J., A., M. L., Thedin, R., Rood, J., Sakievich, P., Vijayakumar, G., Zhang, W., and Sprague, M. A.: AMR-Wind: A performance-portable, high-fidelity flow solver for wind farm simulations, *Wind Energy*, 28, –, <https://doi.org/10.1002/we.70010>, 2025.
- 830 Liew, J., Urbán, A. M., and Andersen, S. J.: Analytical model for the power–yaw sensitivity of wind turbines operating in full wake, *Wind Energy Science*, 5, 427–437, <https://doi.org/10.5194/wes-5-427-2020>, 2020.
- Meyers, J., Bottasso, C., Dykes, K., Fleming, P., Gebraad, P., Giebel, G., Göçmen, T., and van Wingerden, J. W.: Wind farm flow control: prospects and challenges, *Wind Energy Science*, 7, 2271–2306, <https://doi.org/10.5194/wes-7-2271-2022>, 2022.
- 835 Mittelmeier, N., Blodau, T., and Kühn, M.: Monitoring offshore wind farm power performance with SCADA data and an advanced wake model, *Wind Energy Science*, 2, 175–187, <https://doi.org/10.5194/wes-2-175-2017>, 2017.
- Mühle, F. V., Heckmeier, F. M., Campagnolo, F., and Breitsamter, C.: Wind tunnel investigations of an individual pitch control strategy for wind farm power optimization, *Wind Energy Science*, 9, 1251–1271, <https://doi.org/10.5194/wes-9-1251-2024>, 2024.
- Munters, W. and Meyers, J.: Towards practical dynamic induction control of wind farms: analysis of optimally controlled wind-farm boundary layers and sinusoidal induction control of first-row turbines, *Wind Energy Science*, 3, 409–425, <https://doi.org/10.5194/wes-3-409-2018>, 2018.
- 840 National Renewable Energy Laboratory: FLORIS Version 4.4, <https://github.com/NREL/floris>, last accessed: 13 July 2025, 2024a.
- National Renewable Energy Laboratory: OpenFAST: An Open-Source Wind Turbine Simulation Tool, <https://github.com/OpenFAST/openfast>, version 3.5.0, 2024b.
- 845 Pedersen, J. G., Svensson, E., Poulsen, L., and Nygaard, N. G.: Turbulence Optimized Park model with Gaussian wake profile, *Journal of Physics: Conference Series*, 2265, 022063, <https://doi.org/10.1088/1742-6596/2265/2/022063>, 2022.

- Pedersen, M. M., Forsting, A. M., van der Laan, P., Riva, R., Romàn, L. A. A., Risco, J. C., Friis-Møller, M., Quick, J., Christiansen, J. P. S., Rodrigues, R. V., Olsen, B. T., and Réthoré, P.-E.: PyWake 2.5.0: An open-source wind farm simulation tool, <https://gitlab.windenergy.dtu.dk/TOPFARM/PyWake>, 2023.
- 850 Quick, J., Annoni, J., King, R., Dykes, K., Fleming, P., and Ning, A.: Optimization Under Uncertainty for Wake Steering Strategies, *Journal of Physics: Conference Series*, 854, 012 036, <https://doi.org/10.1088/1742-6596/854/1/012036>, 2017.
- Quick, J., King, J., King, R. N., Hamlington, P. E., and Dykes, K.: Wake steering optimization under uncertainty, *Wind Energy Science*, 5, 413–426, <https://doi.org/10.5194/wes-5-413-2020>, 2020.
- Rott, A., Doekemeijer, B., Seifert, J. K., van Wingerden, J. W., and Kühn, M.: Robust active wake control in consideration of wind direction variability and uncertainty, *Wind Energy Science*, 3, 869–882, <https://doi.org/10.5194/wes-3-869-2018>, 2018.
- 855 Simley, E., Fleming, P., and King, J.: Design and analysis of a wake steering controller with wind direction variability, *Wind Energy Science*, 5, 451–468, <https://doi.org/10.5194/wes-5-451-2020>, 2020.
- Simley, E., Millstein, D., Jeong, S., and Fleming, P.: The value of wake steering wind farm flow control in US energy markets, *Wind Energy Science*, 9, 219–234, <https://doi.org/10.5194/wes-9-219-2024>, 2024.
- 860 Taschner, E., van Vondelen, A., Verzijlbergh, R., and van Wingerden, J. W.: On the performance of the helix wind farm control approach in the conventionally neutral atmospheric boundary layer, *Journal of Physics: Conference Series*, 2505, 012 006, <https://doi.org/10.1088/1742-6596/2505/1/012006>, 2023.
- Taschner, E., Becker, M., Verzijlbergh, R., and Van Wingerden, J. W.: Comparison of helix and wake steering control for varying turbine spacing and wind direction, *Journal of Physics: Conference Series*, 2767, 032 023, <https://doi.org/10.1088/1742-6596/2767/3/032023>, 2024.
- 865 Türk, M. and Emeis, S.: The dependence of offshore turbulence intensity on wind speed, *Journal of Wind Engineering and Industrial Aerodynamics*, 98, 466–471, <https://doi.org/10.1016/j.jweia.2010.02.005>, 2010.
- van Beek, M. T., Viré, A., and Andersen, S. J.: Sensitivity and Uncertainty of the FLORIS Model Applied on the Lillgrund Wind Farm, *Energies*, 14, <https://doi.org/10.3390/en14051293>, 2021.
- 870 van der Hoek, D., Doekemeijer, B., Andersson, L. E., and van Wingerden, J. W.: Predicting the benefit of wake steering on the annual energy production of a wind farm using large eddy simulations and Gaussian process regression, *Journal of Physics: Conference Series*, 1618, 022 024, <https://doi.org/10.1088/1742-6596/1618/2/022024>, 2020.
- van der Hoek, D., den Abbeele, B. V., Simao Ferreira, C., and van Wingerden, J. W.: Maximizing wind farm power output with the helix approach: Experimental validation and wake analysis using tomographic particle image velocimetry, *Wind Energy*, 27, 463–482, <https://doi.org/10.1002/we.2896>, 2024.
- 875 van Vondelen, A. A., Navalkar, S. T., Kerssemakers, D. R., and van Wingerden, J. W.: Enhanced wake mixing in wind farms using the Helix approach: A loads sensitivity study, in: 2023 American Control Conference (ACC), pp. 831–836, <https://doi.org/10.23919/ACC55779.2023.10155965>, 2023.
- van Vondelen, A. A. W., Coquelet, M., Navalkar, S. T., and van Wingerden, J. W.: Synchronized Helix Wake Mixing Control, *Wind Energy Science Discussions*, 2025, 1–36, <https://doi.org/10.5194/wes-2025-51>, 2025.
- 880 van Wingerden, J. W., Fleming, P. A., Göçmen, T., Eguinoa, I., Doekemeijer, B. M., Dykes, K., Lawson, M., Simley, E., King, J., Astrain, D., Iribas, M., Bottasso, C. L., Meyers, J., Raach, S., Kölle, K., and Giebel, G.: Expert Elicitation on Wind Farm Control, *Journal of Physics: Conference Series*, 1618, 022 025, <https://doi.org/10.1088/1742-6596/1618/2/022025>, 2020.

Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright, J.,
 885 van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., Carey, C. J., Polat,
 İ., Feng, Y., Moore, E. W., VanderPlas, J., Laxalde, D., Perktold, J., Cimrman, R., Henriksen, I., Quintero, E. A., Harris, C. R., Archibald,
 A. M., Ribeiro, A. H., Pedregosa, F., van Mulbregt, P., and SciPy 1.0 Contributors: SciPy 1.0: Fundamental Algorithms for Scientific
 Computing in Python, *Nature Methods*, 17, 261–272, <https://doi.org/10.1038/s41592-019-0686-2>, 2020.
 von Brandis, A., Centurelli, G., Schmidt, J., Vollmer, L., Djath, B., and Dörenkämper, M.: An investigation of spatial wind direction variability
 890 and its consideration in engineering models, *Wind Energy Science*, 8, 589–606, <https://doi.org/10.5194/wes-8-589-2023>, 2023.
 Vortex FDC: Vortex Wind Map, Accessed via Youwind, <https://youwindrenewables.com>, accessed: 2024-11-01, 2024.
 Zahle, F., Barlas, T., Lønbæk, K., Bortolotti, P., Zalkind, D., Wang, L., Labuschagne, C., Sethuraman, L., and Barter, G.: Definition of the
 IEA Wind 22-Megawatt Offshore Reference Wind Turbine, Tech. Rep. DTU Wind Energy Report E-0243, Department of Wind and En-
 895 ergy Systems, Technical University of Denmark, Roskilde, Denmark, ISBN 978-87-87335-71-3, <https://doi.org/10.11581/DTU.00000317>,
 2024.