

Airborne measurements for investigating offshore wind farm wakes and modifications of sea state - benefits and limitations

Astrid Lampert¹, Beatriz Cañadillas¹, Thomas Rausch¹, Lea Schmitt¹, Bughsin' Djath², Johannes Schulz-Stellenfleth², Andreas Platis³, Kjell zum Berge³, Ines Schaefer³, Jens Bange³, Lukas Gruchot³, Thomas Neumann⁴, Martin Dörenkämper⁵, Bernhard Stoevesandt⁵, Julia Gottschall^{5,6}, Lukas Vollmer⁵, Stefan Emeis⁷, Mares Barekzai⁷, Simon Siedersleben⁷, Martin Kühn^{8,9}, Gerald Steinfeld^{8,9}, Detlev Heinemann^{8,9}, Joachim Peinke^{8,9}, Hendrik Heißelmann^{8,9}, Jörg Schneemann^{8,9}, Gabriele Centurelli^{8,9}, Philipp Waldmann¹, and Konrad Bärfuss¹

¹TU Braunschweig, Institute of Flight Guidance, Hermann-Blenk-Str. 27, 38108 Braunschweig, Germany

²Helmholtz-Zentrum Hereon, Institute of Coastal Systems - Analysis and Modeling, Max-Planck-Str. 1, 21502 Geesthacht, Germany

³Environmental Physics, Eberhard Karls University of Tübingen, Schnarrenbergstr. 94-96, 72076 Tübingen, Germany

⁴FGW e.V. – Fördergesellschaft Windenergie und andere Dezentrale Energien, Oranienburger Str. 45, 10117 Berlin, Germany

⁵Fraunhofer IWES, Küppersweg 70, 26129 Oldenburg, Germany

⁶Faculty of Geosciences, University of Bremen, 28359 Bremen, Germany

⁷Karlsruhe Institute of Technology (KIT), Institute of Meteorology and Climate Research, Kreuzeckbahnstr. 19, 82467 Garmisch-Partenkirchen, Germany

⁸Carl von Ossietzky Universität Oldenburg, School of Mathematics and Science, Institute of Physics, Germany

⁹ForWind - Center for Wind Energy Research, Küppersweg 70, 26129 Oldenburg, Germany

Correspondence: Astrid Lampert (Astrid.Lampert@tu-braunschweig.de)

Abstract. In the framework of the two large wind energy research projects WIPAFF and X-Wakes, crewed airborne measurements have been performed in and around wind farm clusters of the German Bight to investigate offshore wind farm wakes and associated sea-state modifications. These flights offer high spatial flexibility. Routes can be adapted in real time to wind direction, stability, wake extent, and features of interest, providing complementary coverage to fixed ground-based instruments and remote sensing systems. Aircraft-based observations achieve high vertical resolution in the order of several centimetres and allow simultaneous measurements of wind speed, turbulence, thermodynamic variables, air-sea fluxes, and sea surface characteristics. This enables a detailed description of wake structure, wake recovery, and the influence of atmospheric stability, as well as the interaction of multiple wakes across scales of tens to hundreds of kilometres. Airborne measurements also provide a direct link between atmospheric changes and sea-surface modifications, such as altered roughness or wave patterns, and supply valuable data for evaluating simulations and improving parameterizations used in wind farm modelling. When combined with satellite remote sensing, they help bridge the gap between high-resolution local observations and large-area coverage. A central limitation of aircraft campaigns is their restricted temporal coverage. Flights are episodic and sample evolving atmospheric conditions over finite time periods, which complicates the comparison with satellite snapshots and limits the ability to derive long-term statistics. Small wind farm effects that are in the order of the natural variability of the background flow are easily masked by natural variability in the marine boundary layer. Therefore, the global blockage effect is difficult to isolate

using aircraft data alone. Overall, aircraft-based observations offer unique strengths when integrated with other measurement systems and modelling tools, despite inherent temporal constraints. This article summarizes which effects benefit from the analysis of airborne data sets, and shows examples where they helped to improve the understanding of the interaction of wind farms, atmosphere and sea state significantly.

20 1 Introduction

The transformation of energy towards renewable resources requires the worldwide installation of large capacities of wind power. Offshore wind farm clusters play a key role in the increase of the share of renewables, as offshore sites typically offer more reliable and stronger wind conditions than onshore locations (Veers et al., 2019). The globally installed offshore wind capacity is expected to increase from 75.2 GW (as of 2024) to 380 GW by 2030, and to 2,000 GW by 2050. In Germany, an
25 installation of a total capacity of 30 GW is planned until 2030, and even 70 GW until 2045 (Global Offshore Wind Report, 2025).

It is a physical fact that offshore wind farms are associated with wind farm wakes, but the large extent of wakes for offshore environments has only recently been explored (Platis et al., 2018). Wakes are defined as a region of reduced wind speed and increased turbulence downwind (e.g., Schneemann et al., 2020). Airborne measurements provided key data to quantify wake
30 extent and wind speed recovery under different atmospheric conditions (Platis et al., 2020; Cañadillas et al., 2020).

With the strong future expansion in offshore installations of wind capacities, an increasing area will be influenced by wind farm wakes (Pryor and Barthelmie, 2021; Akhtar et al., 2021; Bodini et al., 2021). Especially wake impacts on downstream farms have become increasingly important in the overall planning of offshore farms in recent years (Ouro et al., 2025). The installation and operation of large offshore wind farms have environmental and technological consequences (Bailey et al., 2014;
35 Windt et al., 2024), and in addition socially relevant aspects, like a different visual appearance (Ladenburg, 2009), which is not an issue because of the far-offshore placement in the German Bight. Large wind farms can modify the atmospheric boundary layer, cloudiness and precipitation (Akhtar et al., 2022). For the additional implementation of offshore wind farms, the overall mutual impacts of and on the existing wind farms and their wakes have to be taken into account (Christiansen et al., 2023). This refers to reduced available wind resource as well as increased downstream turbulence intensity, which has an impact on fatigue
40 loadings within wind farms (Sathe et al., 2012; Lee et al., 2013; Vera-Tudela and Kühn, 2017), but only very limited impact for far downstream cluster wakes (Anantharaman et al., 2025). Further, the impact on sea state (Bärfuss et al., 2021; Schmitt et al., 2026), ocean stratification (Lian et al., 2022; Christiansen et al., 2022) and ocean circulation (Broström, 2008) are supposed to increase, with secondary effects for the ecosystem (Daewel et al., 2022). As the electrical grid and feed-in planning relies on an increasing share of the highly flexible resource of wind power (Drew et al., 2015), it is of crucial importance to be able to
45 predict the power output with high reliability on the time scale of days and hours. Also for the financing of wind farm projects, the knowledge of the wind resource is essential (Mora et al., 2019). Further, with increasing impact of wakes on neighbouring wind farms, resulting in reduced energy output (Lundquist et al., 2019), international planning gains importance (Finserås et al., 2024). Therefore, characterizing wind farm wakes is of large importance. An enhanced understanding is required to

develop suitable parameterizations for wind farm models of different complexity, from fast engineering models (Bastankhah and Porté-Agel, 2014; Nygaard et al., 2020) to mesoscale weather models (Fitch et al., 2012; Vollmer et al., 2024). In contrast, large eddy simulations, LES (Wu and Porté-Agel, 2011; Dörenkämper et al., 2015), fully resolve the flow around and through turbines, assuming actuator disks to be a sufficiently good representation. At the same time, the deployment of LES for resource assessment is limited due to the large computational costs. As mentioned in several review articles, the lack of offshore data characterizing the marine atmospheric boundary layer is a major drawback for improving understanding and simulations (Veers et al., 2019; Shaw et al., 2022).

The motivation to perform airborne measurements to characterize the properties of offshore wind farm wakes was provided in 2012 by radar satellite images, where a modification of the water surface downstream of wind farm areas was evident (Christiansen and Hasager, 2005), and first simulations suggesting a much higher wind speed deficit and long-reaching wakes under stable atmospheric conditions (Fitch et al., 2012; Abkar et al., 2016). The first project for airborne in-situ measurements in the wake of offshore wind farms, WIPAFF, was finally granted in 2015 (Emeis et al., 2016). This first project proved the existence of far-reaching wind farm wakes extending several 10 km under stable atmospheric conditions, and provided a first idea of the impact of wakes on the sea surface. Another proposal was initiated in 2017, and finally the project called X-Wakes was funded with an extended consortium in 2019.

The article presents progress in the field of offshore wind farm wake research based on measurements with manned aircraft. To the authors' knowledge, these are so far the only airborne observations worldwide with the purpose to study the wakes of entire wind farms. It summarizes results that are already published, and adds new aspects, which have not yet been published so far: Such new material includes

- the direct comparison of almost simultaneous airborne in-situ measurements and satellite-derived wind field in the wake of wind farms (Sect. 3.1)
- a study of changes of sea surface properties (Sect. 3.6)
- limitations in identifying the global blockage effect by airborne measurements (Sect. 3.7)

The article is structured as follows: Section 2 introduces the methodology of airborne in-situ measurements of offshore wind farm wakes. Sect. 3 presents an overview of several phenomena associated with offshore wind farm wakes that were investigated with airborne measurements: Section 3.1 provides the improvement of wake characterization by airborne observations. Section 3.2 demonstrates the interaction of wakes of different wind farms. Sect. 3.3 shows the modification of latent heat fluxes in wakes, which may be responsible for local cloud formation at wind farms. Sect. 3.4 provides an overview of coastal effects, which is the modification of the wind field across the coast line. Section 3.5 presents airborne data as used for model validation. Sect. 3.6 demonstrates the link of wind farm wakes to modified sea surface properties. Section 3.7 illustrates the limits of airborne measurements, which is the observation of small effects due to the limited observation time and constraints in flight patterns close to wind farms, with the example of the global blockage effect. Finally, Sect. 4 summarizes the results in the conclusions.

2 Methodology of airborne in-situ wake measurements

The airborne offshore wind farm wake measurements were mainly performed with the research aircraft Dornier 128 with call sign D-IBUF of TU Braunschweig (Corsmeier et al., 2001; Lampert et al., 2020), and in addition several flights were done in parallel with the research aircraft Cessna F406 with call sign D-ILAB of TU Braunschweig (Lampert et al., 2024). The typical air speed is around 65 m s^{-1} .

The meteorological instrumentation for measuring the high resolution (100 Hz) wind vector, temperature and humidity is installed in the nose boom. For the wind vector, this includes a five-hole probe (Rosemount, USA) and sensors for differential and total pressure (Setra, USA) to determine the airflow angles. The position and orientation of the aircraft are determined with a combination of an inertial measurement unit (IMU, different systems for the Dornier 128: iNAV-RQH-1003, iMAR, Germany, and for the Cessna F406: iNAT-RQT-4001, iMAR, Germany) and a Global Navigation Satellite System (GNSS, receiver OEM6, NovAtel, Canada). The wind vector can then be derived by subtracting the air speed vector from the ground speed vector. The temperature is measured by two complementary sensors, one with high accuracy, but slower response time (102DB1AG, Rosemount, USA), one with lower accuracy, but higher response time (102E4AL, Rosemount, USA). Humidity is measured with three different sensors: A capacitive sensor Humicap H233 (Vaisala, Finland), a dew point mirror TP 3-S (Meteolabor, Switzerland), and a fast, but drifting optical sensor (for the Dornier 128: Lyman-alpha sensor L-6/HMS-2, Buck Research, USA, and for the Cessna F406: KH-20, Campbell Scientific, USA). The different sensors are combined by advanced data fusion techniques, like complementary filtering and Kalman filters to gain data of enhanced quality and reduced uncertainties, as described, e.g., in Bärffuss et al. (2018). This is generally of high importance for improving airborne measurements of the wind speed, e.g., Cayon et al. (2025).

Additional instruments for measuring surface temperature, sea state and solar and terrestrial radiation are installed in the aircraft cabin: an infrared radiation thermometer (KT15.82D in the Dornier 128 and KT19.85 in the Cessna F406, Heimann, now Heitronics, Germany), a laser scanner VZ-1000 (Riegler, Austria, only for the Dornier 128), two pyranometers for measuring upward and downward solar irradiance (CMP22, Kipp and Zonen, The Netherlands), and two pyrgeometers for measuring upward and downward terrestrial irradiance (CGR4, Kipp and Zonen, The Netherlands). The radiation sensors are only available for the Cessna F406. More details on the sensors and the accuracies are provided in Lampert et al. (2020) and Lampert et al. (2024).

The measurements for investigating wind farm wakes were performed at hub height crossing the wind farm wake perpendicular to the wind direction at different downstream distances. Based on these in-situ measurements, vertical mixing in the atmospheric boundary layer is identified by fluctuations of the vertical component of the wind speed vector. This allows calculating turbulent kinetic energy, momentum fluxes and heat fluxes. In addition, ascending and descending flight tracks from very low altitudes (15 m) to the free troposphere (1 km) were integrated in the flight pattern regularly to determine atmospheric stability, (almost) vertical profiles of the wind vector, and the temporal and spatial variability of the wind field. Each horizontal flight leg across the wake typically had a distance of 40 km in order to capture also the undisturbed flow to both sides, and took around 10 min. The ascent/descent took around 2 min from the minimum to the maximum flight altitude, resulting in a

horizontal displacement of around 8 km. Also the upstream conditions were probed. For investigating wake interactions, flights across wake areas were done between and downstream of different wind farms. The overall duration of one flight, including the ferry from the airport with jigsaw patterns of vertical profiles to investigate the spatial development of the ABL, then the pattern to sample the wake, including the vertical profiles in between the legs, and the ferry back, was around 4 h. Other flight
120 patterns were dedicated to changes of meteorological parameters above the wind farms, to the global blockage effect with upstream measurements, and to modifications of the atmospheric boundary layer induced by the influence of the coast. Detailed explanations of the aircraft, the sensors and the different flight patterns are provided in Lampert et al. (2020) and Lampert et al. (2024).

In addition to continuous measurements at fixed locations, airborne measurements provide the opportunity to determine the
125 spatial variability and a complementary data set for intensive observation periods. This allows to study the representativeness of continuous profile measurements, like at the meteorological masts FINO1, e.g. Wagner et al. (2019); Spanghel et al. (2023), and FINO3, e.g. Peña et al. (2015); Olsen et al. (2022) for the German Bight (Platis et al., 2021). Further, lidar profile measurements at one location can be embedded in the context of spatial variability of the wind field by airborne observations (Cañadillas et al., 2022). Airborne measurements can also be used to characterize the sensitivity of stability definitions on the
130 height interval of local measurements, e.g., air temperature at only two heights compared to high resolution vertical profiles acquired by aircraft (Platis et al., 2021). The analysis of airborne measurements has to take into account the synoptic spatial and temporal variability of the wind field. Stationary conditions cannot be assumed over the 4 h time period of a research flight. Therefore, it turned out to be not possible to use the upstream wind field as a reference for the downstream modifications, as planned originally. Instead, the wind speed in the wake area was compared to the wind speed in the undisturbed area next to
135 the wind farm wake area for each of the flight legs (Cañadillas et al., 2020). Spatial gradients of the wind field across the wake area were frequently present as well (Platis et al., 2018).

3 Airborne observations of offshore wind farm wakes and associated phenomena

In the following, different aspects of offshore wind farm wakes are considered from the perspective of airborne measurements, as published by Bärffuss et al. (2019) and Rausch et al. (2023a). As the wind speed in the published datasets shows a small cross
140 correlation regarding the wind impact angle on the flight path (angle between wind direction and flight direction) – likely caused by pressure transducers with temperature and temperature gradient effects out of the valid ranges – the wind speed data were corrected by the assumption of a constant aircraft sideslip angle error for the analyses in Sects. 3.1 and 3.2, with subsequent median filtering over a time window of 30 s. The systematic wind speed correction was derived by analytically estimating wind speed perturbation caused by a static installation offset and a small angle-of-sideslip error using a first-order linearisation of
145 the wind derivation equations (see, e.g., Bärffuss et al. (2023). Assuming an absolute error of 0.3° on the angle of sideslip and a measurement speed of 65 m s^{-1} , the wind speed error of the 100 Hz data is $\pm 0.35 \text{ m s}^{-1}$ on flight legs perpendicular to the prevailing wind direction.

3.1 Wind farm wake characterization

The wind farm wakes were characterized by flying meander patterns, i.e., individual flight tracks, called legs, oriented perpendicular to the prevailing wind direction. Typically, in the framework of the campaigns conducted in the projects WIPAFF and X-Wakes, the transects through the wake region were spaced with a horizontal distance of 10 km. The closest flight leg was at a distance of 500 m downstream of the wind farm due to flight permissions. For neutral and unstable conditions, the distance between the flight legs was reduced. In this way, the horizontal extent and the wind speed recovery of wind farm wakes were quantified. Under neutral conditions, wakes extend several km downstream (Cañadillas et al., 2020), under stable atmospheric conditions at least several 10 km (Platis et al., 2018). The recovery of the wind speed can be approximated by an exponential function, with a typical recovery to 95% of the undisturbed wind speed after a downstream distance of around 55 km for stable and 20 km for unstable conditions (Cañadillas et al., 2020), with high variability (Foreman et al., 2025). This recovery, in particular for stable conditions, is significantly slower than usually assumed in industry models (Cañadillas et al., 2020; Platis et al., 2020) but in the order of magnitude predicted by simple analytical stability-dependent wind farm models such as EFFWAKE (Emeis, 2010, 2022). The wake length (Platis et al., 2020) and also the initial wind speed deficit directly downwind of the wind farms (Platis et al., 2021) strongly depend on atmospheric stability, but also other parameters, like wind farm geometry and density seem to have a major influence. Downstream of wind farms, vertical mixing is enhanced at the altitude range of the rotor blades. This vertical mixing can result in micrometeorological changes, either warming or cooling of the air at hub height, and either drying or moistening of the downstream atmosphere, which depends on the altitude of the temperature inversion and the moisture distribution with height (Siedersleben et al., 2018b). The airborne measurements show that directly above the wind farms, turbulence is strongly increased (Siedersleben et al., 2020).

Although the methods of airborne in-situ measurements of wakes and satellite borne remote sensing observations based on synthetic aperture radar (SAR) are highly different and sample on other spatial and temporal scales, the quantification of wakes based on the regular SAR overpasses are an important monitoring instrument, which will be compared to almost simultaneous airborne measurements in the following. Figure 1 shows the wind speed at 10 m height derived from SAR imagery. The radar data were obtained on 11 September 2021 at 17:17 UTC, and the 10-m wind speed with a horizontal resolution of 300 m was derived from the normalized radar cross section (NRCS) using a C-band geophysical model function CMOD5N (Hersbach et al., 2007; Verhoef et al., 2017; Djath et al., 2018). For a potential explanation of the higher wind speed values close to the coast, the reader is referred to Sect. 3.4. Figure 2 displays an almost temporally overlapping measurement flight carried out in the same area between 12:51 and 17:13 UTC. The SAR snapshot provides a quasi-synoptic view of the near-surface wind field at the end of the flight period, while the aircraft sampled the same flow along several transects at hub height and in vertical profiles. Downstream of the wind-farm cluster N4, both observations capture a decrease of the wind speed for the individual wind farms Amrumbank West, Nordsee Ost and Meerwind Süd-Ost (from north to south), and a speed-up in the so-called "Kaskasi gap" between Amrumbank West and Nordsee Ost, where the wind farm Kaskasi was built after the flights were conducted. For a more detailed comparison, Fig. 3 shows the wind speed measured along three horizontal transects (T6, T7 and T8). Satellite-based estimated typically derive the wind speed at hub height in several steps indirectly from the height of the capillary

waves at the surface that are an indicator for the wind speed and roughness at the surface. From those, the 10 m wind speed is derived first. Then the SAR-derived 10-m wind speed was extrapolated to hub height using stability information obtained from the airborne profiles. One should note that extrapolating from SAR-derived 10 m wind speed towards hub height introduces
185 uncertainty related to atmospheric stability, surface roughness, and the vertical wind profile. This uncertainty is reduced here by using stability information from the flight profiles, but the stability functions used in the extrapolation are still idealized (Garraat, 1994).

Airborne in-situ measurements along these transects show substantial small-scale variability and enhanced turbulence, whereas the collocated SAR-derived hub-height winds provide smoother fields because of the finite radar footprint and the averaging applied in the retrieval (Djath et al., 2018). Despite the high-frequency fluctuations observed in the airborne data, the SAR-derived
190 wind speed closely follows the mean airborne signal for all transects. Small discrepancies are visible, particularly in regions of enhanced turbulence (e.g., at distances of around 0.5–1.5 km for the transects at 16:49 UTC and 17:04 UTC), but the overall agreement is high in both magnitude and spatial patterns. For transects T6–T8, the SAR-derived and airborne wind speeds show an overall agreement with an rms (root mean square) of 0.8 m s^{-1} and a correlation coefficient of 0.8. The bias varies between
195 the individual transects (including a change in sign between T6 and T7/T8), indicating that the differences are not systematic across all transects and may depend on local atmospheric boundary layer conditions. The standard deviation of the SAR and airborne wind speed differences is about 0.3 m s^{-1} . The joint analysis highlights the complementarity between airborne and satellite observations in offshore wind-farm wake studies. Aircraft-based measurements provide an independent reference at hub height and resolve turbulence and vertical shear on scales that cannot be captured by SAR, thereby supplying essential
200 context for interpreting SAR-derived wake signatures. At the same time, SAR offers an instantaneous, spatially extensive view of the near-surface wind field that cannot be achieved by aircraft alone. Together, these platforms show that SAR-derived wind speed can reliably reproduce the horizontal wind field at hub height when combined with appropriate stability information, and can therefore serve as a consistent complement to airborne measurements.

Overall, compared to other wake measurement methods, airborne measurements offer several advantages. These include
205 the ability to directly validate satellite-derived wind speed at hub height. Satellite-based techniques typically derive the wind speed at hub height indirectly, using surface roughness to estimate the wind speed at 10 m and subsequently extrapolating to hub height. Airborne measurements also extend the spatial coverage provided by long-range scanning wind lidar systems, which are typically fixed at a single location and can retrieve wind field data over distances of up to approximately 15 km, depending on atmospheric conditions. The effective range of these systems is influenced by several factors, including aerosol
210 concentration (which influences backscatter strength), atmospheric visibility and humidity (which affect signal attenuation), laser pulse energy and optical design (which influence system sensitivity), and the scanning geometry (as longer path lengths or steeper elevation angles can reduce the signal-to-noise ratio). In contrast, point measurements from fixed installations such as the FINO1 meteorological mast (FINO1, 2025) provide data with high precision and high resolution in time, but are limited to single locations where additional measurements are needed to estimate wake strengths.

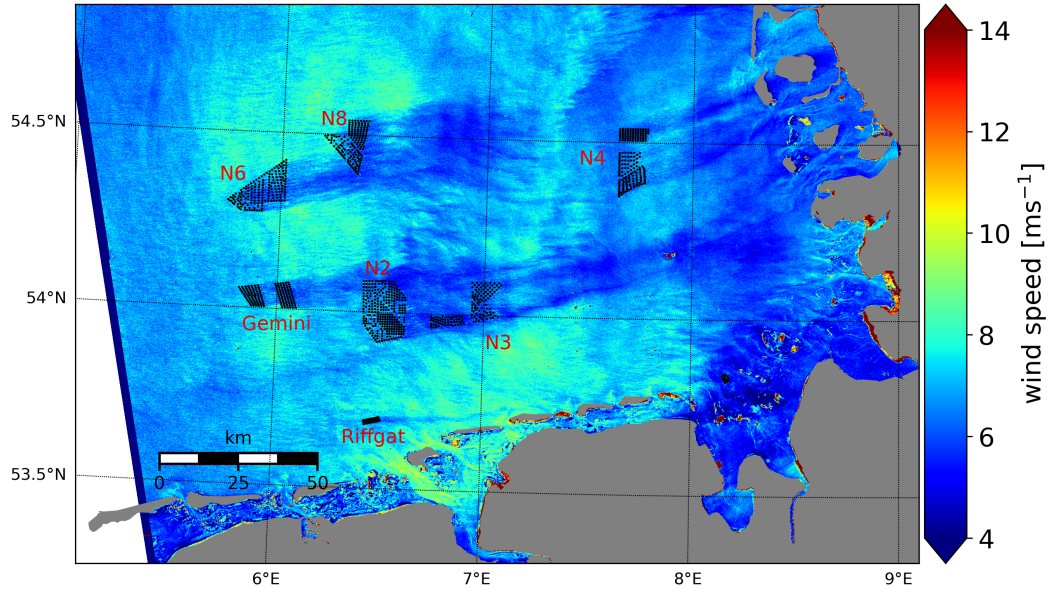


Figure 1. 10-m wind speed derived from Sentinel-1A SAR (Contains modified Copernicus Sentinel data [2021]) data acquired on 11 September 2021 at 17:17 UTC. Black dots represent wind turbines; names of wind farms and clusters are labelled in red. The wind direction is from West. Powered by Esri.

215 3.2 Wake interaction

Airborne observations provide the opportunity to focus the measurement strategy on covering overlapping wake effects of multiple wind farms, and to confirm numerical simulations of the wind field. The interaction of different wind farm wakes has been investigated by numerical simulations of different complexity (Cañadillas et al., 2020; Cañadillas et al., 2023; Foreman et al., 2024; Sengers et al., 2024) and by satellite images providing an overview of large scales (Djath et al., 2018). Figure 4 shows airborne measurements which confirm the further reduction of the wind speed downstream of a second wind farm, with the wind speed reduction depending on turbine density and the mode of operation (Cañadillas et al., 2022; zum Berge et al., 2024).

Building on these findings, zum Berge et al. (2024) evaluated both engineering and mesoscale models using the in situ airborne measurements behind large-scale wind farm clusters in the German Bight. The study compared four representative measurement flights with simulations from the Weather Research and Forecasting Model (WRF), developed by the National Center of Atmospheric Research widely used in the wind energy community (Skamarock et al., 2019), including wind farm parameterizations and several engineering wake models implemented in the FOXES software tool (Schmidt et al., 2023). Results showed that engineering models, when properly configured or coupled with mesoscale input, are capable of reproducing wake effects over tens of kilometres, including merged wakes from multiple farms. Particularly the engineering model coupled with WRF (EM-WRF, Fig. 7) - where a heterogeneous, undisturbed WRF background simulation is used as input to initialize each turbine

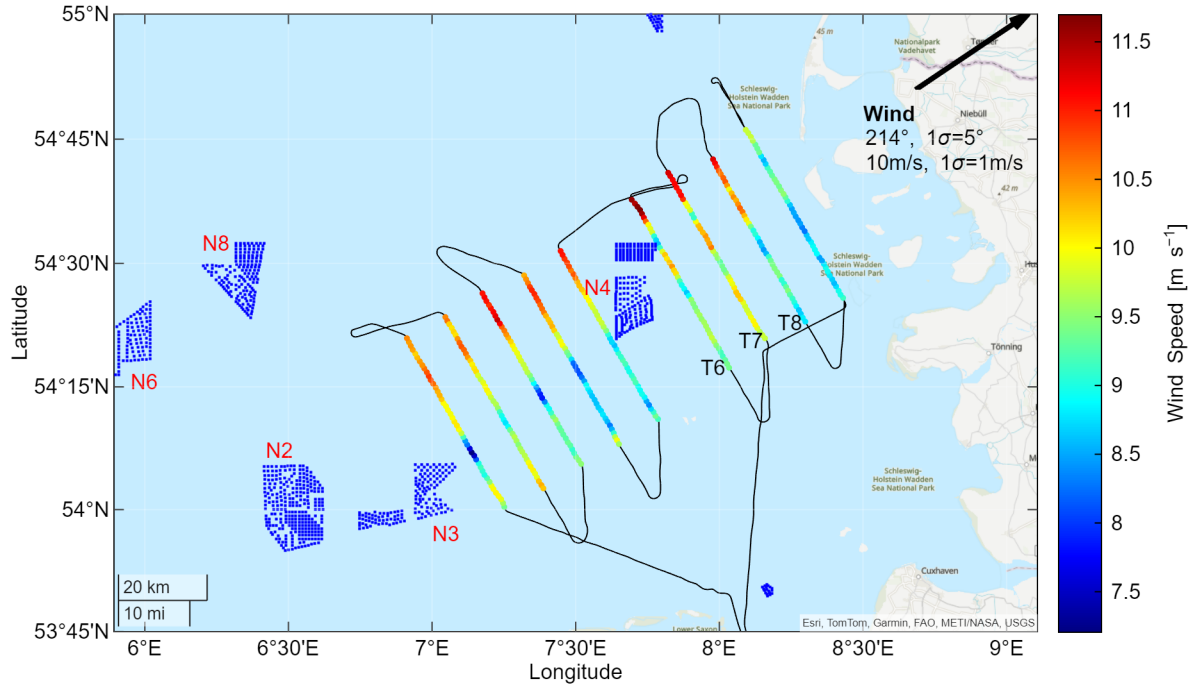


Figure 2. In-situ wind speed measured on 11 September 2021 by the research aircraft D-IBUF from 12:51 UTC to 17:13 UTC in the lee of wind farm clusters N2 and N3 for South-Westerly wind direction. Blue dots represent the individual wind turbines, black lines represent the flight path of the aircraft. Wind speed measurements along the flight path perpendicular to the main wind direction are colour coded and plotted for every 15 s, corresponding to a displayed horizontal resolution of around 1 km. One flight leg of around 45 km length requires a flight time of around 12 min. The indicated transects through the wakes T6, T7 and T8 are used for direct comparison with satellite data in Fig. 3. The arrow indicates the main wind direction. The variability of the wind field during the measurement flight is illustrated by the standard deviations of wind speed and wind direction. Powered by Esri.

locally, and turbine wakes are propagated as passive scalars along the atmospheric flow streamlines derived from the WRF data (zum Berge et al., 2024) - proved to be most consistent with the airborne observations, especially under stable stratification. All models (see Fig. 7) showed a reduced accuracy in predicting wake position and strength at distances beyond 30 km from the wind farm cluster. Therefore, accurate inflow conditions and proper atmospheric stability characterization are required to improve the performance of all model results over such large scales. Unlike traditional meteorological masts, which only provide single-point time series, or Doppler lidars, which are limited to a scanning range of about 10 km, in-situ airborne measurements allow capturing the full, large-scale cluster wake developments that can extend beyond 50 km to 70 km under stable atmospheric conditions (Platis et al., 2020). By flying meandering patterns perpendicular to the wind direction at hub height across multiple locations, aircraft data uniquely provide highly spatially resolution cross-sections of the wind field. This makes

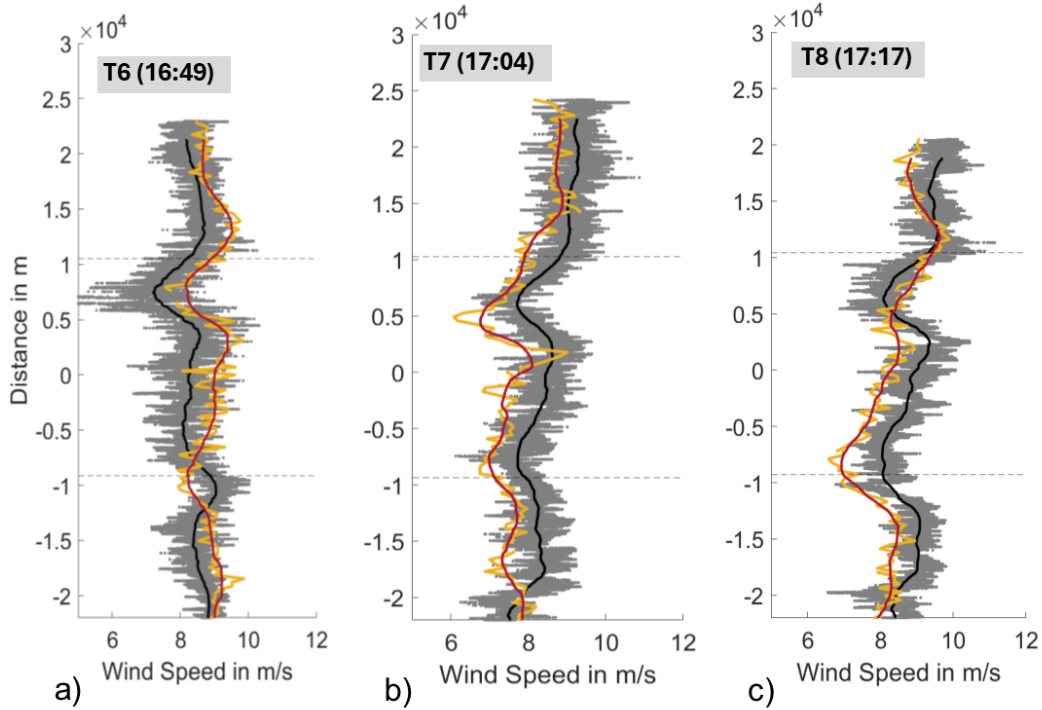


Figure 3. Comparison of airborne wind measurements with the research aircraft D-IBUF at hub height (running mean, black) showing substantial small-scale variability (gray shading) with collocated SAR-derived wind speed (red) and variability (yellow) on 11 September 2021. The SAR wind speed was extrapolated from an altitude of 10 m to hub height using stability information obtained from the flight. The gaps in the SAR-derived data are caused by quality filtering of unrealistic SAR wind speed values due to turbine-related SAR artifacts close to the wind farm Amrumbank West. Panels (a), (b), and (c) correspond to different sampling times (in UTC) and transects called T6, T7 and T8 of the flight data. One flight leg of around 45 km length requires a flight time of around 12 min.

240 it possible to simultaneously evaluate wake deficits, lateral wake extent, and merged wake structures from multiple adjacent wind farm clusters across vast horizontal distances.

On the other hand, the results of the model comparison also underline the difficulties of using only one aircraft, lacking simultaneous inflow measurements. Further, the lack of repetition of similar conditions makes it hard to remove or quantify uncertainty based on aircraft measurements.

245 3.3 Modification of latent heat fluxes

Airborne measurements were able to show that latent heat fluxes increased above and downstream of wind farm clusters across a range of atmospheric stability regimes (Platis et al., 2023). Latent heat fluxes were calculated based on the eddy covariance method, correlating the fluctuations of the vertical wind speed component and the fluctuations of the mixing ratio based on measurements of the Lyman-alpha fast humidity sensor. More details of the averaging method are explained in Platis

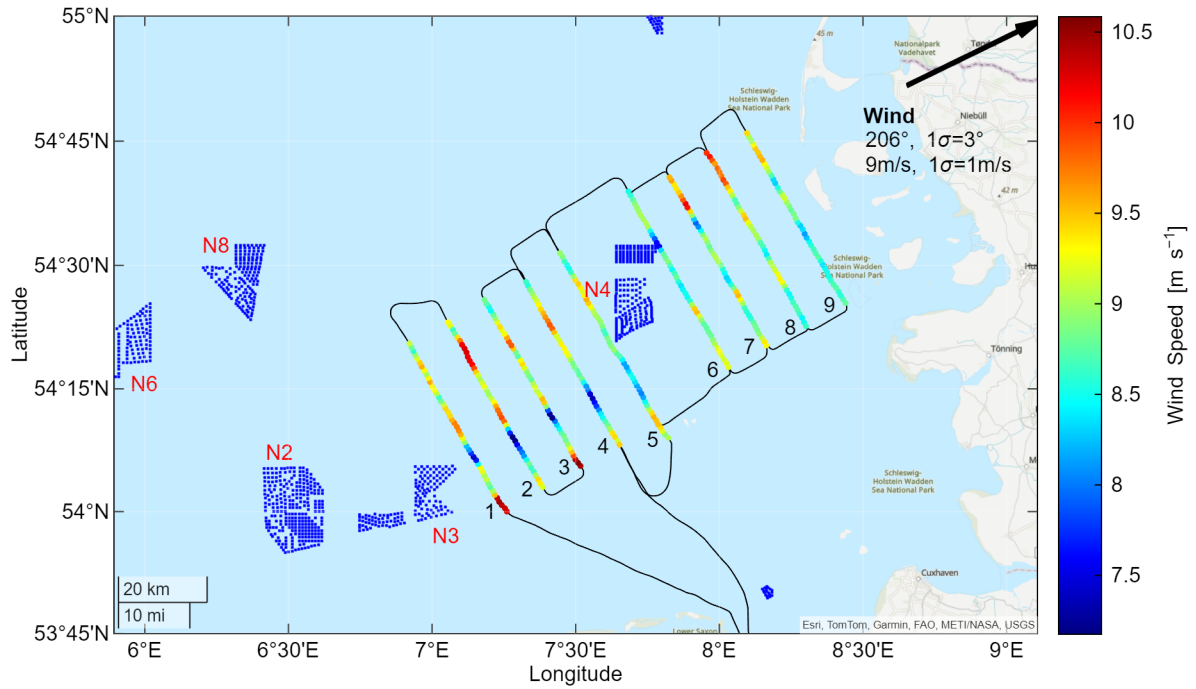


Figure 4. Wind speed measured at hub height in-situ by the research aircraft D-IBUF in the lee of wind farm clusters N2 and N3 for south-westerly wind direction on 27 July 2021. Blue dots represent the wind farm cluster, black lines represent the flight path of the aircraft. Wind speed measurements along the flight path perpendicular to the main wind direction are colour coded and plotted for every 15 s. One flight leg of around 45 km length requires a flight time of around 12 min. The arrow indicates the main wind direction. The variability of the wind field during the measurement flight is illustrated by the standard deviations of wind speed and wind direction. Powered by Esri.

et al. (2023). Under thermally stable conditions, nearly all flights showed a notable increase in upward latent heat flux above the wind farms, with maximum enhancements reaching $+160 \text{ W m}^{-2}$ relative to background conditions. During near neutral stratification, the latent heat flux enhancement was generally stronger, with peak values up to $+600 \text{ W m}^{-2}$, although more spatially confined. The data suggest that while the signal is more consistently detectable during stable conditions, it becomes more pronounced under neutral conditions. This is likely due to enhanced vertical mixing induced by the wind farms, which facilitates downward entrainment of drier air into the near-surface layer, enhancing the evaporation potential. The increase in latent heat flux was generally limited to the area above and immediately downstream (up to around 1 km) of the wind farms (Fig. 5), while the associated wakes extended further downwind, indicating different spatial scales of momentum and scalar flux modifications. The distance of the flight trajectory to the wind farms varies due to wind park geometry and wind direction, resulting in visible effects of the latent heat fluxes only for part of the areas indicated as downstream of the wind farms in Fig. 5.

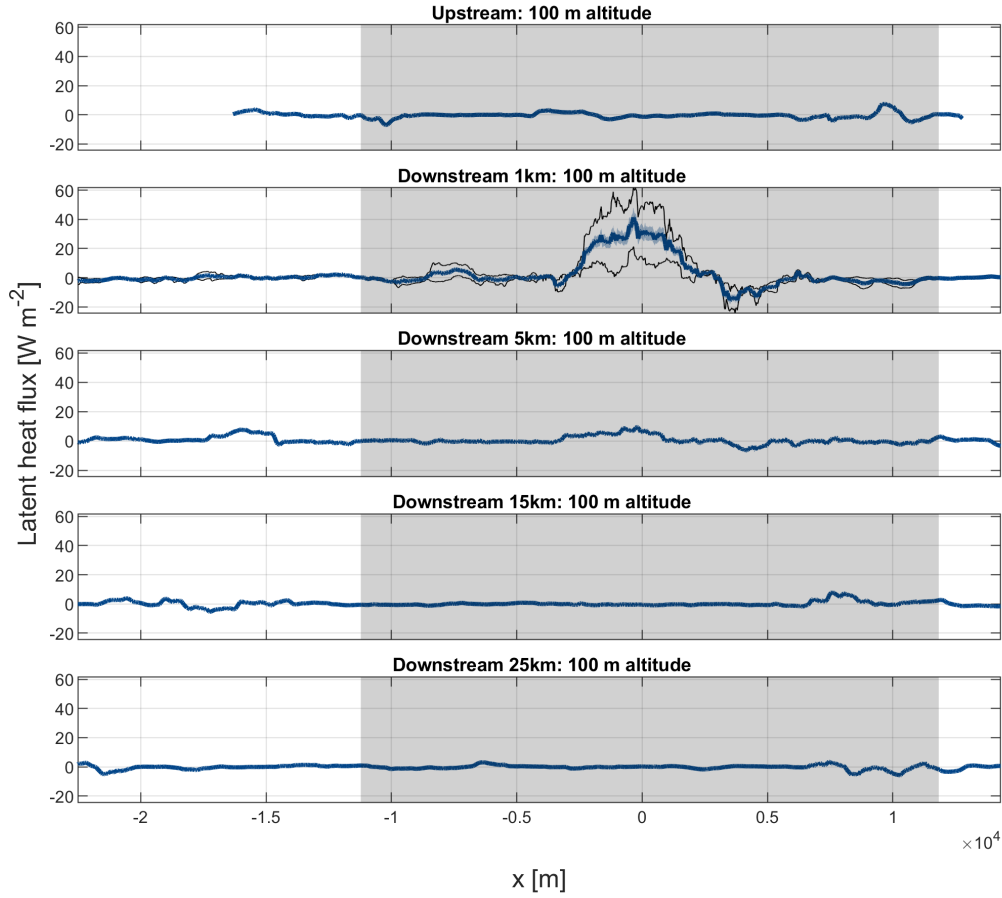


Figure 5. Airborne observations obtained with the research aircraft D-IBUF of the turbulent latent heat flux on 27 May 2017 during a research flight at the Amrumbank West wind farm cluster N4. Measurements were taken upstream and downstream of the cluster under weakly stable thermal stratification, with a capping inversion located at around 800 m above sea level. The figure presents the latent heat flux collected along two consecutive flight legs aligned perpendicular to the prevailing wind direction of 130 degree and flown at hub height (100 m). The blue line represents the averaged latent heat flux across both flight legs, while the grey-shaded area indicates the projected position of the Amrumbank West wind farm along the mean wind direction. The blue-shaded envelope denotes the measurement uncertainty associated with the latent heat flux. The figure has been published in Platis et al. (2023).

However, attributing the observed effects solely to wind farm influence remains also challenging for airborne observations due to varying flight patterns, measurement altitudes, atmospheric background variability, and limitations in a suitable definition for accurately classifying stability (Platis et al., 2021). Additionally, wind farm characteristics such as turbine layout and density likely play a role in modulating the magnitude of these impacts. The observed modification of moisture fluxes at hub
265 height and above suggests potential downstream effects on surface latent heat fluxes, as supported by previous numerical mod-

elling studies. While our measurements represent only short-term snapshots, they support the hypothesis that offshore wind farms may locally alter the surface energy budget and atmospheric structure (Platis et al., 2023). For instance, on two flights with near-saturated humidity and weakly stable conditions, small cumulus clouds were visually observed forming directly above wind farms, suggesting that increased latent heat flux may contribute to localized cloud development.

270 3.4 Coastal effect

The wind speed over the North Sea is typically higher than over land due to the approximately two orders of magnitude lower surface roughness over water (Taylor, 1970; Lange et al., 2004), and the higher heat capacity of water. However, the transition of wind from land to sea, and the distance required to reach an equilibrium wind speed, is strongly influenced by atmospheric stability (Djath et al., 2022), the formation of internal boundary layers (Barekzai et al., 2025a, b), and mesoscale phenomena such as low-level jets (LLJ) (Djath et al., 2022; Barekzai et al., 2025a) and sea breezes. Previous studies (e.g., Schulz-Stellenfleth et al., 2022; Djath et al., 2022; Cañadillas et al., 2023) show that offshore wind speed generally increases with distance from the coast, especially at lower altitudes. This increase is more pronounced under neutral or unstable conditions and is attenuated at higher altitudes. Atmospheric stratification plays a critical role: stable conditions can delay the offshore wind adjustment, while unstable conditions tend to accelerate it. For studies in the German Bight, the equilibrium was typically reached within 280 50-80 km. A mesoscale modelling study over the Baltic Sea showed potential temperature developments under stable stratification over distances of more than 200 km (Dörenkämper et al., 2015).

Cañadillas et al. (2023) present two contrasting airborne measurement cases illustrating the offshore adjustment of low-level jets (LLJs) over the German Bight under offshore-flow conditions. In the first case (Fig. 6a; 23 July 2020), warmer sea-surface temperatures offshore (approximately 17°C at FINO1 compared to about 13°C over land during the early morning) reduced atmospheric stability over the sea and enhanced vertical turbulent mixing. This promoted the downward transport of momentum and led to a rapid weakening and gradual erosion of the land-based LLJ as the flow adjusted offshore, accompanied by increasing near-surface wind speed with increasing fetch. In the second case (Fig. 6b; 23 September 2020), the flow over land was initially much more strongly stratified. Although the warmer sea surface gradually reduced the stability offshore, the boundary layer adjustment occurred more slowly, allowing the LLJ to persist farther offshore before weakening. As a consequence, the 290 wind speed decreased with increasing distance from the coast. The airborne data were analysed in the context of stationary lidar measurements at the island of Norderney (Rausch et al., 2023b) and at the meteorological mast FINO1, as well as satellite observations, and complemented with ERA5 reanalyses data and WRF simulations (Cañadillas et al., 2023).

3.5 Evaluation of numerical flow simulations

Airborne measurements offer significant potential for capturing atmospheric parameters during periods with meteorologically interesting flow conditions (e.g., stable stratification around and above offshore wind farms), which can be compared to simulations. Unlike many ground-based methods, they provide high-resolution data in the range of few cm in both horizontal and vertical directions, often exceeding 1000 m in altitude. This makes them a valuable tool for comparison with simulations and for evaluating parameterizations in numerical models, including those related to wind turbines and turbulence, particularly

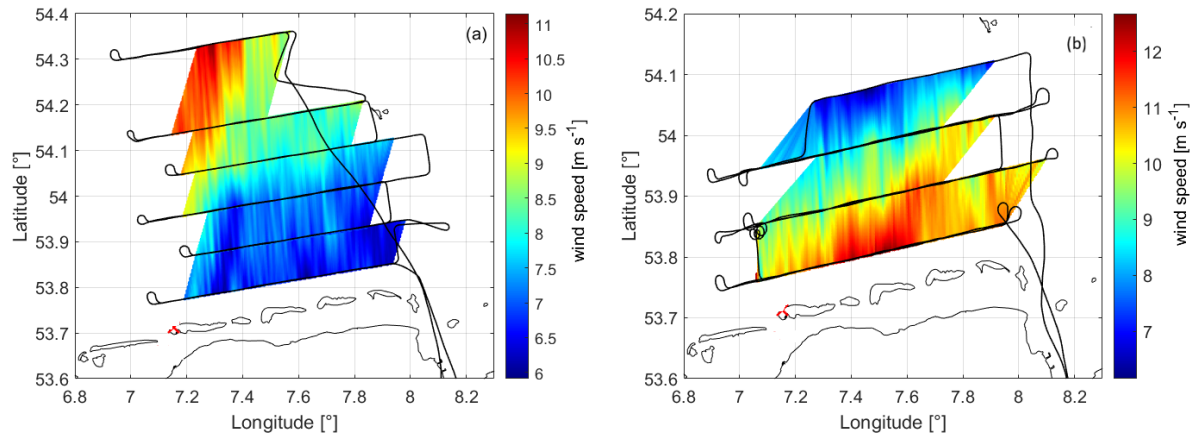


Figure 6. Contour plot of interpolated aircraft D-IBUF wind field measurements along the mean wind direction from South at 100 m altitude, with the black line indicating the flight trajectory from 07:05 to 11:03 UTC on 23 July 2020 (a) and from 05:24 to 08:53 UTC on 23 September 2020 (b), as published in Cañadillas et al. (2023).

in complex flow regimes such as those found in offshore environments, e.g., Siedersleben et al. (2018a); Platis et al. (2020);
 300 Cañadillas et al. (2023).

3.5.1 Mesoscale simulations

Mesoscale simulations, such as those performed with WRF, experience intrinsic difficulties of direct comparison with single observations as provided by the different flights. WRF simulations suffer from time shifts (zum Berge et al., 2024) and an overall lack of detailed accuracy, when single situations are considered. In particular, WRF simulations have generally shown
 305 difficulties in accurately representing atmospheric stability (Siedersleben et al., 2018a, b). These discrepancies are particularly pronounced near coastal regions, where deviations are larger compared to offshore locations over open water (Platis et al., 2020). Under stable conditions, the model struggles to accurately reproduce the altitude of the inversion layer (Siedersleben et al., 2020), as well as the coastal transition zone (Cañadillas et al., 2023). The WRF model, using the wind farm parameterization by Fitch et al. (2012), was found to capture the horizontal extent of wakes well (Cañadillas et al., 2022). The agreement
 310 between lidar observations and WRF simulations including wind farm effects (WRF-WF) was generally good, with mean wind speed differences of approximately 2%, although larger deviations occurred under stable atmospheric conditions. Both observations and simulations consistently show that the wind speed deficit extends above the upper tip height of the rotor (Siedersleben et al., 2018a). Several studies have used the airborne dataset to first evaluate model performance and subsequently draw conclusions on wake behaviour and model representation (Larsen and Fischereit, 2021; van Stratum et al., 2022; Ali et al.,
 315 2023). Simulation progress has been achieved by coupling atmospheric and oceanic models. Nevertheless, current simulation approaches for representing wind-turbine generated turbulence do not fully reproduce observations, particularly regarding the vertical transport of turbulent kinetic energy and its impact on the sea surface (Larsen et al., 2024).

First modelling experiments indicate that the angle between wind and wave direction plays a role for the undisturbed wind profile upstream of wind farms, as aligned wind-wave directions result in a lower roughness length. This reduced friction leads to higher wind speed. Further, the angle between wind and wave direction influences the wind speed recovery in the downstream wakes, as opposing wind and wave direction lead to more vertical mixing and therefore shorter wakes (Porchetta et al., 2021; Christiansen et al., 2022; Schmitt et al., 2026).

3.5.2 Engineering Models

Engineering models, such as FLORIS (Gebraad et al., 2016), PyWake (Pedersen et al., 2023), Open Wind (OpenWind, 2020) and FOXES (Schmidt et al., 2023), are widely used to optimize wind farm layouts and estimate energy production. Since this optimization process requires a large number of simulations across various configurations, the underlying wake models must be computationally efficient. Consequently, the flow within and around wind farms is typically strongly simplified by analytical, e.g., Gaussian, models that describe the wake decay downstream of individual turbines, which are then superposed (Cañadillas et al., 2023). By design, since they are simplifications of mean momentum equations, engineering models cannot match the instantaneous turbulent flow. Also since they do not have a clear sensitivity to several atmospheric parameters, it is necessary to sample over several different atmospheric states to get close to the fully neutral conditions they are often calibrated upon. While it is possible to collect measurements with the aircraft over multiple days, there is a lot of scatter in the atmospheric conditions, and therefore in the measured wind speed, wind direction and atmospheric stability. Hence, with such large standard deviations, comparison to engineering models is generally challenging.

Despite their focus on representing the annual energy production in the long-term correctly, several studies have used two-dimensional airborne measurements to compare wake recovery behind offshore wind farms with engineering model results. For example, Cañadillas et al. (2020) analysed data from a series of flights conducted within the wakes at various distances downstream of two wind farm clusters in the North Sea under different atmospheric stability conditions. The study concluded that engineering models, which are often configured for neutral conditions, tend to underestimate wake effects under stable stratification.

In a more recent study, zum Berge et al. (2024) applied several WRF and engineering models with different configurations, WRF with a wind farm parameterization (WRF-WF), an engineering model coupled to WRF (EM-WRF), a standard engineering model with a baseline calibration (EM-BL), a calibration aiming at strongly dampening wake recovery (EM-LR), and the TurbOPark model (Pedersen et al., 2022) of Ørsted (EM-TP) to simulate large-scale cluster wakes over extended distances in the German Bight and compared the results with airborne measurements. Fig. 7, reproduced from zum Berge et al. (2024), shows the comparison of measured and modelled wake recovery for a large offshore wind farm cluster. Overall, the engineering models showed good agreement with the observations in the immediate vicinity of the wind farms and up to 20–30 km downstream. However, their accuracy in predicting the wake induced wind speed deficit declined significantly with increasing distance from the wind farm clusters. Specifically, as observed on Leg 6 in Fig. 7, the distinct drop in measured wind speed is not caused by the wind farms, but is rather due to the spatial variability and the closer distance to the coast, and/or a temporal change in the weather situation (e.g., cloud or rain formation) during the multi-hour measurement flight, which the steady-state

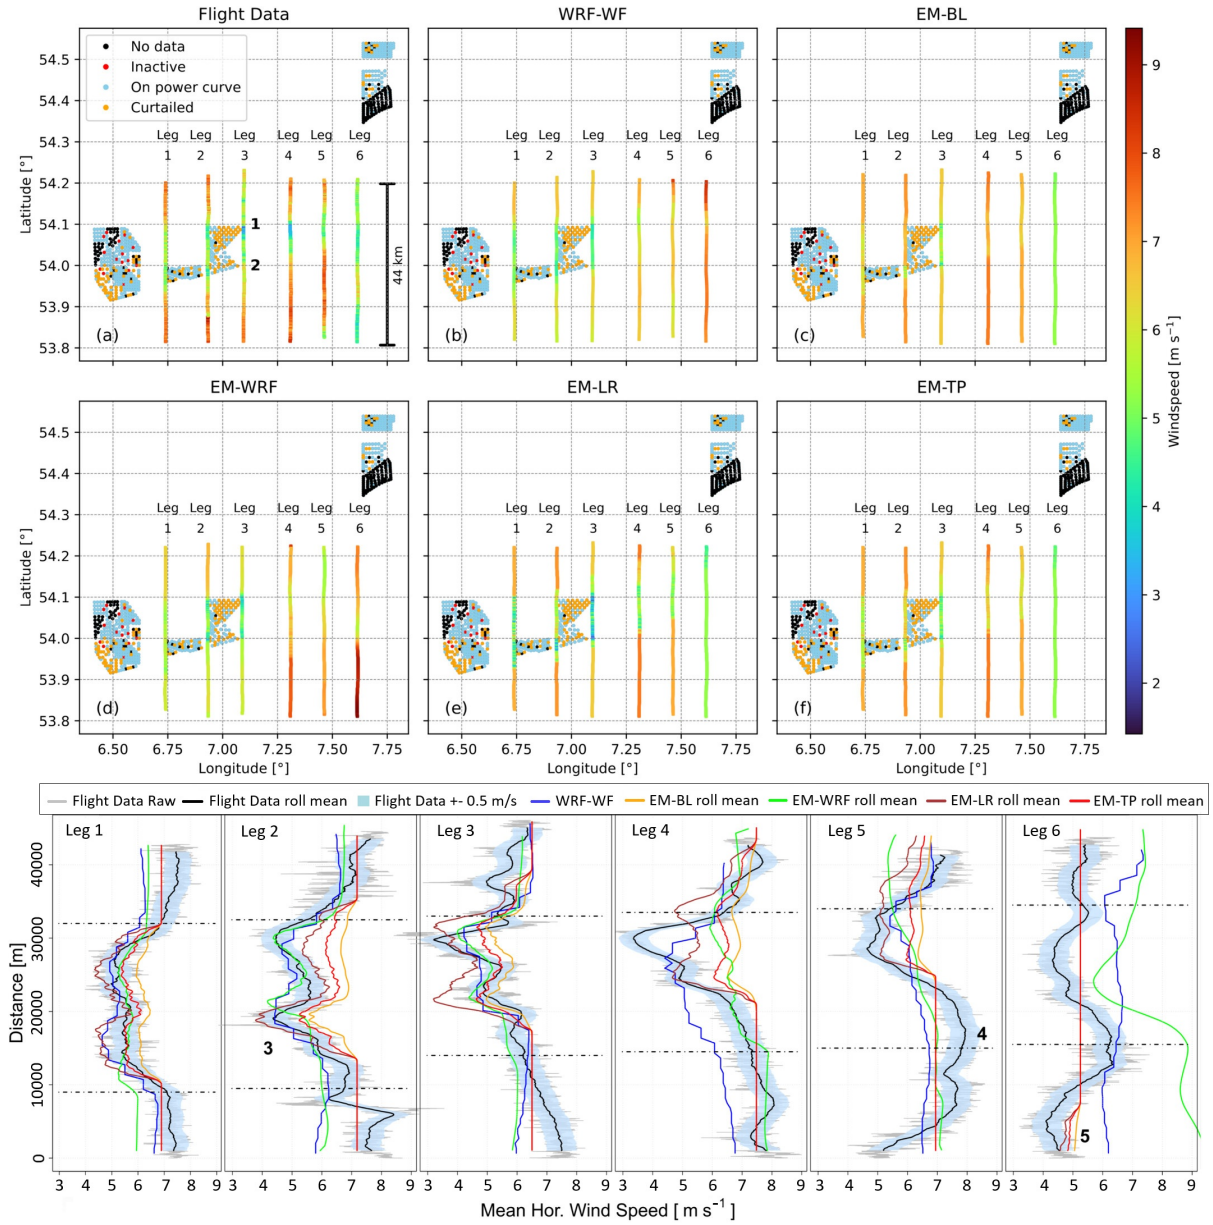


Figure 7. Top part: the measurement area in the German Bight with wind farm clusters N2, N3, and N4 on 14.07.2020 between 12:30 and 16:00 UTC. The dots represent the individual turbines and their operational status during the entire measurement time. (a) Results of the flight measurements on six flight legs with a mean wind direction of 270° . Results of the model calculations on the coordinates of the flight paths corresponding to (b) WRF-WF, (c) EM-BL, (d) EM-WRF, (e) EM-LR, and (f) EM-TP. Bottom part: The flight legs are shown as line plots with rolling average data filters for direct comparison. The dashed lines represent the estimated wake area. Graphic reproduced from zum Berge et al. (2024) (Figure 7), licensed under CC BY-NC-ND 4.0 <https://creativecommons.org/licenses/by-nc-nd/4.0/>.

engineering models fail to capture. Several models provide the same output for specific locations, and the corresponding lines overlap in Fig. 7. As the models are initialized with a uniform, undisturbed free-stream wind speed for each flight leg, they have the same background velocity at the lateral edges of the flight path or far downstream where the wake has dissipated. Since no wake effect is computed in these regions, the models provide the exact same undisturbed background wind speed.

3.6 Sea state

As wind is a driving force for sea state development, the reduced wind speed downstream of wind farms leads to changes in the wave spectra. The enhanced laser scanner surface reflectance in wake areas (Platis et al., 2018) indicates that the water surface is smoother, and a larger percentage of the laser pulse is reflected back to the receiver. These changes of the surface roughness can take place on the horizontal scale of less than 1 km. Modifications of the wave spectra, i.e., the energy per wavelength, were observed in wake areas for developing sea state conditions (Bärfuss et al., 2020).

A significant reduction in wind speed in the wake of a wind farm also results in a decrease in significant wave height. Under stable atmospheric conditions, influences on sea state characteristics can be detected that can be attributed to a sea surface wake induced by the atmospheric wake. For the atmospheric wake, different parameters such as wind speed reduction are characteristic for the wake length. Characteristics for the sea surface wake can be selected as well. A simple, yet meaningful description can be provided by the reduction of the significant wave height (Schmitt et al., 2026). For all meander flights performed during WIPAFF and X-Wakes, the atmospheric wake length was found to be visible up to larger distances than wakes at the sea surface, defined as reduced significant wave height, but long-reaching surface wakes of several 10 km have also been identified (Schmitt et al., 2026). More detailed analyses can be performed using the spectral sea surface energy distribution. Figure 8 shows such an energy distribution of the measurement flight on 24 July 2020. The area influenced by the wind farm is depicted within the manually inserted black lines, and from a graphical perspective, the wind originates from the left, i.e., from 270° . Within the black lines, a reduction in wind speed is observed, which can be noted as the wake of the wind farm. As the wind speed decreases, the energy density spectrum is also modified over a wide frequency range. This can be observed to a downstream distance of at least 29 km behind the wind farm. At downstream distances of 70 km and 76 km, very low spectral energy density are observed (black colour), particularly at angular frequencies below approximately 1.5 rad s^{-1} . Overall, the spectra at these large distances from the wind farm exhibit a more homogeneous distribution, with energy levels predominantly around $0.2 \text{ m}^2 \text{ rad}^3 \text{ s}^{-3}$ (green range of the color scale), leaving low-energy regions appearing black due to the applied range. Wind farms can have a significant impact on developing sea state conditions, particularly on young wind waves. Reduced wind speed disrupts wave growth, resulting in a less energetic spectrum. A larger impact on sea conditions is observed for stable atmospheric conditions with more pronounced reductions in wind speed.

3.7 Global blockage effect

The global blockage effect (GBE) is the combined induction zone of all turbines in a wind farm (Porté-Agel et al., 2020). The upstream pressure field is responsible for deflecting the upstream flow to the side (Schneemann et al., 2025) and above the wind farm (Porté-Agel et al., 2020). The upward deflection reaches the upper atmospheric layers where stable stratification is always

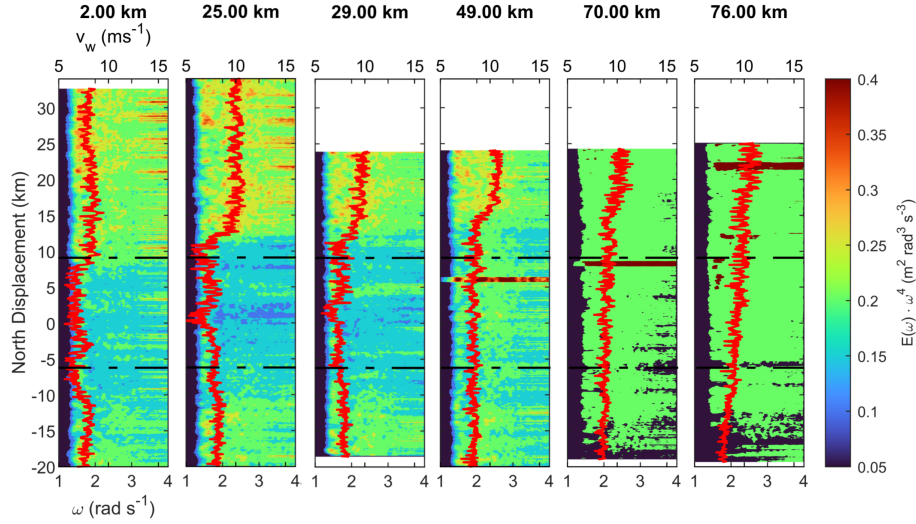


Figure 8. Sea surface energy distribution (colour-coded) for the flight on 24 July 2020 downstream of the wind farm clusters N2/N3 with stable atmospheric conditions. The airborne measured wind speed is represented by the red lines. On that day, wind originated from 270° with a mean velocity of 10 m s^{-1} . The estimated wake region is depicted by the dashed lines. The horizontal, narrow lines with high energy density can be attributed to boats or other disturbances near the sea surface. The fact that similar disturbances appear across three different range panels (49 km, 70 km, and 76 km) at similar spatial positions suggests that the source was advected or moving during the measurement period. For each subplot, the downstream distance from the wind farm cluster is provided.

present and thus induces gravity waves that further intensify the GBE (Centurelli et al., 2021; Lanzilao and Meyers, 2024). Therefore, GBE depends on atmospheric boundary layer height and stratification of the inversion layer and the free atmosphere (Lanzilao and Meyers, 2024). Schneemann et al. (2021) also demonstrate that the GBE is sensitive to the stratification of the atmospheric boundary layer, as justified by Sanchez Gomez et al. (2023). It is still subject of research if and to which extent it leads to a net power loss in a wind farm or rather a power redistribution (Lanzilao and Meyers, 2024). Compared to wind turbine or wind farm wake effects the GBE is much harder to investigate experimentally (Meijer et al., 2024). While wind speed gradients in wind farm wakes appear in the order of m s^{-1} over short distances of some hundreds of metres (Schneemann et al., 2020), the wind speed gradient in GBE spreads over distances of several kilometres with much smaller wind speed differences of only tenths of m s^{-1} (Schneemann et al., 2021). Similar to the previously described downstream wind farm wake investigations, airborne measurements with horizontal flight legs were performed upstream of wind farms. The flight path was oriented perpendicular to the main wind direction with the goal to quantify GBE induced wind speed differences in front of and beside the farm. The investigations were limited by the flight permission, which only allowed to operate with a safety distance of at least 500 m to the wind turbines.

Figure 9 shows an exemplary data set and illustrates how the GBE was investigated: The flight patterns were aligned close to

the wind farm cluster N4 with distances of 500 m to 2 km upstream. The wind speed was normalized to 1 in the undisturbed areas next to the areas affected by wakes, and latitudinal and longitudinal transects are displayed. Based on all flights with such patterns, small average numbers of wind speed reductions in the wake areas compared to the undisturbed areas were observed in the range of 2% for the closest flight distance of 500 m with a high scatter. On averaged data, a not significant trend of reduced wind speed in the direction towards the farm is visible, which cannot be reliably attributed to GBE. In this overview, different days with different atmospheric conditions are compared. The wind speed difference is calculated over large distances not considering mesoscale changes in the wind field. In summary, it turned out that the GBE is potentially too small to be determined by airborne measurements for single flights and also on average.

4 Conclusions

In conclusion, aircraft-based measurements provide many advantages for wind energy investigations: They can be flexibly adapted to the wind direction to study wake effects. They provide highly resolved data of air temperature, humidity, and wind speed and direction. This allows for vertical profile measurements to obtain a detailed description of the local atmospheric boundary layer, including the derivation of atmospheric stability as well as high resolution horizontal measurements to quantify atmospheric structures spanning over large areas. Simultaneous measurements of atmospheric modifications and changes in the surface properties can be recorded. Airborne measurements can resolve the complex and height-dependent phenomena of wind field modifications for coastal transitions, and such data can help to understand and properly simulate mesoscale processes in offshore wind assessments. The extensive data sets of the research projects WIPAFF and X-Wakes are to date unique for flexibly characterizing the North Sea atmospheric boundary layer. There is a large potential of combining the airborne data with satellite investigations, stationary long-term measurements by meteorological masts or lidar systems and numerical simulations. Therefore, the airborne data sets obtained during the projects WIPAFF (Bärfuss et al., 2019; Lampert et al., 2020) and X-Wakes (Rausch et al., 2023a; Lampert et al., 2024) provide a valuable base for investigating offshore wind conditions and their interaction with wind farms.

Data availability. The airborne meteorological data of the project WIPAFF are published in Bärfuss et al. (2019), and the data of the project X-Wakes in Rausch et al. (2023a).

Author contributions. AL wrote the initial draft of the manuscript with contributions from all co-authors. AL, BC, JSS, JB, JS, TN, MD, BS, SE, MK, HH, DH, JP, and AP designed the project idea and acquired funding. All authors worked with the airborne data sets and performed different studies quoted in the manuscript.

Competing interests. One of the authors is a member of the Editorial Board. The other authors declare no competing interests.

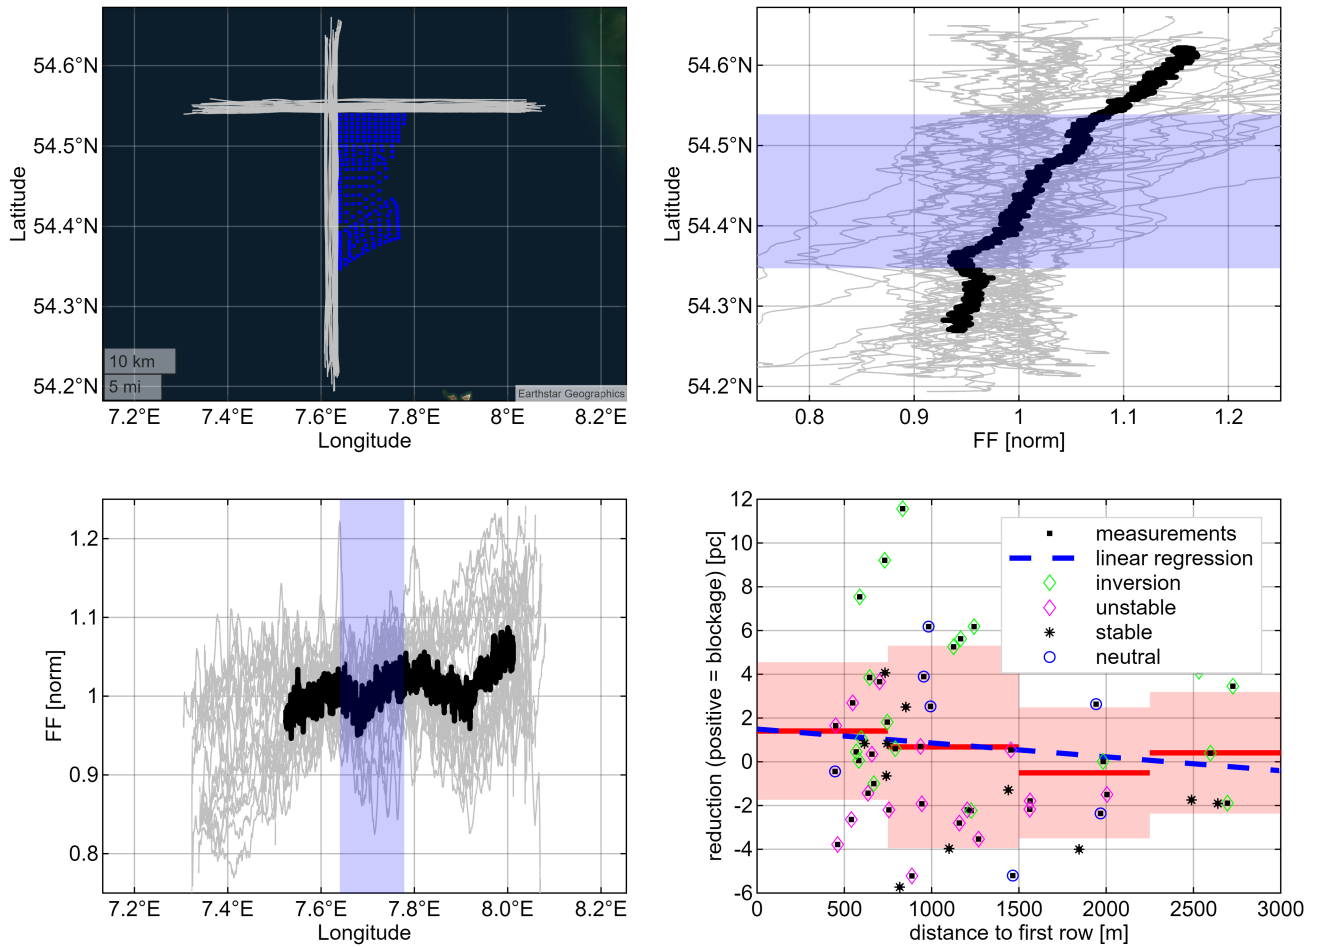


Figure 9. Airborne investigation of the blockage effect for wind from North and West. Upper left: flight sections (in white) used for investigation of the blockage effect around the wind farms (single wind turbines in blue). The sections were flown on different days and at different distances in front of the first wind turbine row. Upper right: This panel shows the unfolding of all meridional measurement sections on latitude vs. normalised wind speed (normalised by the median wind speed outside the wake for the leg regarded). The averaged normalised wind speed is shown with a thick black line. Lower left: This panel shows the unfolding of all longitudinal measurement sections on longitude vs. normalised wind speed (normalised by the median wind speed outside the wake for the leg regarded). The averaged normalised wind speed is shown with a thick black line. Lower right: Statistical results: relative wind speed reduction which could be caused by the GBE over measurement leg distance. The single measurement legs used for the analysis are shown as black dots, with an overlaying marker for inversion/unstable/stable and neutral conditions. Average relative wind speed reduction is shown as red line for each distance band, with an underlying reddish region indication standard deviation (1σ). The dashed blue line is the first order polynomial regression on average relative wind speed reduction versus distance to the first row of the wind turbines.

Acknowledgements. The projects WIPAFF and X-Wakes were funded by the German Federal Ministry for Economic Affairs and Energy under grant number 0325783 and 03EE3008, respectively, on the basis of a decision by the German Bundestag.

The authors would like to thank the aircraft crew, Rolf Hankers, Thomas Feuerle, Mark Bitter, Helmut Schulz, Matthias Cremer, Maik Angermann and Jonas Füllgraf, for making it possible to acquire the airborne data above the North Sea.

References

- Abkar, M., Sharifi, A., and Porté-Agel, F.: Wake flow in a wind farm during a diurnal cycle, *J. of Turbulence*, 17, 4,, 420-441, <http://dx.doi.org/10.1080/14685248.2015.1127379>, 2016.
- Akhtar, N., Geyer, B., Rockel, B., Sommer, P.S., and Schrum, C.: Accelerating deployment of offshore wind energy alter wind climate and
435 reduce future power generation potentials, *Nature Sci. Rep.*, 11, 11826, <https://doi.org/10.1038/s41598-021-91283-3>, 2021.
- Akhtar, N., Geyer, B., and Schrum, C.: Impacts of accelerating deployment of offshore windfarms on near-surface climate, *Nature Sci. Rep.*, 12, 18307, <https://doi.org/10.1038/s41598-022-22868-9>, 2022.
- Ali, K., Schultz, D.M., Revell, A., Stallard, T., and Ouro, P.: Assessment of five wind-farm parameterizations in the Weather Research and Forecasting model: A case study of wind farms in the North Sea, *Monthly Weather Review*, DOI: 10.1175/MWR-D-23-0006.1, 152, 9,
440 2333–2359, 2023.
- Anantharaman, A., Schneemann, J., Theuer, F., Beaudet, L., Bernard, V., Deglaire, P., and Kühn, M.: The impact of far-reaching offshore cluster wakes on wind turbine fatigue loads, *Wind Energ. Sci.*, 10, 1849–1867, <https://doi.org/10.5194/wes-10-1849-2025>, 2025.
- Barekzai, M., Cañadillas, B., Emeis, S., Dörenkämper, M., and Lampert, A.: Mesoscale Simulations of Coastal Boundary-Layer Transitions. Part 1: Low-Level Jets, *Meteorologische Zeitschrift*, 33, 6, 457-474, DOI: 10.1127/metz/2024/1195, 2025.
- 445 Barekzai, M., Cañadillas, B., Emeis, S., Dörenkämper, M., and Lampert, A.: Mesoscale Simulations of Coastal Boundary-Layer Transitions. Part 2: Offshore Wind Speed Development, *Meteorologische Zeitschrift*, 33, 6, 475 - 488, DOI: 10.1127/metz/2024/1196, 2025.
- Bärfuss, K., Pätzold, F., Altstädter, B., Kathe, E., Nowak, S., Bretschneider, L., Bestmann, U., and Lampert, A.: New Setup of the UAS ALADINA for Measuring Boundary Layer Properties, Atmospheric Particles and Solar Radiation. *Atmosphere*, 9, 1, 28, <https://doi.org/10.3390/atmos9010028>, 2018.
- 450 Bärfuss, K., Hankers, R., Bitter, M., Feuerle, T., Schulz, H., Rausch, T., Platis, A., Bange, J., and Lampert, A.: In-situ airborne measurements of atmospheric and sea surface parameters related to offshore wind parks in the German Bight, PANGAEA, <https://doi.pangaea.de/10.1594/PANGAEA.902845>, 2019.
- Bärfuss, K., Djath, B., Lampert, A., and Schulz-Stellenfleth, J.: Airborne LiDAR Measurements of the sea surface properties in the German Bight, *IEEE Transactions on Geoscience and Remote Sensing*, doi: 10.1109/TGRS.2020.3017861, 2020.
- 455 Bärfuss, K., Schulz-Stellenfleth, J., and Lampert, A.: The Impact of Offshore Wind Farms on Sea State Demonstrated by Airborne LiDAR Measurements, *J. Mar. Sci. Eng.* 2021, 9, 644, 2021.
- Bärfuss, K. B., Schmithüsen, H., and Lampert, A.: Drone-based meteorological observations up to the tropopause – a concept study, *Atmos. Meas. Tech.*, 16, 3739–3765, <https://doi.org/10.5194/amt-16-3739-2023>, 2023.
- Bastankhah, M., and Porté-Agel, F.: A new analytical model for wind-turbine wakes, *Renewable Energy*, 70, 116-123,
460 <https://doi.org/10.1016/j.renene.2014.01.002>, 2014.
- Bailey, H., Brookes, K.L., and Thompson, P.M.: Assessing environmental impacts of offshore wind farms: lessons learned and recommendations for the future, *Aquatic Biosystems*, 10, 1-13, 2014.
- zum Berge, K., Centurelli, G., Dörenkämper, M., Bange, J., and Platis, A.: Evaluation of Engineering Models for Large-Scale Cluster Wakes With the Help of In Situ Airborne Measurements, *Wind Energy*, 27, 1040–1062, <https://doi.org/10.1002/we.2942>, 2024.
- 465 Bleeg, J., Purcell, M., Ruisi, R., and Traiger, E.: Wind Farm Blockage and the Consequences of Neglecting Its Impact on Energy Production. *Energies*, 11, 6, 1609, <https://doi.org/10.3390/en11061609>, 2018.
- Bodini, N., Lundquist, J.K., and Moriarty, P.: Wind plants can impact long-term local atmospheric conditions, *Sci. Rep.*, 11, 1, 1-12, 2021.

- Broström, G.: On the influence of large wind farms on the upper ocean circulation, *Journal of Marine Systems*, 74, 585–591, <https://doi.org/10.1016/j.jmarsys.2008.05.001>, 2008.
- 470 Cañadillas, B., Foreman, R., Barth, V., Siedersleben, S., Lampert, A., Platis, A., Djath, B., Schulz-Stellenfleth, J., Bange, J., Emeis, S., and Neumann, T.: Offshore wind farm wake recovery: Airborne measurements and its representation in engineering models, *Wind Energy*, doi:10.1002/we.2484, 17 pp., 2020.
- Cañadillas, B., Beckenbauer, M., Trujillo, J.J., Dörenkämper, M., Foreman, R., Neumann, T., and Lampert, A.: Offshore wind farm cluster wakes as observed by long-range-scanning wind lidar measurements and mesoscale modeling, *Wind Energy Science*, 7, 1241–1262, 2022.
- 475 Cañadillas, B., Wang, S., Ahlert, Y., Djath, B., Barekzai, M., Foreman, R., and Lampert, A.: Coastal horizontal wind speed gradients in the North Sea based on observations and ERA5 reanalysis data, *Meteorologische Zeitschrift*, 32(3), 207–228, doi:10.1127/metz/2022/1166, 2023.
- Cañadillas, B., Foreman, R., Steinfeld, G., and Robinson, N.: Cumulative interactions between the global blockage and wake effects as observed by an engineering model and large-eddy simulations, *Energies*, 16, 7, 2949, <https://www.mdpi.com/1996-1073/16/7/2949>, 2023.
- 480 Cayon, O., Watson, S., and Schmehl, R.: Kite as a sensor: wind and state estimation in tethered flying systems, *Wind Energ. Sci.*, 10, 2161–2188, <https://doi.org/10.5194/wes-10-2161-2025>, 2025.
- Centurelli, G., Vollmer, L., Schmidt, J., Dörenkämper, M., Schröder, M., Lukassen, L.J., and Peinke, J.: Evaluating Global Blockage engineering parametrizations with LES, *J. Phys.: Conf. Ser.*, 1934, 012021, 2021.
- Christiansen, M.B., and Hasager, C.B.: Wake effects of large offshore wind farms identified from satellite SAR, *Remote Sens. Env.*, 98, 485 251–268, 2005.
- Christiansen, N., Daewel, U., and Schrum, C.: Tidal mitigation of offshore wind wake effects in coastal seas, *Frontiers in Marine Science*, 9, 1006647, doi:10.3389/fmars.2022.1006647, 2022.
- Christiansen, N., Daewel, U., Suzuki, N., Carpenter, J.R., and Schrum, C.: Regional modeling of structure-induced mixing at offshore wind farm sites, *Front. Mar. Sci.*, 10, 2023a.
- 490 Corsmeier, U., Hankers, R., and Wieser, A.: Airborne turbulence measurements in the lower troposphere onboard the research aircraft Dornier 128-6, *D-IBUF, Meteorol. Z.*, 10, 315–329, 2001.
- Daewel, U., Akhtar, N., Christiansen, N., and Schrum, C.: Offshore wind farms are projected to impact primary production and bottom water deoxygenation in the North Sea, *Communications Earth and Environment*, 3, 292, <https://doi.org/10.1038/s43247-022-00625-0>, 2022.
- Djath, B., Schulz-Stellenfleth, J., and Cañadillas, B.: Impact of atmospheric stability on X-band and C-band synthetic aperture radar imagery of offshore windpark wakes. *J. Renewable Sustainable Energy*, 10, 4, 043301, <https://doi.org/10.1063/1.5020437>, 2018.
- 495 Djath, B., Schulz-Stellenfleth, J., and Cañadillas, B.: Study of Coastal Effects Relevant for Offshore Wind Energy Using Spaceborne Synthetic Aperture Radar (SAR). *Remote Sens.* 2022, 14, 1688. <https://doi.org/10.3390/rs14071688>, 2022.
- Dörenkämper, M., Witha, B., Steinfeld, G., Heinemann, D., and Kühn, M.: The impact of stable atmospheric boundary layers on wind-turbine wakes within offshore wind farms, *J. Wind Engineering and Industrial Aerodynamics*, 144, 146–153, 500 <https://doi.org/10.1016/j.jweia.2014.12.011>, 2015.
- Drew, D.R., Cannon, D.J., Brayshaw, D.J., Barlow, J.F., and Coker, P.J.: The impact of future offshore wind farms on wind power generation in Great Britain. *Resources*, 4, 1, 155–171, 2015.
- El-Asha, S., Zhan, L., and Lungo, G.V.: Quantification of power losses due to wind turbine wake interactions through SCADA meteorological and wind LiDAR data, *Wind Energy*, 20, 1823–1839, 2017.
- 505 Emeis, S.: A simple analytical wind park model considering atmospheric stability. *Wind Energy*, 13, 459–469, 2010.

- Emeis, S.: Analysis of some major limitations of analytical top-down wind farm models. *Bound.-Layer Meteorol.*, 187,423–435, 2022.
- Emeis, S., Siedersleben, S., Lampert, A., Platis, A., Bange, J., Djath, B., Schulz-Stellenfleth, J., and Neumann, T.: Exploring the wakes of large offshore wind farms. *Journal of Physics: Conference Series* 2016, 753, 092014 (11 pp.) DOI: 10.1088/1742-6596/753/9/092014, 2016.
- 510 FINO1: FINO1 – Research Platform in the North and Baltic Seas No. 1, available at: <https://www.fino1.de/en/>, last access: 14 February 2024, 2025.
- Finserås, E., Herrera Anchustegui, I., Cheynet, E., Gebhardt, C.G., and Reuder, J.: Gone with the Wind? Wind Farm-Induced Wakes and Regulatory Gaps, *Marine Policy*, 159, 105897, <https://doi.org/10.1016/j.marpol.2023.105897>, 2024.
- Fitch, A.C., Olson, J.B., Lundquist, J.K., Dudhia, J., Gupta, A.K., Michalakes, J., and Barstad, I.: Local and Mesoscale Impacts of Wind Farms as Parameterized in a Mesoscale NWP Model. – *Mon. Wea. Rev.* 140, 3017–3038, DOI: 10.1175/MWR-D-11-00352.1, 2012.
- 515 Foreman, R. J., Cañadillas, B., and Robinson, N.: The atmospheric stability dependence of far wakes on the power output of downstream wind farms, *Energies*, 17, 2, 488, <https://doi.org/10.3390/en17020488>, 2024.
- Foreman, R.J., Birzer, C., and Cañadillas, B.: Measuring and Simulating Wind Farm Wakes in the North Sea for Use in Assessing Other Regions. *Energies*, 18, 20, 5538, <https://doi.org/10.3390/en18205538>, 2025.
- 520 Garrat, J: *The Atmospheric Boundary Layer*, Cambridge University Press, 1994.
- Gebraad, P.M.O., Churchfield, M.J., and Fleming, P.A.: Incorporating Atmospheric Stability Effects into the FLORIS Engineering Model of Wakes in Wind Farms, *J. Phys.: Conf. Ser.*, 753 052004, <https://doi.org/10.1088/1742-6596/753/5/052004>, 2016.
- Global Wind Energy Council, Global Offshore Wind Report, HY1, <https://tethys.pnnl.gov/sites/default/files/publications/Williams-et-al-2025.pdf>, accessed on 7 November 2025, 2025.
- 525 Hersbach, H and Stoffelen, A and De Haan, S: An improved C-band scatterometer ocean geophysical model function: CMOD5, *Journal of Geophysical Research: Oceans*, 112, C3, 10.1029/2006JC003743, 2007.
- Ladenburg, J.: Visual impact assessment of offshore wind farms and prior experience, *Appl. Energy*, 86, 3, 380-387, 2009.
- Lanzilao, L., and Meyers J.: A parametric large-eddy simulation study of wind-farm blockage and gravity waves in conventionally neutral boundary layers, *Journal of Fluid Mechanics*, 979, A54. doi:10.1017/jfm.2023.1088, 2024.
- 530 Lampert, A., Bärfuss, K., Platis, A., Siedersleben, S., Djath, B., Cañadillas, B., Hankers, R., Bitter, M., Feuerle, T., Schullz, H., Rausch, T., Angermann, M., Schwithal, A., Bange, J., Schulz-Stellenfleth, J., Neumann, T., and Emeis, S.: In-situ airborne measurements of atmospheric and sea surface parameters related to offshore wind parks in the German Bight, *Earth Syst. Sci. Data*, 12, 935–946, 2020.
- Lampert, A., Hankers, R., Feuerle, T., Rausch, T., Cremer, M., Angermann, M., Bitter, M., Füllgraf, J., Schulz, H., Bestmann, U., and Bärfuss, K. B.: In situ airborne measurements of atmospheric parameters and airborne sea surface properties related to offshore wind parks in the German Bight during the project X-Wakes, *Earth Syst. Sci. Data*, 16, 4777–4792, <https://doi.org/10.5194/essd-16-4777-2024>, 2024.
- 535 Lange, B., Larsen, S., Højstrup, J., and Barthelmie, R.: Importance of thermal effects and sea surface roughness for offshore wind resource assessment, *J. Wind Engineering and Industrial Aerodynamics*, 92, 959-988, 2004.
- Larsen, X.G. and Fischereit, J.: A case study of wind farm effects using two wake parameterizations in the Weather Research and Forecasting (WRF) model (V3.7.1) in the presence of low-level jets, *Geosci. Model Dev.*, 14, 3141–3158, 2021.
- 540 Larsén, X.G., Fischereit, J., Hamzeloo, S., Bärfuss, K., and Lampert, A.: Investigation of wind farm impacts on surface waves using coupled numerical simulations, *Renewable Energy*, 237, 121671, <https://doi.org/10.1016/j.renene.2024.121671>, 2024.
- Lee, S., Churchfield, M.J., Moriarty, P.J., Jonkman, J., and Michalakes, J.: A Numerical Study of Atmospheric and Wake Turbulence Impacts on Wind Turbine Fatigue Loadings, *J. olar energy Engineering*, 135, 031001, 10 p., 2013.

- Lenschow, D. H.: The Measurement of Air Velocity and Temperature Using the NCAR Buffalo Aircraft Measuring System; National Center
545 for Atmospheric Research, Boulder, CO, NCARTN/EDD-74, 39 pp., <https://doi.org/10.5065/D6C8277W>, 1972.
- Li, X., and Lehner, S.: Observation of TerraSAR-X for studies on offshore wind turbine wake in near and far fields, *IEEE J Sel Top Appl Earth Observ Remote Sens.*, 6, 3, 1757-1768, 2013.
- Lian, Z., Liu, K., and Yang, T.: Potential Influence of Offshore Wind Farms on the Marine Stratification in the Waters Adjacent to China, *J. Mar. Sci. Eng.*, 10, 1872, <https://doi.org/10.3390/jmse10121872>, 2022.
- 550 Lundquist, J., DuVivier, K.K., Kaffine, D., and Tomaszewski, J.M.: Costs and consequences of wind turbine wake effects arising from uncoordinated wind energy development, *Nature Energy*, 4, 26-34, 2019.
- Manzano-Agugliaro, F., Sanchez-Calero, M., Alcayde, A., San-Antonio-Gomez, C., Pereo-Moreno, A.-J., and Salmeron-Manzano, E.: Wind Turbine Offshore Foundations and Connections to Grid, *Inventions* 2020, 5, 1, 8, 2020.
- Meijer, J., Steinfeld, G., Vollmer, L., and Dörenkämper, M.: The global blockage effect of a wind farm cluster - an LES study, *J. Phys.: Conf. Ser.*, 2767, 092093, DOI 10.1088/1742-6596/2767/9/092093, 2024.
- 555 Mora, E.B., Spelling, J., van der Weijde, A.H., Pavageau, E.-M.: The effects of mean wind speed uncertainty on project finance debt sizing for offshore wind farms, *Applied Energy*, 252, 113419, <https://doi.org/10.1016/j.apenergy.2019.113419>, 2019.
- Nygaard, N.G., and Hansen, S.D.: Wake effects between two neighbouring wind farms, *Journal of Physics: Conference Series*, 753, 3, 032020, 2016.
- 560 Nygaard, N.G., Steen, S.T., Poulsen, L., and Pedersen, J.G.: Modelling cluster wakes and wind farm blockage, *J. Phys.: Conf. Ser.*, 1618, 062072, <https://doi.org/10.1088/1742-6596/1618/6/062072>, 2020.
- Olsen, A.-M., Øiestad, M., Berge, E., Køltzow, M.Ø, and Valkonen, T.: Evaluation of Marine Wind Profiles in the North Sea and Norwegian Sea Based on Measurements and Satellite-Derived Wind Products, *Tellus A: Dynamic Meteorology and Oceanography*, 74, 1–16, <https://doi.org/10.16993/tellusa.43>, 2022.
- 565 Ouro, P., Ghobrial, M., Ali, K., and Stallard, T.: Numerical modelling of offshore wind-farm cluster wakes, *Renewable and Sustainable Energy Reviews*, 115526, 215, <https://doi.org/10.1016/j.rser.2025.115526>, 2025.
- Pedersen, J.G., Svensson, E., Poulsen, L., and Nygaard, N.G.: Turbulence Optimized Park model with Gaussian wake profile, *J. Phys.: Conf. Ser.*, 2265, 022063, <https://doi.org/10.1088/1742-6596/2265/2/022063>, 2022.
- Pedersen, M.M., Meyer Forsting, A., van der Laan, P., Riva, R., Alcayaga Romàn, L.A., Criado Risco, J., Friis-Møller, M., Quick, J., Schøler
570 Christiansen, J.P., Valotta Rodrigues, R., Olsen, B.T., and Réthoré, P.-E.: PyWake 2.5.0: An open-source wind farm simulation tool, DTU Wind, Technical University of Denmark, February 2023.
- Peña, A., Gryning, S.-E., and Floors, R.: Lidar observations of marine boundary-layer winds and heights: a preliminary study, *Meteorologische Zeitschrift*, 24, 6, 581–589, 2015.
- Pettas, V., Kretschmer, M., Clifton, A., and Cheng, P.W.: On the effects of inter-farm interactions at the offshore wind farm Alpha Ventus,
575 *Wind Energ. Sci.*, 6, 1455-1472, 2021.
- Paskyabi, M.B.: Offshore Wind Farm Wake Effect on Stratification and Coastal Upwelling, *Energy Procedia*, 80, 131-140, 2015.
- Platis, A., Siedersleben, S., Bange, J., Lampert, A., Bärfuss, K., Hankers, R., Cañadillas, B., Foreman, R., Schulz-Stellenfleth, J., Djath, B., Neumann, T., and Emeis, S.: First in situ evidence of wakes in the far field behind offshore wind farms, *Scientific Reports*, doi 10.1038/s41598-018-20389-y, 2018.

- 580 Platis, A., Bange, J., Bärfuss, K., Cañadillas, B., Hundhausen, M., Djath, B., Lampert, A., Schulz-Stellenfleth, J., Siedersleben, S., Neumann, T., and Emeis, S.: Long-range modifications of the wind field by offshore wind parks – results of the project WIPAFF, *Meteorologische Zeitschrift*, DOI: 10.1127/metz/2020/1023, 22 pp., 2020.
- Platis, A., Hundhausen, M., Lampert, A., Emeis, S., and Bange, J.: The Role of Atmospheric Stability and Turbulence in Offshore Wind-Farm Wakes in the German Bight, *Boundary-Layer Meteorology*, <https://doi.org/10.1007/s10546-021-00668-4>, 29 pp., 2021a.
- 585 Platis, A., Hundhausen, M., Mauz, M., Siedersleben, S., Lampert, A., Bärfuss, K., Djath, B., Schulz-Stellenfleth, J., Cañadillas, B., Neumann, T., Emeis, S., and Bange, J.: Evaluation of a simple analytical model for offshore wind farm wake recovery by in situ data and Weather Research and Forecasting simulations, *Wind Energy*, 24, 212–228, 2021b.
- Platis, A., Büchau, Y., Zuluaga, S., and Bange, J.: The impact of offshore wind farms on the latent heat flux, *Boundary-Layer Meteorology*, 32, 4, 261–277, https://www.schweizerbart.de/papers/metz/detail/32/102963/The_impact_of_offshore_wind_farms_on_the_latent_he?af=crossref, 2023.
- 590 Ponce de León, S., Bettencourt, J.H., and Kjerstad, N.: Simulation of Irregular Waves in an Offshore Wind Farm with a Spectral Wave Model, *Cont. Shelf Res.*, 31, 1541–1557, 2011.
- Porchetta, S., Munoz-Esparza, D., Munters, W., van Beeck, J., and van Lipzig, N.: Impact of ocean waves on offshore wind farm power production, *Renewable nergy*, 180, 1179–1193, <https://doi.org/10.1016/j.renene.2021.08.111>, 2021.
- 595 Porté-Agel, F., Bastankhah, M. and Shamsoddin, S.: Wind-Turbine and Wind-Farm Flows: A Review, *Boundary-Layer Meteorol.*, 174, 1–59, <https://doi.org/10.1007/s10546-019-00473-0>, 2020.
- Pryor, S.C., and Barthelmie, R.J.: A global assessment of extreme wind speeds for wind energy applications, *Nat. Energy*, 6, 268–276, <https://doi.org/10.1038/s41560-020-00773-7>, 2021.
- Rausch, T., Bärfuss, K., Hankers, R., Bitter, M., Feuerle, T., Cremer, M., Angermann, M., Füllgraf, J., and Lampert, A.: In-situ airborne measurements of atmospheric and sea surface parameters related to offshore wind parks in the German Bight [dataset publication series]. PANGAEA, <https://doi.org/10.1594/PANGAEA.955382>, 2023.
- 600 Rausch, T., Cañadillas, B., and Lampert, A.: Coastal vertical wind lidar measurements of horizontal wind speed and wind direction from 40 to 500 m at Norderney island, German Bight, North Sea, Germany [dataset]. PANGAEA, <https://doi.org/10.1594/PANGAEA.953770>, 2023.
- 605 Rivier, S., Bennis, A.-C., Pinon, G., Magar, V., and Gross, M.: Parameterization of wind turbine impacts on hydrodynamics and sediment transport, *Ocean Dynamics*, 66, 1285–1299, 2016.
- Sanchez Gomez, M., Lundquist, J.K., Mirocha, J.D., and Arthur, R.S.: Investigating the physical mechanisms that modify wind plant blockage in stable boundary layers, *Wind Energ. Sci.*, 8, 1049–1069, <https://doi.org/10.5194/wes-8-1049-2023>, 2023.
- Sathe, A., Mann, J., Barlas, T., Bierbooms, W.A.A.M., van Bussel, G.J.W.: Influence of atmospheric stability on wind turbine loads, *Wind Energy*, 16, 1013–1032, doi:10.1002/we.1528, 2013.
- 610 Schmidt, J., Vollmer, L., Dörenkämper, M., and Stoevesandt, B.: FOXES: Farm Optimization and eXtended yield Evaluation Software, *Journal of Open Source Software*, 8, 86, 5464, <https://doi.org/10.21105/joss.05464>, 2023.
- Schmitt, L., Bärfuss, K., Larsen, X.G., Fischereit, J., and Lampert, L.: Spatial Variability of Sea State in the German Bight and Influence of Offshore Wind Farms, *Wind Energy*, 29, 3, e70101, <https://doi.org/10.1002/we.70101>, 2026.
- 615 Schneemann, J., Rott, A., Dörenkämper, M., Steinfeld, G., and Kühn, M.: Cluster wakes impact on a far-distant offshore wind farm’s power, *Wind Energ. Sci.*, 5, 29–49, 2020.

- Schneemann, J., Theuer, F., Rott, A., Dörenkämper, M., and Kühn, M.: Offshore wind farm global blockage measured with scanning lidar, *Wind Energ. Sci.*, 6, 521–538, <https://doi.org/10.5194/wes-6-521-2021>, 2021.
- Schneemann, J., Theuer, F., Rott, A., and Kühn, M.: Measurement of flow deflection effects around an offshore wind farm caused by global
620 blockage, *J. Phys.: Conf. Ser.*, 3016, 012012, DOI 10.1088/1742-6596/3016/1/012012, 2025.
- Schulz-Stellenfleth, J., Emeis, S., Dörenkämper, M., Bange, J., Cañadillas, B., Neumann, T., Schneemann, J., Weber, I., zum Berge, K., Platis, A., Djath, B., Gottschall, J., Vollmer, L., Rausch, T., Barekzai, M., Hammel, J., Steinfeld, G., and Lampert, A.: Coastal impact on offshore wind farms – a review focusing on the German Bight area, *Meteorologische Zeitschrift*, 31, 4, 289 - 315, 2022.
- Sengers, B.A.M., Vollmer, L., and Dörenkämper, M.: Multi-model approach for wind resource assessment, *J. Phys.: Conf. Ser.*, 2767, 092024,
625 <https://doi.org/10.1088/1742-6596/2767/9/092024>, 2024.
- Shaw, W. J., Berg, L. K., Debnath, M., Deskos, G., Draxl, C., Ghate, V. P., Hasager, C. B., Kotamarthi, R., Mirocha, J. D., Muradyan, P., Pringle, W. J., Turner, D. D., and Wilczak, J. M.: Scientific challenges to characterizing the wind resource in the marine atmospheric boundary layer, *Wind Energ. Sci.*, 7, 2307–2334, <https://doi.org/10.5194/wes-7-2307-2022>, 2022.
- Siedersleben, S.K., Platis, A., Lundquist, J.K., Lampert, A., Bärfuss, K., Cañadillas, B., Djath, B., Schulz-Stellenfleth, J., Neumann, T.,
630 Bange, J., and Emeis, S.: Evaluation of a Wind Farm Parametrization for Mesoscale Atmospheric Flow Models with Aircraft Measurements, *Meteorologische Zeitschrift*, PrePub DOI 10.1127/metz/2018/0900, 2018a.
- Siedersleben, S.K., Lundquist, J.K., Platis, A., Bange, J., Bärfuss, K., Lampert, A., Cañadillas, B., Neumann, T., and Emeis, S.: Micrometeorological impacts of offshore wind farm as seen in observations and simulations, *Env. Res. Lett.*, 13, 124012, 2018b.
- Siedersleben, S., Platis, A., Lundquist, J., Djath, B., Lampert, A., Bärfuss, K., Cañadillas, B., Schulz-Stellenfleth, J., Bange, J., Neumann, T.,
635 and Emeis, S.: Turbulent kinetic energy over large offshore wind farms observed and simulated by the mesoscale model WRF (3.8.1), *Geosci. Model Dev.*, 13, 249–268, 2020.
- Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Liu, Z., Berner, J., Wang, W., Powers, J. G., Duda, M. G., Barker, D., and Huang, X.-Y.: A Description of the Advanced Research WRF Version 3, NCAR Technical Note NCAR/TN-556+STR, National Center for Atmospheric Research, Boulder, Colorado, USA, 162 pp., <https://doi.org/10.5065/1dfh-6p97>, 2019.
- Spanghel, T., Borsche, M., Niermann, D., Kaspar, F., Schimanke, S., Brienens, S., Möller, T., and Brast, M.: Intercomparing the quality of
640 recent reanalyses for offshore wind farm planning in Germany’s exclusive economic zone of the North Sea, *Adv. Sci. Res.*, 20, 109–128, <https://doi.org/10.5194/asr-20-109-2023>, 2023.
- Spyridonidou, S., and Vagiona, D.G.: Systematic Review of Site-Selection Processes in Onshore and Offshore Wind Energy Research, *Energies* 13, 5906, 2020.
- Stickney, T. M., Shedlov, M. W., and Thompson, D. I.: Goodrich Total Temperature Sensors, Technical Report, 5755, 32 pp. available at:
645 <https://www.flightdatacommunity.com/wp-content/uploads/downloads/2013/02/TAT-Report.pdf> (accessed on 18 April 2022), 1994.
- van Stratum, B., Theeuwes, N., Barkmeijer, J., van Uft, B., and Wijnant, I.: A one-year-long evaluation of a wind-farm parameterization in HARMONIE-AROME. *Journal of Advances in Modeling Earth Systems*, 14, e2021MS002947. <https://doi.org/10.1029/2021MS002947>, 2022.
- 650 Taylor, P.A.: A model of airflow above changes in surface heat flux, temperature and roughness for neutral and unstable conditions, *Boundary-Layer Meteorology*, 1, 18-39, DOI:10.1007/BF00193902, 1970.
- UL-International, Openwind User Manual, Version 1.9, AWS Truepower, LLC, Albany, NY, USA, 2020.
- Veers, P., Dykes, K., Lantz, E., Barth, S., Bottasso, S.B., Carlson, O., Clifton, A., Green, J., Holttinen, H., Laird, D., Lehtomäki, V., Lundquist, J.K., Manwell, J., Marquis, M., Meneveau, C., Moriarty, P., Munduate, X., Muskulus, M., Naughton, J., Pao, L., Paquette, J., Peinke, J.,

- 655 Robertson, A., Sanz Rodrigo, J., Sempreviva, A.M., Smith, J.C., Tuohy, A., and Wiser, R.: Grand challenges in the science of wind energy, *Science*, 366, 443, 2019.
- Vera-Tudela, L., and Kühn, M.: Analysing wind turbine fatigue load prediction: The impact of wind farm flow conditions, *Renew. Energ.*, 107, 352-360, 2017.
- Verhoef, A., Portabella, M., Stoffelen, A., and Hersbach, H. (2008). CMOD5. n-the CMOD5 GMF for neutral winds. Tech. Rep. SAF/OSI/C-
- 660 DOP/KNMI/TEC/TN/3, 165, KNMI, De Bilt, Netherlands, 2017.
- Vollmer, L., Sengers, B. A. M., and Dörenkämper, M.: Brief communication: A simple axial induction modification to the Weather Research and Forecasting Fitch wind farm parameterization, *Wind Energ. Sci.*, 9, 1689–1693, <https://doi.org/10.5194/wes-9-1689-2024>, 2024.
- Wagner, D. Steinfeld, G., Witha, B., Wurps, H., and Reuder, J.: Low Level Jets over the Southern North Sea, *Meteorologische Zeitschrift*, 28, 5, 389 - 415, DOI: 10.1127/metz/2019/0948, 2019.
- 665 Windt, C., Goseberg, N., Schimmels, S., Kudella, M., Shanmugasundaram, R., Rusche, H., Vanjakula, V., Adam, F., Majewski, M., Kazimierowicz-Frankowska, K., Pietrkiewicz, M., Kirca, V.S.O., Sumer, B.M.: Liquefaction around marine structures: Development of a numerical modelling framework in OpenFOAM, *Int. J. Offshore Polar Engineering*, 34, 2, 2024.
- Wiser, R., Rand, J., Seel, J., Beiter, P., Baker, E., Lantz, E., and Gilman, P.: Expert elicitation survey predicts 37% to 49% declines in wind energy costs by 2050, *Nature Energy*, 6, 5555-565, 2021.
- 670 Wu, Y.T., and Porté-Agel, F.: Large-Eddy Simulation of Wind-Turbine Wakes: Evaluation of Turbine Parametrisations, *Boundary-Layer Meteorol.*, 138, 345–366, <https://doi.org/10.1007/s10546-010-9569-x>, 2011.