

Performance of Multi-Band MDE-Based Virtual Sensing for Estimating Lifetime Fatigue Damage Equivalent Loads for the IEA 15 MW Reference Wind Turbine

Mads Greve Pedersen^{1,2}, Jennifer Marie Rinker³, Isaac Farrereas Alcover², and Jan Høgsberg¹

¹Department of Civil and of Mechanical Engineering, Technical University of Denmark, 2800 Kongens Lyngby, Denmark

²COWI A/S, 2800 Kongens Lyngby, Denmark

³Department of Wind and Energy Systems, Technical University of Denmark, 2800 Kongens Lyngby, Denmark

Correspondence: Mads Greve Pedersen (mgpe@cowi.com)

Abstract. Offshore Wind Turbines (OWTs) are increasingly susceptible to fatigue damage, motivating structure-wide stress monitoring for asset integrity management and life extension. Virtual sensing methodologies, such as multi-band Modal Decomposition and Expansion (MDE), offer a solution to the above by extrapolating measurements from a few sensors at accessible locations to the global structure. However, most MDE studies model the Rotor-Nacelle-Assembly (RNA) as a lumped mass inertia, thereby ignoring rotor flexibility. This can lead to errors in estimated strains or stresses arising from erroneous mode shapes and the omission of relevant rotor modes from the estimates. The present paper quantifies these errors using HAWC2 simulations of the IEA 15-MW Reference Wind Turbine (RWT). Multi-band MDE estimates of section moments are compared to true responses in terms of Damage Equivalent Load (DEL) and Stress (DES). Long-term estimates show that MDE accuracy depends on both the design load case and the elevation considered on the RWT support structure, with the MDE exhibiting notable errors near the tower top and at ± 15 m around the Mean Sea Level (MSL). Furthermore, the error of the MDE estimates exhibits wind speed dependency, which underlines the inherent limitation of the MDE, assuming a linear and time-invariant response. In conclusion, multi-band MDE provides accurate estimates of section moments across most of the IEA 15-MW RWT support structure. However, improvements to the MDE may be achieved by the inclusion of rotor flexibility in the RNA model and environmental variability in the wave load Ritz vector.

1 Introduction

During recent decades, wind turbines have been consistently growing in size, and modern Offshore Wind Turbines (OWTs) already on the market, such as the Vestas V236-15MW, now have a power production of up to 15 MW and rotor diameters approaching 240 m (Vestas Wind Systems A/S). At the same time, prototypes of the Mingyang MySE18.X-20MW, with a power production of 20 MW and a rotor diameter of up to 292 m, and the Siemens Gamesa SG DD-276, with a power production of 21.5 MW and a rotor diameter of up to 276 m, have also been installed (Ghoshal, 2024; Salas, 2025). The growth in wind turbine size results in highly flexible support structures (tower, transition piece, and foundation), with the lowest natural frequencies approaching the quasi-static frequency domain. This makes them susceptible to dynamic excitation from turbulence

and wave loads, resulting in designs that are increasingly vulnerable to fatigue damage (Zou et al., 2023). The same period has experienced the emergence of Structural Health Monitoring (SHM), where data from sensors installed in a given structure is applied to inform Operation and Maintenance (O&M) strategies, in asset integrity assessments, and lately also for the assessment of potential life-extension through monitoring of strain histories at fatigue critical locations. However, for offshore structures, these critical locations are often sub-sea, where the strain sensors are only accessible with significant efforts, or sub-soil, where strain sensors cannot be installed or maintained in practice after erection. Furthermore, pre-installed sensors are likely to be damaged during erection, while any undamaged strain sensors tend to fail after a few years (Toftekær et al., 2023). To overcome these challenges, virtual sensing has gained traction in SHM of OWTs, where structural responses (stresses or strains) are estimated by so-called virtual sensors in which physical (above-sea) sensor signals are extrapolated to critical locations by a digital process model. Additionally, virtual sensing has the significant benefit of estimating the response of the structure at any location, hence not limiting the information from the Structural Health Monitoring System (SHMS) to a few predefined sensor locations.

According to Zou et al. (2023), virtual sensing process models can be separated into two main categories. The deterministic approach uses model-based extrapolation, from which strain responses are estimated based on measurements from e.g. accelerometers, inclinometers, strain gauges, or 3D point tracking (Baqersad et al., 2015). The alternative probabilistic approach applies state-estimation from Kalman filters (Maes et al., 2016), augmented Kalman filters (Vettori et al., 2023), dual Kalman filters (Eftekhar Azam et al., 2015), or, more recently, from a generic latent force model (Bilbao et al., 2022; Zou et al., 2023). Lately, the use of neural networks has also entered the field of virtual sensing, e.g. when physics-guided learning from SCADA data and 10-minute acceleration statistics are used to estimate damage equivalent moments (de N Santos et al., 2023), or when virtual sensors are trained based on strain sensors for gap-filling in strain histories in case of sensor failure (Faria et al., 2025).

The present work applies the predominant deterministic model-based expansion method: Modal Decomposition and Expansion (MDE). The concept of virtual sensing by MDE was initially introduced for dynamic strain estimation in OWTs in the pioneering work by Iliopoulos et al. (2014, 2016), and subsequently extended in Iliopoulos et al. (2017) to multi-band MDE, where strain histories are estimated individually in separate frequency bands (quasi-static, low-frequency and high-frequency) based on measurements from strain gauges (for the quasi-static band) and accelerometers (for low- and high-frequency bands) using mode shapes and static deflection shapes from a Finite Element (FE) beam model with a lumped Rotor-Nacelle-Assembly (RNA) inertia. This approach has been further developed by Noppe et al. (2016), using a SCADA-driven thrust load model for quasi-static band estimation, and by Henkel et al. (2021) for estimating and validating sub-soil fatigue stresses by dual-band MDE with experimental mode shapes and Operational Deflection Shapes (ODSs).

The use of experimental ODSs and mode shapes is also applied for strain estimation using a synthetic response of the National Renewable Energy Laboratory (NREL) 5 MW Reference Wind Turbine with an OC4 jacket substructure in Henkel et al. (2020), indicating less good performance for strains in the braces due to the occurrence of local brace modes and extrapolation of the wave loading. Augustyn et al. (2021) attempts to improve the accuracy for jacket structures by including sensors in a few submerged braces and applying the wave load generated Ritz vectors from Skaftø et al. (2017) and local brace modes in MDE.

Recently, Toftekær et al. (2023) have investigated the use of rotations obtained from filtered acceleration measurements in combination with Ritz vectors to estimate quasi-static stresses at the mud line of an 8.4 MW offshore wind turbine, and thereby
60 quantifying the accuracy of the estimated stress range histories for different modal expansion configurations. Subsequently, Fallais et al. (2024) have investigated the accuracy of a single-model MDE configuration for estimating damage equivalent stresses in the lower part of an OWT support structure, concluding that varying operational conditions across 2000 10-minute time series only have a minor impact on the estimate precision.

Studies performing strain/stress estimates for monopile-supported OWTs, using MDE with mode shapes and Ritz vectors
65 from an FE model (Iliopoulos et al., 2017; Noppe et al., 2016; Toftekær et al., 2023; Fallais et al., 2024), commonly consider the RNA as a lumped inertia. Consequently, the tower mode shapes that include blade motions are estimated inaccurately. This is demonstrated by Reinhardt et al. (2024), which shows that ignoring blade flexibility in the RNA model significantly impacts the natural frequency and mode shape of the second tower bending modes. Additionally, rotor modes, which, given the inherent coupling between the tower and the blades, also affect the tower vibrations, are omitted from the MDE, as these
70 cannot be represented using a lumped inertia RNA model. These simplifications can therefore introduce errors in the strains or stresses estimated in the support structure. Furthermore, in the reviewed studies, the MDE performance is typically evaluated in the lower part of the support structure, where the influence from errors in the RNA model is less pronounced, thus giving an erroneous impression of their importance for the global response of the considered structure. Finally, these studies do not include wave loading separately in the MDE, thus assuming that wave loads are either insignificant or that the associated
75 dynamic mode shapes can well capture their effects. However, these simplifications will lead to errors in the estimated strains and stresses in areas of the OWT support structure exposed to substantial wave loading.

The present paper addresses the errors associated with representing the rotor by a lumped RNA inertia and its influence on the MDE prediction of Damage Equivalent Loads (DELs) and Stresses (DESS) in modern scale offshore wind turbines. Furthermore, it investigates how wave loads can be explicitly included in the Ritz vectors for quasi-static and low-frequency
80 estimation. For that precise purpose, uncertainties from soil modelling, variations in the OWT's as-built conditions, and measurement noise from sensors have been eliminated by considering the synthetic response data in Pedersen et al. (2025), which is an open access dataset (available for download at <https://doi.org/10.11583/DTU.24460090>) containing response simulations covering the Fatigue Limit State (FLS) design life of the IEA Wind 15-Megawatt Offshore Reference Wind Turbine with a monopile foundation (IEA 15-MW RWT) version 1.1.6 (Gaertner et al., 2020a).

85 The novel contributions of this paper are summarised as follows. The paper demonstrates the structure-wide performance of multi-band MDE by quantifying the error in terms of DES and DEL along the IEA 15-MW RWT support structure, while applying a state-of-the-art lumped inertia model for deriving mode shapes used in the MDE. It specifically shows how errors are associated with the second and third tower bending modes and the omission of rotor modes coupled to tower excitation. Additionally, this paper proposes a simple time-invariant load distribution for the wave load Ritz vector, which, to the best of
90 the author's knowledge, has not been explicitly defined in existing studies dealing with virtual sensing in OWTs on monopile foundations. Finally, this is the first work to utilise the dataset Pedersen et al. (2025). This dataset facilitates cross-institute benchmarking of virtual sensing algorithms, as it provides an unrestricted range of sensor locations and associated output

channels. Furthermore, it enables validation of the predicted response in the entire OWT, including the monopile, tower, and blades.

95 The structure of the paper is as follows. Section 2 briefly presents the data from Pedersen et al. (2025), Section 3 presents the assessment of the performance of the IEA 15-MW RWT, along with a relative lifetime damage calculation made for the individual design load cases included in Pedersen et al. (2025). Section 4 explains the multi-band MDE methodology used in the present work and the Finite Element (FE) model used to extract mode shapes and Ritz vectors for the MDE. In Section 5, the MDE is used for the estimation of Damage Equivalent Loads (DELs) and Stresses (DESSs) and the MDE errors are
100 quantified and discussed, with the final Section 6 providing conclusions and perspective for future work.

2 Data

The present work is based on synthetic wind turbine response data from the online open-access dataset "*IEA-15MW-RWT-Monopile HAWC2 Response Database*" (Pedersen et al., 2025), which is available for download at <https://doi.org/10.11583/DTU.24460090> along with the relevant documentation, model- and input files, and scripts for reading and sorting data.
105 The dataset comprises 4902 HAWC2 output files covering the Fatigue Limit State (FLS) design life of the IEA 15-MW RWT (presented Figure 1) version 1.1.6, which is described in Gaertner et al. (2020a). The metocean data used for the simulations performed by Pedersen et al. (2025) is based on the metocean assessment performed for Energinet Eltransmission A/S in DHI (2023a), DHI (2023b), and DHI (2023c). The individual HAWC2 output files contain time series data from 898 sensors, hereunder environmental- and operational data (e.g. hub wind speed, wave height, rotor speed, blade pitch angles, torque, thrust,
110 and power production) and structural response data in terms of displacements, rotations, accelerations, forces, and moments in the individual structural members.

Appendix A briefly describes the IEA 15-MW RWT, and the modelling assumptions and Design Load Cases (DLCs) considered in Pedersen et al. (2025).

3 IEA 15-MW RWT performance and relative damage assessment

115 In the present section, the performance of the IEA 15-MW RWT is assessed based on the data presented in Section 2. Subsequently, the relative lifetime damage from the individual DLCs from Pedersen et al. (2025) is calculated for the IEA 15-MW RWT, based on Damage Equivalent Loads (DELs).

3.1 Performance of the IEA 15-MW RWT

When performing Modal Decomposition and Expansion (MDE) modal truncation is needed due to a limited number of sensors.
120 Furthermore, a finite number of Ritz vectors can be included to assess the quasi-static part of the response. Hence, it is important to have an overview of the different governing loads to be accounted for in the response estimates. This section gives an example of how diverse operational and environmental conditions can impact the Damage Equivalent Loads (DELs) of the IEA 15-MW

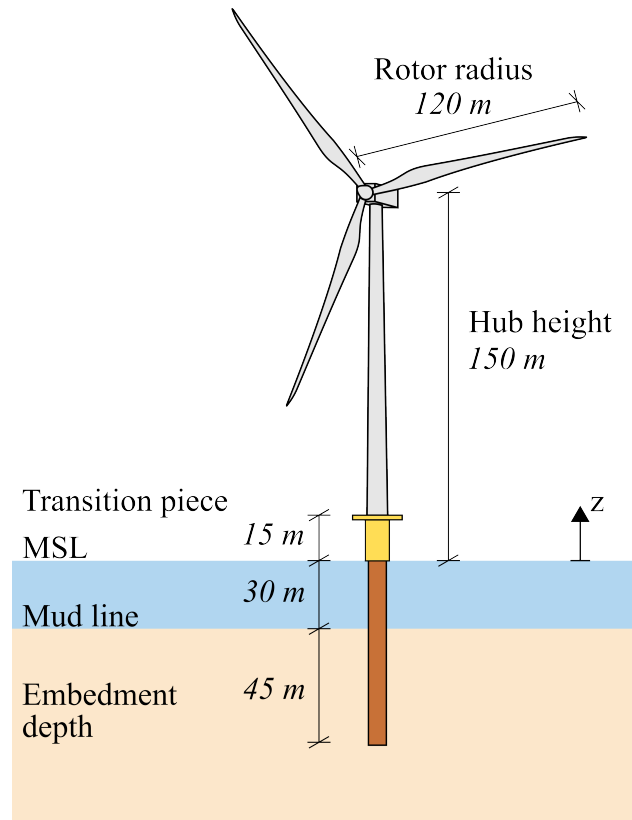


Figure 1. Overview of the IEA 15-MW RWT (data from Gaertner et al. (2020a)). The RWT has a hub height of 150 m above the Mean Sea Level (MSL) and a rotor radius of 120 m. The water depth at the chosen site is 30 m. The support structure of the RWT consists of a 75 m monopile with an embedment depth of 45 m, a 15 m transition piece, and 129.4 m tower.

RWT, and hence contribute differently to lifetime damage. Specifically, statistical values of relevant operational parameters and the tower base Fore-Aft (FA) and Side-Side (SS) section moments are considered during normal power production (DLC 1.2).

In Figure 2, the statistics (minimum, mean, maximum) of the operational parameters (rotor speed, electrical power, generator torque, thrust, and pitch angle) and the wave amplitude are presented, while Figure 3 shows the associated statistics of the tower base FA and SS section moments and the 1 Hz Damage Equivalent Loads (DELs) for the individual HAWC2 time series (evaluated by (4)) for DLC 1.2. The operational parameters in Figure 2 are compared with steady-wind rotor performance values from Gaertner et al. (2023), generated by the *Wind-plant Integrated System Design and Engineering Model* (WISDEM), which uses the aeroelastic code OpenFAST.

Figure 2(a-e) shows that the mean values generally coincide well with the WISDEM output, and Figure 2(f) verifies that the minimum- and maximum wave amplitudes follow the development of the input significant wave height. The greatest discrepancies are observed for the thrust in Figure 2(d) and the pitch angle in Figure 2(e). The discrepancies in the thrust and

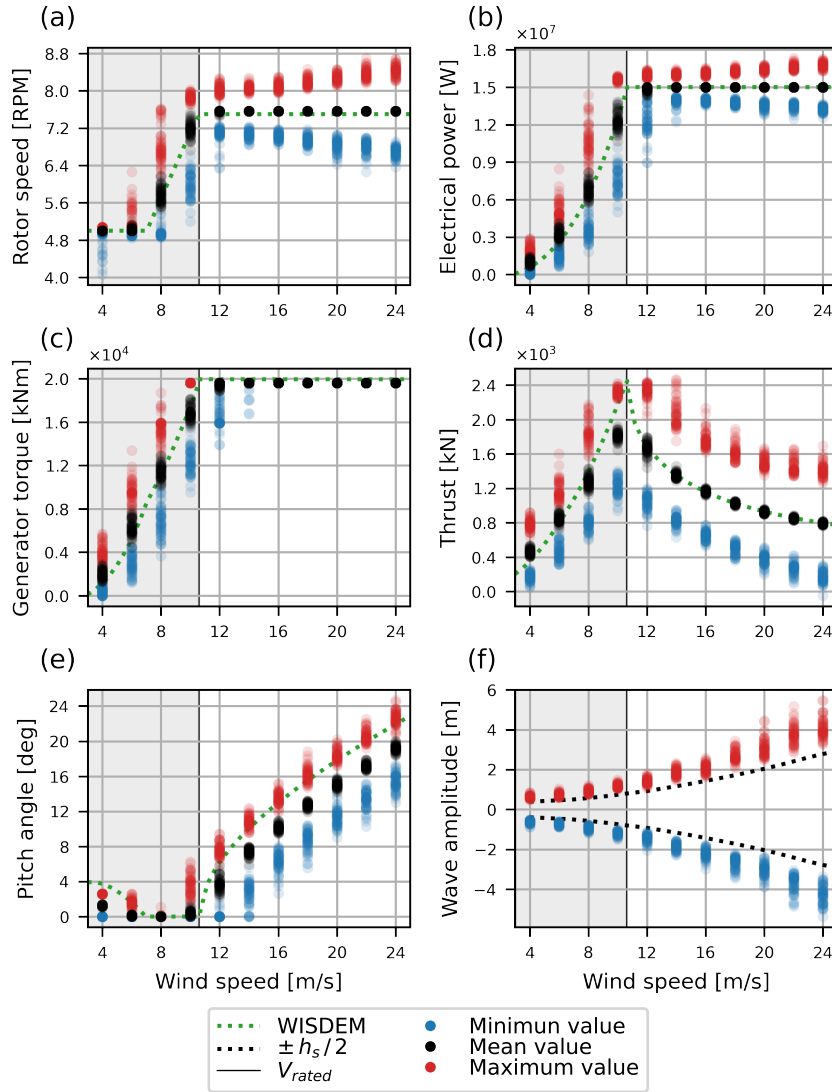


Figure 2. Statistical values (minimum, mean, maximum) for selected operational parameters (a) rotor speed, (b) electrical power, (c) generator torque, (d) thrust load, (e) pitch angle, and (f) wave amplitude depicted across the wind speed at the hub, calculated for the HAWC2 time series covering DLC 1.2 for the MWL equal to MSL.

135 pitch angle are due to: steady versus turbulent operation and the ElastoDyn beam model used in the WISDEM calculation (Gaertner et al., 2020b) not including a torsional degree of freedom (Rinker et al., 2020). The generally good match between the models indicates that the HAWC2 model may be used for further analysis.

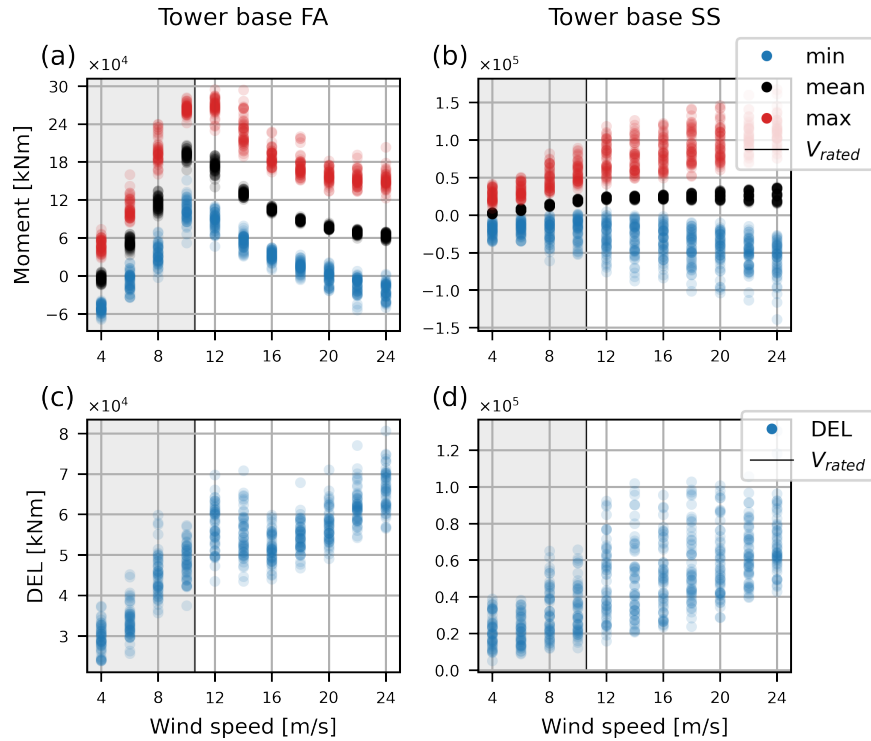


Figure 3. Statistical values (minimum, mean, maximum) of the tower base moment calculated in (a) the FA direction and (b) the SS direction, and DELs calculated in (c) the FA direction and (d) the SS direction, all based on the HAWC2 time series covering DLC 1.2 for the MWL equal to MSL.

The statistical values for the tower base FA moment presented in Figure 3(a) follow the thrust curve from Figure 2(d) as expected. The DELs associated with the tower base FA moment presented in Figure 3(c) generally increase with both the wind speed and turbulence. However, they plateau at wind speeds from approximately 12 – 16 m/s, in which range the blades start to pitch (see Figure 2(e)). This illustrates that the DELs in the FA direction at the tower base are primarily governed by quasi-static wind loading, while operational parameters (e.g., the pitch angle) also affect the damage. Similarly to the statistical values of the tower base FA moment, the mean values of the tower base SS moment presented in Figure 3(b) follow the generator torque curve in Figure 2(c). The minimum and maximum values of the tower base SS moment are symmetric around the mean value with increasing amplitudes for increasing wind speeds. The associated DELs in Figure 3(d) also increase with the wind speed and turbulence. Furthermore, Figure 3(d) shows that the variance of the DELs increases with the wind speed up to the rated wind speed, from where it is rather significant.

To assess the cause of the high variance, the time histories of the tower base SS moment, wind speed (in the SS direction), and wave height associated with the minimum and maximum DELs for the wind speed of 14 m/s are presented in Figure 4. Considering the moment time series in Figure 4(a) and the related PSD in Figure 4(b), it is concluded that DELs are mainly

driven by the first tower SS mode. There is not a significant difference in the frequency content of the wind around the natural frequencies of the first order tower bending modes. However, the mean wind speed in the SS direction is significantly higher for the maximum DEL than for the minimum DEL, due to the -10° yaw error. Furthermore, the waves have an angle-of-attack of -32.5° for the maximum DEL, whereas it is 0° for the minimum DEL. Thus, the variation in DEL magnitude is caused
155 by the excitation of the first tower SS mode occurring for the maximum DEL, while not for the minimum DEL, likely due to the difference of the excitation forces resulting from the varying angle-of-attack of the wind and waves between the two time series.

In conclusion, the present section underlines that the DELs calculated for the IEA 15-MW RWT are indeed influenced by environmental parameters such as turbulence, which govern the quasi-static response, and wave direction. Furthermore,
160 operational parameters such as pitch angles and yaw errors can, in some cases, contribute to the excitation of the dynamic modes, which significantly impacts the DELs. Thus, the MDE configuration presented in Section 5.1, is required to accurately capture both quasi-static and dynamic responses for varying operational and environmental conditions.

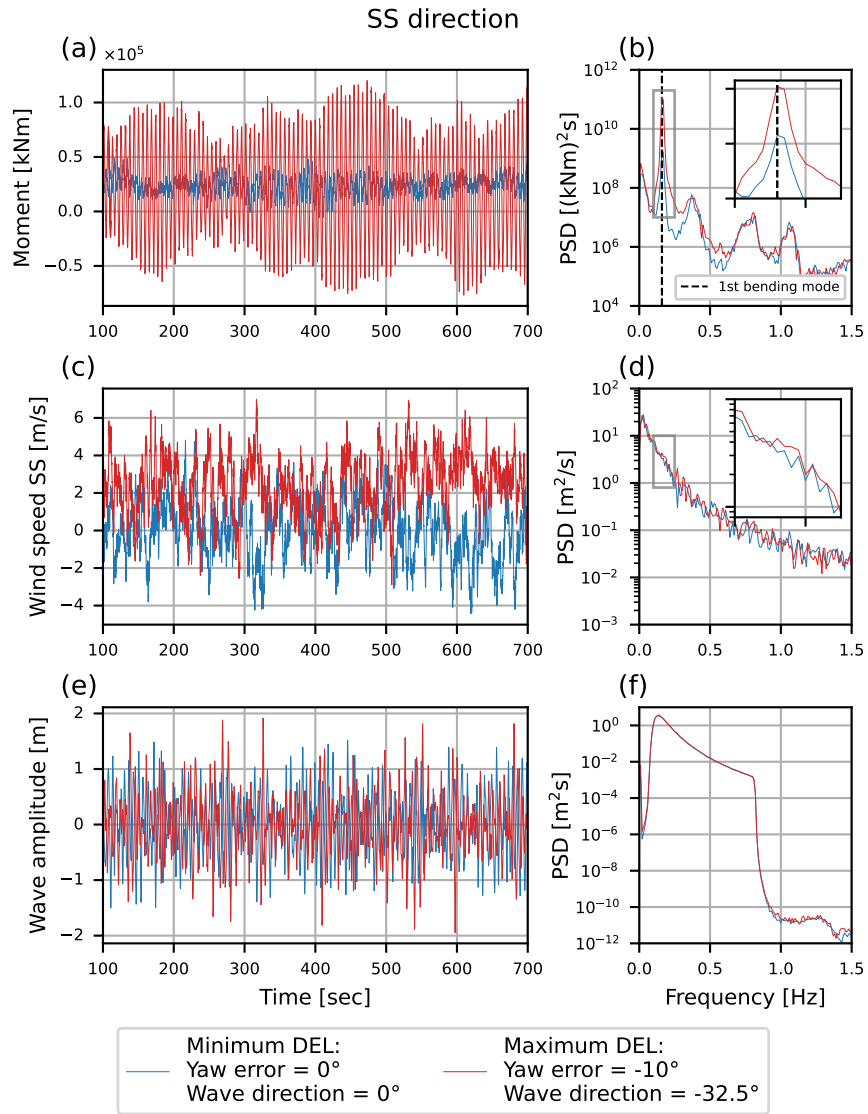


Figure 4. Time series data for maximum and minimum DELs from Figure 3(d) at 14 m/s hub wind speed: (a) time history and (b) PSD of tower base moment in the SS direction, (c) time history and (d) PSD of hub wind speed in the SS direction, and (e) time history and (f) PSD of wave amplitude (water surface elevation).

3.2 Relative lifetime damage results

The present section investigates the lifetime damage of the IEA 15-MW RWT caused by the individual design load cases presented in Section A3, thereby giving an overview of which operating scenarios are significant for the fatigue damage in the support structure.

According to Veldkamp (2006), the relative lifetime damage caused in a given structure by a load case i is given as

$$d_{i,rel} = \frac{n_i (\Delta P_{eq,i})^m}{n_T (\Delta P_{eq})^m} \quad (1)$$

where $\Delta P_{eq,i}$ represents the 1 Hz DEL ranges for the individual load case i , m is the Wöhler coefficient, n_i is the number of 1 Hz cycles for load case i , n_T is the total number of 1 Hz cycles in the structure's lifetime, and ΔP_{eq} is the lifetime DEL range.

In the present analysis, a similar approach to that of Veldkamp (2006) in (1) is used for the evaluation of the relative lifetime damage for individual DLCs. By adding the 1 Hz DELs from the HAWC2 simulations contained in a DLC, the relative damage of the individual DLCs is calculated as

$$d_{DLC,rel} = \frac{\sum_{s \in \text{DLC}} n_s (\Delta P_{eq,s})^m}{n_T (\Delta P_{eq})^m} \quad (2)$$

where

$$n_s = p(\text{DLC}, V, \theta_{yaw}, \theta_{wvm}) \frac{n_T}{n_{seed}} \quad (3)$$

is the number of 1 Hz cycles during the lifetime of the IEA 15-MW RWT, $p(\cdot)$ is the joint probability of the input parameters for the operational and environmental conditions (DLC, wind speed (V), yaw error (θ_{yaw}), and wind-wave misalignment (θ_{wvm})) used for the simulation s , and n_{seed} is the number of simulations that share these operational and environmental conditions. Note that the number of summations in (2) refers to the number of (converged) simulations in Table A2 for a given DLC at MWL equal to MSL. Finally, in (2) the 1 Hz DEL range for the individual HAWC2 simulations is evaluated as

$$\Delta P_{eq,s} = \left(\frac{\sum n_j \Delta P_j^m}{n_{eq}} \right)^{\frac{1}{m}} \quad (4)$$

where n_{eq} is the number of 1 Hz cycles in the time series s , while ΔP_j and n_j are the binned load ranges and corresponding number of load cycles identified from the individual time series using the Rainflow counting method from ASTM E1049-85 (2017). In the present work, a single slope S-N curve with a Wöhler coefficient of $m = 5$ is used for the support structure. This is based on m_1 of the S-N curves for welded and non-welded circular hollow sections from Chapter 8 in DSF/FprEN 1993-1-9 (2024), which is not representative of the damage at all locations in the support structures but still considered sufficiently accurate for the assessment of the impact of the individual DLCs.

The relative damage for the individual DLCs $d_{DLC,rel}$, is presented in Figure 5 for the FA and SS direction of the IEA 15-MW RWT support structure. From these relative damage plots in Figure 5, it is observed that there is a big resemblance in the distribution of damage across the height of the IEA 15-MW RWT for DLC 1.2 and 2.4, which is expected as these load cases

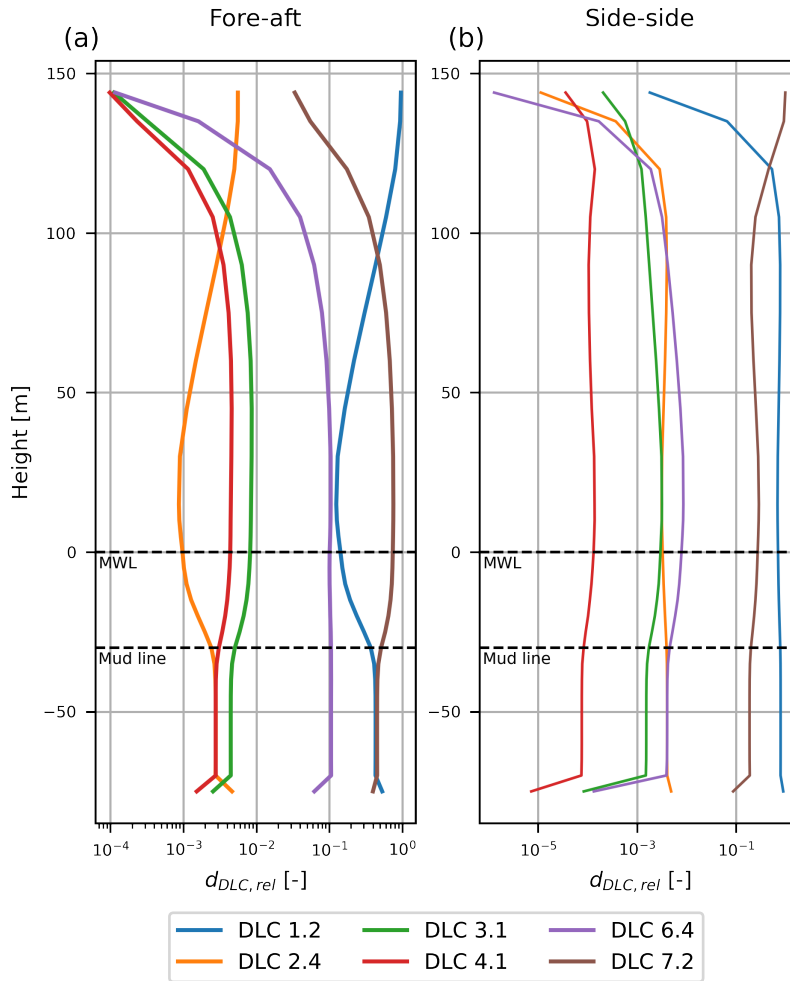


Figure 5. Relative damage for the individual DLCs calculated across the height of the IEA 15-MW RWT support structure as presented in (2) for the FA (a) and SS (b) direction.

are both for operation in normal conditions. A similar expected resemblance is found for DLC 3.1 and 4.1, as these load cases represent start-up and shut-down, respectively. Figure 5(a) shows that approximately 99 % of the damage in the FA direction is caused by DLC 1.2 (Power production in normal conditions), DLC 6.4 (Parked - idle rotor in normal conditions), and 7.2 (Fault - locked rotor in normal conditions). In the SS direction, shown in Figure 5(b), the damage from DLC 6.4 falls below 1%, so only DLC 1.2 and 7.2 are considered significant for the damage in the SS direction. As presented in Table A3, DLC 1.2 is significantly more frequent than DLC 6.4 and 7.2, and the significant damage contribution of this DLC is associated with the

large duration, whereas for DLC 6.4 and 7.2, the substantial damage contribution is associated with the large DELs (see Figure 200 12).

The relative damage in the FA direction in Figure 5(a) is dominated by DLC 1.2 at the tower top ($\approx 100 - 144$ m above the MSL). This is due to 3P effects (tower shadow, wind shear, and turbulence), which are significant contributors to damage in the tower top, as the varying forces on the blades and uneven loading on the rotor result in a significant moment at the hub. In the remainder of the free standing support structure ($\approx -30 - 100$ m), the relative damage in the FA direction is dominated 205 by DLC 7.2. In this area, the section moments are to a higher degree governed by the global bending of the support structure caused by the thrust loading (for DLC 1.2) and especially the first tower FA mode (for DLC 6.4 and 7.2). The tower bending modes in the FA direction for DLC 1.2 are subject to significant aerodynamic damping arising from the operating rotor, thus explaining the smaller contribution to the relative damage from this DLC, and the larger contribution from DLCs 6.4 and 7.2, where the rotor is not operating and the aerodynamic damping is effectively negligible. Below MSL the relative damage 210 contribution from DLC 1.2 and 7.2 approaches each other and balances out at the mud line. This is likely due to the influence of wave loads, which increase with the water depth and are less affected by the aerodynamic damping present for DLC 1.2.

The relative damage in the SS direction in Figure 5(b), is dominated by DLC 7.2 at the tower top ($\approx 120 - 144$ m above MSL), while DLC 1.2 dominates the damage below this area. Unlike the FA response, the SS response for DLC 1.2 is not significantly affected by aerodynamic damping, the 3P effects, or the thrust load variations. Consequently, the damage in both 215 DLC 1.2 and 7.2 is primarily driven by ambient excitation at the turbine's resonant frequencies. However, the locked rotor condition in DLC 7.2 particularly influences damage at the tower top. Because the rotor is fixed in rotation and the blades are pitched 90° , the blades are more susceptible to turbulence-induced excitation, which creates a moment at the blade root. This, in turn, excites the second tower SS mode, and possibly different rotor modes, resulting in DLC 7.2's dominant contribution to damage in the upper part of the support structure. In the lower part, the damage patterns are more governed by the first order 220 tower bending modes, which are similar for DLC 1.2 and 7.2. However, the significantly longer duration of DLC 1.2 (90% of the turbine's lifetime) results in it being dominant below 120 m. This effect is visible in Figure 5(b), where the distribution of relative damage from DLCs 1.2 and 7.2 remains rather constant in the support structure below 100 m, with $d_{DLC,rel}$ for the two DLCs varying between 69 – 80% and 19 – 29%, respectively.

In conclusion, the damage in the support structure of the IEA 15-MW RWT is governed by both normal operation conditions 225 and conditions where the rotor is idling or locked, whereas start-up and shut-down of the wind turbine and operation with yaw error are less critical. However, in a real operating scenario, shut-down and start-up may have a larger influence on the lifetime damage, as they occur more frequently than described by IEC (2019b) due to, for example, curtailment. This has not been accounted for in the present paper. The damage contribution across the elevation of the support structure arises from different local and global effects caused by different environmental and operational scenarios e.g. turbulence, 3P effects, wave loads, and 230 inherent dynamical properties. It should be emphasised that the durations used in this analysis for the DLCs are estimated, and scenarios can occur where the durations are differently distributed between the DLCs. Therefore, it is also relevant to evaluate DELs for individual DLCs, without accounting for their specific durations, when assessing how the different operational scenarios impact lifetime damage, as done in Section 5.2.

4 Virtual Sensing

235 The present section initially explains the basic concepts of multi-band MDE and the methodology applied when moving from nodal displacements to internal force estimates. This is followed by a presentation of the prediction FE model used in the subsequent estimation of Damage Equivalent Loads (DELs) and Stresses (DESS) in Section 5. Finally, the current section presents the model output with respect to dynamic mode shapes and quasi-static Ritz vectors.

4.1 Modal Decomposition and Expansion

240 Modal Decomposition and Expansion (MDE) is a well-established process model in virtual sensing (see Section 1). The formulation used in the present work is described in Iliopoulos et al. (2017). MDE assumes that the displacement vector $\mathbf{u}(t)$ of an undamped dynamic system can be decomposed and written as a linear combination of the system's mode shapes and modal coordinates on the matrix form

$$\mathbf{u}(t) = \mathbf{\Phi} \mathbf{q}(t) \quad (5)$$

245 The mode shape matrix $\mathbf{\Phi} = [\varphi_1, \varphi_2, \dots, \varphi_n]$ contains the n mode shapes (φ_j) included to describe the dynamical system, while the modal coordinate vector $\mathbf{q}(t) = [q_1(t), q_2(t), \dots, q_n(t)]^T$ collects the corresponding modal coordinates (q_j) at each time instant t . The mode shapes of the system φ_j , can be derived from, e.g., experimental or operational modal analysis, while in the present work, the vectors φ_j are derived from an FE model representing the dynamic system in Section 4.3. Assuming that the FE model is an accurate representation of the considered dynamic system, it follows that

$$250 \quad \mathbf{\Phi} = \mathbf{\Phi}_{FE} \quad (6)$$

which applies in the remainder of the paper. If the total number of Degrees of Freedom (DOFs) in the FE model is n_{dof} , the modal matrix $\mathbf{\Phi}$ becomes an $n_{dof} \times n$ array. The nodal displacement vector $\mathbf{u}(t)$ in (5) is conveniently partitioned as

$$\mathbf{u}(t) = \begin{bmatrix} \mathbf{u}_m(t) \\ \mathbf{u}_p(t) \end{bmatrix} = \begin{bmatrix} \mathbf{\Phi}_m \\ \mathbf{\Phi}_p \end{bmatrix} \mathbf{q}(t) \quad (7)$$

where the first n_m DOFs in $\mathbf{u}_m(t)$ represent those that are measured by physical sensors, while the remaining n_p DOFs in $\mathbf{u}_p(t)$ are those that are predicted by the MDE, i.e. the virtual sensors. By direct comparison of (5) and (7), the mode shape matrix is similarly partitioned into

$$\mathbf{\Phi} = \begin{bmatrix} \mathbf{\Phi}_m \\ \mathbf{\Phi}_p \end{bmatrix} \quad (8)$$

in which the $n_m \times n$ array $\mathbf{\Phi}_m$ refers to the mode shape amplitudes associated with the measured DOFs, while correspondingly the $n_p \times n$ array $\mathbf{\Phi}_p$ accounts for the remaining DOFs that are used for the subsequent prediction procedure. From the above partitioning in (7) and (8), it is seen that the total number of DOFs in the FE model is $n_{dof} = n_m + n_p$, i.e. the sum of measured and predicted DOFs.

MDE utilises that the displacements in $\mathbf{u}_m(t)$ are available from measurements, while the remaining DOFs in $\mathbf{u}_p(t)$ are predicted simultaneously once the modal matrix in (8) can be obtained from the underlying FE-model with sufficient accuracy. It follows from (7) that the predicted nodal displacements can be expressed by the modal representation

$$265 \quad \mathbf{u}_p(t) = \Phi_p \mathbf{q}(t) \quad (9)$$

The modal coordinates in $\mathbf{q}(t)$, used for the extrapolation in (9), are determined by the corresponding relation

$$\mathbf{u}_m(t) = \Phi_m \mathbf{q}(t) \quad (10)$$

for the measured DOFs in $\mathbf{u}_m(t)$. The inversion of this relation requires that the dynamic displacement field can be represented by at most n modes, where n must be less than or equal to the number of measured DOFs n_m . Hereby, the modal coordinates
270 can be determined as

$$\mathbf{q}(t) = \Phi_m^\dagger \mathbf{u}_m(t) \quad (11)$$

using the Moore-Penrose pseudo-inverse depicted by the commonly used $(\)^\dagger$ symbol. The predicted nodal displacements are then obtained by substitution of (11) into (9), which then takes on its final form

$$\mathbf{u}_p(t) = \Phi_p \Phi_m^\dagger \mathbf{u}_m(t) \quad (12)$$

275 In virtual sensing, one of the objectives is to minimise the number of physical sensors n_m by introducing virtual sensors. Hence, the condition $n \leq n_m$ poses a challenge, as this limits the number of modes n that can be included to describe the dynamic system. Furthermore, for low frequencies, it can be desirable to perform MDE using only a subset of the measurements $\tilde{\mathbf{u}}_m(t)$ to minimise the noise introduced in the estimates, or to introduce Ritz vectors containing static deflection shapes to predict the response $\mathbf{u}_p(t)$ in frequency ranges not dominated by resonant response (see Section 4.3.2). The introduction of
280 multi-band virtual sensing in Iliopoulos et al. (2017) utilises that the nodal displacement vector $\mathbf{u}(t)$ can be divided into separate bands B_i in the frequency domain, which, when combined by summation, reattains the original nodal displacement vector

$$\mathbf{u}(t) = \sum_{i=1}^N \mathbf{u}_i(t) = \sum_{i=1}^N B_i(\mathbf{u}(t)) \quad (13)$$

where \mathbf{u}_i is the nodal displacement vector band-pass filtered in the band B_i , and $i = 1, 2 \dots N$ denotes the individual frequency bands (see Figure 11). Similarly, the predicted nodal displacements $\mathbf{u}_p(t)$ can be calculated in individual bands and combined
285 by summation as

$$\mathbf{u}_p(t) = \sum_i \mathbf{u}_{i,p}(t) = \sum_i \tilde{\Phi}_{i,p} \tilde{\Phi}_{i,m}^\dagger \tilde{\mathbf{u}}_{i,m}(t) \quad (14)$$

now only including the modes and Ritz vectors $\tilde{\Phi}_i$ and the measurements $\tilde{\mathbf{u}}_m(t)$ that are relevant for the band B_i . This representation assumes that the energy content of $\mathbf{u}_p(t)$ is fully captured by the sum of its filtered components in the bands B_i .

4.2 Internal force estimation

290 The previous Section 4.1 has explained how modal decomposition and expansion can be used to predict displacement response at virtual sensor locations. The present section extends the MDE to predict internal forces based on the predicted nodal displacement vector $\mathbf{u}_p(t)$.

The section forces to be predicted by the proposed method are specific for the element of the applied FE representation, e.g. bending moments for the planar beam elements used to describe the dynamics of the present support structure. Let the nodal
295 forces be contained in the nodal element vector

$$\begin{aligned} \mathbf{r}_e(t) = \begin{bmatrix} \mathbf{r}_A(t) \\ \mathbf{r}_B(t) \end{bmatrix}_e &= \begin{bmatrix} f_x^A(t), & f_y^A(t), & m^A(t), & f_x^B(t), & f_y^B(t), & m^B(t) \end{bmatrix}_e^T \\ &= \begin{bmatrix} -N_A(t), & V_A(t), & -M_A(t), & N_B(t), & -V_B(t), & M_B(t) \end{bmatrix}_e^T \end{aligned} \quad (15)$$

for a planar (2D) beam element e between two nodes A and B , with f_x , f_y and m representing the nodal normal force, shear force and moment, respectively. As shown in (15), the corresponding section forces N , V and M are derived from the nodal
300 force by appropriate sign changes.

For a given element (subscript) e , the element nodal force vector in (15) can be determined by the element stiffness matrix \mathbf{k}_e . The element stiffness relation can thus be written as

$$\mathbf{r}_e(t) = \mathbf{k}_e \mathbf{T}_e \mathbf{u}_p(t) \quad (16)$$

where \mathbf{T}_e is a $6 \times n_p$ array that both collects and rotates the six DOFs from the global vector $\mathbf{u}_p(t)$ into the local coordi-
305 nate system for element $e = 1, 2 \dots N_e$. Elimination of the response in the predicted DOFs $\mathbf{u}_p(t)$ by (12) gives the compact representation

$$\mathbf{r}_e(t) = \mathbf{k}_e \mathbf{T}_e \mathbf{\Phi}_p \mathbf{\Phi}_m^\dagger \mathbf{u}_m(t) = \mathbf{D}_e \mathbf{u}_m(t) \quad (17)$$

where

$$\mathbf{D}_e = \mathbf{k}_e \mathbf{T}_e \mathbf{\Phi}_p \mathbf{\Phi}_m^\dagger \quad (18)$$

310 defines the section force matrix that predicts the section forces $\mathbf{r}_e(t)$ from the measured nodal displacements in $\mathbf{u}_m(t)$. For a model with vertical beam elements, as in the present case, the transformation matrix \mathbf{T}_e is an all-zero $6 \times n_p$ matrix, except for ± 1 entries in the 6×6 block associated with the specific element e .

4.3 Prediction FE model

The prediction FE model from which the mode shapes and Ritz vectors used in the MDE are obtained is a 3D linear elastic
315 beam model with the Rotor-Nacelle-Assembly (RNA) and transition piece modelled as lumped inertias. The FE model is created using a non-commercial Python-based FE software. The beam model is presented schematically in Figure 6. The

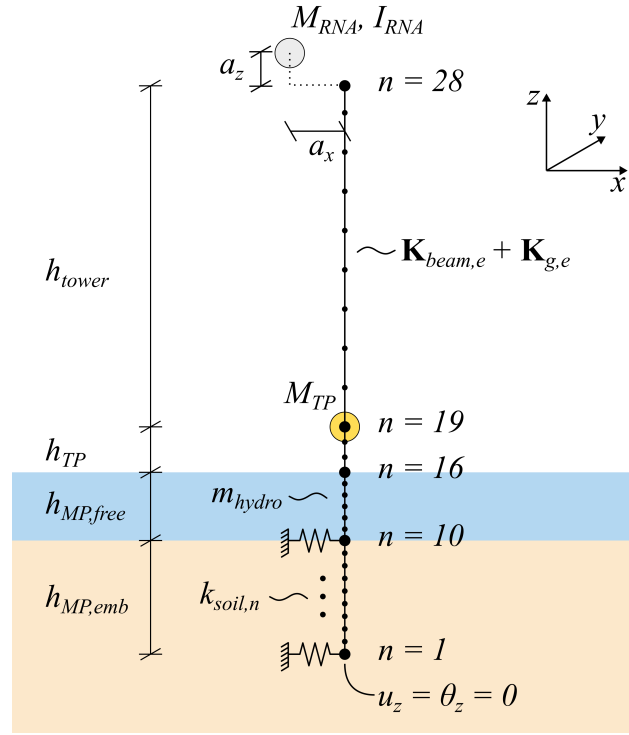


Figure 6. Schematic presentation of the prediction FE model used for the modal decomposition and expansion, including the height of the members in the support structure h_* , the element stiffness $\mathbf{K}_{beam,e} + \mathbf{K}_{g,e}$, the nodal masses of the transition piece M_{TP} and Rotor-Nacelle-Assembly (RNA) M_{RNA} , the RNA inertia tensor I_{RNA} , the soil stiffness in node n $k_{soil,n}$, and the hydrodynamic added mass m_{hydro} .

geometrical properties and the mass and stiffness input parameters for the prediction FE model are extracted from the HAWC2 model of the IEA 15-MW RWT described in Section A1 and presented in Appendix B.

The beam element stiffness is established according to Krenk and Høgsberg (2013), which combines the element stiffness matrix developed from the Timoshenko beam theory $\mathbf{K}_{beam,e}$ with a so-called geometric stiffness term $\mathbf{K}_{g,e}$ expressing the total element stiffness matrix as

$$\mathbf{K}_e = \mathbf{K}_{beam,e} + \mathbf{K}_{g,e} \quad (19)$$

thus accounting for the stiffness contribution adhering from the normal forces causing Euler buckling in bending, although omitting the stiffness terms associated with torsion, i.e., loads causing lateral buckling in static analysis.

The monopile foundation support conditions are modelled using lateral linear elastic soil springs in the embedded part of the monopile. The stiffness of the individual springs $k_{soil,n}$ varies with the embedment depth, as presented in Table A1. The bottom node in the beam model restrains torsion and vertical translation.

Table 1. Nodal mass, inertia tensor, and Center of Gravity (CoG) of the IEA 15-MW RWT RNA, calculated based on the individual body properties extracted from HAWC2 and nodal mass of the IEA 15-MW RWT Transition Piece (TP).

M_{RNA}	9.45E+05	[kg]
a_x	-7.12E+00	
a_y	0	[m]
a_z	4.58E+00	
I_{xx}	3.52E+08	
I_{yy}	1.96E+08	
I_{zz}	1.97E+08	
I_{xy}	0	[kgm ²]
I_{xz}	-4.04E+07	
I_{yz}	0	
M_{TP}	1.00E+05	[kg]

The mass contributing to the modal mass of the prediction FE model includes the distributed mass of the tower, transition piece, and monopile presented in Appendix B, the nodal mass of the transition piece M_{TP} located at the top of the transition piece, and the eccentric nodal mass and inertia tensor of the RNA, M_{RNA} and I_{RNA} , located at the distances a_x , a_y , and a_z relative to the top of the tower. The input parameters for the nodal masses for the TP and RNA and the mass moments and mass products of inertia included in the inertia tensor (I_{xx} , I_{yy} , I_{zz} , I_{xy} , I_{xz} , I_{yz} ,) are presented in Table 1. In addition to the mass contributions already presented, an external mass contribution referred to as the hydrodynamic mass m_{hydro} arises when a body moves in a fluid. According to Sumer and Fredsøe (1997), the hydrodynamic mass per unit length of a free circular cylinder can be expressed as

$$m_{hydro} = \rho C_m A \quad (20)$$

if the current is disregarded. Here, the fluid density is $\rho = 1027 \text{ kg/m}^3$, $C_m = 1$ is the hydrodynamic mass coefficient for a cylinder, and $A = \pi r^2$ is the fluid-displaced area for the monopile with radius r .

The first three tower bending mode shapes used for the MDE configuration in Section 5.1 have been calculated using the FE model presented above. They are shown in Figure 7 for displacements and bending moments in the FA and SS directions.

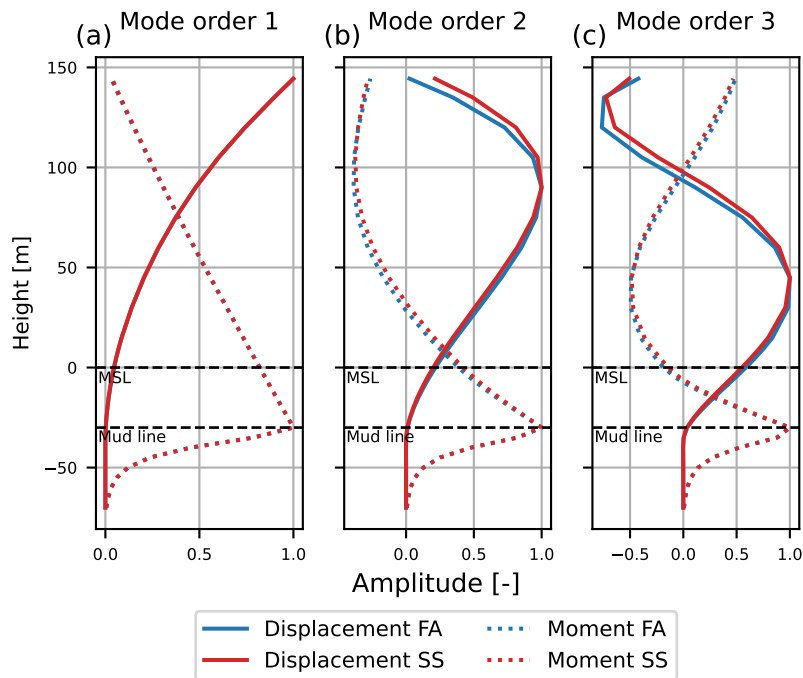


Figure 7. Mode shapes in terms of displacement and bending extracted from the prediction FE model presented in Figure 6 in the FA and SS direction: (a) the first tower bending modes, (b) the second tower bending modes, and (c) the third tower bending modes.

4.3.1 Model Validation

In the present section, the prediction FE model presented in the previous Section 4.3 is validated. The validation is performed simply by comparing the undamped natural frequencies f_n of the prediction FE model to those of the IEA 15-MW RWT extracted using the HAWC2 built-in module *system_eigenanalysis*.

345 The objective of this validation is to ensure the correct interpretation of the input parameters derived from HAWC2 and used in the prediction FE model in Figure 6. Therefore, this validation does not compare the prediction FE model against the full HAWC2 model of the IEA 15-MW RWT. Instead, the comparison is performed stepwise using the simplified HAWC2 model setups 1, 2, and 3 for the IEA 15-MW RWT, in which the rotor flexibility is deactivated so that the model comparison is performed accounting for the contributions to the mass and stiffness terms.

350 As mentioned previously, the prediction FE model does not include a detailed model of the RNA. Therefore, the influence of an operating rotor, blade flexibility, and shaft torsion is not included in the prediction FE model. In the simplified HAWC2 models, this is acknowledged by restraining shaft rotation, disabling torsional deformations, and using stiff blades. The comparison aims at validating the effects of mass and stiffness terms, soil support conditions, and hydrodynamic mass used in the

Table 2. Overview of comparison of natural frequencies of three different model setups for a simplified version of the IEA 15-MW RWT HAWC2 model and the prediction FE model presented in Section 4.3.

Model setup	Mode No.	1	2	3	4	5	6	7
1	Mode	1st bend.	1st bend.	2nd SS	2nd FA	1st torsion	3rd SS	3rd FA
	$f_{n,HAWC2}$	1.31E-01	1.31E-01	6.79E-01	7.19E-01	8.05E-01	1.50E+00	1.61E+00
	$f_{n,Pred}$	1.30E-01	1.31E-01	6.75E-01	7.12E-01	7.79E-01	1.52E+00	1.61E+00
	$\varepsilon(f_n)$	-0.55%	-0.16%	-0.48%	-0.88%	-3.17%	1.13%	0.06%
2	Mode	1st bend.	1st bend.	1st torsion	2nd SS	2nd FA	3rd SS	3rd FA
	$f_{n,HAWC2}$	1.61E-01	1.62E-01	8.01E-01	8.47E-01	9.15E-01	1.93E+00	2.02E+00
	$f_{n,Pred}$	1.60E-01	1.61E-01	7.75E-01	8.52E-01	9.11E-01	1.95E+00	2.02E+00
	$\varepsilon(f_n)$	-0.80%	-0.29%	-3.32%	0.54%	-0.47%	0.94%	0.16%
3	Mode	1st SS	1st FA	1st torsion	2nd SS	2nd FA	3rd SS	3rd FA
	$f_{n,HAWC2}$	1.61E-01	1.62E-01	8.01E-01	8.37E-01	9.00E-01	1.79E+00	1.87E+00
	$f_{n,Pred}$	1.60E-01	1.61E-01	7.74E-01	8.41E-01	8.96E-01	1.81E+00	1.88E+00
	$\varepsilon(f_n)$	-0.83%	-0.49%	-3.29%	0.43%	-0.47%	0.97%	0.22%

prediction FE model by gradually adding these terms. This yields the following three model setups for the simplified HAWC2 model:

- Model setup 1: Excluding the hydrodynamic elements and the soil model, and fixing the bottom node in all DOFs. This model resembles a bottom-fixed land-based wind turbine.
- Model setup 2: Excluding the hydrodynamic elements, while reintroducing the soil support from the original HAWC2 model in Section A1.
- Model setup 3: Introducing the hydrodynamic elements without water kinematics to reduce complexity.

The comparison of the natural frequencies of the simplified HAWC2 model $f_{n,HAWC2}$ and the prediction FE model $f_{n,Pred}$ are presented for the first seven modes in Table 2, in which the error is calculated as

$$\varepsilon(f_n) = \frac{f_{n,Pred} - f_{n,HAWC2}}{f_{n,HAWC2}} \quad (21)$$

As presented in Table 2, the error $\varepsilon(f_n)$ for the tower bending modes is within the range from -0.88 to 1.13% , while for the torsion mode the error range increases to $3.17 - 3.32\%$. The two models are created from different underlying beam theories and implemented in different software tools, whereby discrepancies are expected. Thus, the agreement in Table 2 is generally good, with the larger error for the torsion mode possibly arising from the geometric stiffness matrix $\mathbf{K}_{g,e}$ in (19) not affecting torsional deformations.

Based on the results in Table 2, it is concluded that the mass and stiffness terms and the soil model are reasonably implemented in the prediction FE model. Furthermore, the simple implementation of the hydrodynamic mass is deemed acceptable

for cases where waves and currents are not included in the analysis. However, it is acknowledged that the model cannot capture the effects of currents and waves, as well as boundary effects at the seabed and water line. In the following sections, where the mode shapes used for the subsequent multi-band MDE are presented, only Model setup 3 is considered, as it represents the most complete structural model that includes both soil support and hydrodynamic mass.

375 4.3.2 Ritz vectors

As explained in Section 4.1, the predicted response $\mathbf{u}_p(t)$ of a dynamic system can be estimated as the sum of the predicted response in the individual frequency bands B_i based on the mode shape matrix Φ . However, for large-scale OWTs, the quasi-static effects arising from e.g. yawing, wind, and waves significantly contribute to the response. These effects can be captured by a linear combination of higher-order modes. However, because a modal truncation omitting higher-order modes is needed in
380 MDE, due to the limited number of sensors available, the accuracy of the predicted response may be compromised in the quasi-static region and between the resonant peaks. Different suggestions have been made to account for the quasi-static response, where Skaftø et al. (2017) suggest the use of Ritz vectors. Similar methods are applied in Iliopoulos et al. (2017), Augustyn et al. (2021), and Toftekær et al. (2023). Furthermore, Tarpø (2020) compares the use of Ritz vectors with a *modal truncation augmentation method* and finds that the difference in performance is insignificant for the considered case. In the present work,
385 the methodology using Ritz vectors based on static loads from Skaftø et al. (2017) is applied, as explained in the following.

The mode shape matrix in (8) is extended to include not only the n mode shapes of the dynamic system Φ_d obtained from the eigenanalysis of the FE model presented in Section 4.3, but also the m Ritz vectors obtained from static analysis Φ_s ,

$$\Phi = \begin{bmatrix} \Phi_s & \Phi_d \end{bmatrix} \quad (22)$$

whereby Φ becomes an $n_{dof} \times (m + n)$ array. The matrix $\Phi_s = [\phi_1, \phi_2, \dots, \phi_m]$ contains the m Ritz vectors (ϕ_k), obtained
390 by the static solution

$$\Phi_s = \mathbf{K}^{-1} \mathbf{F} \quad (23)$$

where \mathbf{K} is the stiffness matrix of the FE model presented in Figure 6 and \mathbf{F} contains the static load vectors \mathbf{f}_i representing the load effects included in the MDE. Both Toftekær et al. (2023) and Iliopoulos et al. (2017) suggest that an appropriate Ritz vector for the thrust load can be obtained by applying a horizontal nodal force at the top of the FE model tower, see Figure
395 8(a). Furthermore, Toftekær et al. (2023) shows that a supplemental Ritz vector from the nodal tower-top moment in Figure 8(b) improves the MDE strain estimates associated with RNA yaw or uneven rotor loading. Finally, Skaftø et al. (2017), Tarpø (2020), and Augustyn et al. (2021) all include load from waves in the performed MDE, see Figure 8(c). In the present work, three pairs of Ritz vectors are included in the MDE, representing the FA and SS directions, respectively. In each direction, the tower-top nodal load (a) and moment (b), and the wave loading (c) are presented in Figure 8. A Ritz vector for the distributed
400 wind load on the tower has not been established in the present work. However, as presented in Table 3, the first tower bending mode shapes are used to represent the quasi-static response resulting from this load.

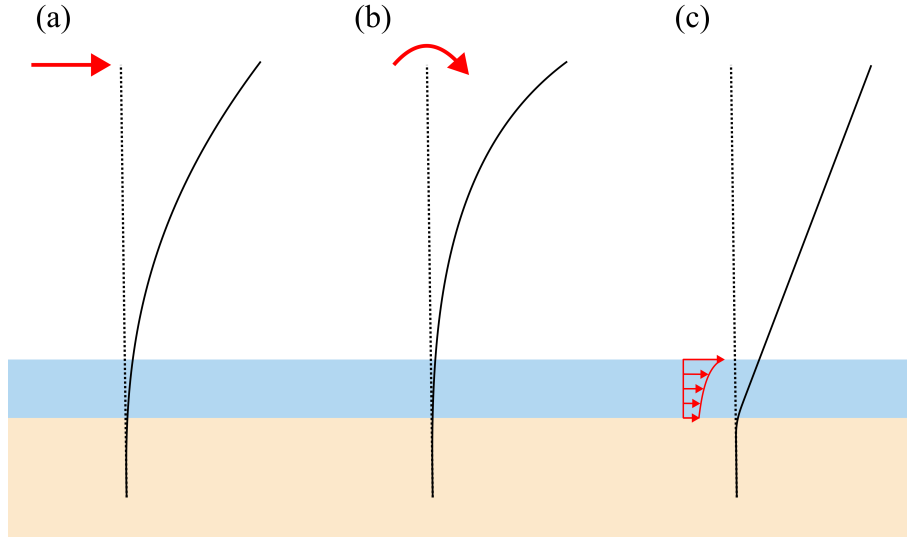


Figure 8. Loads and moments applied to determine the Ritz vectors for the estimation of the quasi-static response. Based on suggested loads in Toftekær et al. (2023). (a) shows the tower-top nodal load, (b) shows the tower top moment, and (c) shows the wave loading.

The wave load depicted in Figure 8(c) is based on the expression for the total force

$$F_x(z, t) = \frac{2\rho g H}{k} \frac{\cosh(k(z+h))}{\cosh(kh)} A(kr_0) \cos(\omega t - \delta) \quad (24)$$

on a unit height of a vertical cylinder (Sumer and Fredsøe, 1997). In the present work, normalized displacements are used.

405 Hence, only the distribution across the water depth of the monopile is of interest, whereby the temporal and constant terms can be removed in (24). Thereby, the vertical distribution of the force (above the seabed) reduces to

$$F'_x(z) = \frac{\cosh(k(z+h))}{\cosh(kh)} \quad (25)$$

where $h = 30$ m is the water depth and $k = \frac{2\pi}{L}$ is the deep-water wave number, derived for the wave length $L = \frac{g}{2\pi} T^2$ with the wave period $T = 6.52$ s calculated for a hub wind speed of $V_{hub} = 10$ m/s. The distributed force in (25) assumes that the
 410 wave loads are dominated by the inertia contribution in Morison's equation, while neglecting drag. This assumption is indeed valid for $V_{hub} = 10$ m/s, for which inertia forces constitute 98.5 % of the total force. However, extending the wave load Ritz vector to be wind speed dependent might be relevant, as suggested in Tarpø (2020). The Ritz vectors obtained from the load presented in Figure 8 are presented in Figure 9 in terms of displacements and bending moments.

5 MDE estimation of damage equivalent loads and stresses

415 The objective of the multi-band MDE is to obtain valid estimates of strains, stress, or force histories at any given location in a given structure. The accuracy of the MDE depends not only on the quality of the FE model from Section 4.3, but also on

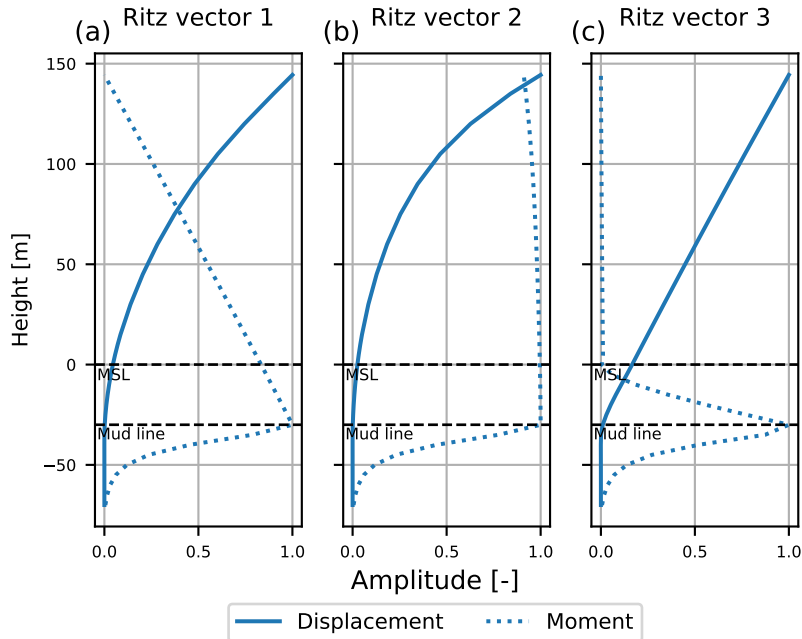


Figure 9. Ritz vectors in terms of displacement and bending moments extracted from the prediction FE model presented in Figure 6: (a) is based on nodal force in tower top, (b) is based on the nodal moment in the tower top, and (c) is based on the approximated wave load presented in (25). The three loads are illustrated in Figure 8.

the configuration and input data, which are presented in the next Section 5.1. The purpose of the applied multi-band Modal Decomposition and Expansion (MDE) is to evaluate the fatigue damage from bending stresses in any relevant location of the support structure. Hence, the performance of the MDE should be assessed using a measure that accounts for the accuracy in terms of strains or forces, while also being consistent with how fatigue damage is evaluated. In Section 5.2 this comparison is therefore conducted in terms of Damage Equivalent Loads (DELs) and Damage Equivalent Stresses (DESSs).

5.1 MDE setup

This section presents the basis for the MDE performed for the IEA 15-MW RWT support structure in terms of sensor type and placement (i.e. the HAWC2 output channels in $\mathbf{u}_m(t)$), band separation used in the frequency domain, and the choices of Ritz vectors and mode shapes used within the individual bands ($\tilde{\Phi}_i$).

As presented in Section 1, it is widely accepted in the literature that the dynamic part of the response $\mathbf{u}_p(t)$ can be predicted based on measured accelerations. From these accelerations, displacements are obtained through double integration. However, for the quasi-static part of the response, the displacements are often inaccurate because measurement noise in the acceleration measurements is amplified during low-frequency integration. To overcome this challenge, Iliopoulos et al. (2017) uses strain

430 gauge measurements as input to the MDE for the quasi-static response estimation. Alternatively, Toftekær et al. (2023) uses the low-pass filtered (vertical) accelerations obtained from DC accelerometers relative to the gravitational acceleration to estimate rotations. This has the advantage that no double integration must be performed, and no additional sensors must be installed. In the present work, $\mathbf{u}_m(t)$ therefore contains displacements and rotations for the prediction of dynamic and quasi-static responses, respectively (see Figure 10).

435 Obviously, the location of the accelerometers will impact the quality of the virtual sensors. Different methods have been used to optimise the sensor placement (Mehrjoo et al., 2022; Ercan and Papadimitriou, 2021). However, in practical applications, accessibility is just as relevant for the installation of sensors, since maintenance and replacement of structural health monitoring systems play a central role in the robustness of the overall system. Thus, in the present work, the physical sensors are placed at locations where internal platforms are most likely installed inside the tower (see Figure 10).

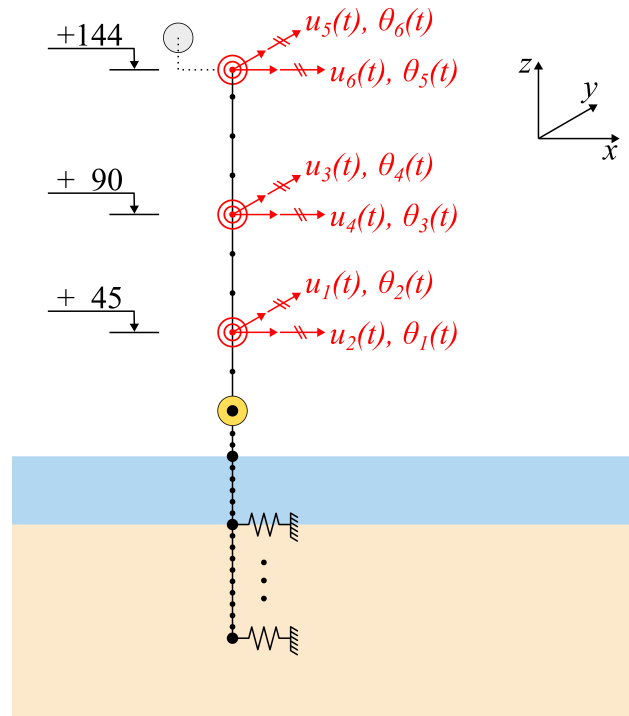


Figure 10. Measurement locations i.e. HAWC2 output channels in red in terms of displacements $u_*(t)$ included in MDE in dynamic frequency range and rotations $\theta_*(t)$ included in MDE in quasi-static frequency range

440 As presented in Figure 11, the multi-band MDE (14) is performed by separating the response of the IEA 15-MW RWT into four individual bands (B_1 to B_4) before combining them to the total predicted response $\mathbf{u}_p(t)$. The rationale for the band separation depends on case-specific factors, including the frequency distribution of the external loads, the dynamic properties

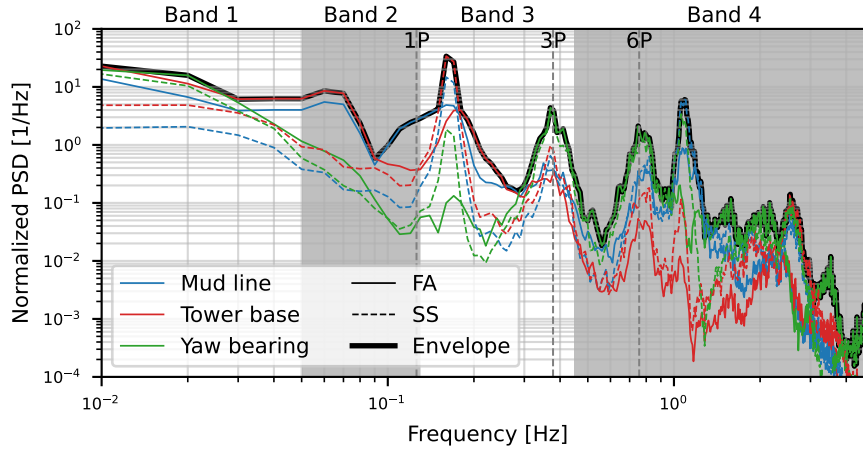


Figure 11. Normalised PSD of moment time series (from DLC 1.2). The frequency spectra of the moments at the yaw bearing, tower base, and mud line are shown in the FA and SS directions. Transparent white/grey bands indicate the frequency ranges used in the MDE, representing: Band 1 (turbulence), Band 2 (turbulence and wave loads), Band 3 (first tower bending and wave loads), and Band 4 (higher dynamic modes and rotor harmonics).

of the considered structure, and the properties of the sensors available in the monitoring system. Thus, the frequency bands should be selected such that the response is predicted accurately without exceeding the inherent sensor limitations of the MDE.

445 The justification of the present band separation is given below for the MDE configuration summarised in Table 3:

- B_1 is defined with an upper limit of 0.05 Hz. According to Toftekær et al. (2023), accurate displacements cannot be obtained from measured accelerations at frequencies below 0.05 Hz. Hence, the measured DOFs in Φ_m are defined in terms of rotations in B_1 , and the boundary represents a practical limitation of the sensors. B_1 represents the quasi-static domain of the response, primarily driven by turbulence. Thus, the Ritz vectors included for the prediction in this band are obtained from the nodal force and moment in Figure 8(a,b). Furthermore, the wind is assumed to act as a distributed load across the tower, whereby the first tower bending mode shapes in Figure 7(a) are also included in the MDE.
- 450 – B_2 is defined within the frequency range 0.05 to 0.13 Hz. The upper limit is chosen as the boundary between the thrust-dominated and the resonant parts of the response, dominated by the first tower bending modes. B_2 is governed by wave loading with a wave frequency of $1/T_p = 0.068$ Hz at $V = 35$ m/s and $1/T_p = 0.18$ Hz at $V = 4$ m/s for the given site conditions. Furthermore, the wind load also contributes significantly to the response in this frequency band, whereby all three pairs of Ritz vectors in Figure 9 are included in the MDE for this band.
- 455 – B_3 is defined within the frequency range 0.13 to 0.45 Hz. The upper limit is defined as the boundary between the 3P frequency and the frequency of the first flapwise blade mode. B_3 is governed by the first tower bending modes along with the wave loads and the 3P excitation. Hence, the first tower bending mode shapes in Figure 7(a) and the Ritz vectors

Table 3. Configuration used for the multi-band MDE in (14) in the band frequency ranges B_1 , B_2 , B_3 , and B_4 . The configuration is defined in terms of measured DOFs $\mathbf{u}_{i,m}(t)$ (Figure 10), Ritz vectors (Figure 9), and mode shapes (Figure 7) applied within the individual bands.

Band id	i	1	2	3	4
Frequency ranges	B_i	[0.00 – 0.05] Hz	[0.05 – 0.13] Hz	[0.13 – 0.45] Hz	[0.45 – 50] Hz
Measured DOFs	$\tilde{\mathbf{u}}_{i,m}(t)$	$[\theta_1 \theta_2 \theta_3 \theta_4 \theta_5 \theta_6]$	$[u_1 u_2 u_3 u_4 u_5 u_6]$	$[u_1 u_2 u_3 u_4 u_5 u_6]$	$[u_1 u_2 u_3 u_4 u_5 u_6]$
Ritz vectors	$\tilde{\Phi}_{i,s}$	$[\phi_1 \phi_2 \phi_3 \phi_4]$	$[\phi_1 \phi_2 \phi_3 \phi_4 \phi_5 \phi_6]$	$[\phi_3 \phi_4 \phi_5 \phi_6]$	-
Mode shapes	$\tilde{\Phi}_{i,d}$	$[\varphi_1 \varphi_2]$	-	$[\varphi_1 \varphi_2]$	$[\varphi_1 \varphi_2 \varphi_4 \varphi_5 \varphi_6 \varphi_7]$

460 from wave loading in Figure 8(c) are included in the MDE. As the 3P excitation is driven primarily by uneven thrust loading on the rotor, it is well represented by the Ritz vector obtained from a nodal moment in Figure 8(b), hence, the Ritz vector in Figure 9(b) is also included in B_3 for the MDE.

– B_4 is defined within the frequency range 0.45 to 50 Hz. This frequency band represents a part of the response where the external loads are of minor influence. Hence, B_4 includes the higher-order dynamics and rotor harmonics. Here, the first three pairs of tower bending modes in Figure 7 are included in the MDE, while the first tower torsion mode is omitted as it is considered less significant for estimating bending stresses.

465

The following section assesses the performance of the MDE using the configuration described above and the prediction FE model presented in Section 4.3. This is achieved by comparing DELs and DESs, calculated from section moment load histories, obtained from both the MDE and the true HAWC2 output time series. The comparison is performed in both the FA and SS directions and at all nodes in the support structure for the DLCs described in Section A3.

470

5.2 Damage equivalent loads and stresses

Fatigue Damage Equivalent Loads (DELs) reduce a load history to a single equivalent load range ΔP_{eq} , which is defined as the constant amplitude 1 Hz sinusoidal load causing the same amount of fatigue damage as the original load history. The same applies for fatigue Damage Equivalent Stresses (DESs) ΔS_{eq} , making DELs and DESs convenient measures for comparing fatigue contributions across load cases with different durations (Veldkamp, 2006). Thus, in the present section, the DELs and DESs combined for the individual DLCs presented in Section A3 are compared and discussed. Furthermore, the MDE performance is assessed: first for DELs and DESs calculated for the individual DLCs and subsequently, in Section 5.3, for the DESs calculated for the individual HAWC2 section moment time histories. In both cases, the comparison is performed in all nodes of the IEA 15-MW RWT HAWC2 model.

475

480 The DEL for a single load history $\Delta P_{eq,s}$ can be calculated as in (4), where n_{eq} is the number of 1 Hz cycles in the considered time series. Similarly, the DEL for the individual DLCs can be calculated as

$$\Delta P_{eq,DLC} = \left(\frac{\sum_{s \in \text{DLC}} n_{eq} (\Delta P_{eq,s})^m}{n_{eq,DLC}} \right)^{\frac{1}{m}} \quad (26)$$

where

$$n_{eq,DLC} = n_{eq} n_{seed,DLC} \quad (27)$$

485 is the total number of 1 Hz cycles in the simulations contained in the individual DLCs, with $n_{seed,DLC}$ being the simulation seeds for the individual DLC (i.e., the number of (converged) simulations in Table A2 for a given DLC at MWL equal to MSL). Inserting (27) in (26) yields the more compact representation

$$\Delta P_{eq,DLC} = \left(\frac{\sum_{s \in DLC} (\Delta P_{eq,s})^m}{n_{seed,DLC}} \right)^{\frac{1}{m}} \quad (28)$$

As the DEL retains the unit of load, the DES $\Delta S_{eq,s}$ can be obtained by applying Navier's stress distribution formula to the
 490 DEL $\Delta P_{eq,s}$ for the individual nodes of interest in the support structure. However, the elements in the IEA 15-MW RWT are not consistent in terms of bending stiffness across the nodes, whereby Navier's formula will produce discontinuous stresses at the nodes. Thus, only the DES associated with the maximum nodal stresses in the monopile and tower circumference are considered for each node. Furthermore, only the contributions arising from the bending moments are included in the DESs which are calculated as

$$495 \Delta S_{eq,DLC} = \left(\frac{\sum_{s \in DLC} (\Delta S_{eq,s})^m}{n_{seed,DLC}} \right)^{\frac{1}{m}} \quad (29)$$

for the individual DLCs.

Figures 12 and 13 show the DELs and DESs related to the FA and SS section moments obtained from the HAWC2 simulations directly (—) and predicted using the multi-band MDE configuration from Section 5.1 (-----).

As illustrated in Figure 12, the DELs generally look similar to the moment curve from the first tower bending modes or the
 500 thrust load (see Figures 7 and 9), with overlying effects from other loads and modes. In the FA direction (a), the operating DLCs 1.2 and 2.4 generally induce lower DELs compared to DLCs 3.1, 4.1, 6.4, and 7.2, with DLC 6.4 resulting in the maximum DEL across all DLCs and directions (FA and SS) at the mud line. The lower DELs of DLCs 1.2 and 2.4 can be attributed to the significant aerodynamic damping provided by the operating rotor, as discussed in Section 3.2. However, within the tower top region, specifically from around 120 – 144 m, the operating DLCs show higher DELs due to uneven loading of the rotor
 505 and 3P effects, as discussed in Section 3.2.

In the SS direction (b), in which the aerodynamic damping, the effects from thrust load variations, and the 3P effects have less influence, the differences in DEL between operating and non-operating DLCs are generally smaller than those observed in the FA direction (a). It is worth noting that DLC 7.2 results in significantly higher DELs than all other DLCs at elevations above approximately 75 m. As discussed in Section 3.2, this can be attributed to tower top moment arising from the blade
 510 vibrations, which are enabled by the locked rotor configurations specific to this DLC.

An inherent problem of the DELs in Figure 12 is that they do not explicitly account for changes in cross-section dimensions, whereby small DELs might still cause large stresses in regions with small tower diameters. Thus, in Figure 13, the DESs have large values in the tower-top region, where the corresponding DELs in Figure 12 are small. This indicates that the accuracy of

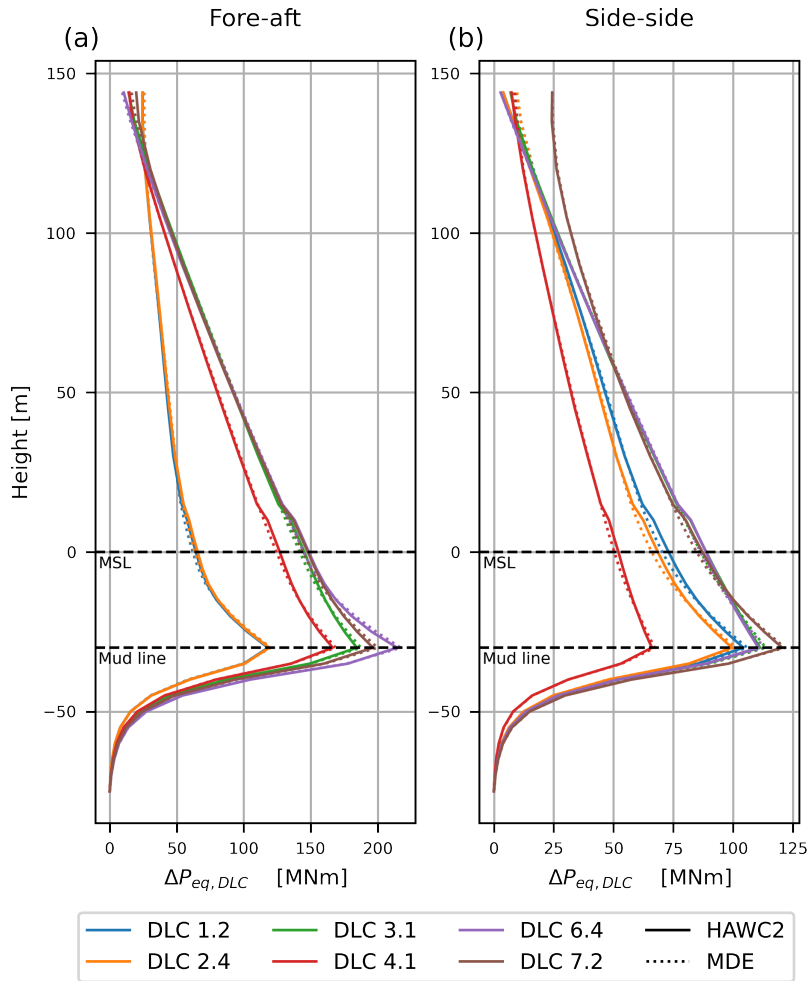


Figure 12. DELs calculated for the individual DLCs based on section moment load histories from HAWC2 (—) and MDE prediction (·····) in the FA (a) and SS (b) direction of the IEA 15-MW RWT, as presented in (28).

the MDE cannot be ignored in the tower-top region. For the present analysis in Figure 13, this is especially important for DLCs 1.2 and 2.4 in the FA direction (a), and DLC 7.2 in the SS direction (b), which have their DES maxima in the tower-top region.

Figures 12 and 13 show that the MDE underestimates the DELs in a ± 15 m zone around the MSL for all DLCs in both the FA and SS directions. Furthermore, for the DESs estimated by MDE in Figure 13, it is seen that the multi-band MDE performs poorly at the tower top, where it overestimates the DESs of the operating DLCs (1.2 and 2.4) in both the FA and SS directions while underestimating the DESs for the standstill DLCs (6.4 and 7.2) in the FA direction.

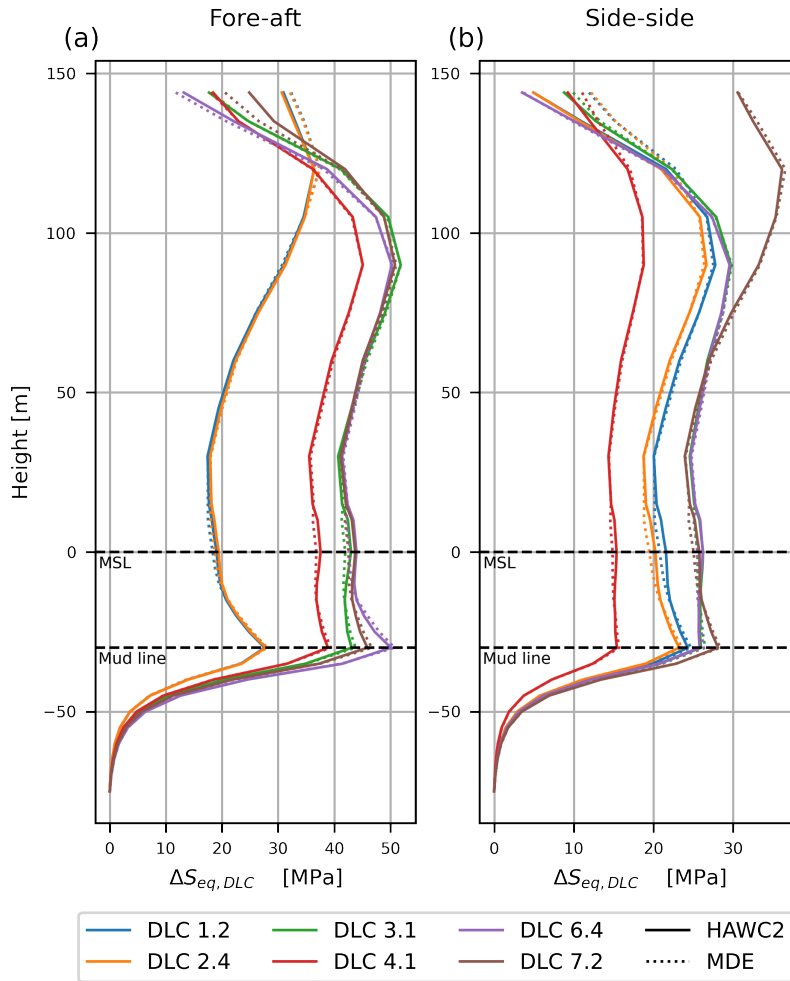


Figure 13. DESs calculated for the individual DLCs based on section moment load histories from HAWC2 (—) and MDE prediction (·····) in the FA (a) and SS (b) direction of the IEA 15-MW RWT, as presented in (29).

520 5.3 MDE Performance

Figures 12 and 13 are based on a combined DEL and DES calculated for the individual DLCs for each elevation z along the IEA 15-MW RWT support structure. Thus, it corresponds to an averaged or mean error, conveniently used for assessing long-term MDE performance, although inherently sensitive to bias errors. Therefore, to assess the short-term performance of the MDE in the individual HAWC2 simulations, the relative error of the DESs is calculated for the individual HAWC2 simulations

$$\varepsilon_{MDE} = \frac{\Delta S_{eq,s,MDE}}{\Delta S_{eq,s,HAWC2}} - 1 \quad (30)$$

where $(\)_{HAWC2}$ denotes the DESs calculated from the HAWC2 time series of the FA and SS section moments and $(\)_{MDE}$ denotes the DESs calculated from the corresponding MDE estimate. Figure 14 presents the relative error ε_{MDE} of the DESs, related to the FA and SS section moment and calculated for each elevation z along the IEA 15-MW RWT support structure.

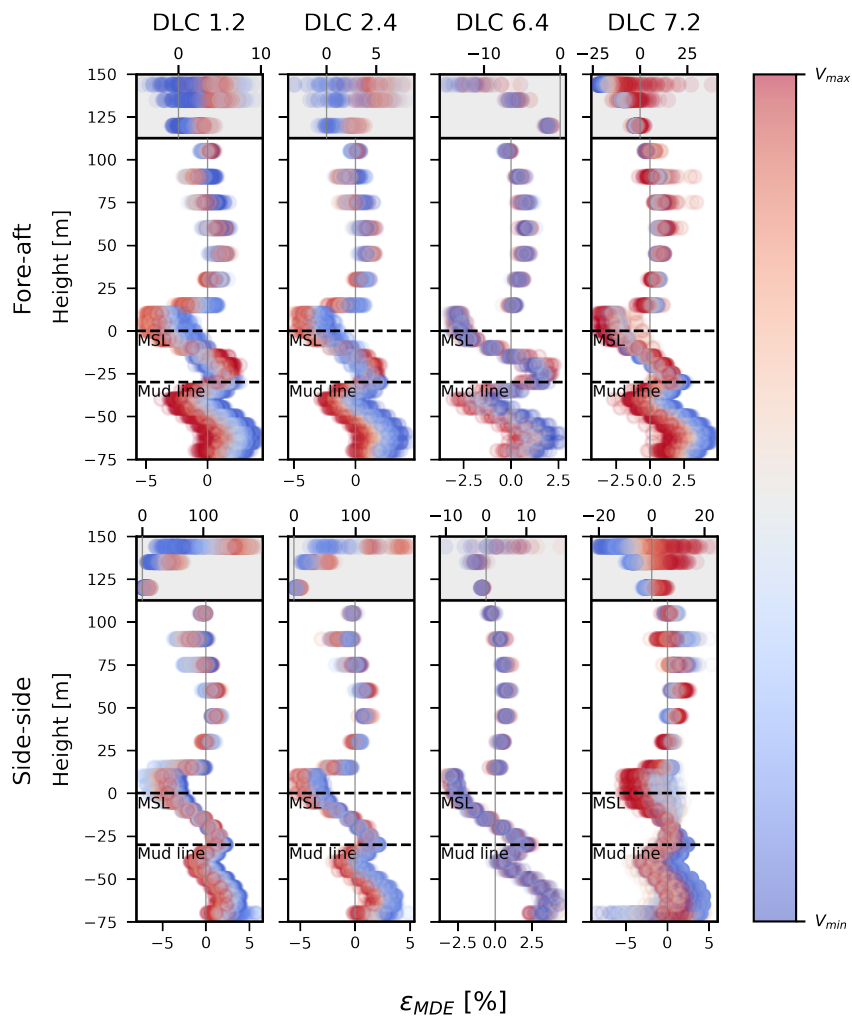


Figure 14. Error ε_{MDE} of DESs for the MDE predicted section moment load histories in the FA (top) and SS (bottom) direction of the IEA 15-MW RWT from the individual HAWC2 simulation s , as presented in (30). Color gradient represents the mean wind speed at the hub V_{hub} for the considered simulation s . Two separate x-axes are used to present ε_{MDE} (illustrated with white and grey background colour).

530 It is observed in Figure 14 that the error ε_{MDE} is predominantly in the range of $\pm 5\%$, except at the tower top, where the MDE performs inconsistently for the various DLCs. The error generally shows a dependency on the wind speed, which can be attributed to the operational and environmental variability of the IEA 15-MW RWT, arising from the varying rotor speeds, changing turbulence, and changing wave loads, which cannot be captured by the MDE, assuming a linear and time-invariant response.

In the following sections, the tower top MDE error observed in Figures 13 and 14 is discussed for the individual operating scenarios (operating, idle, and locked rotor). Furthermore, the MDE error observed at ± 15 m around the MSL in Figures 12 and 13 is discussed. To contextualise the behaviour observed in Figures 12 to 14 and enhance insight into the discrepancies between the DELs and DESs obtained from HAWC2 and MDE, selected sample moment histories are considered in the discussion. These are chosen based on the error metric ε_{MDE} , however, for DLC 7.2, the sample moment histories have been chosen based on the absolute error obtained from:

$$\Delta S_{eq,s,MDE} - \Delta S_{eq,s,HAWC2}$$

535 Intervals of the selected moment histories discussed in the following sections are presented in Appendix C

5.3.1 DLCs 1.2 and 2.4: MDE error at tower top

In the present section, the MDE error (ε_{MDE}) at the tower top elevation from 135 – 144 m (Figures 13 and 14) is considered for the operating DLCs (1.2 and 2.4). As previously mentioned, Figure 13 shows that the MDE generally overestimates the DES for the DLCs 1.2 and 2.4, which is most pronounced in the SS direction (b). This is underlined by Figure 14, which
540 shows that the maximum MDE error for DLCs 1.2 and 2.4 is approximately 10% in the FA (top) direction, while reaching approximately 188% in the SS (bottom) direction for DLC 1.2, with similar errors observed for DLC 2.4.

To contextualise the behaviour observed in Figures 13 and 14, the moment histories from DLC 1.2 corresponding to the five largest MDE errors at an elevation of 144 m in the FA and SS directions, respectively, have been selected for further analysis. Figures C1 and C2 present segments of the moment histories, while Figures 15 and 16 provide an overview of the moment
545 response in terms of the PSDs of: the HAWC2 moment histories, the difference between the HAWC2 and MDE predicted moment histories, the wind speed, and the wave amplitude for this selection.

Figures 15 and particularly 16 show that tower top MDE errors observed for DLC 1.2 in Figures 13 and 14 are highly related to the second, and partly third, tower bending modes (at ≈ 1.1 Hz and 2.4–2.6 Hz) in both the FA and SS directions. As shown by Reinhardt et al. (2024), these mode shapes are highly sensitive to the inclusion of flexible blades in the rotor model, whereby
550 the error might be improved by the inclusion of a flexible rotor in the RNA model. Furthermore, Figure 14 shows that the MDE error increases proportionally with wind speed for DLCs 1.2 and 2.4 in both the FA (top) and SS (bottom) directions. This may be explained by blade flexibility, which is dependent on the rotor speed due to, e.g. gyroscopic stiffening and blade pitch. Consequently, the MDE error will, to some extent, depend on the wind speed. This dependency may also arise from varying forced excitation from wind and waves, as well as the excitation of different modes due to the varying turbulence, as these
555 effects may not be equally well represented by the MDE.

DLC 1.2 — FA moment PSD at $z = +144$ m

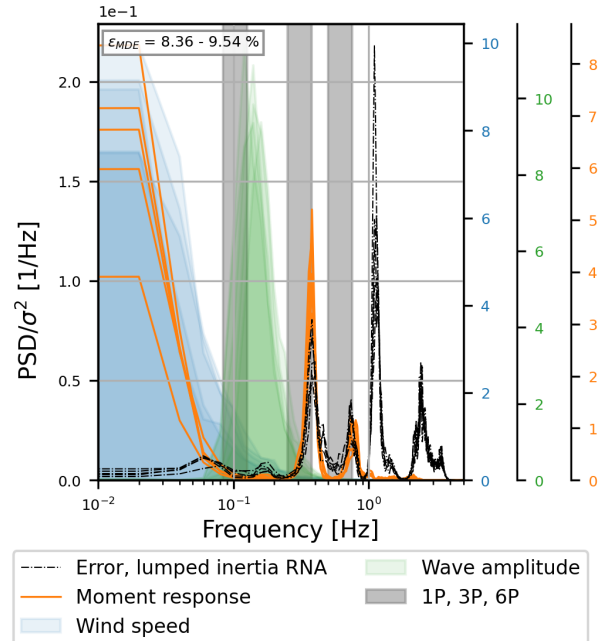


Figure 15. Normalised PSDs representing the MDE performance for the FA moment at the elevation 144 m for five selected moment histories in DLC 1.2. The corresponding selected moment histories are presented in Figure C1. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

DLC 1.2 — SS moment PSD at z = + 144 m

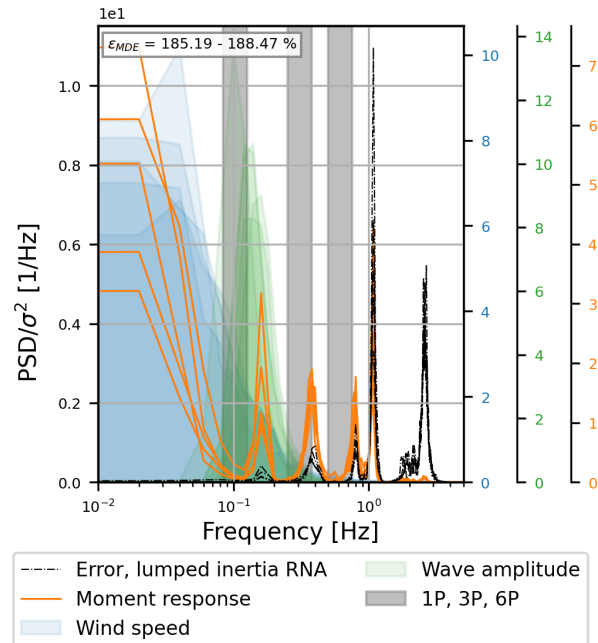


Figure 16. Normalised PSDs representing the MDE performance for the SS moment at the elevation 144 m for five selected moment histories in DLC 1.2. The corresponding selected moment histories are presented in Figure C2. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

5.3.2 DLC 6.4: MDE error at tower top

The present section considers the MDE error (ε_{MDE}) at the tower top elevation (Figures 13 and 14) for DLC 6.4 (idle rotor). Figure 13 shows that the MDE underestimates the DES in the FA (a) direction, while in the SS (b) direction, the tower top error is considered to be insignificant. However, Figure 14 shows that the maximum MDE error (ε_{MDE}) in the FA (top) direction is approximately 15%, while reaching approximately 13% in the SS (bottom) direction.

Due to the low DES and small discrepancies observed between MDE and HAWC2 DES for DLC 6.4 in Figure 13(b), the MDE error is not considered further for the SS direction. However, the moment histories from DLC 6.4 corresponding to the five largest MDE errors at an elevation of 144 m in the FA direction have been selected for further analysis. These are presented in Figure C3, and the PSDs representing the moment response are presented in Figure 17, following the approach as in Section 5.3.1.

Figure 17 shows that the dominating frequency for the MDE error (ε_{MDE}) for the moment history at the tower top for DLC 6.4 coincides with the natural frequency of the first tower bending modes at approximately 0.16 Hz. This error may be a result of a discrepancy between the mode shapes extracted from the prediction FE model and the actual mode shapes of the IEA 15-MW RWT. However, since frequency band B_3 utilises mode shapes and Ritz vectors which are not orthogonal to each other, the error may also stem from the matrix Φ_m being ill-conditioned, leading to an erroneous model decomposition for this frequency band. It is therefore relevant to investigate the implications on the MDE results arising from the current lack of independence of the Ritz vectors and mode shapes applied in B_3 .

In addition to the MDE error at 0.16 Hz, a pronounced error peak in the MDE error PSD is associated with the natural frequency of the first edgewise blade mode, at approximately 0.64 Hz, where a significant contribution to the moment response is also observed (Figure 17). This underlines that not only the tower modes, but also rotor modes contribute to the DES, and these must be accurately accounted for by the MDE.

Finally, Figure 14 shows that the wind speed dependency of ε_{MDE} is less obvious for DLC 6.4 than for DLC 1.2. This could be attributed to vibrations being governed by the inherent dynamics of the wind turbine (first tower bending modes and the first edgewise blade mode, as shown in Figure 17 for DLC 6.4), which are not influenced by operational variability (e.g., gyroscopic stiffening and blade pitching) for an idle rotor. However, it is likely because DLC 6.4 is only considered for wind speeds above 25 m/s.

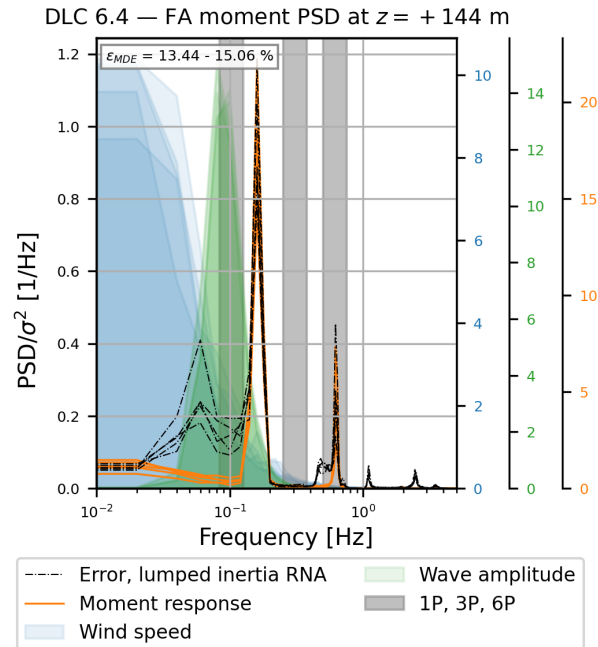


Figure 17. Normalised PSDs representing the MDE performance for the FA moment at the elevation 144 m for five selected moment histories in DLC 6.4. The corresponding selected moment histories are presented in Figure C3. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

5.3.3 DLC 7.2: MDE error at tower top

The present section considers the MDE error (ϵ_{MDE}) at the tower top elevation (Figures 13 and 14) for DLC 7.2 (locked rotor). For DLC 7.2, a large variance is observed for the MDE error (ϵ_{MDE}) at the tower top, being in the ranges $\pm 25\%$ in the FA (top) direction and $\pm 20\%$ in the SS (bottom) direction, respectively. It is somewhat surprising that the large variance of the error ϵ_{MDE} for DLC 7.2 in the SS direction, shown in Figure 14(bottom), results in such small discrepancies in the HAWC2 and MDE DESs, shown in Figure 13(b). However, it underlines that the long term MDE prediction is mostly sensitive to biased errors.

As for DLC 1.2, five FA and five SS moment histories from DLC 7.2 have been further analysed to contextualise the behaviour observed in Figures 13 and 14. However, the DLC 7.2 moment histories have been selected based on their absolute MDE rather than their relative MDE error (ϵ_{MDE}), as previously mentioned. The selected moment histories for DLC 7.2 are presented in Figures C4 and C5, and the PSDs representing the moment responses are presented in Figures 18 and Figures 19, following the approach as in Section 5.3.1.

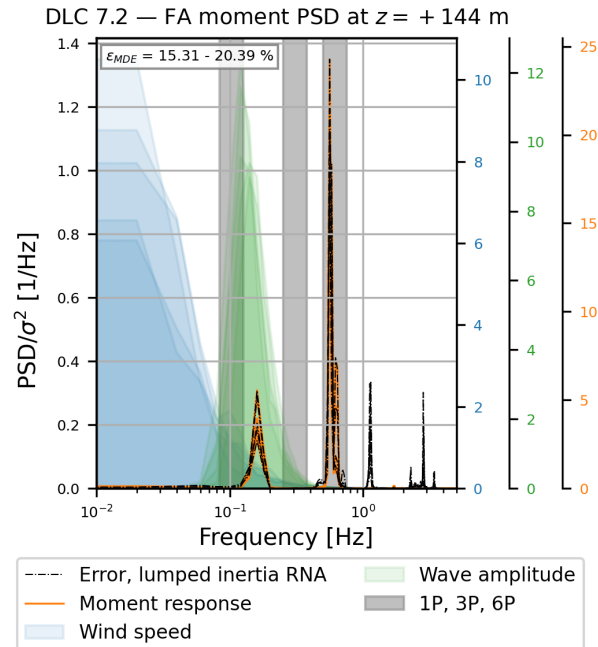


Figure 18. Normalised PSDs representing the MDE performance for the FA moment at the elevation 144 m for five selected moment histories in DLC 7.2. The corresponding selected moment histories are presented in Figure C4. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

In contrast to the idle rotor configuration (DLC 6.4), the locked rotor configuration (DLC 7.2) enables excitation of both the flapwise and edgewise blade modes. Thus, the wind turbine is susceptible to excitation of different rotor modes by different wind fields in the locked configuration. This is shown in Figures 18 and 19, where the PSD of the moment response exhibits significant peaks at different frequencies near the natural frequencies of the first flapwise and edgewise blade modes (at ≈ 0.56 , and 0.64 Hz). Figures 18 and 19 also demonstrate that significant contributions to the MDE error arise from the rotor modes at these frequencies. This indicates the need to include a rotor mode in the multi-band MDE for this DLC, which cannot be achieved using a lumped inertia RNA model.

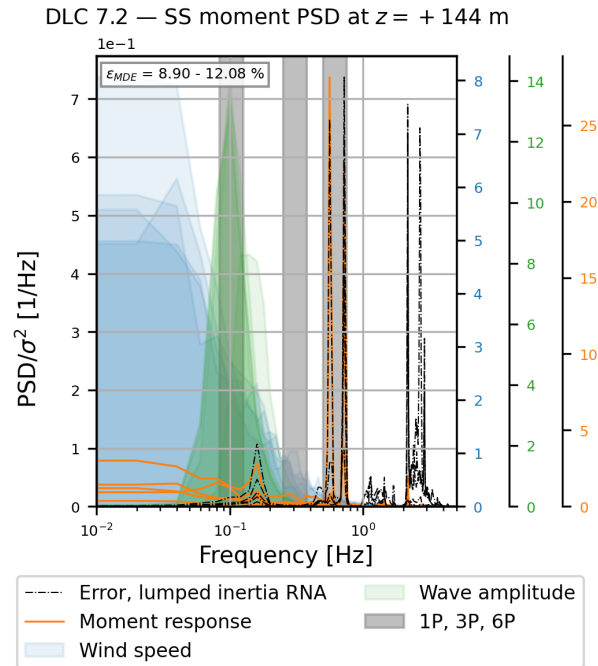


Figure 19. Normalised PSDs representing the MDE performance for the SS moment at the elevation 144 m for five selected moment histories in DLC 7.2. The corresponding selected moment histories are presented in Figure C5. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

5.3.4 MDE error at MSL ± 15 m

The present section considers the MDE error (ϵ_{MDE}) present for all of the considered DLCs at ± 15 m around the MSL. Figure 14 shows that the MDE generally underestimates the moment DES in the region around the MSL, with the maximum MDE error for the individual DLCs being approximately in the range -3% to -6% .

605 To explain the underlying reason for MDE error in this region, five moment histories, corresponding to the five largest MDE errors at an elevation of 0 m for DLC 1.2 in the FA and SS directions and DLC 6.4 in the FA direction, respectively, have been selected for further analysis. Figures C6, C7, and C8 present segments of the moment histories, while Figures 20, 21, and 22 provide an overview of the moment response, following the approach from 5.3.1.

610 Figure 20 shows that the main contribution to the MDE error in the FA direction at the MSL coincides with the natural frequencies for the waves for DLC 1.2. This behaviour can be attributed to the MDE errors arising from using a too simple wave model. The wave load Ritz vectors do not account for wave height fluctuations or the dynamic interchange between drag and inertia forces. Furthermore, the wave load is applied to the monopile between the mud line and MSL, thus ignoring the

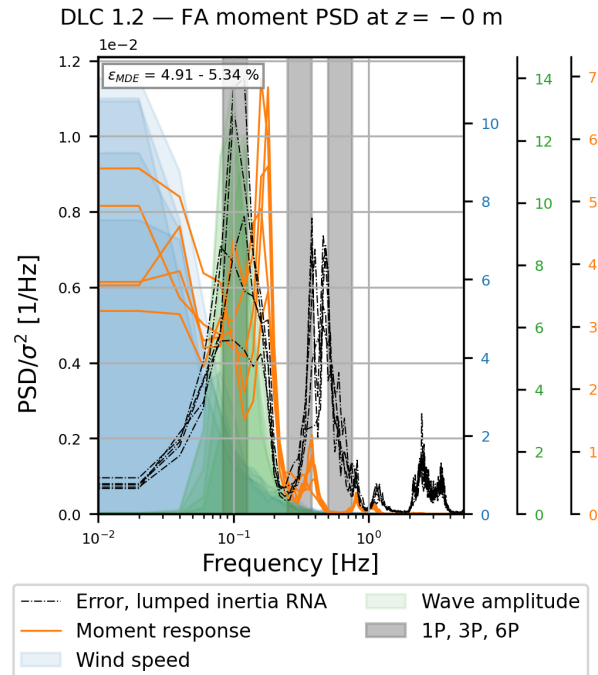


Figure 20. Normalised PSDs representing the MDE performance for the FA moment at the elevation 0 m for five selected moment histories in DLC 1.2. The corresponding selected moment histories are presented in Figure C6. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

change in loading area during the transition from wave trough to crest. In conclusion, the wave load Ritz vector is unable to capture the full complexity of the actual wave load in the IEA 15-MW RWT HAWC2 model.

615 In the SS direction, where aerodynamic damping is significantly lower, the response is governed by structural dynamics rather than wave loads. Consequently, the error PSD coincides with the first three SS tower bending modes, approximately 0.16, 1.1, and 2.6 Hz. In this direction, the waves are less influential, as they are generally more aligned with the FA direction. Furthermore, due to the low aerodynamic damping in the SS direction compared to the FA direction, the response is mainly dominated by the inherent structural dynamics of the IEA 15 MW RWT, and thus, the relative contribution from the waves to
 620 the moment response is small. This is also underlined by the MDE error observed in the FA direction for DLC 6.4 (Figure 22), which is dominated by the first FA tower bending mode, resulting in the forced excitation being of small significance.

As the error observed in Figures 21 and 22 cannot be explained by the wave load Ritz vector, the reason for the MDE error for these moment histories is more likely related to discrepancies between the mode shapes of the FE prediction model and the actual mode shapes of the IEA 15 MW RWT. However, the MDE error might also arise from the lack of independence of the
 625 mode shapes and Ritz vectors in frequency band B_3 , as discussed previously.

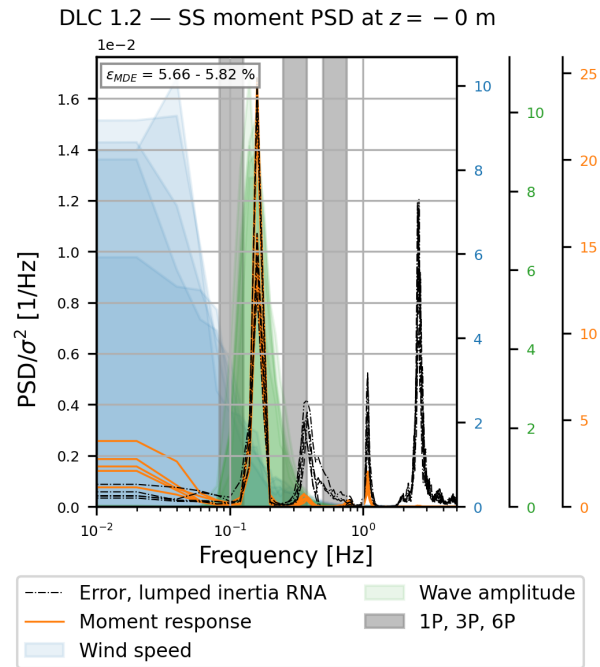


Figure 21. Normalised PSDs representing the MDE performance for the SS moment at the elevation 0 m for five selected moment histories in DLC 1.2. The corresponding selected moment histories are presented in Figure C7. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

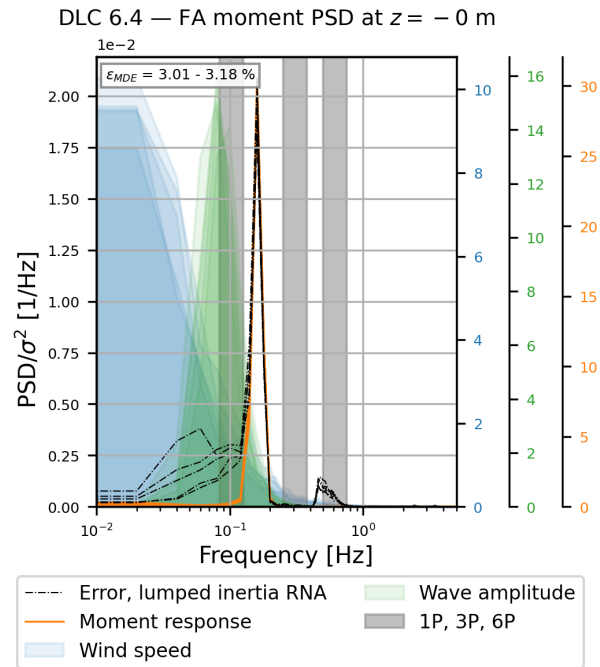


Figure 22. Normalised PSDs representing the MDE performance for the FA moment at the elevation 0 m for five selected moment histories in DLC 6.4. The corresponding selected moment histories are presented in Figure C8. The PSDs include: 1) the MDE error for the lumped inertia RNA model (black), 2) the 10-minute section moment time series (orange), 3) the wind speed in the FA direction (light blue), and 4) the wave amplitude (green). The grey bands indicate the 1P, 3P, and 6P excitation frequencies.

5.4 Summary

When combining the conclusions from the above discussion, it is assessed that the MDE used in the present work generally performs well, except at the tower top, where it performs inconsistently across the different considered DLCs. Furthermore, in the ± 15 m range around the MSL, the MDE consistently underestimates the DES, resulting in an error of up to 6%. This may
630 be improved by further enhancing the MDE as described below, although, in practice, a 5-6% error level may be overshadowed by other uncertainties. Hereby, the main challenges associated with the present use of MDE are:

- Capturing the local effects of the flexible and dynamic response of the rotor and blades.
- Including the effects from rotor flexibility and operation in the tower mode shapes used in the MDE.
- Including the relevant rotor modes for the standstill DLCs (6.4 and 7.2).
- 635 – Including wind speed variability and time dependency of the waves in the MDE.
- Ensuring independent mode shapes and Ritz vectors while representing various forced excitations and excited structural modes in the same frequency bands.

Some of the errors observed in the present section may also be related to the chosen sensor locations and the associated MDE configuration presented in Section 5.1. However, as noise is not included in the present analysis, the noise-to-signal ratio is not
640 an issue, whereby a non-optimal sensor location would have less impact in the present comparison.

6 Conclusions

This paper presents an overview of the dataset available in Pedersen et al. (2025), containing response simulations covering the Fatigue Limit State (FLS) design life of the IEA Wind 15-Megawatt Offshore Reference Wind Turbine with a monopile foundation (IEA 15-MW RWT) version 1.1.6.

645 The paper explores how diverse operational and environmental scenarios impact the Damage Equivalent Loads (DELs) calculated from the Fore-Aft (FA) and Side-Side (SS) section moment histories at the tower base, after which the relative lifetime damage for the individual FLS Design Load Cases (DLCs), described in IEC 61400-3-1:2019 (IEC, 2019b), is calculated at all nodes in the support structure of the IEA 15-MW RWT. It has been found that the DLCs representing *power production in normal conditions* (DLC 1.2), *parked turbine with idle rotor in normal conditions* (DLC 6.4), and *fault - locked rotor in normal*
650 *conditions* (DLC 7.2) govern the lifetime damage of the support structure. The high contribution from DLC 1.2 occurs because of its high duration (90% of the design life) and the excitation at the tower top caused by 3P effects, while the contribution of DLCs 6.4 and 7.2 is large because of their high DELs associated with low aerodynamic damping. The damage associated with *start-up* and particularly *shut-down in normal conditions* (DLCs 3.1 and 4.1) might be significantly underestimated in the present paper, as the durations specified by IEC (2019b) for these DLCs do not necessarily reflect a real operation scenario,
655 where start-up and shut-down can occur for many reasons, including curtailment.

The paper gives an overview of multi-band Modal Decomposition and Expansion (MDE) and a methodology for expressing the estimated response in sectional forces, after which it presents the Finite Element (FE) model used to calculate the Ritz vectors and mode shapes used to perform MDE. It explains the configuration used to perform MDE for the estimation of section moment time histories in the support structure of the IEA 15-MW RWT, which is based on rotation and displacement data from six HAWC2 sensors located at three elevations in the RWT tower (in both the FA and SS direction), and includes both the quasi-static and dynamic part of the frequency response.

The present work utilises MDE to estimate section moment histories in all nodes of the support structure of the IEA 15-MW RWT across different operational and environmental regimes represented in the data from Pedersen et al. (2025). Based on the moment histories, the combined DELs of the individual DLCs are calculated along with the combined DESs for the individual DLCs and the DESs from the individual HAWC2 simulations. The MDE generally performs well in estimating the combined DELs and DESs for the individual DLCs. However, its accuracy strongly depends on the elevation considered on the IEA 15 MW RWT support structure. Thus, notable errors occur around the tower top, specifically from 120 - 144 m above the Mean Sea Level (MSL), and at the $MSL \pm 15$ m. The error magnitude is also influenced by the operational and environmental conditions of the OWT, as highlighted by the dependency of the MDE error on the DLC considered. This is directly related to the external forces and structural modes dominant in each DLC. This is emphasized by the errors at the tower top, which are closely linked to the second and third tower bending modes in DLC 1.2 and to various rotor modes in DLC 7.2. As these modes are sensitive to rotor flexibility, the MDE performance in the tower top region may be improved by including rotor flexibility in the Rotor-Nacelle-Assembly (RNA) model rather than using a lumped inertia RNA model. Furthermore, the MDE errors at the MSL may be attributed to limitations of the Ritz vector used to represent the wave loads for DLC 1.2 in the FA direction, whereas the error may stem from erroneous tower mode shapes in the SS direction. It is also suggested that the linear dependency between the mode shapes and Ritz vectors used in the MDE in the low-frequency band B_3 may result in MDE errors.

The relative MDE errors for the DESs of the individual HAWC2 simulations ε_{MDE} are predominantly in the range of $\pm 5\%$, thus confirming that the MDE performs well in general. These MDE errors also underline that the MDE performs poorly around the tower top, where errors up to 188% are observed. Finally, the MDE errors show a wind speed dependency. It is concluded that the wind speed dependency of the MDE error is caused by environmental and operational variability of the rotor, which is not captured by the MDE assuming a linear and time-invariant response. Additionally, the lumped inertia RNA model and the wave load Ritz vector, which do not incorporate wind speed variability and the time-dependent nature of waves, likely contribute further to the observed wind speed dependency of the MDE error.

In future work, the authors suggest investigating the effects of including a flexible rotor in the FE model used to obtain the mode shapes used in the MDE. The knowledge obtained from the present work will serve as a basis for updating the RNA model to include blade flexibility, and subsequently to include operational and environmental variability in the RNA modelling, e.g. by using individual RNA models for various wind speeds. The authors also plan to implement a wave load model that accounts for the waves' variation with the wind speed. Finally, it would be vital to investigate the MDE accuracy

690 of a reduced number of physical sensors, e.g. from existing monitoring systems, not specifically designed for virtual sensing purposes.

Data availability. Dataset with synthetic wind turbine response data is available at <https://doi.org/10.11583/DTU.24460090>.

Code availability. Python code for reading data is available at <https://github.com/madg-DTU/IEA-15MW-RWT-HAWC2-Monopile-Response-Database>. Python-based FE software can be shared upon request.

695 **Appendix A: Database description**

The present appendix briefly describes the IEA 15-MW RWT, as well as the modelling assumptions and Design Load Cases (DLCs) considered in Pedersen et al. (2025).

A1 IEA Wind 15-Megawatt Offshore Reference Wind Turbine

The IEA 15-MW RWT is a monopile-founded offshore wind turbine with a rated power of 15 MW and a cut-in, rated, and
700 cut-out wind speed of $V_{in} = 3$ m/s, $V_r = 10.69$ m/s, and $V_{out} = 25$ m/s, respectively. The support structure consists of a 75 m monopile with an embedment depth of 45 m, a 15 m transition piece, and a 129.4 m tower, see Figure 1. The design of the support structure has been derived from the Ultimate Limit State (ULS) and modal analysis following a soft-stiff approach (Gaertner et al., 2020a), thus locating the natural frequency of approximately 0.17 Hz for the first order tower bending modes between the 1P and 3P rotor frequencies. The design of the IEA 15-MW RWT is available from the Github repository in
705 Gaertner et al. (2023).

A2 Modelling

As previously stated, the database in Pedersen et al. (2025) comprises synthetic wind turbine response data obtained by HAWC2 simulations, whereby it inherits the limitations and assumptions associated with HAWC2. HAWC2 calculates the aerodynamic loads based on Blade Element Momentum (BEM) theory. The implementation of BEM theory in HAWC2 has been extended
710 to account e.g. for dynamic inflow, dynamic stall, and the rotor's yaw and tilt (Larsen and Hansen, 2021). In the present work, the turbulent wind field is modelled using the Mann Turbulence generator which is directly linked with HAWC2. The tower shadow effect is accounted for using a potential flow model, and the wind shear is implemented using the standard power law expression

$$V(z) = V(z_r) \left(\frac{z}{z_r} \right)^\alpha \quad (\text{A1})$$

Table A1. Lateral spring stiffness of soil in node n of the embedded part of the monopile (presented in Figure 6) as a result of the z -coordinate presented in Figure 1. Defined in Appendix B.2 in Gaertner et al. (2020a) and used by Pedersen et al. (2025).

n [-]	z [m]	$k_{soil,n}$ [kN/m]
10	-30	3.54E+06
9	-35	6.65E+06
8	-40	9.76E+06
7	-45	1.29E+07
6	-50	1.60E+07
5	-55	1.91E+07
4	-60	2.22E+07
3	-65	2.53E+07
2	-70	2.84E+07
1	-75	3.15E+07

715 where $V(z)$ is the wind speed across the elevation z above the Mean Sea Level (MSL), z_r is the reference elevation at which
the wind speed $V(z_r)$ is known (in this case at hub-height), while $\alpha = 0.08$ from the metocean assessment in DHI (2023a).

The structural modelling in HAWC2 is based on a multi-body formulation, where each body is an assembly of Timoschenko
beam elements. Thus, the formulation for the structural members accounts for large deflections and rotations, geometrical
non-linearities, and shear deformations (Larsen and Hansen, 2021). The soil model implemented in the model for simulations
720 performed by Pedersen et al. (2025) utilize the lateral linear soil springs presented in Table A1. In HAWC2, the hydrodynamic
forces acting on the monopile are calculated using Morison's formula. The present work ignores the current when calculating
hydrodynamic forces, and the water kinematics are calculated based on the irregular Pierson–Moskowitz wave spectrum,
utilising the significant wind speed-dependent wave height and the wave period from the metocean assessment in DHI (2023c).

A3 Load Cases

725 The Design Load Cases (DLCs) for the Fatigue Limit State (FLS) of bottom-fixed OWTs are described in IEC 61400-3-1:2019
(IEC, 2019b). In Pedersen et al. (2025), the implementation of the DLCs follows Natarajan et al. (2016), with the input values
used for the HAWC2 simulations presented in Table A2. The number of simulations in Table A2 is a result of the operational
and environmental variability needed to capture the individual load cases, e.g. DLC 1.2 considers 11 different *wind speeds*
at three different *yaw errors*, *wind-wave misalignments*, and *Mean Water Levels (MWL)*. Finally, six seeds are used to secure
730 numerical robustness for the simulation of both turbulence and irregular waves. In total, this gives $11 \times 3 \times 3 \times 3 \times 6 = 1782$
simulations for DLC 1.2. According to DHI (2023b), the tidal effects at the chosen site are weak and thus only the simulations
where the Mean Water Level (MWL) is equal to the Mean Sea Level (MSL) are considered, thereby discarding simulations
where MWL is at either Lowest (LAT) or Highest (HAT) Astronomical Tide in the analysis conducted for the present paper.

Table A2. Overview of DLCs from IEC (2019b) considered in Pedersen et al. (2025).

DLC	Description	Environmental parameters			No. Simulations
1.2	Power production in normal conditions	Wind speed	[4:2:24]	[m/s]	1782
		Yaw error	-10, 0, 10	[deg]	
		wind-wave misalignment	-22.5, 0, 22.5	[deg]	
		Sea level	LAT, MSL, HAT	[m]	
2.4	Power production with large yaw errors in normal conditions	Wind speed	[4:2:24]	[m/s]	132
		Yaw error	-20, 20	[deg]	
		wind-wave misalignment	0	[deg]	
		Sea level	MSL	[m]	
3.1	Start-up in normal conditions	Wind speed	3, 10.69, 25	[m/s]	18
		Yaw error	0	[deg]	
		wind-wave misalignment	0	[deg]	
		Sea level	MSL	[m]	
4.1	Shut-down in normal conditions	Wind speed	3, 10.69, 25	[m/s]	18
		Yaw error	0	[deg]	
		wind-wave misalignment	0	[deg]	
		Sea level	MSL	[m]	
6.4	Parked turbine with idle rotor in normal conditions	Wind speed	[4:2:34]	[m/s]	576
		Yaw error	-8, 8	[deg]	
		wind-wave misalignment	0	[deg]	
		Sea level	LAT, MSL, HAT	[m]	
7.2	Fault - locked rotor at azimuth angle 0°, 30°, 60°, and 90° in normal conditions	Wind speed	[4:2:24]	[m/s]	2376*
		Yaw error	-10, 0, 10	[deg]	
		wind-wave misalignment	0	[deg]	
		Sea level	LAT, MSL, HAT	[m]	

*208 simulations of the simulations for DLC 7.2 failed to converge and are disregarded in the further work.

To evaluate the lifetime damage contribution from the individual HAWC2 simulations, their representative durations are calculated based on the joint probability of the DLC occurrence and the environmental parameters: Wind speed, yaw error, and wind-wave misalignment. An overview of the input for the duration of the individual simulations is presented in Table A3. The duration of the individual DLCs is based on the recommendations in Section 7 of IEC (2019b). The application of these recommendations in the present work is presented below.

Table A3. Input for joint probability used for calculating the expected life-time duration for the individual time series available in Pedersen et al. (2025).

DLC	Exposure	Wind speed	Yaw error	Wind-wave misalignment
1.2	90 %	$p(V)$ for $V \in [3, 25]$ m/s	1/4, 1/2, 1/4	1/3, 1/3, 1/3
2.4	0.57 %	$p(V)$ for $V \in [3, 25]$ m/s	1/2, 1/2	1
3.1	0.35 %	1000/1100, 50/1100, 50/1100	1	1
4.1	0.35 %	1000/1100, 50/1100, 50/1100	1	1
6.4		$p(V)$ for $V \in [25, 35]$ m/s	1/4, 1/2, 1/4	1
7.2	8.7 %	$p(V)$ for $V \in [3, 25]$ m/s	1/4, 1/2, 1/4	1

- DLC 1.2: It is expected that the wind turbine will be available for operation at normal conditions for 90 % of its 20-year lifetime. In the present work, this is interpreted as DLC 1.2 occurring 90 % of the time the wind speed falls within the cut-in and cut-out wind speed ($V_{in} = 3$ m/s and $V_{out} = 25$ m/s).
- DLC 2.4: For operation during the occurrence of fault or loss to the electrical network, IEC (2019b) suggests that the duration may be applied as follows: 10 shut-downs per year for overspeed event, 24 hours per year of operation for events with yaw error, 24 hours per year of operation for events with pitch error, and 20 times per year with loss of electrical network connection. In Pedersen et al. (2025) only the fault “*operation for events with yaw error*” is modelled. To account for the damage occurring during the remaining fault conditions specified for DLC 2.4, the duration is adjusted to 50 hours per year of operation (0.57 % of the time the wind speed falls within the V_{in} and V_{out}) in the present work.
- DLC 3.1 and 4.1: IEC (2019b) states that start-up/shut-down in normal conditions (DLC 3.1/4.1) can be expected to occur 1100 times annually: 1000 times at the cut-in wind speed, 50 times at the rated wind speed and 50 times at the cut-out wind speed (0.35 % of the total life for each of DLCs 3.1 and 4.1).
- DLC 6.4: In the present analysis, DLC 6.4 is considered to occur only when the wind speed at the hub exceeds the cut-out wind speed $V_{out} = 25$ m/s. As this DLC is the only one expected to occur for wind speeds above V_{out} , the duration of DLC 6.4 is assumed to be the total duration the hub wind speed exceeds the cut-out wind speed.
- DLC 7.2: As IEC (2019b) does not specify a duration for DLC 7.2, this work defines its duration as the time not accounted for by previous DLCs within the operational wind speed range from V_{in} to V_{out} , which is 8.7 %.

The wind speed’s probability density is assumed to follow the Weibull distribution

$$p(V) = \frac{k}{A} \left(\frac{V}{A}\right)^{k-1} \exp\left(-\left(\frac{V}{A}\right)^k\right) \quad (\text{A2})$$

with the omnidirectional Weibull parameters $k = 2.35$ and $A = 9.91$ m/s given in DHI (2023b) for a mean wind speed $\bar{V}_{10} = 8.79$ m/s at 10 m above MSL. These values are corrected for the hub height using a wind shear for the Normal Wind Profile

760 (NWP) presented in (A1). According to IEC (2019b), only part of the wind speed spectrum is considered, namely $V_{hub} \in [V_{in}, V_{out}]$ for DLC 1.2, 2.4, 3.1, 4.1, and 7.2 and $V_{hub} \in [V_{out}, 0.7 V_{ref}]$ for DLC 6.4. As such, it is assumed that there is no contribution to the fatigue life consumption for $V_{hub} \notin [V_{in}, 0.7 V_{ref}]$, where $V_{ref} = 50$ m/s is the reference wind speed for wind turbine class 1 (IEC, 2019a).

Although the DLCs described above do not exhaustively represent the scenarios occurring during the actual lifetime of an
765 OWT, they provide an overview of the fatigue-life impact from the most common and governing operating scenarios.

Appendix B: Properties of IEA 15-MW RWT support structure

Table B1. Structural properties of element e in the IEA 15-MW RWT support structure. Including the node coordinates of the end nodes in the element $n_{e,1}$ and $n_{e,2}$, the Young's modulus E , the shear modulus G , the outer radius r , the cross section area A , the moments of inertia I_{xx} and I_{yy} , the polar moment of inertia I_p , and the distributed mass m along the height z .

Element No.	Coord $n_{e,1}$ [m]	Coord. $n_{e,2}$ [m]	E [Pa]	G [Pa]	r [m]	A [m ²]	I_{xx} [m ⁴]	I_{yy} [m ⁴]	I_p [m ⁴]	m [kg/m]
1	(0,0,-75)	(0,0,-70)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
2	(0,0,-70)	(0,0,-65)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
3	(0,0,-65)	(0,0,-60)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
4	(0,0,-60)	(0,0,-55)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
5	(0,0,-55)	(0,0,-50)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
6	(0,0,-50)	(0,0,-45)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
7	(0,0,-45)	(0,0,-40)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
8	(0,0,-40)	(0,0,-35)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
9	(0,0,-35)	(0,0,-30)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
10	(0,0,-30)	(0,0,-25)	2.00E+11	7.93E+10	5.00E+00	1.73E+00	2.14E+01	2.14E+01	4.27E+01	1.44E+04
11	(0,0,-25)	(0,0,-20)	2.00E+11	7.93E+10	5.00E+00	1.67E+00	2.07E+01	2.07E+01	4.13E+01	1.39E+04
12	(0,0,-20)	(0,0,-15)	2.00E+11	7.93E+10	5.00E+00	1.61E+00	1.99E+01	1.99E+01	3.98E+01	1.34E+04
13	(0,0,-15)	(0,0,-10)	2.00E+11	7.93E+10	5.00E+00	1.55E+00	1.92E+01	1.92E+01	3.83E+01	1.29E+04
14	(0,0,-10)	(0,0,-5)	2.00E+11	7.93E+10	5.00E+00	1.49E+00	1.84E+01	1.84E+01	3.68E+01	1.24E+04
15	(0,0,-5)	(0,0,0)	2.00E+11	7.93E+10	5.00E+00	1.42E+00	1.76E+01	1.76E+01	3.53E+01	1.19E+04
16	(0,0,0)	(0,0,5)	2.00E+11	7.93E+10	5.00E+00	1.36E+00	1.69E+01	1.69E+01	3.37E+01	1.14E+04
17	(0,0,5)	(0,0,10)	2.00E+11	7.93E+10	5.00E+00	1.32E+00	1.64E+01	1.64E+01	3.28E+01	1.10E+04
18	(0,0,10)	(0,0,15)	2.00E+11	7.93E+10	5.00E+00	1.28E+00	1.59E+01	1.59E+01	3.19E+01	1.07E+04
19	(0,0,15)	(0,0,30)	2.00E+11	7.93E+10	5.00E+00	1.22E+00	1.52E+01	1.52E+01	3.03E+01	1.01E+04
20	(0,0,30)	(0,0,45)	2.00E+11	7.93E+10	4.99E+00	1.11E+00	1.36E+01	1.36E+01	2.72E+01	9.22E+03
21	(0,0,45)	(0,0,60)	2.00E+11	7.93E+10	4.89E+00	9.85E-01	1.10E+01	1.10E+01	2.21E+01	8.18E+03
22	(0,0,60)	(0,0,75)	2.00E+11	7.93E+10	4.58E+00	8.65E-01	8.36E+00	8.36E+00	1.67E+01	7.20E+03
23	(0,0,75)	(0,0,90)	2.00E+11	7.93E+10	4.21E+00	7.42E-01	5.95E+00	5.95E+00	1.19E+01	6.18E+03
24	(0,0,90)	(0,0,105)	2.00E+11	7.93E+10	3.78E+00	6.25E-01	4.07E+00	4.07E+00	8.14E+00	5.20E+03
25	(0,0,105)	(0,0,120)	2.00E+11	7.93E+10	3.47E+00	5.13E-01	2.98E+00	2.98E+00	5.95E+00	4.28E+03
26	(0,0,120)	(0,0,135)	2.00E+11	7.93E+10	3.37E+00	4.46E-01	2.44E+00	2.44E+00	4.87E+00	3.72E+03
27	(0,0,135)	(0,0,144)	2.00E+11	7.93E+10	3.28E+00	4.90E-01	2.59E+00	2.59E+00	5.18E+00	4.09E+03

Appendix C: Moment histories

The present appendix presents Figures C1 to C8, which contain the 20 s segments in the time interval from 390 s to 410 s of the moment histories corresponding to the PSDs presented in Sections 5.3.1 to 5.3.4 and Figures 15 to 22, respectively. The content of the individual figures are described below:

- Figure C1 shows 20 s segments of the five moment histories corresponding to the five largest relative MDE errors (ε_{MDE}) occurring in the FA direction at the elevation 144 m for DLC 1.2. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C2 shows 20 s segments of the five moment histories corresponding to the five largest relative MDE errors (ε_{MDE}) occurring in the SS direction at the elevation 144 m for DLC 1.2. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C3 shows 20 s segments of the five moment histories corresponding to the five largest relative MDE errors (ε_{MDE}) occurring in the FA direction at the elevation 144 m for DLC 6.4. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C4 shows 20 s segments of the five moment histories corresponding to the five largest absolute MDE errors ($\Delta S_{eq,s,MDE} - \Delta S_{eq,s,HAWC2}$) occurring in the FA direction at the elevation 144 m for DLC 7.2. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C5 shows 20 s segments of the five moment histories corresponding to the five largest absolute MDE errors ($\Delta S_{eq,s,MDE} - \Delta S_{eq,s,HAWC2}$) occurring in the SS direction at the elevation 144 m for DLC 7.2. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C6 shows 20 s segments of the five moment histories corresponding to the five largest absolute MDE errors ($\Delta S_{eq,s,MDE} - \Delta S_{eq,s,HAWC2}$) occurring in the FA direction at the elevation 0 m for DLC 1.2. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C7 shows 20 s segments of the five moment histories corresponding to the five largest absolute MDE errors ($\Delta S_{eq,s,MDE} - \Delta S_{eq,s,HAWC2}$) occurring in the SS direction at the elevation 0 m for DLC 1.2. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.
- Figure C8 shows 20 s segments of the five moment histories corresponding to the five largest absolute MDE errors ($\Delta S_{eq,s,MDE} - \Delta S_{eq,s,HAWC2}$) occurring in the FA direction at the elevation 0 m for DLC 6.4. The figure provides the HAWC2 and MDE predicted moment histories, the relative error metric ε_{MDE} and the filename for the individual HAWC2 simulations.

DLC 1.2 — FA moment at z = + 144 m

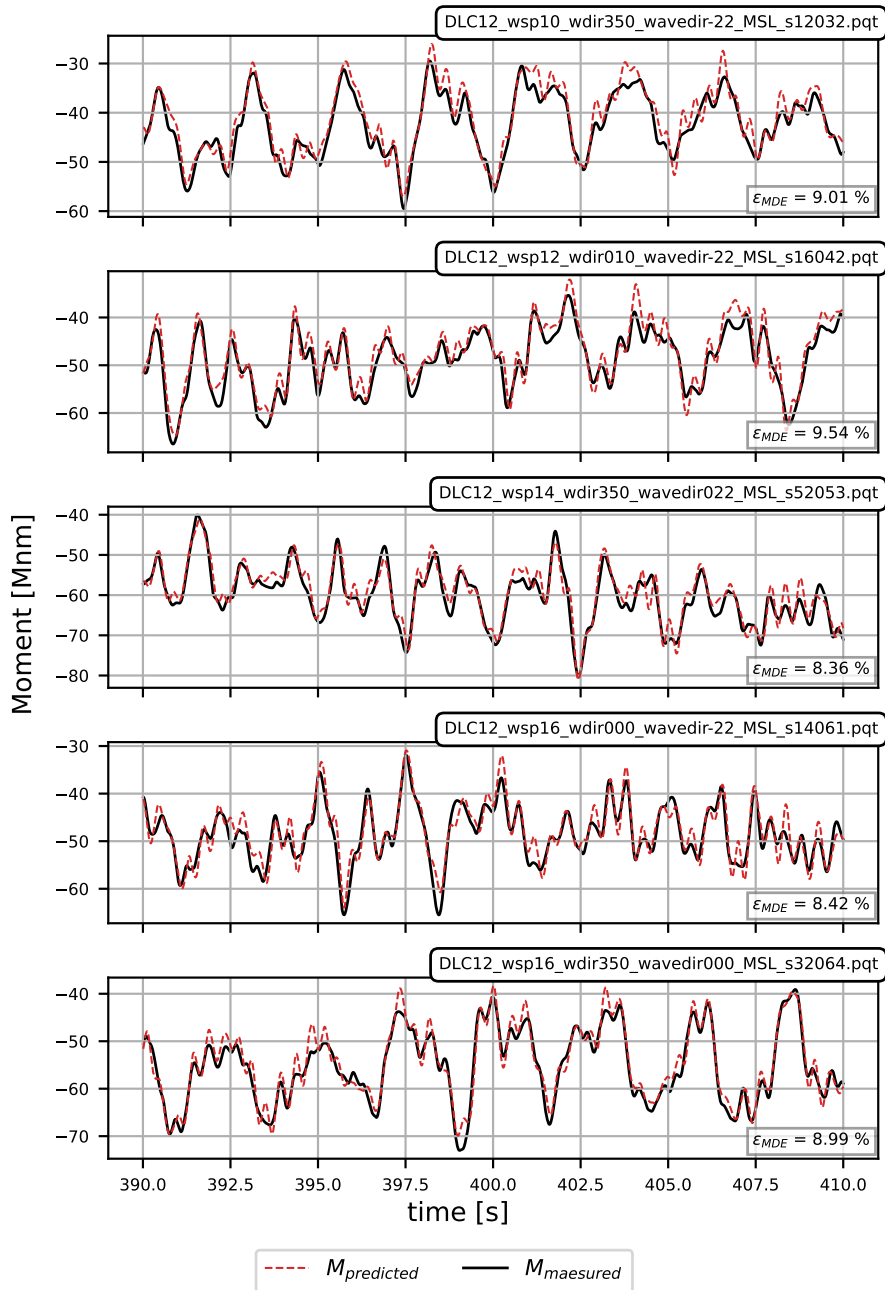


Figure C1. Segments of selected FA moment histories corresponding to the largest relative MDE errors (ϵ_{MDE}) at the elevation 144 m above MSL for DLC 1.2. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 1.2 — SS moment at z = + 144 m

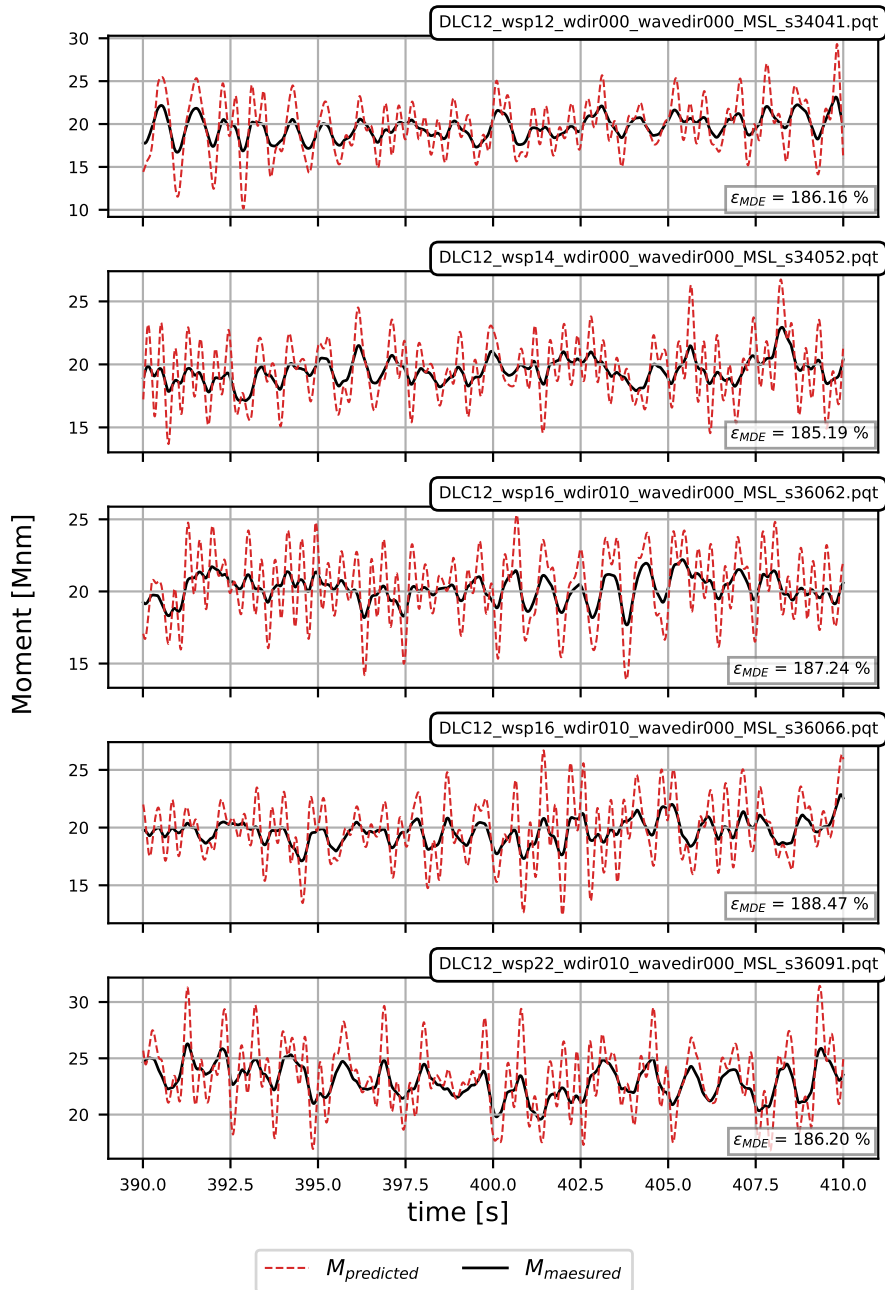


Figure C2. Segments of selected SS moment histories corresponding to the largest relative MDE errors (ϵ_{MDE}) at the elevation 144 m above MSL for DLC 1.2. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 6.4 — FA moment at z = + 144 m

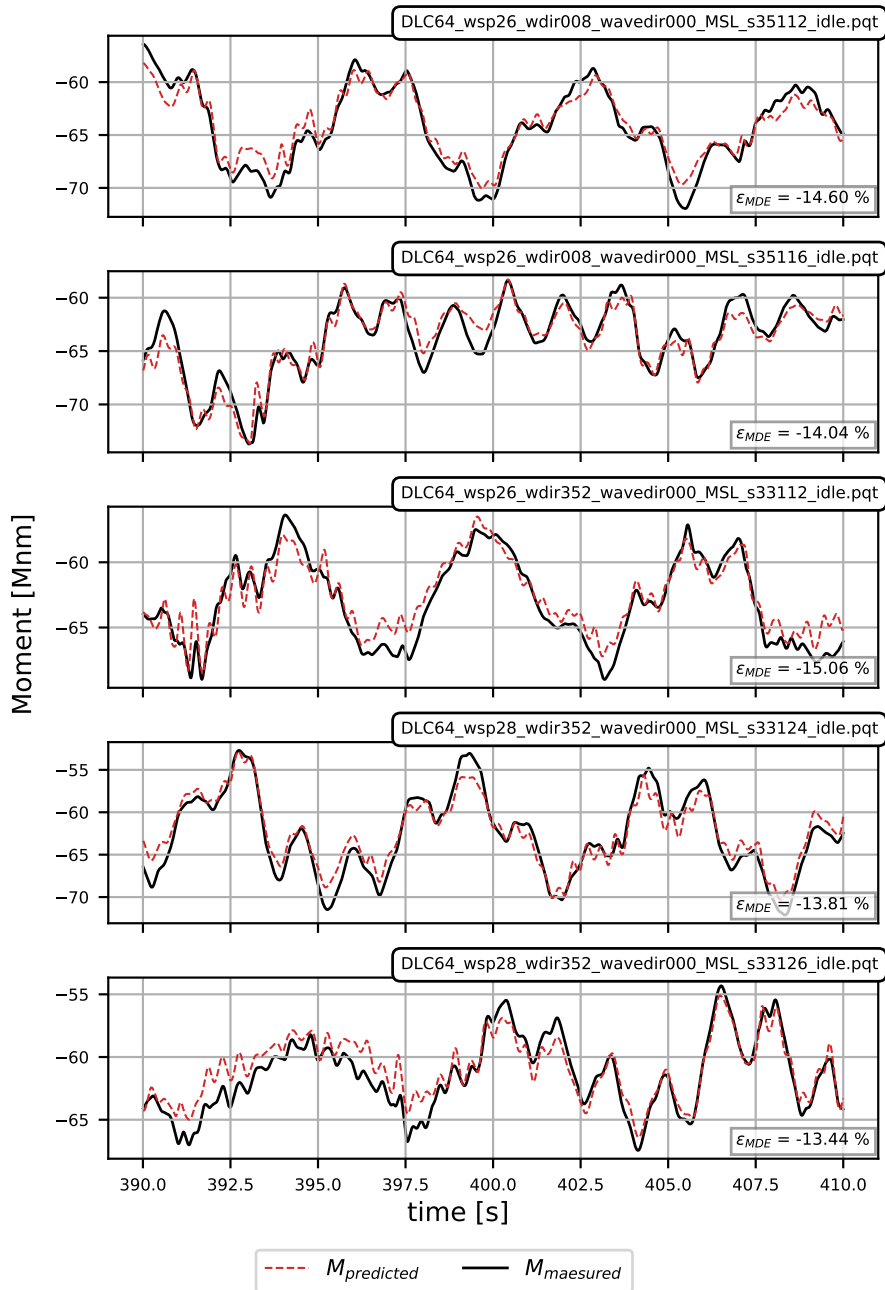


Figure C3. Segments of selected FA moment histories corresponding to the largest relative MDE errors (ϵ_{MDE}) at the elevation 144 m above MSL for DLC 6.4. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 7.2 — FA moment at z = + 144 m

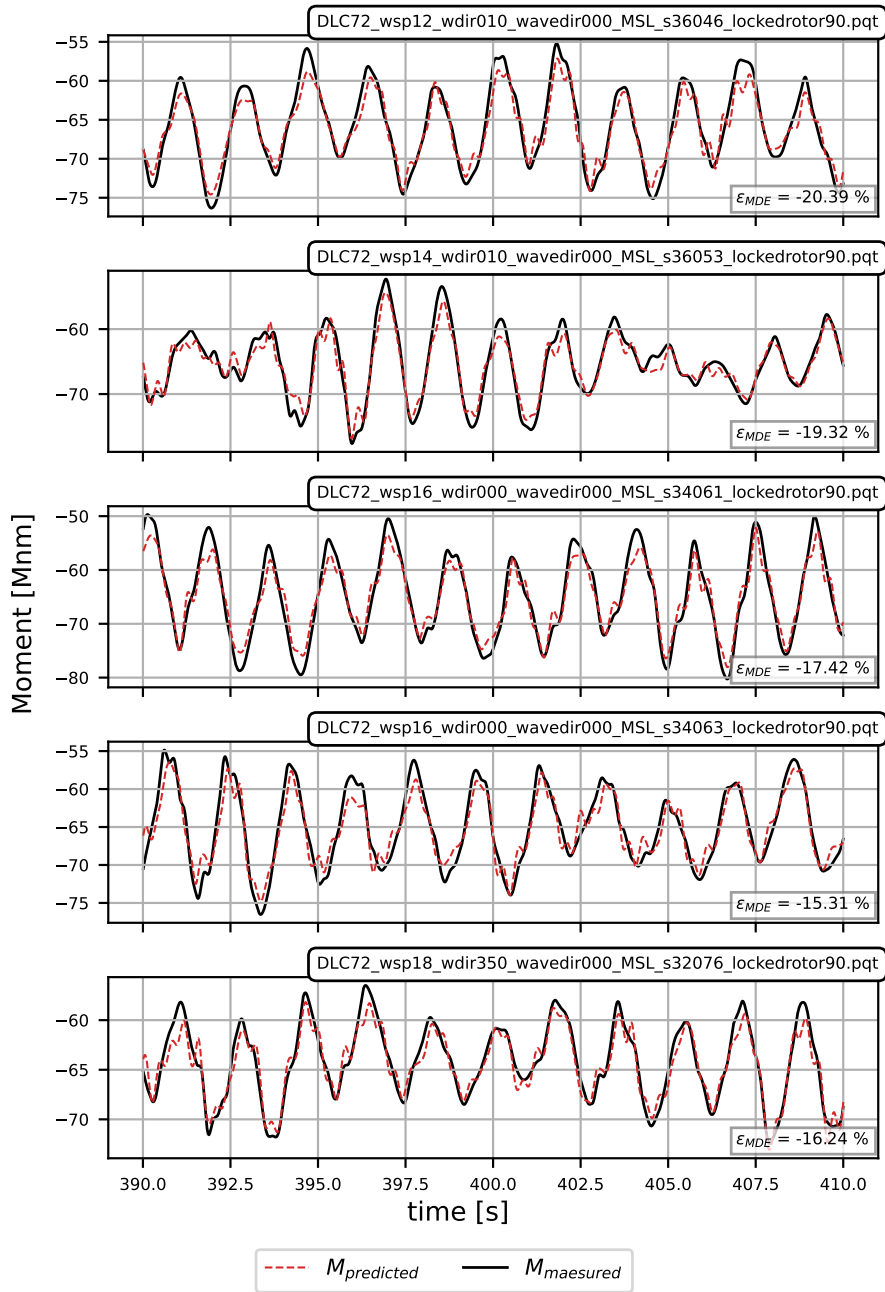


Figure C4. Segments of selected FA moment histories corresponding to the largest absolute MDE errors (ϵ_{MDE}) at the elevation 144 m above MSL for DLC 7.2. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 7.2 — SS moment at z = + 144 m

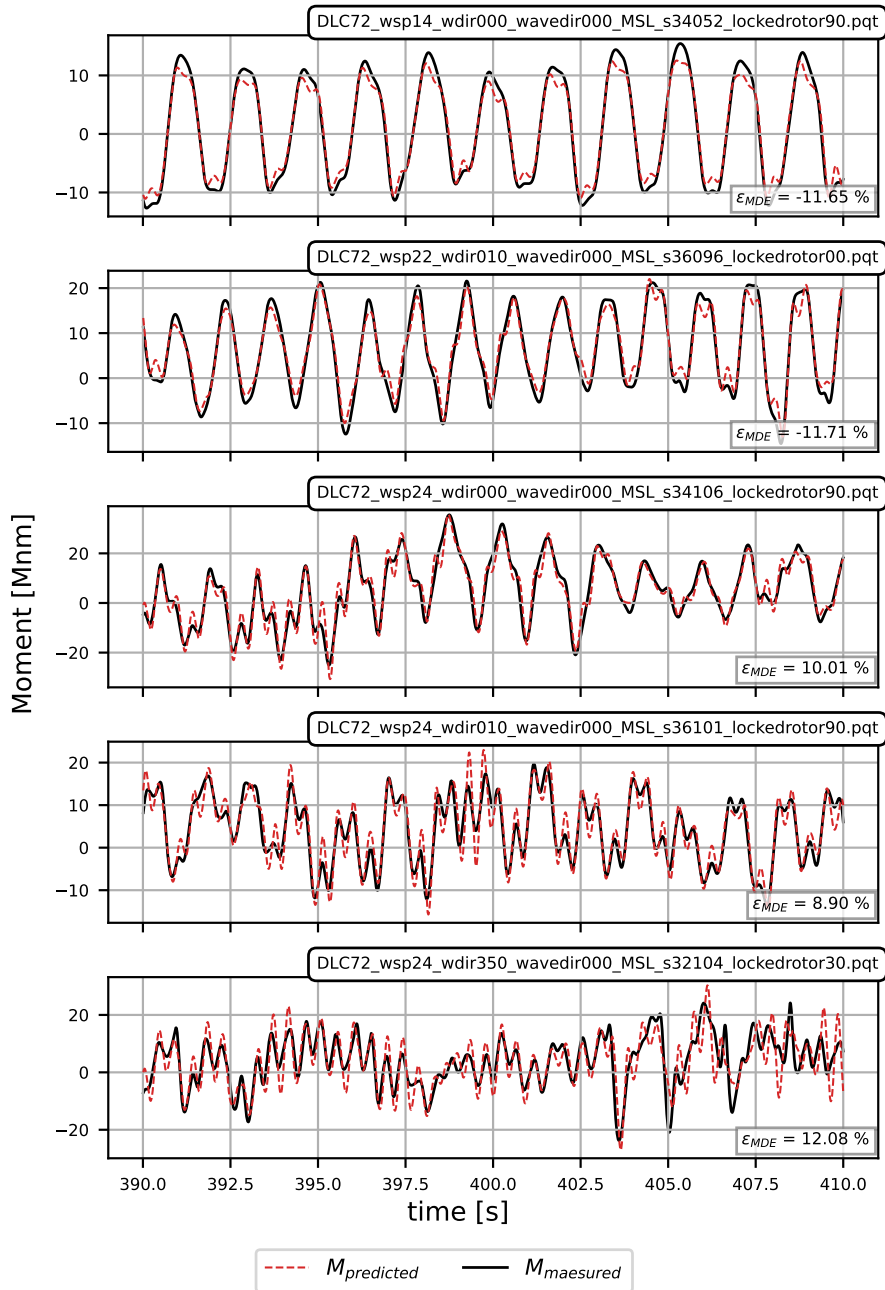


Figure C5. Segments of selected SS moment histories corresponding to the largest absolute MDE errors (ϵ_{MDE}) at the elevation 144 m above MSL for DLC 7.2. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 1.2 — FA moment at z = - 0 m

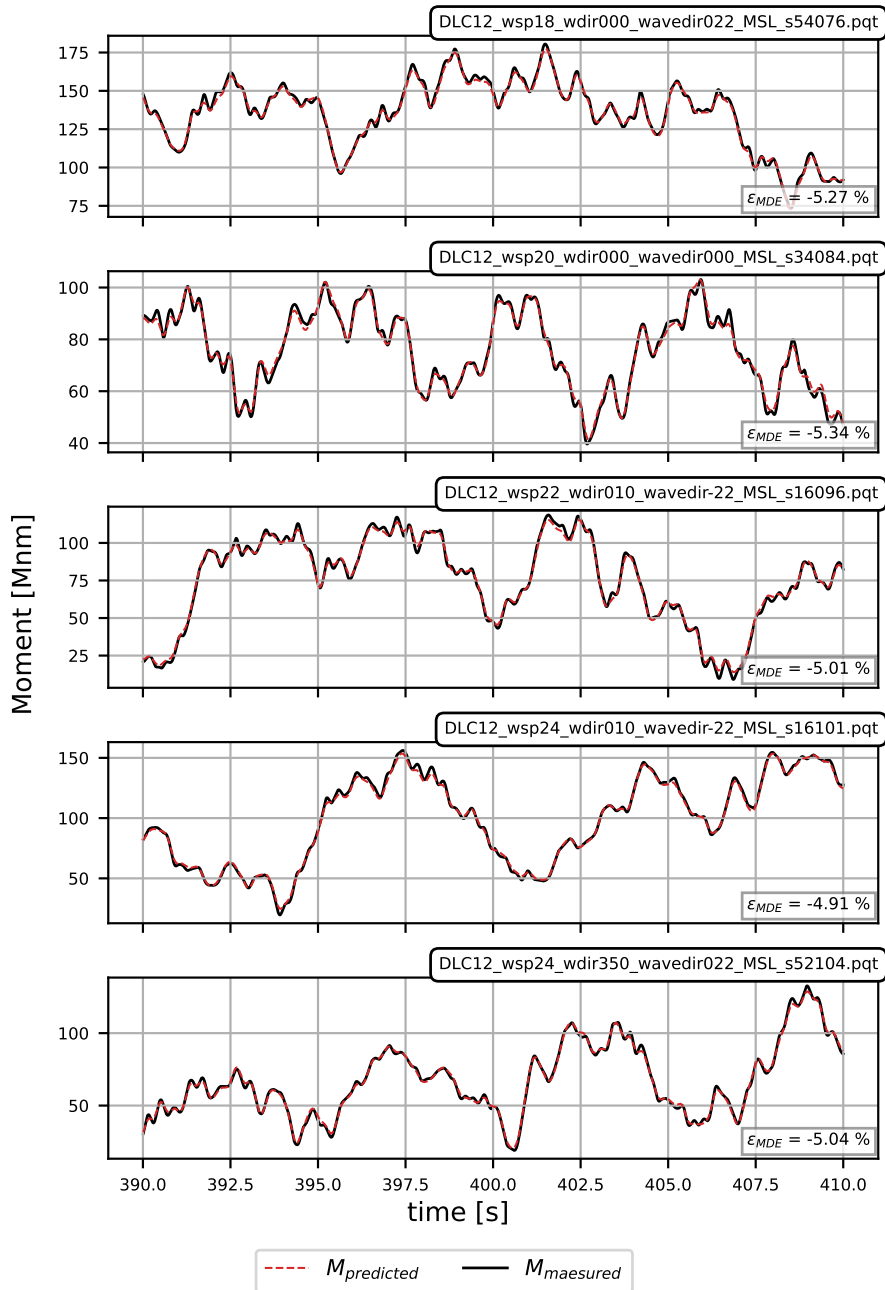


Figure C6. Segments of selected FA moment histories corresponding to the largest relative MDE errors (ϵ_{MDE}) at the elevation 0 m above MSL for DLC 1.2. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 1.2 — SS moment at z = - 0 m

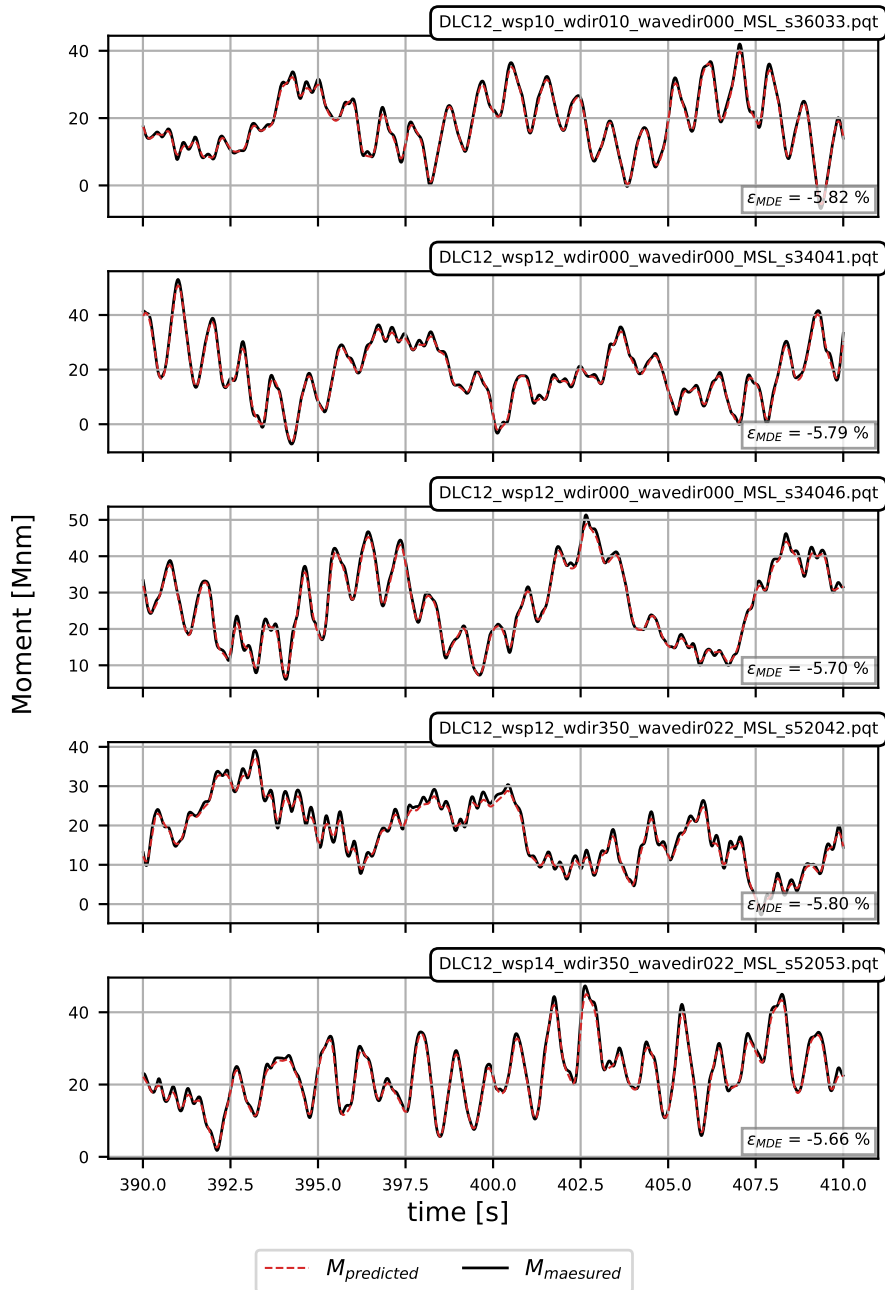


Figure C7. Segments of selected SS moment histories corresponding to the largest relative MDE errors (ϵ_{MDE}) at the elevation 0 m above MSL for DLC 1.2. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

DLC 6.4 — FA moment at z = - 0 m

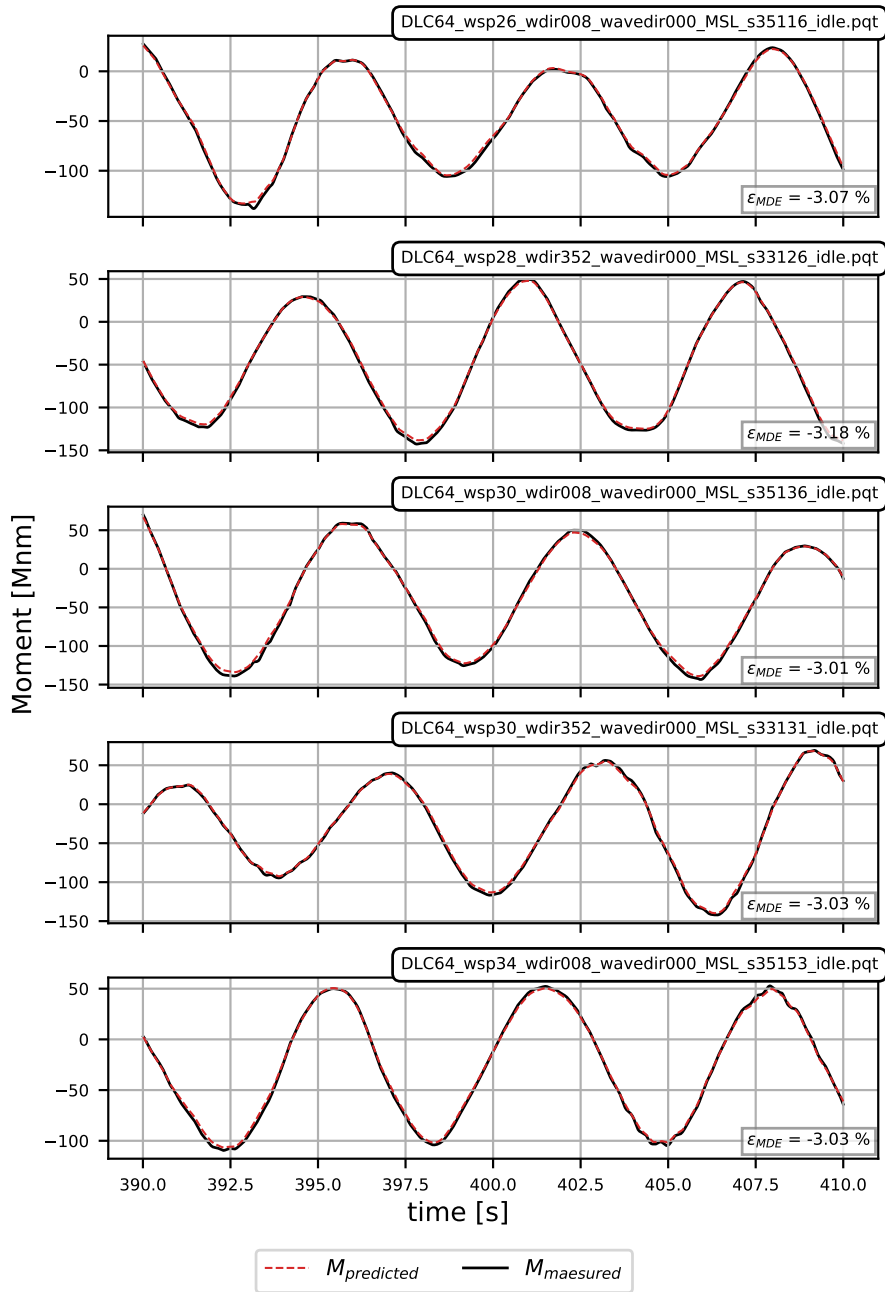


Figure C8. Segments of selected FA moment histories corresponding to the largest relative MDE errors (ϵ_{MDE}) at the elevation 0 m above MSL for DLC 6.4. The time series segments include: 1) the predicted moment history (red) and 2) the true (or measured) moment history (black).

800 *Author contributions.* Conceptualisation and methodology: MGP, JR, IFA, and JH; Wind turbine response simulations: MGP and JR; Data preparation and interpretation: MGP and JR; Prediction FE model: MGP and JH; Modal decomposition and expansion: MGP; writing (original draft): MGP; supervision and writing (review and editing): JR, IFA, and JH

Competing interests. The contact author has declared that none of the authors has any competing interests.

Acknowledgements. This work is partially funded by the Innovation Fund Denmark (grant 1155-00008B) and COWIfonden (grant C-805 153.01). The authors acknowledge the use of AI language models for proofreading and enhancing the readability of this manuscript.

References

- ASTM E1049-85: Standard practices for cycle counting in fatigue analysis, <https://doi.org/10.1520/E1049-85R17>, 2017.
- Augustyn, D., Pedersen, R. R., Tygesen, U. T., Ulriksen, M. D., and Sørensen, J. D.: Feasibility of modal expansion for virtual sensing in offshore wind jacket substructures, *Marine Structures*, 79, 1–17, <https://doi.org/10.1016/j.marstruc.2021.103019>, 2021.
- 810 Baqersad, J., Niezrecki, C., and Avitabile, P.: Full-field dynamic strain prediction on a wind turbine using displacements of optical targets measured by stereophotogrammetry, *Mechanical Systems and Signal Processing*, 62–63, 284–295, <https://doi.org/10.1016/J.YMSSP.2015.03.021>, 2015.
- Bilbao, J., Lourens, E.-M., Schulze, A., and Ziegler, L.: Virtual sensing in an onshore wind turbine tower using a Gaussian process latent force model, *Data-Centric Engineering*, 3, <https://doi.org/10.1017/DCE.2022.38>, 2022.
- 815 de N Santos, F., D’Antuono, P., Robbelein, K., Noppe, N., Weijtjens, W., and Devriendt, C.: Long-term fatigue estimation on offshore wind turbines interface loads through loss function physics-guided learning of neural networks, *Renewable Energy*, 205, 461–474, <https://doi.org/10.1016/J.renene.2023.01.093>, 2023.
- DHI: Energy Island North Sea, Metocean Assessment, Part A: Data Basis – Measurements and Models, 2023-06-28, Tech. rep., DHI, 2023a.
- DHI: Energy Island North Sea, Metocean Assessment, Part B: Data Analyses – Energy Island, 2023-08-09, Tech. rep., DHI, 2023b.
- 820 DHI: Energy Island North Sea, Metocean Assessment, Part C: Data Analyses – Wind Farm Area, 2023-08-09, Tech. rep., DHI, 2023c.
- DSF/FprEN 1993-1-9: Draft no. M372165 - Eurocode 3: Design of steel structures - Part 1-9: Fatigue, 2024.
- Eftekhar Azam, S., Chatzi, E., and Papadimitriou, C.: A dual Kalman filter approach for state estimation via output-only acceleration measurements, *Mechanical Systems and Signal Processing*, 60–61, 866–886, <https://doi.org/10.1016/j.ymssp.2015.02.001>, 2015.
- Ercan, T. and Papadimitriou, C.: Optimal sensor placement for reliable virtual sensing using modal expansion and information theory, *Sensors*, 21, <https://doi.org/10.3390/s21103400>, 2021.
- 825 Fallais, D., Sastre Jurado, C., Weijtjens, W., and Devriendt, C.: Validation of a model-based dual-band modal decomposition and expansion approach for fatigue monitoring of offshore wind turbines, in: 11th European Workshop on Structural Health Monitoring, EWSHM 2024, vol. 29, NDT.net, <https://doi.org/10.58286/29660>, 2024.
- Faria, B. R., Dimitrov, N., Perez, V., Kolios, A., and Abrahamsen, A. B.: Virtual load sensors based on calibrated wind turbine strain sensors for damage accumulation estimation: A gap-filling technique, *Journal of Physics: Conference Series*, 3025, <https://doi.org/10.1088/1742-6596/3025/1/012011>, 2025.
- 830 Gaertner, E., Rinker, J., Sethuraman, L., Anderson, B., Zahle, F., Barter, G., Abbas, N., Meng, F., Bortolotti, P., Skrzypinski, W., Scott, G., Feil, R., Bredmose, H., Dykes, K., Shields, M., Allen, C., and Viselli, A.: IEA Wind TCP Task 37: Definition of the IEA Wind 15-Megawatt Offshore Reference Wind Turbine, Tech. rep., National Renewable Energy Laboratory, Golden CO, <https://www.nrel.gov/docs/fy20osti/75698.pdf>, 2020a.
- 835 Gaertner, E., Rinker, J., Sethuraman, L., Anderson, B., Zahle, F., Barter, G., Nikhar, A., Fanzhong, M., Pietro, B., Witold, S., George, S., Roland, F., Henrik, B., Katherine, D., Matt, S., Christopher, A., and Anthony, V.: IEA-15-240-RWT Frequently Asked Questions (FAQ), [https://github.com/IEAWindSystems/IEA-15-240-RWT/wiki/Frequently-Asked-Questions-\(FAQ\)](https://github.com/IEAWindSystems/IEA-15-240-RWT/wiki/Frequently-Asked-Questions-(FAQ)), 2020b.
- 840 Gaertner, E., Rinker, J., Sethuraman, L., Anderson, B., Zahle, F., Barter, G., Abbas, N., Meng, F., Bortolotti, P., Skrzypinski, W., Scott, G., Feil, R., Bredmose, H., Dykes, K., Shields, M., Allen, C., and Viselli, A.: IEAWindTask37/IEA-15-240-RWT: 15MW reference wind turbine repository developed in conjunction with IEA Wind. Version 1.1.6, <https://github.com/IEAWindTask37/IEA-15-240-RWT>, 2023.

- Ghoshal, A.: Colossal 20-MW wind turbine is the largest on the planet (for now), <https://newatlas.com/energy/world-largest-offshore-wind-turbine-20-mw-mingyang/>, 2024.
- 845 Henkel, M., Häfele, J., Weijtjens, W., Devriendt, C., Gebhardt, C. G., and Rolfes, R.: Strain estimation for offshore wind turbines with jacket substructures using dual-band modal expansion, *Marine Structures*, 71, <https://doi.org/10.1016/j.marstruc.2020.102731>, 2020.
- Henkel, M., Weijtjens, W., and Devriendt, C.: Fatigue stress estimation for submerged and sub-soil welds of offshore wind turbines on monopiles using modal expansion, *Energies*, 14, <https://doi.org/10.3390/en14227576>, 2021.
- IEC: IEC 61400-1:2019, Wind energy generation systems – Part 1: Design requirements, 2019a.
- IEC: IEC 61400-3-1:2019, Wind energy generation systems – Part 3-1: Design requirements for fixed offshore wind turbines, 2019b.
- 850 Iliopoulos, A., Shirzadeh, R., Weijtjens, W., Guillaume, P., Hemelrijck, D. V., and Devriendt, C.: A modal decomposition and expansion approach for prediction of dynamic responses on a monopile offshore wind turbine using a limited number of vibration sensors, *Mechanical Systems and Signal Processing*, 68-69, 84–104, <https://doi.org/10.1016/j.ymsp.2015.07.016>, 2016.
- Iliopoulos, A., Weijtjens, W., Hemelrijck, D. V., and Devriendt, C.: Fatigue assessment of offshore wind turbines on monopile foundations using multi-band modal expansion, *WIND ENERGY*, 20, 1463–1479, <https://doi.org/10.1002/we.2104>, 2017.
- 855 Iliopoulos, A. N., Devriendt, C., Iliopoulos, S. N., and Van Hemelrijck, D.: Continuous fatigue assessment of offshore wind turbines using a stress prediction technique, in: *Health Monitoring of Structural and Biological Systems*, vol. 9064, p. 90640S, <https://doi.org/10.1117/12.2045576>, 2014.
- Krenk, S. and Høgsberg, J.: *Statics and mechanics of structures*, Springer, ISBN 978-94-007-6113-1, <https://doi.org/10.1007/978-94-007-6113-1>, 2013.
- 860 Larsen, T. J. and Hansen, A. M.: *How 2 HAWC2 , the user’s manual*, 2021.
- Maes, K., Iliopoulos, A., Weijtjens, W., Devriendt, C., and Lombaert, G.: Dynamic strain estimation for fatigue assessment of an offshore monopile wind turbine using filtering and modal expansion algorithms, *Mechanical Systems and Signal Processing*, 76-77, 592–611, <https://doi.org/10.1016/j.ymsp.2016.01.004>, 2016.
- Mehrjoo, A., Song, M., Moaveni, B., Papadimitriou, C., and Hines, E.: Optimal sensor placement for parameter estimation and virtual sensing of strains on an offshore wind turbine considering sensor installation cost, *Mechanical Systems and Signal Processing*, 169, 108787, <https://doi.org/10.1016/j.ymsp.2021.108787>, 2022.
- 865 Natarajan, A., Hansen, M. H., and Wang, S.: *Design Load Basis for Offshore Wind turbines: DTU Wind Energy Report No. E-0133*, DTU Department of Wind Energy, ISBN 978-87-93278-99-8, 2016.
- Noppe, N., Iliopoulos, A., Weijtjens, W., and Devriendt, C.: Full load estimation of an offshore wind turbine based on SCADA and accelerometer data, in: *Journal of Physics: Conference Series*, vol. 753, p. 072025, <https://doi.org/10.1088/1742-6596/753/7/072025>, 2016.
- 870 Pedersen, M. G., Rinker, J., Høgsberg, J., and Farreras, I. A.: IEA-15MW-RWT-Monopile HAWC2 Response Database, <https://doi.org/10.11583/DTU.24460090.v3>, 2025.
- Reinhardt, T., Sastre Jurado, C., Weijtjens, W., and Devriendt, C.: On the influence of rotor nacelle assembly modelling on the computed eigenfrequencies of offshore wind turbines, *Journal of Physics: Conference Series*, 2767, <https://doi.org/10.1088/1742-6596/2767/5/052034>, 2024.
- 875 Rinker, J., Gaertner, E., Zahle, F., Skrzypiński, W., Abbas, N., Bredmose, H., Barter, G., and Dykes, K.: Comparison of loads from HAWC2 and OpenFAST for the IEA Wind 15 MW Reference Wind Turbine, in: *Journal of Physics: Conference Series*, vol. 1618, p. 052052, <https://doi.org/10.1088/1742-6596/1618/5/052052>, 2020.

- Salas, J.: Another turbine world record set – but not by China this time, <https://newatlas.com/energy/siemens-gamesa-sg-dd-276-turbine/>, 2025.
- 880 Skafte, A., Kristoffersen, J., Vestermark, J., Tygesen, U. T., and Brincker, R.: Experimental study of strain prediction on wave induced structures using modal decomposition and quasi static Ritz vectors, *Engineering Structures*, 136, 261–276, <https://doi.org/10.1016/j.engstruct.2017.01.014>, 2017.
- Sumer, B. M. and Fredsøe, J.: *Hydrodynamics Around Cylindrical Structures*, World Scientific, 1997.
- 885 Tarpø, M.: *Stress Estimation of Offshore Structures*, Ph.D. thesis, Aarhus University, ISBN 978-87-7507-491-4, <https://ebooks.au.dk/aul/catalog/book/393>, 2020.
- Toftækær, J. F., Vestermark, J. T., and Jepsen, M. S.: Uncertainty of Virtually Sensed Stress Ranges in Offshore Wind Support Structures, in: *Proceedings of the ASME 2023 42nd International Conference on Ocean, Offshore and Arctic Engineering*, p. V001T01A011, <https://doi.org/10.1115/OMAE2023-101045>, 2023.
- 890 Veldkamp, H. F.: *Chances in Wind Energy: A probabilistic Approach to Wind Turbine Fatigue Design*, Ph.D. thesis, Delft University, ISBN 978-90-76468-12-9, 2006.
- Vestas Wind Systems A/S: V236-15.0 MWTM, <https://www.vestas.com/en/energy-solutions/offshore-wind-turbines/V236-15MW>.
- Vettori, S., Di Lorenzo, E., Peeters, B., Luczak, M. M., and Chatzi, E.: An adaptive-noise Augmented Kalman Filter approach for input-state estimation in structural dynamics, *Mechanical Systems and Signal Processing*, 184, 109654, 895 <https://doi.org/10.1016/j.ymsp.2022.109654>, 2023.
- Zou, J., Lourens, E.-M., and Cicirello, A.: Virtual sensing of subsoil strain response in monopile-based offshore wind turbines via Gaussian process latent force models, *Mechanical Systems and Signal Processing*, 200, 110488, <https://doi.org/10.1016/J.YMSSP.2023.110488>, 2023.