

Power Output of Turbines Mounted on Tension-Leg Platforms Subjected to Fully Developed Ocean Gravity Waves

Juan M. Restrepo^{1, 2}, Matthew Norman¹, Stuart Slattery¹, Lawrence Cheung³, and Yihan Liu⁴

¹Oak Ridge National Laboratory, Oak Ridge TN USA 37831

²Department of Mathematics, University of Tennessee Knoxville, Knoxville TN USA 37920

³Sandia National Laboratory, Livermore, CA USA 94550

⁴Virginia Tech, Blacksburg, VA USA 24061

Correspondence: Juan M. Restrepo (restrepojm@ornl.gov)

Abstract. A concern in the deployment of large wind turbines on ocean floating platforms is the effect of floating platform motions on their electrical power generation. Further, it is not clear how floating motions influence waking, which might affect the combined power generation of collections of turbines. We examine the average power output of a single and a collection of NREL 5 MW wind turbines, mounted on a Tension-Leg Platform (TLP) under the action of fully developed ocean wave motions, coupling floating motions with Large Eddy Simulation (LES) of atmospheric and rotor dynamics. The ocean dynamics enter as fully developed waves derived from the Pierson-Moskowitz spectrum. To assess the influence of ocean motions we performed simulations ~~under multiple turbulence intensities~~over the full range of wind speeds in the operational range of the turbine, reporting comparisons of average power output when the platforms are allowed to move to when they are held rigidly in place. In all simulations, we find that the effects of TLP floating platform's induced motions have a minor effect on single and multiple turbine power production and wake deficits. Even when using coherent and large amplitude harmonic floating induced perturbations, any significant wake modifications from floating motions are confined to the near-wake region, where downstream turbines are unlikely to be located. The relatively small amplitude of TLP motions relative to pre-existing turbulent fluctuations are the primary reason for low wake and power modifications downstream.

Copyright statement. This manuscript has been authored by UT-Battelle, LLC under Contract No. DE-AC05-00OR22725 with the U.S. Department of Energy. The publisher, by accepting the article for publication, acknowledges that the U.S. Government retains a non-exclusive, paid up, irrevocable, world-wide license to publish or reproduce the published form of the manuscript, or allow others to do so, for U.S. Government purposes. The DOE will provide public access to these results in accordance with the DOE Public Access Plan (<http://energy.gov/downloads/doe-public-access-plan>).

1 Introduction

~~Modeling and simulation of~~The aim of this study is to determine whether, on average, ocean gravity waves affect the average power output of turbines mounted on floating platforms. We do so by comparing the power output of a turbine mounted on

a platform allowed to be mechanically affected by wave motions to the same arrangement with no wave motions. We also compare the average power of a simple multi-turbine farm configuration of floating platform turbines to a fixed platform arrangement.

25 The comparison is made via simulations. For the moving platform we employ large eddy simulations of a stably- and unstably-stratified atmosphere, a mechanical model for the platform, a parametric representation of a 5MW turbine, and a spectral representation of the ocean gravity waves. The waves and platform dynamics are suppressed when we compute the fixed platform outcomes. The novelty of the results derives from the complexity of the fully coupled model and the high spatio-temporal resolutions of the simulations.

30 Simulation of wind turbines has proven to be an effective way to inform the design, siting, and in the prediction of wind turbine power production (e.g. Wu and Porté-Agel (2015), Miller et al. (2013)). Significant fidelity has been achieved in simulations of individual and clusters of turbines as well as the interaction of turbine wakes and its environment. Off-shore sites for wind farms, particularly deep water ones, have obvious attractive features, among these are: lower interference with maritime operations, potentially smaller ecological impact, the possibility to employ larger turbines, and more reliable wind
35 conditions than shallower sites. One obvious challenge to wind turbine deep water deployment is that they may require a floating platform.

~~The aim of this study is to determine whether, on average, turbines mounted on floating platforms that are subjected to wave motions are impacted with regard to power output. We do so by comparing the power output of a turbine mounted on a platform allowed to be mechanically affected by wave motions to the same arrangement with no wave motions. We will be focusing on a specific type of floating platform and wind turbine configuration, both described in due course. We also consider a simple multi-turbine farm configuration of floating platform turbines. This study looks at the relative average power output of these turbines using a dynamic model for the parametric representation of 5MW turbines. Well-resolved large eddy simulation of atmospheric motions under stable and unstable stratifications and a mechanical model for the platform are used in the simulations. The platform, in turn is dynamically subjected to ocean gravity wave motions under fully developed conditions.~~
40 ~~The novelty of the results derives from the complexity of the fully coupled model and high spatio-temporal resolutions.~~

~~An ocean platform would be exposed to a variety of different waves. Our study will focus on motions induced by 'fully developed' wave ocean wave conditions. Wind waves that equilibrate spectrally broadly define fully developed ocean conditions (see Pierson and Moskowitz (1964)). Equilibration depends on fetch conditions and the length of time that steady wind is stressing the sea surface. A fully developed ocean wind wave spectrum has an effective random phase field, and empirical models, such as the Pierson-Moskowitz model and its various specializations (e. g. JONSWAP), are recognized as good models of the fully developed ocean wind wave conditions. Equilibration and random phases are key features that impact the types of motions generated mechanically in a floating platform. Not under consideration are: (1) swells, generated by distant storms and disturbances which manifest themselves as episodic/transient changes in the sea surface; (2) white-capping waves, typified by random breaking events, and steep episodic breaking waves of large amplitude.~~

55 Modeling of wind turbines is a modeling of floating platform, offshore wind turbines is a multi-scale, multi-physics problem (Lemmer et al., 2018). ~~The work of Wang et al. (2022) focuses on simulations that form the basis for the Offshore Code~~

~~Comparison Projects, which use NREL's OpenFAST. Blade-resolved simulations~~ problem (Lemmer et al., 2018) which can be addressed using varying levels of simulation fidelity. For instance, the work of Wang et al. (2022) used the low-fidelity OpenFAST model with empirical modifications to the drag forces to simulate the wave loads of semi-submersible platforms. While this method improves on the under-predictions of the low-frequency, nonlinear responses from typical engineering models, it does rely on calibration to experimental data. On the other hand, the highest fidelity, blade-resolved simulations including the turbine and floating platform require less empirical calibration, but must include boundary layer physics at very small scales while regional characterization of the wind resource requires encapsulation of hour and kilometer-scale phenomena in mesoscale simulations (i.e. simulations that bridge the scales between highly resolved models and earth system simulations).

The complexity and multitude of design considerations associated with the various platform configurations has shown the need for comprehensive studies on the modeling offshore wind platforms and their interactions with the environment. The Offshore Code Comparison Collaboration, Continued with Correlation and ~~uncertainty~~-Uncertainty Project (OC6) ~~project~~ addresses this- addresses the need for model validation and comparison. Of particular interest to the current work are Phase III (Bergua et al., 2023; Cioni et al.) and Phase IV (Bergua et al., 2024) of the OC6 project, which studied the aerodynamic rotor behavior and full-system, aerodynamic and hydrodynamic interactions of floating platforms. Their results have shown that two-phase flow simulations of semi-submersible and TetraSpar floating platforms (Darling et al., 2025) are able to be successfully compared against experiments, but there are many remaining challenges in these high-fidelity simulations and simplified models of their behavior are still necessary in many instances. Our long-term goal is to create more accurate representations of wind farms in the mesoscale simulations. For this purpose we argue that large eddy simulations (LES) are appropriate to resolve atmospheric interactions with turbines, and the momentum and energetic exchanges critical to power generation by the turbines and their effect on the atmospheric boundary layer. LES has been used to compare the effect of moving platform turbine wakes to those of a fixed platform. For example Johlas et al. (2019, 2020) found the wakes of these two configurations ~~not very dissimilar~~were similar.

Large-scale simulations using LES of wind farms are now possible with modern computing tools (Cheung et al., 2022). These studies allow for computation at different atmospheric conditions and are often able to connect to experimental data (Kumer et al., 2016). Unlike blade-resolved models where individual turbines are largely represented in their geometric entirety (see Ribeiro et al. (2023)), LES models often represent the turbine via either an actuator line or actuator disk model (Martinez et al., 2012). The choice of the wind turbine rotor model in high fidelity wind farm simulations is dependent on both the computational resources available and the expected wake dynamics to be encountered. For instance, in floating turbines with a surge motion frequency commiserate with the rotor speed, a vortex ring state can be encountered if the blade tips interact with the vortex emerging from the previous blade (Sebastian and Lackner, 2011; Kyle et al., 2020), and consequently change the near field wake. In other cases, an asymmetric loaded rotor (Abraham and Leweke, 2023) or individual pitch control (Cheung et al., 2024) can lead to different loading on individual blades and change the downstream wake behavior. For those situations, an actuator line method or a blade-resolved method may be appropriate to resolve the tip vortex behavior or blade loading differences. However, differences in wake behavior can also be caused by changes to the turbine orientations or to rotor behavior which are not depending on resolving the individual blade loading profiles or tip vortices.

Inclusion of platform motion in the dynamics of turbines has become more prevalent in the literature recently (e.g. Li et al. (2024); Wena et al. (2018)). For instance, wake deflections due to turbine yaw steering (Frederik et al., 2025; Brown et al., 2025) or platform yaw or pitch are a steady phenomenon which can directly impact wind farm performance. Previous studies by Li et al. (2022) and Messmer et al. (2025) have also shown that lower-frequency floating platform motions can introduce large scale structures in the far wake which can enhance wake recovery. Such effects can be captured using simpler actuator disk models without the need for resolving blade motions or blade pitch controllers and are the focus of the current study (Dong et al., 2022; Malecha and Dsouza, 2023; Mirocha et al., 2014; Hsieh et al., 2025).

~~In the context of LES for mesoscale models, approaches include using LES data to build models for hub height wind speeds and other relevant model parameters (Pan and Archer (2018)) for static turbine configurations. It is therefore unclear from the literature what effect, if any, moving turbines will have on key performance parameters in mesoscale simulations, particularly at the timescales of hours and days over which mesoscale simulations operate. Inclusion of platform motion in these models has become more prevalent in the literature recently (e.g. Li et al. (2024); Wena et al. (2018); Yang et al. (2022)) but the coupled dynamics of platforms, atmospheric flows and turbines are new.~~

The wind tunnel experiments in Wei and Dabiri (2022) report decreased mean power at high tip-speed ratios and high surge due to the stall onset on blades. They were also able to obtain an increase in power under certain controlled wave conditions. Their work points to the importance of having active and passive wave motion control on these floating ocean wind turbines (FOWTs). A significant effort is being made to model and simulate turbine dynamics on moving platforms. These model and simulation efforts are aimed ~~toward~~ at discerning first order dynamic/structural issues that will inform the design and construction of these FOWTs. For example, Johlas et al. (2020) compare wake characteristics of turbines mounted on different floating platforms, and their wakes to those of fixed turbines.

~~To model floating platform effects initially at an intermediate resolution using 10m grid spacing to better understand the dynamics relevant to mesoscale, our approach is to first~~ Here we assess the effect of fully-developed ocean gravity waves on the average power output from turbines mounted on a floating platform, over a wide range of wind speeds. We focus on the power characteristics of a 5MW NREL turbine, mounted on a specific and familiar moored platform, namely the Tension-Leg Platform. These platforms will have active motion control. We omit active motion control, since active platform stability mechanisms primarily address transient motions due to storms, swells, and developing ocean conditions, and the residual flow due to waves (for example, see McWilliams and Restrepo (1999); McWilliams et al. (2004); Restrepo (2007)).

Our approach allows us to understand how floating platform motions from ocean dynamics and turbulent thrust intermittency alters key elements of the flow used in mesoscale parameterizations including hub-height wind speeds and directions, turbulence, and turbine power output over the time scales present in a mesoscale simulation. First, we extend LES simulations to include floating turbine dynamics such that power production and subsequently turbulent kinetic energy (i.e. the quantities of interest in a mesoscale parameterization), are directly modified by the turbine motions. To do this, we have modified an existing LES simulation tool capable of modeling a variety of atmospheric conditions using an actuator disk approach. ~~We assess the power output from floating platforms subjected to a fully-develop ocean gravity-wave spectrum over a wide range of wind speeds. This approach allows us to understand how floating platform motions from ocean dynamics and turbulent thrust intermittency alters~~

key elements of the flow used in mesoscale parameterizations including hub-height wind speeds and directions, turbulence, and turbine power output over the time scales present in a mesoscale simulation.

130 This study couples the dynamics of a specific floating platform, the ocean below it, and The resolution of atmospheric dynamics of these simulations is 10m. Secondly, we include explicitly how platform motions affect the wind flow encountering the turbine as well as the effects of platform motion on the mechanics to turbine. Thirdly, we account for how gravity wave motions affect the dynamics of single and multiple turbines. The goal is to compare the relative differences in the average generated by these floating turbine configurations, to the power generated by these turbines when they are not subjected to platform motions. the platform itself.

135 Floating motions of platforms affect the dynamics of the turbines attached to them. The wind tunnel experiments in Wei and Dabiri (2022) report decreased mean power at high tip-speed ratios and high surge due to the stall onset on blades. They were also able to obtain an increase in power under certain controlled wave conditions. Their work points to the importance of having active and passive wave motion control on these FOWTs.

140 Driven primarily by the oil industry, An ocean platform would be exposed to a variety of different waves. Our study will focus on motions induced by 'fully developed' ocean wave conditions. Well established and verified empirical models for these ocean waves have been around for more than half a century. The most widely cited and tested models for these waves are the technological development of ocean platforms has generated very sophisticated designs. Ocean platforms can be actively driven, they might be buoyantly floating moored designs, and most designs have some sort of active ocean motion control. We focus on a specific and familiar moored platform, namely the Tension-Leg Platform, which is well suited to carry an

145 NREL 5MW turbine Pierson-Moskowitz model (see Pierson and Moskowitz (1964)) and its variant applicable to developing conditions, the more prominently peaked JONSWAP spectrum model (see Hasselmann et al. (1973)). The Pierson-Moskowitz model has as input the wind speed at a set reference height above the mean sea elevation, and it produces a multi-spectral description of the gravity wave field, presuming the sea state has reached statistically stationary conditions –fully developed– over sufficiently large expanses –fetches–. The gravity waves are, by some measures, the overwhelmingly most common

150 waves found in deep waters, where most of the turbines on floating platforms operate or plan to operate. In the ensemble, these gravity waves are stationary and can be described as having random phases. As a consequence of this choice of the types of waves under consideration we then exclude swells, generated by distant storms and disturbances which manifest themselves as episodic/transient changes in the sea surface, dissipative white-capping waves, typified by random breaking events, or steep episodic breaking waves of large amplitude that result from interactions of the wave field with the underlying ocean currents.

155 Notwithstanding the prevalence of wind waves in places where these floating platform ocean turbines are placed or are planned for, in the interpretation of the results that follow it is cautioned that fully developed sea states are not common in nature and thus the Pierson-Moskowitz spectral model for these waves apply with caveats to the practical case. However, we deliberately omit active motion control, in the hopes of assessing, as a first pass, how a simple chain anchor system handles ocean dynamics. Further, active platform stability mechanisms are focused on addressing transient motions due to storms, swell, and developing

160 ocean conditions, the residual flow due to waves (see McWilliams and Restrepo (1999); McWilliams et al. (2004); Restrepo (2007)) and thus the results of this study do not extend to these ocean conditions the effect on turbine power output due to waves

modeled by Pierson-Moskowitz is not at all obvious and a motivation for this paper. Different geographic and weather conditions determine what types of transient oceanic disturbance are prevalent, and thus answering whether waves of this type have an impact on power output of these floating installations will require specifics of geography, time expanse, and large scale atmospheric conditions, to be meaningful.

The remainder of the document is organized as follows. In Section 2 we detail the model of the platform/turbine dynamics, responding to wind wave motions. In Section 3 we give the problem statement and ~~in-make plain how the the wind exposed to the turbines is affected by motions of the platform.~~ In Section 4 we ~~present our~~ provide details on how the turbine is handled numerically and how the atmospheric initial conditions and boundary conditions are chosen for the LES formulation. The LES equations and numerical details appear in the Appendix B. In Section 5 we describe the results of our numerical experiments~~and~~. Wherever possible we show relative quantities, comparing power output, for example, of the turbine mounted on a moving platform and the same where the platform is not subjected to ocean waves. Concluding remarks and suggestions for immediate research followup appear in Section 6~~we give our concluding remarks.~~

2 Platform Dynamics

Our modeling approach for the simulation of the floating offshore wind turbines dynamics is adapted from Betti et al. (2014). A schematic of the platform and turbine appear in Figure 1. In what follows we will be specifically using the parameters associated with an NREL 5 MW turbine, mounted on a floating platform. All of the parameters required to recreate the platform motions we use in this study are found in Betti et al. (2014). Generally we would have 12 degrees of freedom (DOFs): surge, heave, and pitch position, which are the symmetric motions; and the antisymmetric motions are: sway, roll, yaw position (the other six DOFs are the velocities of each aforementioned position). In what follows, however, we will always line up the platforms/turbines such that only symmetric degrees need to be considered (see Ribeiro et al. (2023) and Fontanella et al. (2025) for studies that focus on the effect of sway surge and yaw effects on turbine wakes). We therefore only consider six degrees of freedom: surge ζ , heave η , and pitch α (and their respective velocities) as shown in Figure 1b. See also Figure 2 for more details on the coordinates and platform geometry.

In this model the balance of forces and torques for the surge, heave, and pitch are:

$$E\dot{q} = F, \tag{1}$$

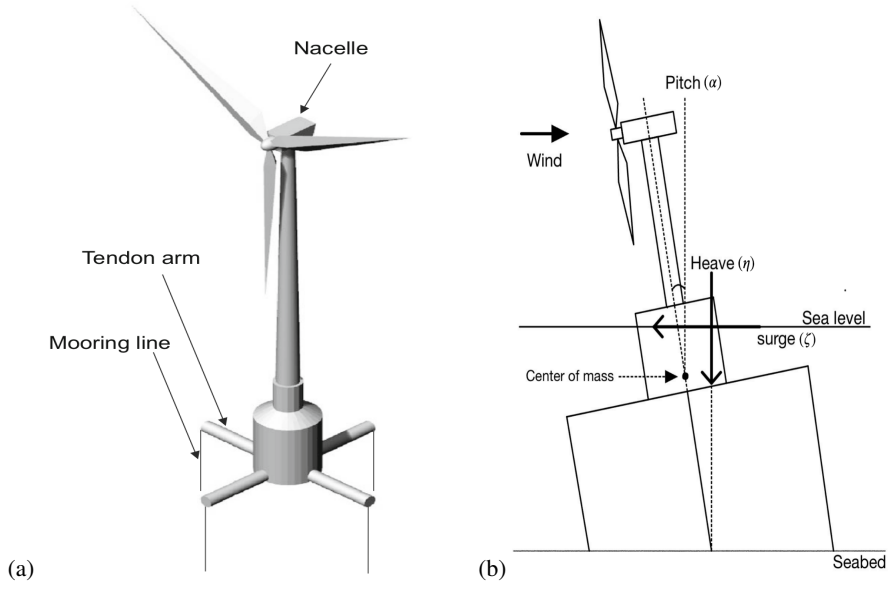


Figure 1. Offshore wind turbine floating platform. The platform is a partially submerged, chain-stabilized design (Figure 1 (a) is reproduced from Karimi et al. (2017). Figure 1 (b) is reproduced from Liu and Chertkov (2023)). The turbine parameters correspond to an NREL 5MW design (Papi and Bianchini (2022)).

with the overdot indicating a time, t , derivative. Here $q = [\zeta, \dot{\zeta}, \eta, \dot{\eta}, \alpha, \dot{\alpha}]^\top := [\zeta, u, \eta, v, \alpha, w]^\top$, the inertia matrix E is defined as

$$E = \begin{bmatrix} 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & M_X & 0 & 0 & 0 & M_d \cos \alpha \\ 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & M_Y & 0 & M_d \sin \alpha \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & M_d \cos \alpha & 0 & M_d \sin \alpha & 0 & J \end{bmatrix}, \quad (2)$$

190 and the forcing vector is

$$F = \begin{bmatrix} u \\ Q_\zeta + M_d w^2 \sin \alpha \\ v \\ Q_\eta - M_d w^2 \cos \alpha \\ w \\ Q_\alpha \end{bmatrix}. \quad (3)$$

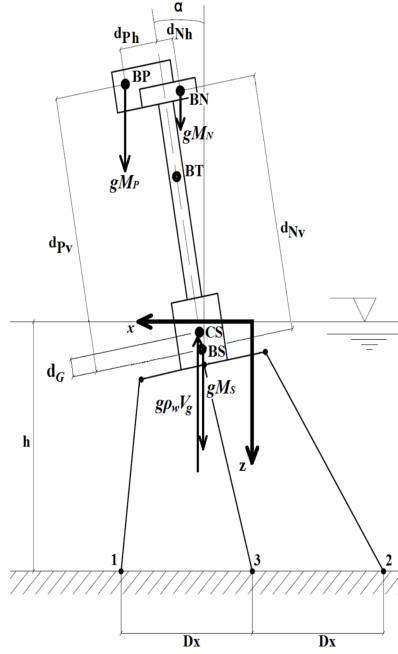


Figure 2. Offshore wind turbine floating platform. Figure reproduced from Betti et al. (2014), where all the symbols are defined: BN nacelle center of mass, BT tower center of mass, BS is the center of mass of float and tower, BP is the center of mass of the fan, CS center of thrust of the buoyancy force, Dx is the attachment point interdistance.

The weight forces are:

$$Q_{\zeta}^{(we)} = 0, \quad (4)$$

$$Q_{\eta}^{(we)} = (M_N + M_P + M_S)g, \quad (5)$$

$$195 \quad Q_{\alpha}^{(we)} = [(M_N d_{Nv} + M_P d_{Pv}) \sin \alpha + (M_N d_{Nh} + M_P d_{Ph}) \cos \alpha] \quad (6)$$

where M_N , M_P and M_S are the masses of the systems N, P, and S shown in Figure 2. The d_{Pv} , d_{Nv} , d_{Ph} , d_{Nh} , are the distances between BS and BP and between BS and BN in the direction parallel to the tower's axis v , and horizontal axis h , $d_N = \sqrt{d_{Nh}^2 + d_{Nv}^2}$. Buoyancy forces are defined as:

$$Q_{\zeta}^b = 0, \quad (7)$$

$$200 \quad Q_{\eta}^b = -\rho w V_g g, \quad (8)$$

$$Q_{\alpha}^b = \rho w V_g d_G \sin \alpha \quad (9)$$

and wave forces as:

$$Q_{\zeta}^{(wa)} = (\rho V_g + m_x) \cos \alpha \ddot{z}, \quad (10)$$

$$Q_{\eta}^{(wa)} = (\rho V_g + m_x) \sin \alpha \ddot{z}, \quad (11)$$

$$205 \quad Q_{\alpha}^{(wa)} = 0 \quad (12)$$

Wind forces, Q^{wi} , are:

$$Q_{\zeta}^{(wi)} = -(FA + FAN + FAT) \quad (13)$$

$$Q_{\eta}^{(wi)} = 0 \quad (14)$$

$$Q_{\alpha}^{(wi)} = -FA(d_{Pv} \cos \alpha - d_{Ph} \sin \alpha) \quad (15)$$

$$210 \quad -FAN(d_{Nv} \cos \alpha - d_{Nh} \sin \alpha) \quad (16)$$

$$-FAT(d_T \cos \alpha) \quad (17)$$

$$FA = \frac{1}{2} \rho A C_T \left(u_{upstream} + v_{\zeta} + \sqrt{d_{Ph}^2 + d_{Pv}^2} w \cos \alpha \right)^2 \quad (18)$$

$$FAN = \frac{1}{2} \rho C_{dN} A_N \cos \alpha (u_{upstream} + v_{\zeta} + d_N w \cos \alpha)^2 \quad (19)$$

$$215 \quad FAT = \frac{1}{2} \rho C_{dT} h_T D_T \cos \alpha (u_{upstream} + v_{\zeta} + d_T w \cos \alpha)^2 \quad (20)$$

where $u_{upstream}$ is the freestream inflow velocity to the turbine actuator disk described in equation (22) and provided by the LES model, A is the turbine swept plan area, C_T is the coefficient of thrust, $C_{dN} = 1$ is the coefficient of drag for the nacelle, $A_N = 9.62 \text{ m}^2$ is the nacelle area, $C_{dT} = 1$ is the coefficient of drag for the tower, $h_T = 87.6 \text{ m}$ is the exposed tower height, $D_T = 4.935 \text{ m}$ is the mean tower diameter, and $d_T = 75.7843 \text{ m}$ is the vertical distance between BS and BT in Figure 2.

220 We refer the reader to Betti et al. (2014) for the definition of tie rod forces, Q^{tr} , and hydraulic drag forces, Q^{hy} . The composite forces are then:

$$\begin{aligned} Q_{\zeta} &= Q_{\zeta}^{(we)} + Q_{\zeta}^{(b)} + Q_{\zeta}^{(wi)} + Q_{\zeta}^{(tr)} + Q_{\zeta}^{(wa)} + Q_{\zeta}^{(hy)} \\ Q_{\eta} &= Q_{\eta}^{(we)} + Q_{\eta}^{(b)} + Q_{\eta}^{(wi)} + Q_{\eta}^{(tr)} + Q_{\eta}^{(wa)} + Q_{\eta}^{(hy)} \\ Q_{\alpha} &= Q_{\alpha}^{(we)} + Q_{\alpha}^{(b)} + Q_{\alpha}^{(wi)} + Q_{\alpha}^{(tr)} + Q_{\alpha}^{(wa)} + Q_{\alpha}^{(hy)} \end{aligned} \quad (21)$$

225 The modifications we made to the platform model in Betti et al. (2014) are that the wind is supplied by a large eddy simulation (LES) of the atmosphere, and the upstream velocity at the hub takes into account the motion of the turbine itself due to wave motions. Furthermore, we use an actuator disk approximation for the turbine, hence, some of the details on how the velocity from the LES calculation enter the platform dynamics will be fully clarified in the subsequent sections. The wave forcing; $Q^{(wa)}$; requires the calculation of $\ddot{z}$, the vertical sea elevation acceleration. The ocean waves considered here are specific to a
230 fully developed gravity wave, deep water sea model. See Appendix A for the calculation of the sea surface acceleration.

3 Problem Statement

We aim to determine whether floating motions of a Tension Leg Platform (TLP) affect the *mean* power generated by wind turbines mounted on floating platforms and the wake deficits. In this study, we focus on wave motions due to fully developed conditions, which means that we exclude remotely-generated swell and transient, storm-driven conditions. To accomplish this, we will be comparing the steady power output of NREL 5MW turbines, mounted on moving Tension-Leg Platforms (TLPs), to the same turbines mounted on non-moving platforms. Since these turbines are usually arranged into large wind farms composed of many turbines, we also want to determine whether wave motions affect the power generation of a farm of floating platform turbines due to changes in the waking effect of upstream turbines on the other turbines.

We will simplify the dynamics of the turbine (compared to actuator line and blade element theory techniques) at 10m grid spacing by making use of an *actuator disk approximation*. Actuator line representations can better resolve tip vortices and individual blade influence by projecting Blade Element Theory on local flow velocities using the chord length and lift and drag coefficients at different blade segments. However, actuator lines require fine grid spacing typically on the order of 1-2m, and the process of projecting input wind velocities onto thrust and torque contributions for each blade section is more complex. Actuator disk simulation does not require this level of resolution and take a simpler approach in projecting thrust and torque by applying them using 1-D momentum theory based on thrust and torque coefficient reference tables created from actuator line simulations. The choice of 10m grid spacing is to allow more than ten model grid cells across the rotor diameter to ensure it is resolved by the numerics (Hsieh et al., 2021; Blaylock et al., 2022). We validate that the actuator disk is giving similar wake deficits as the actuator line representation in Appendix B4.

The wind will be generated by a large eddy simulation (LES) approximation of compressible, non-hydrostatic atmospheric flows using a model called portUrb (Norman et al., 2025). The subgrid model uses a one-equation closure to account for unresolved turbulence kinetic energy. The thrust deficit applied by the turbine to the surrounding flow is derived from the general thrust expression $\mathbf{T} = \frac{1}{2}\rho C|\mathbf{u}|\mathbf{u}$, where ρ is the atmospheric density, C is the coefficient of thrust, $\mathbf{u}$ is the inflow velocity. Further details are presented in Section 4.2.1. Because we are constraining the incoming velocity to be directed normal to the turbine disk, the component of the velocity affecting the thrust deficit, in the absence of platform motions, is:

$$\mathbf{u}(t) \cdot \hat{\mathbf{x}} = u_{upstream}(t), \quad (22)$$

which will be taken at an upstream and on-axis location to the turbine. The computational details of finding $u_{upstream}$ appear in Appendix B1. When the platform motion is taken into account

$$\mathbf{u}(t) \cdot \hat{\mathbf{x}} := U(t) = u_{upstream}(t) + u_{platform}(t), \quad (23)$$

where

$$u_{platform}(t) = u(t) + d_P w(t) \cos[\alpha(t)], \quad (24)$$

where d_P is the distance between BS and BP as shown in Figure 2. The right hand terms of (24) are found by solving (1).

4 Large Eddy Simulation of the Wind and Turbine Model

The goal of the subsequent numerical simulations is to assess the relative impact of induced inflow velocity perturbations on the power output and wake deficits of turbines mounted on floating platforms. The motion of the floating platform is modeled mechanically and is subjected to a fully developed ocean gravity waves. The impact is surmised by comparing the power output and wake deficits of turbines affected by floating platform motions to that of stationary turbines – all other aspects being identical, including the turbulent inflow. The random nature of the waves and turbulent intermittent thrust dictate we report time average power output rather than snapshots in time. In what follows we describe the simulation modeling and numerical conditions used in deriving numerical results.

The Large Eddy Simulation model uses compressible, non-hydrostatic, conservation-form equations conserving mass, momenta, and mass-weighted virtual potential temperature. The equations, [along with numerical implementation details](#), are given in Appendix B ([Norman, 2021; Norman et al., 2023b](#)). ~~A semi-discretized, cell-centered, upwind Finite-Volume discretization is used in space with 9th-order-accurate Weighted Essentially Non-Oscillatory (WENO) reconstruction (Liu et al., 1994) with weight mapping (Henrick et al., 2005) for tracers and standard 9th-order Vandermonde-constrained polynomials for density and velocity. A third-order-accurate, three-stage Strong Stability Preserving (SSP) Runge-Kutta (RK) is used to discretize in time (see (Gottlieb, 2005)).~~ [See \(Norman, 2021; Norman et al., 2023b\) for further details.](#)

The sub-grid-scale (SGS) is modeled with an eddy viscosity model that assumes resolved averages of correlations of unresolved perturbations are proportional to the resolved gradient, the coefficient of proportionality being the eddy viscosity. The eddy viscosity is modeled with a one-equation closure model that actively prognoses SGS unresolved Turbulence Kinetic Energy (TKE) (see (Lilly, 1966, 1967; Smagorinsky, 1963)). TKE is evolved according to shear production, resolved transport, turbulent transport (dissipation), TKE dissipation, and buoyancy modification. At the ocean surface, surface friction is applied using Monin-Obukhov similarity theory (Monin) according to a roughness length determined by the Charnock relation (Mahrt et al., 2003), which estimates roughness length of the ocean surface based on friction velocity, u^* , in an iterative process involving the following two equations:

$$u^* = \kappa |\mathbf{u}|_{hub} \left(\ln \left(\frac{z_{hub}}{z_0} \right) \right), \quad (25)$$

$$z_0 = \frac{\alpha}{g} (u^*)^2, \quad (26)$$

where $\kappa = 0.4$ is the von Karmann constant, $\alpha = 0.018$ is the Charnock constant, and $|\mathbf{u}|$ is specified for each experiment and enforced as a horizontal average in the turbulent precursor via pressure gradient forcing at hub height.

Each simulation is set up by creating a neutral Atmospheric Boundary Layer (ABL) precursor simulation based on a neutral stratification. Initially, a log-profile of u velocity is imposed, based on the target hub-height velocity with $v = w = 0$ using an air density of 1kg/m^3 and a constant potential temperature of 300 K. Turbulence is seeded by applying random potential temperature perturbations from a uniform distribution of $[-0.25, 0.25]$ K in the bottom 100m of the domain. The simulation is spun up for four model hours, and then statistics are gathered over another four model hours. The concurrent precursor simulation uses periodic boundaries in the horizontal direction and solid wall boundaries in the vertical, and it forces the

295 turbine simulations through the inflow boundaries with open boundaries on the outflow. Pressure gradient forcing is used to force the precursor simulation toward a target hub height velocity, and the pressure gradient computed from the precursor is also used in the forced turbine simulations. The default neutral ABL simulations form the $TI_{1.0}$ simulations. The precursor turbulent velocity perturbations about the mean at a given vertical level are scaled by a factor of $2\times$ and $0.25\times$ to force the $TI_{2.0}$ and $TI_{0.25}$ simulations, respectively to simulate the turbines over different turbulence intensities. The precursor hub-
 300 height turbulence intensities (TIs) of the $TI_{1.0}$ simulations for each target hub height velocities are reported in the last column of Table 1 for reference, and they agree well with the ranges of TI observed in offshore contexts from Figure 2 of Wang et al. (2014). Verification of the ABL and turbine wake response is carried out in Appendix B4.

~~The model, including all turbine and floating platform motion parameterizations, are coded in portable C++ using the Yet Another Kernel Launcher (YAKL) library (Norman et al., 2023a), a library based on the Kokkos (Trott et al., 2022) portability
 305 library, to run on CPUs or Nvidia, AMD, and Intel GPUs.~~

4.1 Turbulent Precursor and Boundary Conditions

The turbine simulations use a mean hub-height velocity of $\mathbf{u} = (|\mathbf{u}|_{hub}, 0, 0)$. They are forced with specified inflow at the left x boundary and “sponged” into the domain over 10% of the x direction domain length. By this, we mean that the specified forcing data and existing model data are blended with a convex weight over the first 10% of the domain according to a cosine
 310 function with the strongest forcing at the left boundary. Periodic boundaries are used in the meridional / y direction boundaries, open boundary conditions are used at the right x direction boundary, and no-slip solid wall boundaries are used in the vertical with a Monin-Obukhov friction term at the bottom surface. The specified inflow / outflow boundaries come from a concurrent and horizontally periodic turbulent precursor simulation that simulates an equilibrium turbulent atmospheric boundary layer with pressure gradient forcing that ensures a consistent average horizontal wind speed at turbine hub height. The concurrent
 315 turbulent precursor is simulated over the same domain as the turbine simulation, and the pressure gradient force applied to the precursor is also applied to the turbine simulation each time step.

Both the precursor and the turbine simulations use the same surface friction and roughness length throughout. Turbine simulations with and without floating platform motions use identical precursor forcing and pressure gradient forcing. Thus, differences in the fields are *only* due to the floating motions.

320 4.2 Wind Turbine Parameterization

Wind turbines are parameterized by: (1) applying thrust against the normal horizontal flow passing through the turbine swept plane; and (2) injecting unresolved TKE into the flow to enhance SGS mixing downstream. This parameterization uses a lookup table that interpolates thrust coefficient C_T , power coefficient C_P , and power generation P , as a function of inflow wind speed $|U|$. The lookup table appears in Figure 3. The lookup table was created by running the OpenFAST code (see
 325 github.com/OpenFAST/openfast) using the NREL 5MW turbine with the Aerodyn and Elastodyn modules using steady inflow with wind speeds increasing at integers from 3 to 25 m/s to generate the thrust, power, and rotation rate values as a function of inflow wind speed at a density of 1 kg/m^3 , which increases the rated wind speed from its nominal value of 11.4 m/s.

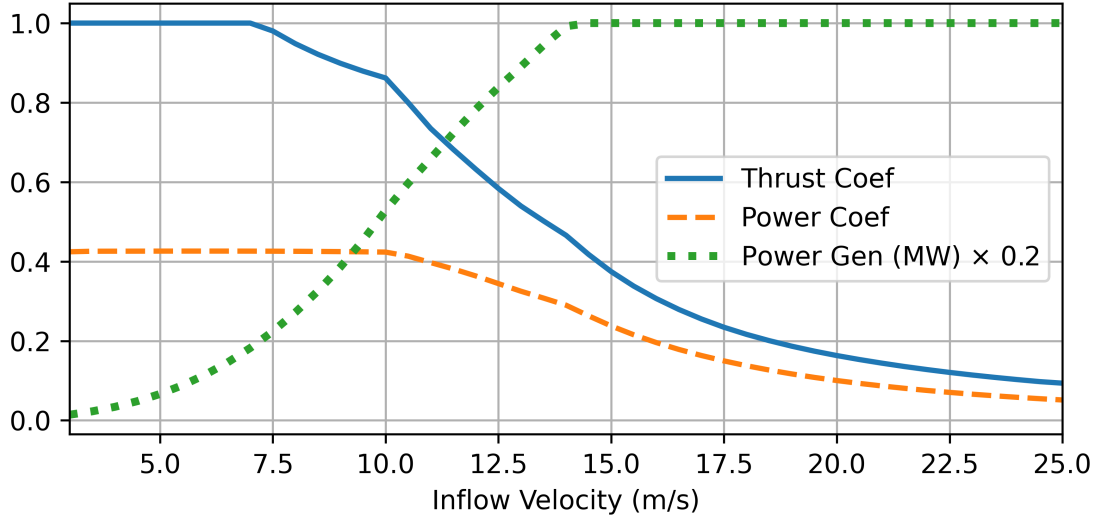


Figure 3. Plot showing the thrust coefficient, power coefficient, and power generation as a function of inflow $|U|$, for the NREL 5MW lookup table computed with OpenFAST. The y -axis units are non-dimensional for thrust and power coefficients and scaled MW for power generation.

The ROSCO controller was used in this calculation. The thrust and power values were then translated into thrust and power coefficients using the actuator disk's swept area and the square and cube of inflow velocity, respectively. The thrust coefficient is capped at a value of one to avoid flow reversal in the actuator disk parameterization.

4.2.1 Actuator Disk Approximation

A one dimensional momentum balance is used to approximate the thrust applied by rotating blades onto a flow (Madsen, 1996). The thrust deficit is given by:

$$\mathbf{T} \cdot \hat{\mathbf{x}} = \frac{1}{2} \rho C_T A |U|^2, \quad (27)$$

where C_T is obtained from the table lookup and $A = \pi (D_T/2)^2$ is the area of the swept disk. D_T is the turbine disk diameter. A projection strategy is devised to relate the turbine parametrization to the dynamics on the computational grid. This total disk thrust is divided up according to convex projection weights, w_{ijk} (described in Appendix B2), to project thrust onto the flow. The indices i, j, k identify the discrete cell volume in the three dimensions, x , y , and z , respectively. Because the Finite-Volume method stores cell-averaged data, this thrust is then also divided by the cell volume $\Delta x \Delta y \Delta z$ in order to be applicable to cell-averaged quantities. Cell averages are indicated with an overbar. The update that introduces thrust and swirl is defined as:

$$\frac{d\bar{\rho} u_{ijk}}{dt} = -\frac{1}{2\Delta x \Delta y \Delta z} C_T \bar{\rho}_{ijk} |U|^2 \cos(\theta_{yaw}) A w_{ijk} - \frac{1}{2\Delta x \Delta y \Delta z} C_Q \bar{\rho}_{ijk} |U|^2 \sin(\theta_{az}) \sin(\theta_{yaw}) A w_{ijk} \quad (28)$$

$$\frac{d\bar{\rho}v_{ijk}}{dt} = -\frac{1}{2\Delta x\Delta y\Delta z}C_T\bar{\rho}_{ijk}|U|^2\sin(\theta_{yaw})Aw_{ijk} + \frac{1}{2\Delta x\Delta y\Delta z}C_Q\bar{\rho}_{ijk}|U|^2\sin(\theta_{az})\cos(\theta_{yaw})Aw_{ijk}, \quad (29)$$

345

$$\frac{\partial\bar{\rho}w_{ijk}}{\partial t} = \frac{1}{2\Delta x\Delta y\Delta z}C_Q\bar{\rho}_{ijk}|U|^2\cos(\theta_{az})Aw_{ijk}, \quad (30)$$

where θ_{yaw} is the yaw angle of the turbine, $\theta_{az} = \tan^{-1}(z/-y)$ is the azimuth angle with respect to the hub center in reference space averaged over the cell, and $C_Q = C_P U / (\Omega R_T)$ is the coefficient of torque with $R_T = D_T/2$ as the turbine radius and Ω as the rotation rate in radians per second obtained through a Reference Wind Turbine table interpolation based on inflow speed. In the simulations that follow, the turbines are aligned with the mean flow, and $\cos(\theta_{yaw}) = 1$. The portion of the total thrust that does not go into the production of power is injected into unresolved TKE:

350

$$\frac{d\bar{\rho}K_{ijk}}{dt} = -\frac{1}{2\Delta x\Delta y\Delta z}C_T\bar{\rho}_{ijk}|U|^3Aw_{ijk}, \quad (31)$$

where $C_{TKE} = \frac{1}{4}(C_T - C_P)$ is the fraction of unused thrust that will contribute to unresolved TKE (Fitch et al., 2012; Bui et al., 2023; Archer et al., 2020). Instantaneous velocities are used to compute the thrust and TKE injection in Eqs (28)-(31). A 30-second average of the inflow velocity at the axis of the disk is used when interpolating C_T^* , C_P^* , and P from the lookup table (see Figure 3).

355

4.3 ~~Other Simulation~~ Details on the Boundary Layer Initialization, and Experiment Setups

The ~~model used herein uses Cartesian coordinates with equal grid spacing in all directions (10m grid spacing unless otherwise mentioned). The model equations and setup are given in Appendix B.~~ The primary parameter in all of the calculations is the inflow speed. The operational wind speeds for the NREL 5MW turbine span 3 – 25 m/s. We consider first the power output and wake deficit of a single turbine and then of a simple multiple turbine farm configuration. In the latter case, the turbines' wakes change the power output of waked turbines downstream.

360

For single-turbine simulations, we simulate with ten different mean hub height precursor wind speeds (5, 7, 9, 11, 13, 15, 17, 19, 21, and 23 m/s) with and without floating platform motions added to the inflow velocity of the turbine actuator disk for three different turbulent intensities: 25% of default ($TI_{0.25}$), 100% of default ($TI_{1.0}$), and 200% of default ($TI_{2.0}$) – all using the Betti et al. (2014) model for floating platform motions. The default turbulence intensity for a given wind speed is that which naturally arises from a neutral atmospheric boundary layer and the surface roughness length arising from the Charnock relation at a given hub height wind speed. These TI values are shown as the last column in Table 1. Additionally, the effects of harmonic-forced floating platform motions (rather than the motions induced by the wave forced Betti et al. (2014) model) are evaluated at $TI_{1.0}$ for the ten wind speeds with and without floating platform motions. This leads to 80 total single turbine simulations, each for eight model hours. For the multi-turbine simulations, a grid of 3 rows of 10 turbines (ten turbine diameters apart in both spanwise and streamwise horizontal directions) is simulated with $TI_{0.25}$ and an inflow average hub height wind

370

speed of 10 m/s for eight model hours. Due to downstream wake effects, an average inflow of around 7.5 m/s was observed for the latter nine turbines.

375 ~~In all simulations in this section, a Courant-Friedrichs-Lewy stability value of CFL=0.6 is used, and a grid spacing of 10m in each direction is used. Identical turbulent precursor inflow conditions are used for all simulations of a given hub height mean wind speed to ensure the only wake and power differences between simulations with and without floating platform motions are due solely to floating platform motions.~~

For the single turbine we use a (length, height, width) $30 \times 10 \times 6.35$ turbine diameters domain (where D is the turbine diameter) simulated for eight model hours – the last four of which are used for analysis after the neutral ABL has spun up. 380 For multi-turbine simulations, a domain of $130 \times 40 \times 6.35$ turbine diameters is simulated for eight model hours – the last four of which are used for analysis. Each turbulent precursor is forced with a uniform pressure gradient forcing that penalizes horizontal-mean deviations of hub height wind speed from the intended mean value. The pressure gradient forcing calculated and used in the precursor is also applied to the turbine simulation to ensure pressure gradient advances the flow physically. 385 All simulations contain a dynamical core, an LES closure, and the application of surface friction to impose a roughness length determined by the Charnock relation for the given hub height wind speed. The time step size used for all portions of the model (dynamical core, LES closure, wind turbine parametrization, surface friction, and floating platform motion parametrization) is: $\Delta x (u_{max})^{-1} (\text{CFL}) = 10\text{m} (450\text{m/s})^{-1} (0.6) = 1.33 \times 10^{-2}\text{s}$. For single turbine simulations, the turbine is placed at six turbine diameters from the left x direction boundary and in the middle of the domain in the y direction. For multi-turbine 390 simulations, the first column of turbines begins at 11 turbine diameters into the x direction of the domain, and the rows are 10 diameters apart and collectively centered in the y direction.

The neutral boundary layer is initialized with the following potential temperature profile:

$$\theta(z, t = 0) = \begin{cases} 300 & \text{if } z < 500\text{m} \\ 300 + 0.08(z - 500) & \text{if } 500 \leq z \leq 650 \\ 312 + 0.003(z - 650) & \text{if } z > 650 \end{cases} \quad (32)$$

The velocity is initialized with a log-law of u velocity targeting the appropriate hub height velocity for the individual experiment 395 with $v = w = 0$. To initiate turbulence, potential temperature perturbations from a random uniform distribution $\in [-1, 1]$ are added to the lowest 100m of the domain, and horizontal velocities are perturbed with four-period sine functions in transverse directions.

The different turbulent intensities ($TI_{0.25}$, $TI_{1.0}$, and $TI_{2.0}$) are created by scaling wind velocity deviations from the mean column from the precursor simulation before applying it as inflow to the turbine simulations by 25%, 100%, and 200%, 400 respectively. These act to mimic turbulent intensities arising from transient stable and unstable boundary layers.

5 Numerical Results and Discussion

5.1 Turbine Power and Velocity – Moving Platform Conditions

In what follows we will refer to outcomes computed with no platform motions as *Fixed*. When the outcomes involve platform motions due to ocean dynamics we will refer to the results as *Moving/Ocean*. A key feature of platform motions affected by a fully-developed (Pierson-Moskowitz) ocean wave spectrum (see Stewart (2008)) is the assumption that the waves have zero-mean random phases. This is in contrast to induced platform motions due to swells created by distant disturbances and storms which tend to have spectra with fixed or slowly changing phases. Consideration of swell conditions is outside of the scope of this study. However, we will explore a simpler case; namely, a sinusoidal perturbation of the incoming wind, with a fixed phase. The significant wave height is used as the amplitude, and the peak Pierson-Moskowitz frequency is used as the frequency for the sinusoidal forcing – resulting in relatively large amplitude perturbations. We will denote the results of calculations with the oscillating perturbation as *Moving/Oscillating*.

We next describe the computation of $U(t)$ to be used in the actuator disk approximation. For the Fixed conditions case:

$$U(t) = u_{upstream}, \quad (33)$$

and in the Moving/Ocean case:

$$U(t) = u_{upstream} + u_{platform}(t). \quad (34)$$

The dynamics of $u_{platform}(t)$ are described by (24), with input $u_{upstream}$ at 10m above the sea surface. The platform motions are described in Section 2. For Moving/Oscillating conditions we have:

$$U(t) = u_{upstream} + A\omega_p \cos(\omega_p t). \quad (35)$$

The amplitude A is determined by the significant height (see Appendix A) and ω_p is the peak of the Pierson-Moskowitz spectrum generated by $u_{upstream}$ at 19.5m above the sea surface.

5.2 Velocity and Power, Moving/Ocean Conditions for a Single Turbine

In Table 1 we report the standard deviation of the components of $U(t)$ (see Eqs. (24) and 34) as a function of incoming hub-height wind speed in the precursor inflow, under three inflow turbulent intensities. Platform-induced motions due to ocean and turbulent thrust motions increase as the standard deviation of $u_{upstream}$ and the hub wind speed increases. In all regimes, the standard deviations of $u_{platform}$ are much smaller than the standard deviations of $u_{upstream}$, meaning the fluctuations due to floating platform motions are not significant compared to already present turbulent intensity and are, therefore, expected to have relatively minor impact on wake deficit and downstream power generation.

Figure 4 plots the ratio of Moving/Ocean x -direction wind speed (disk-normal wind speed) averaged over the hub area divided by that of the Fixed x -direction wind speed averaged over the hub area, averaged over the last four hours of simulations for mean precursor hub height inflow speeds of 5, 7, 9, and 11 m/s, where power production is below rating. Figure 5 plots

$ u_{hub} $	$\sigma(u_{platform})$			$\sigma(u_{upstream})$			Turbulence Intensity at $z = 90m$ for $TI_{1.0}$ in %
	$TI_{2.0}$	$TI_{1.0}$	$TI_{0.25}$	$TI_{2.0}$	$TI_{1.0}$	$TI_{0.25}$	
5	0.018	0.010	0.003	0.267	0.136	0.035	4.589
7	0.038	0.022	0.013	0.382	0.193	0.049	5.409
9	0.058	0.037	0.025	0.571	0.289	0.073	5.187
11	0.080	0.057	0.042	0.673	0.343	0.087	5.407
13	0.090	0.069	0.060	0.772	0.394	0.100	5.622
15	0.105	0.087	0.083	1.048	0.536	0.138	5.783
17	0.113	0.101	0.101	1.149	0.586	0.149	5.539
19	0.131	0.118	0.112	1.296	0.665	0.170	6.028
21	0.132	0.129	0.120	1.468	0.751	0.192	6.170
23	0.152	0.133	0.133	1.668	0.857	0.221	6.849

Table 1. Standard deviation of $u_{platform}$ and $u_{upstream}$ over a range of hub height wind speeds with different inflow turbulent intensities using Moving/Ocean conditions (see Eq. (34)) for the platform over the last four hours of an eight hour simulations. Turbulence intensity is computed as $\sigma(|u_{hub}|) / \mu(|u_{hub}|)$ from the precursor simulation at $t = 8hr$.

are the same except for y-axis instead gives the ratio of power production according to the lookup table of $|u|$ as plotted in Figure 4. For wind speeds higher than 11 m/s, the ratios are extremely small (order 10^{-6} or smaller) because the turbines are already at rated wind speed, meaning the power differences are negligible.

In all simulations, including single and multi-turbine simulations, the power production of the turbines (and emulated power production by using the wake velocity as input to the reference turbine table to deduce power) mounted on floating platforms is within 1% of the power production of fixed turbines. At 10 diameters downstream and onward, where another turbine is likely to be placed in a floating platform offshore farm, the power production is within half a percent, comparing floating to fixed platform, with the larger differences occurring for lower wind speeds, where the power production is already relatively low. The wake deficit ratios between floating and fixed turbines are within 0.1% for all wind speeds as well.

5.3 Motion Effects on Velocities for Moving/Sinusoidal Conditions for a Single Turbine

As a way to assess the extent to which our conclusions regarding floating platform motion effects on power generation depend on the nature of the dynamics of the platform motion, we also simulate cases where we oscillated the hub speed by a sinusoidal (see Eq. (35)). For a given hub wind speed, we use the significant wave height as the amplitude of the sinusoidal and the peak frequency in the sine wave. The outcomes for each wind speed are summarized in Table 2 as well as the bottom right panels of Figures 4 and 5. We test different turbulence intensities to emulate conditions that emerge from stable, neutral, and convective thermal stratifications. While the 10D downstream power generation differences due to floating platform motions remains small (within 0.5-1%), there is a significant effect in the very near wake region of 0-6 turbine diameters downstream due to Moving/Oscillating platform motions. As with the floating platform induced motions, the larger differences are confined to the near-wake region, where a downstream turbine is less likely to be placed in a farm configuration. For all wind speeds,

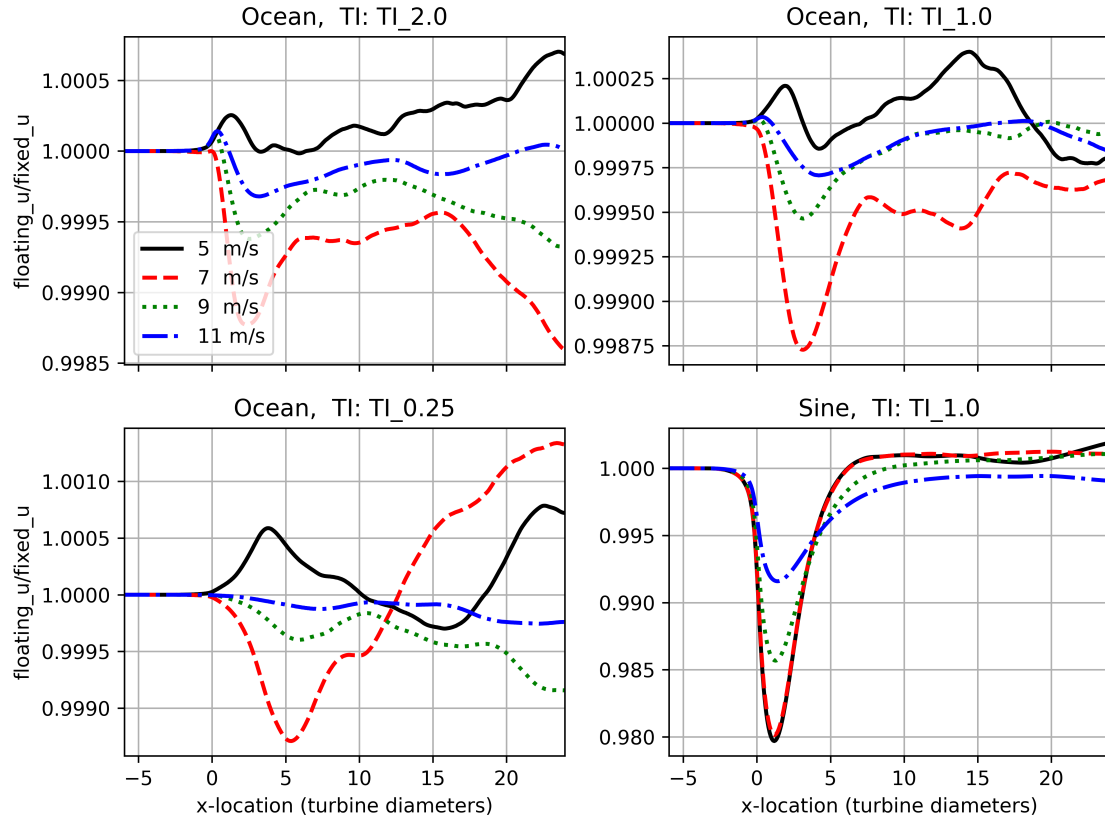


Figure 4. Plots of the ratio of averaged horizontal velocity magnitude of Moving/Ocean to Fixed conditions, for hub height wind speeds of 5, 7, 9, and 11 m/s. Averages are integrated over the last four hours of simulation, over the turbine diameter in the y direction, and over the turbine diameter in the z direction. x -axes are x -direction in units of turbine diameter D . y -axes are dimensionless ratios. Note the different y -axis scales in plots.

450 the sinusoidal motion forcing leads to a decrease in power production in the near-wake region (less than 5 turbine diameters downstream). For lower wind speeds, the power production increases due to sinusoidal forcing in the far-wake region; and for larger wind speeds, the power production is decreased due to sinusoidal forcing in the far-wake region (both to modest degrees of less than half a percentage).

5.4 Velocity and Power Generation of a Farm of Turbines Mounted on Floating Platforms, Forced by Ocean Gravity Waves

455

The question of whether floating platform motions have an effect on the power output of a farm of turbines set on floating platforms is considered next. The turbine farm we consider has three rows of turbines (we consider a “row” to be a streamwise (x) direction series of 10 turbines), equally spaced and at equal heights, lined up with the wind in such a way as to produce

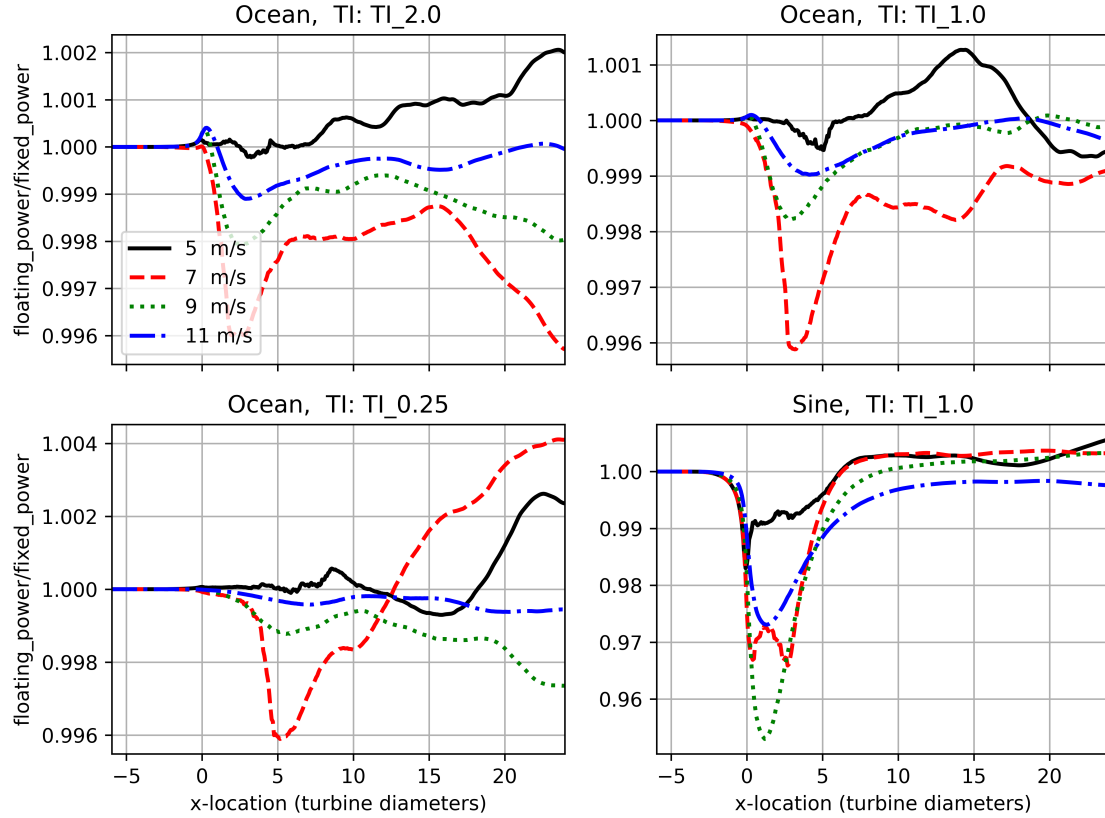


Figure 5. Plots of the ratio of averaged power production of Moving/Ocean to Fixed conditions, for hub height wind speeds of 5, 7, 9, and 11 m/s. Averages are integrated over the last four hours of simulation, over the turbine diameter in the y direction, and over the turbine diameter in the z direction. x -axes are x -direction in units of turbine diameters. y -axes are dimensionless ratios. Note the different y -axis scales in plots.

the most direct interaction of upstream wakes with downstream turbines. We also give the turbines “ID”s in the streamwise
 460 (x) direction from 1 to 10, increasing in the positive x direction (positive streamwise direction). ~~As before, we compare the x -direction velocity at hub height as well as the power produced by turbines in the cluster under Ocean/Moving conditions and Fixed conditions.~~ The Atmosphere conditions are using the $TI_{1.0}$ (or default neutral ABL) configuration, where floating platform motions are relatively larger than turbulent fluctuations as compared to the other turbulent intensities. The sea is fully developed, and thus the platform motions due to ocean waves of each turbine are not correlated with each other. One key
 465 difference between this farm simulation and the previous single turbine simulations is that in this farm simulation, the turbine’s yaw angle and upstream sampling direction are allowed to change in response to the flow for a more realistic view of how turbines might behave differently due to floating motions in a farm setting.

Hub Wind (m/s)	$\sigma(\mathbf{u}_{platform})$	$\sigma(\mathbf{u}_{upstream})$	Ω_{peak}	$h_{1/3}$
5	0.584	0.136	1.95	0.42
7	0.812	0.193	1.39	0.82
9	1.039	0.289	1.08	1.35
11	1.264	0.343	0.89	2.02
13	1.487	0.394	0.75	2.82
15	1.709	0.536	0.65	3.75
17	1.930	0.586	0.57	4.82
19	2.150	0.665	0.51	6.02
21	2.368	0.751	0.46	7.35
23	2.586	0.857	0.42	8.82

Table 2. Standard deviation of $\mathbf{u}_{platform}$ and $\mathbf{u}_{upstream}$ over a range of hub height wind speeds in $TI_{0.25}$ conditions using Moving/Oscillating conditions (see Eq. (35)) for the platform. Ω_{peak} is the peak frequency of the Pierson-Moskowitz approximation to a fully developed ocean used as the frequency for the oscillating forcing. $h_{1/3}$ is the “significant wave height” used as the amplitude for the oscillating forcing.

Horizontal wind speed under Moving/Ocean platform conditions averaged over the turbine vertical swept plane ($z \in [27, 153]$ m) and over $t \in [4, 8]$ hr is depicted in Figure ?? along with an instantaneous plot at $z = 90$ m, $t = 8$ hr. It is clear that the initial turbine produces the most blockage and turbulence is increased in the streamwise direction as more turbines create additional turbulence down each row. Each time step, the horizontal velocity is averaged within one turbine radius of the hub location to determine the upstream direction, and the flow is sampled two turbine diameters upstream of the hub location using the exact same projection technique used to project thrust onto the flow in the actuator disk parameterization. The yaw angle also responds to this upstream direction by rotating toward the time-averaged upstream direction over a one minute moving average window at a maximum rotation rate of 0.3 degrees per second as specified in the NREL 5MW Offshore Wind Turbine Definition document (Jonkman et al., 2009).

Horizontal velocity magnitude in m/s (a) averaged over $z \in [27, 153]$ m and $t \in [4, 8]$ hr; and (b) at hub height at $t = 8$ hr. Inflow hub wind speed is 10 m/s, $TI_{1.0}$ atmospheric conditions and platform movement at Moving/Ocean conditions (see Eq. (34)).

For the three rows, Figure ?? depicts the inflow velocity magnitude at each of the turbines. Figure 6 plots the time-average over $t \in [5, 10]$ hr and spatial average over $z \in [90 - 63, 90 + 63]$ m of (a) fixed-platform horizontal wind speed (in m/s); (b) fixed-platform horizontal wind speed subtracted from floating-platform horizontal wind speed (in m/s); and (c) fixed-platform wind direction subtracted from floating-platform wind direction (in degrees). The initial turbines in the streamwise direction (turbines with ID 1 in rows 1, 2, and 3) receive the largest inflow wind speed. Due to waking of downstream turbines, the downstream turbines receive lower inflow wind speeds. Also, wakes expand in the horizontal spanwise direction (y-direction) as expected as the flow progresses in the streamwise direction (positive x-direction). Initially (at the negative x-direction boundary), the differences between floating and fixed horizontal wind speed and direction are zero due to shared precursor

inflow conditions. The differences slowly develop over the first and second turbine wakes in each row, the wind direction exhibits abrupt changes in the third turbine of each row, and the wind speed differences develop more slowly when progressing in the streamwise direction. After a significant drop in the speed due to waking of the second turbine, the speed recovers somewhat at turbine 3 and is similar for turbine 3-10.

Figure ?? plots the ratio of the power produced by Moving/Ocean simulation turbines divided by that of Fixed turbines in the three rows averaged over the last four hours of simulation. For this specific farm configuration, we find that the power output of the turbine farm is similar between moving and fixed platform simulations. The total farm power output of the 30 turbines differed only by .23% due to floating platform motions. Pressure gradient forced atmospheric boundary layers are known to exhibit streamwise “streaks” in the wind field that differ in the horizontal spanwise direction and persist even over long time averages (Pimont et al., 2020). These are visible in Figure 6a on the left-hand side of the plot (the turbulent precursor inflow). The floating motions lead to minute time-mean differences in wake behavior at the first turbine of each row, which would be experienced even with small random noise due to the chaotic divergence of initially close solutions exhibited in any turbulent fluid flow. These minute wake changes due to floating motions are then modulated by persistent streaks in the pressure gradient forced to lead to time-persisting changes in yaw angle. The altered yaw angle then steers the flow, which coupled with further chaotic divergence in the floating versus fixed solutions, leads to larger changes in flow speed and direction as one progresses downstream. The changes are on the order of 1% relative magnitude or less in terms of inflow speed at each of the turbines, and this leads to larger changes in power productions on the order of 3% or less in relative magnitude, since the power production scales with the cube of the inflow wind speed.

To observe this in a different format, Figure 7 plots the time-average over the last four hours of simulation, though each turbine $t \in [5, 10]$ hr and spatial average over $z \in [90 - 63, 90 + 63]$ m for each individual turbine of (a) floating / fixed platform power production, (b) floating / fixed platform inflow wind speed normal to the disk, (c) floating - fixed platform yaw angle (degrees). Figure 7d plots the fixed platform inflow wind speed for each turbine with the same averaging in space and time. From these plots, it is clear that at the first turbine in each row, the differences in power production, inflow wind speed, yaw angle, and yaw misalignment are all nearly zero and slowly develop over the first three turbines before saturating at larger differences in downstream turbines, which supports the mechanism of chaotic divergence of initially close solutions due to small perturbations from floating motions building in the streamwise direction. With this in mind, even with persistent streaks in the precursor, the mean relative difference in power production over all of the turbines is 0.27%. This is roughly $3 \times$ larger in magnitude than the single-turbine relative power differences at different turbulence intensities at 10 turbine diameters downstream in Figure 5 using the 9 m/s inflow curve since the mean inflow over most of the turbines is between 9 and 9.5 m/s in the farm case. Therefore, while progressive chaotic divergence in the floating versus fixed solutions coupled with active yawing and with pressure gradient based streaks leads to a difference in the farm’s power can differ by up to 2% response, it is not different by an order of magnitude. Further, in the single turbine case, the power difference is slightly lower due to floating motions by roughly 0.1% at ten turbine diameters downstream, while in the farm case, the power generation averaged over all of the turbines is slightly larger due to floating platform motions. Due to periodicity in the spanwise boundaries, this simulation depicts infinite rows in the spanwise direction motions by 0.27%.

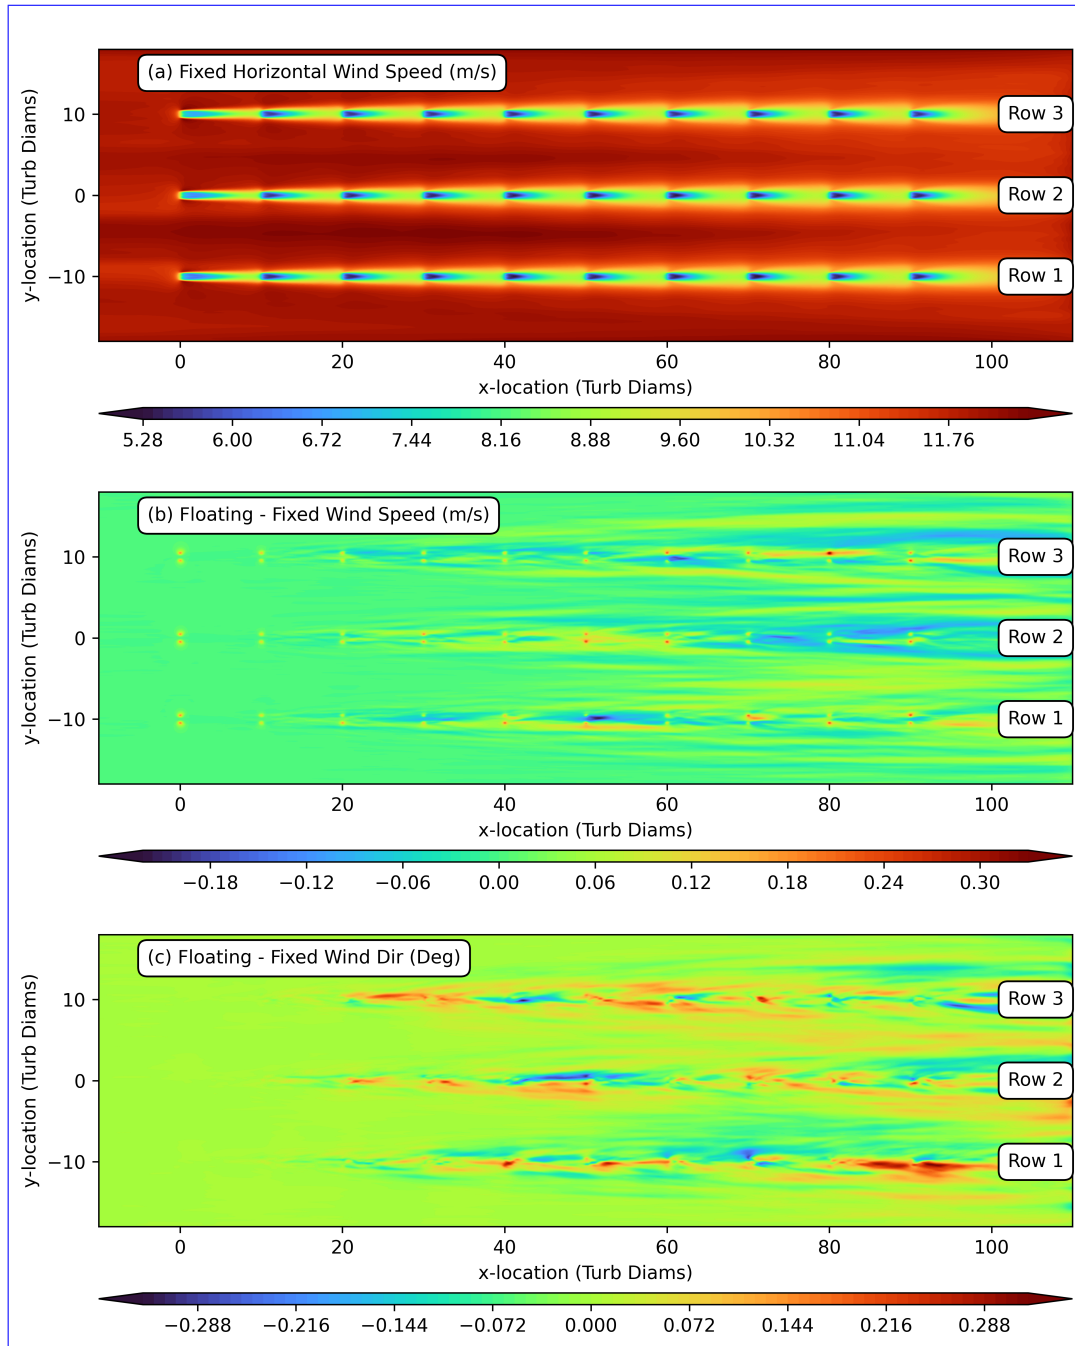


Figure 6. Contour plots of time-average over $t \in [5, 10]$ hr and spatial average over $z \in [90 - 63, 90 + 63]$ m of (a) fixed-platform horizontal wind speed (in m/s); (b) fixed-platform horizontal wind speed subtracted from floating-platform horizontal wind speed (in m/s); and (c) fixed-platform wind direction subtracted from floating-platform wind direction (in degrees).

Plot of time-averaged (between 4 and 8 hours) inflow velocity (m/s) at the ten turbines in the three rows with $TI_{1,0}$ conditions and Moving/Ocean-conditions. A “row” is a set of 10 turbines aligned in the streamwise (x) direction. The horizontal axis corresponds turbine “ID” ordered from 1 to 10 in each row, increasing in the positive streamwise (x) direction.

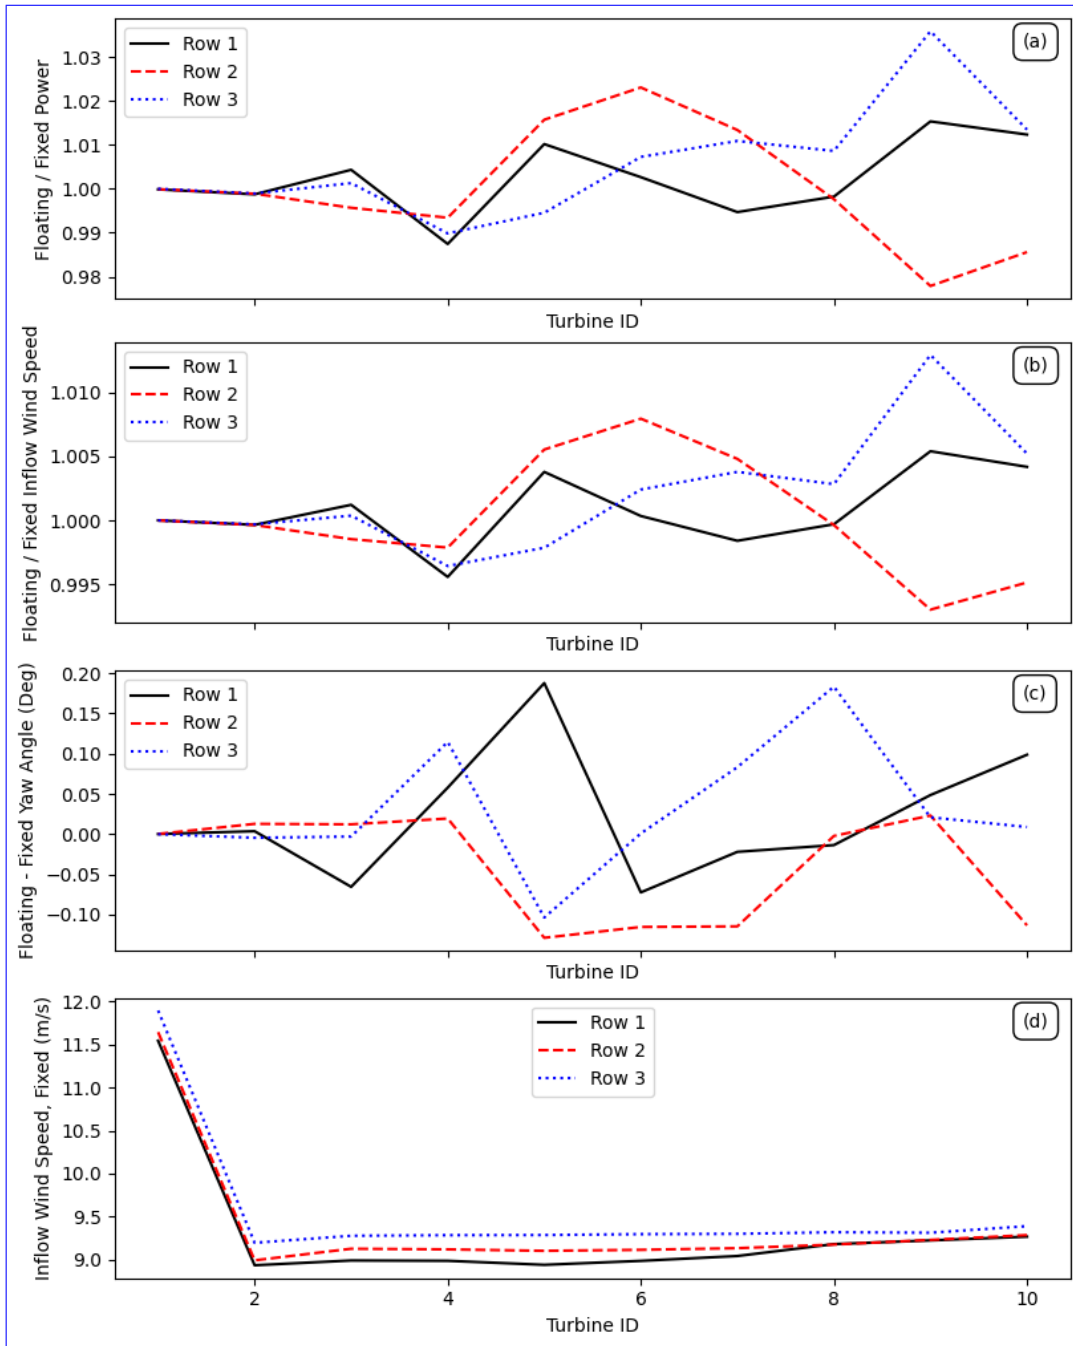


Figure 7. Plots of time-average over $t \in [5, 10]$ hr and spatial average over $z \in [90 - 63, 90 + 63]$ m for each individual turbine of (a) floating / fixed platform power production, (b) floating / fixed platform inflow wind speed normal to the disk, (c) floating - fixed platform yaw angle (degrees). Sub-figure (d) plots the fixed platform inflow wind speed for each turbine with the same averaging in space and time.

Plot of time-averaged (between 4 and 8 hours) power generation, ratio of Moving/Ocean to Fixed condition simulations. $TI_{1.0}$ atmospheric conditions. Moving/Ocean simulations.

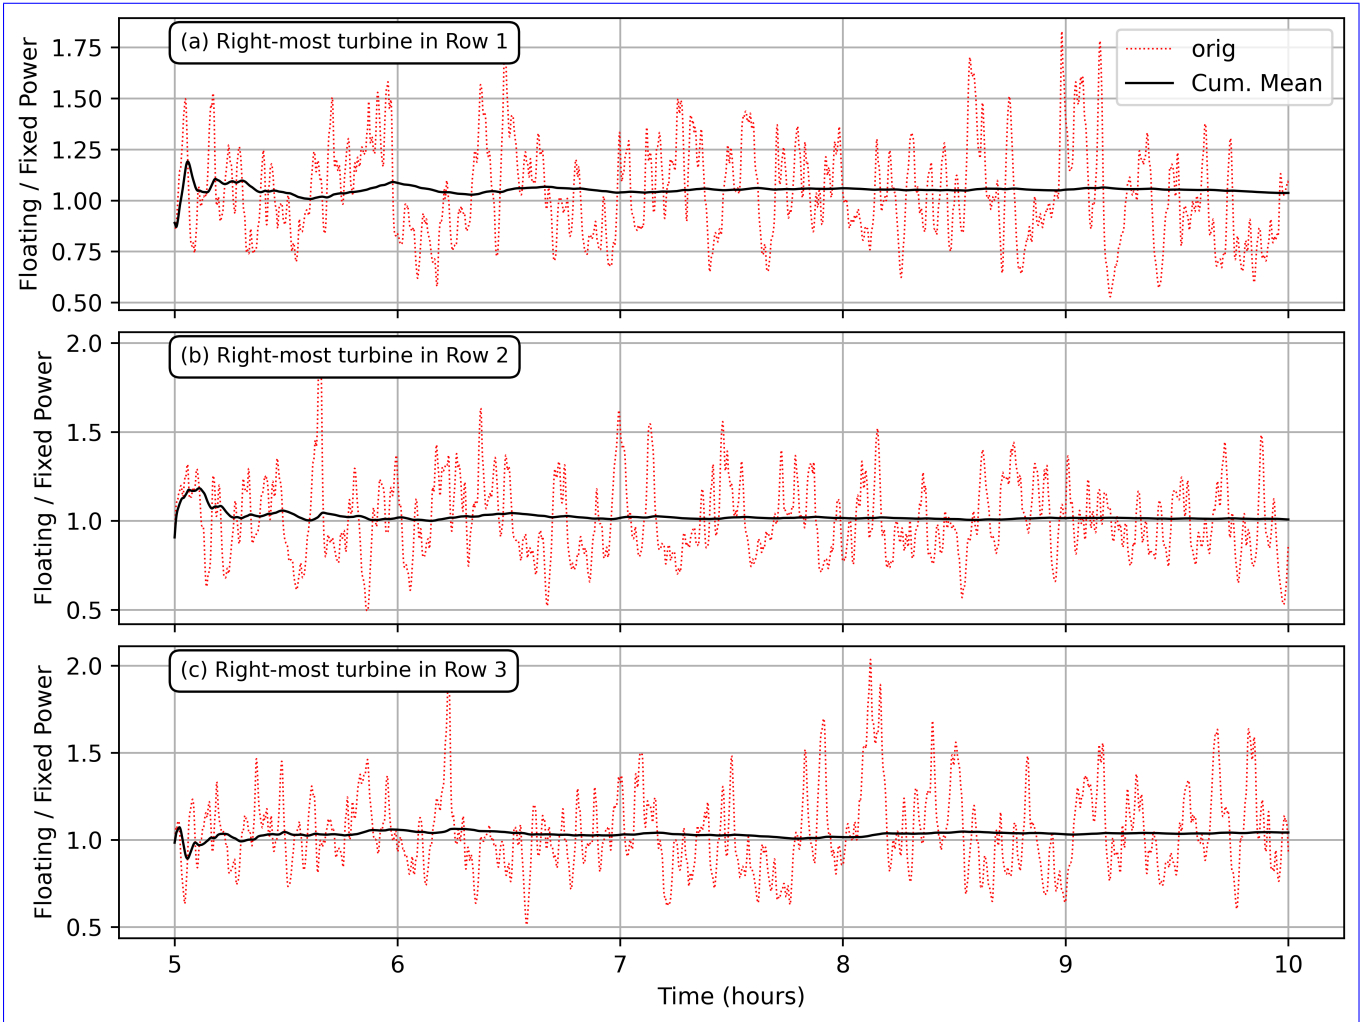


Figure 8. Floating-to-fixed relative power time series and its cumulative mean. Data taken from the right-most turbine (ID 10) in each row. The cumulative mean settles quickly, well before the span we take in averaging power outputs.

Figure 8 depicts the (floating-to-fixed conditions) relative power time series and its cumulative average corresponding to the right-most turbine (ID 10) in each row. This plot demonstrates that, over $t \in [5, 10]$ hr, the flow has reached a state of equilibrium amid the higher frequency oscillations, as the ratio in power production is not drifting. This indicates that our long term average power estimates are stationary and thus robust. Plots of the same quantity for the single FOWT cases will show the same stationary behavior.

525

6 Conclusions

We used simulations to assess ~~the wake characteristics and how the~~ power output of a single wind turbine, 5MW NREL,
530 mounted on a floating tension leg platform as well as well as that of a cluster of the same. ~~The goal was to determine whether~~
~~floating platform motions would affect wake deficit and power output of single or groups of turbines,~~ are affected by ocean wave
motions. This assessment was done by comparing the ~~power and wake characteristics of wind turbines mounted on floating~~
~~platforms forced by ocean waves to those of wind turbines that are not subjected to ocean motions~~ time averaged power of the
floating platform ocean turbines to the same wind conditions while not allowing the platform to move by oceanic disturbances.

535 The simulations consisted of a wind, captured by large eddy simulations (Norman, 2021) of an atmosphere with three inflow
turbulence intensities; a mechanical model of a floating chain-stabilized Tension Leg Platform (TLP) due to Betti et al. (2014);
and a time dependent empirical model for a fully developed wind waves described by the Pierson-Moskowitz spectrum (see
Stewart (2008)). The dynamics of the platform, the turbines, the ocean waves and the atmosphere are coupled. The specific
turbine was the NREL 5 MW design. Platforms ~~of this sort~~ are often motion-stabilized, however, we did not take into account
540 any active motion stabilization and control dynamics. The three turbulence intensities act as a means to understand whether the
results in this study are dependent upon the pre-existing turbulence intensity, typically modulated by surface roughness length
and buoyant stability of the mean atmospheric profile.

For an isolated turbine mounted on a floating platform subjected to waves we found that the platform motions due to a fully
developed ocean minimally affected the wake deficits downstream. Further, the time-averaged downstream power production
545 was not affected in a significant way by ocean-induced and intermittent thrust-induced platform motions. The floating platform
motion induced perturbations to inflow velocity are quite small compared to already existing turbulent intensity, even at 25% of
the naturally occurring neutral boundary layer turbulence, which is the primary reason why observed changes to wake deficits
and downstream power generation due solely to floating platform motions are small.

Figure 9 depicts the power spectrum of $u_{platform}$ and $u_{upstream}$ for neutral atmospheric conditions and the Moving/Ocean
550 platform configuration, with a hub speed of 11 m/s and fully developed ocean wave conditions. From this figure, we surmise
that the spectrum of $U(t)$ is dominated by platform motions in the high frequency regime and by the wind turbulence in the
low frequency regime. Furthermore, the most energetic part of the spectrum is associated with wind dynamics and turbulence.
The sharp spectral peak and trough originate in the vibrational character of the particular floating platform under consideration
and thus one cannot conclude that this structure will appear in the spectra of other floating platform arrangements. Regarding
555 power generation assessments and whether differences in power output are significant for a fixed or moving platform, the
spectra indicates that if power difference assessments are made at sufficiently long times, over well over hundreds of seconds,
the average power output is dominated by the wind contribution, not the combined wind/platform contribution. The random
phase nature of the waves and the dominance of the wind dynamics on $U(t)$ over platform motions suggest that under fully
developed ocean conditions neither the single turbine mounted on a floating platform or organized clusters of turbines of the
560 type we investigated are affected in a significant way with regard to power generation by ocean motions. Long time averages
of the platform acceleration was zero and therefore it was not expected to see, in the average, a net increase or decrease in the

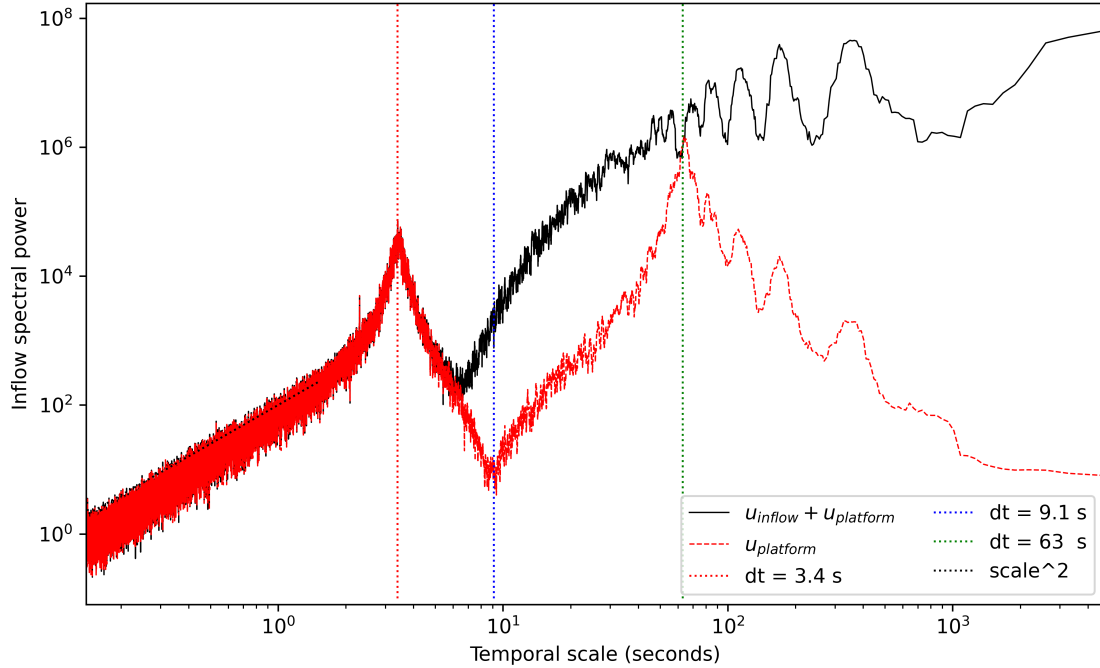


Figure 9. Power spectra in time of the magnitude of $\mathbf{u}_{platform}(t)$ and $\mathbf{u}_{platform} + \mathbf{u}_{inflow}$ as a function of time scale (inverse frequency) at a hub wind speed of 11 m/s with $TI_{1,0}$ inflow with a smoothing window of 10 samples for clarity. All hub wind speeds and stability profiles share the same local extrema for $\mathbf{u}_{platform}$.

power output of a single turbine. However, it was not obvious at the onset that in cluster arrangements the platform dynamics would affect the wake of windward turbines and thus affect the power of the turbines downstream. However, our calculations reveal that downwind turbines are not appreciably affected with regard to average power output. Wake disturbances were clearly apparent on turbines subjected to wave motions, however, this was at near distances that are outside of the realm of practicality.

As a check, we compared random ocean perturbations to (zero-mean) sinusoidal fluctuations of the hub speed in order to determine whether random effects in the platform dynamics had a crucial role to play in enhancing/suppressing time-averaged power output of a moving turbine, as compared to pure sinusoidal fluctuations of the hub speed. We found that, for reasonable sinusoidal amplitude and frequency perturbations there was little change on the power output of the turbine in the far-wake, though downstream power production is lowered in the near-wake where downstream turbines are unlikely to be placed.

Wind waves modeled by the Pierson-Moskowitz (PM) spectrum, and for developing seas, the JONSWAP model, represent the vast majority of wave types in deep waters, however, the model assumptions are seldom perfectly realized in nature: the PM spectrum defines a "fully developed sea," requiring wind to blow steadily at a constant speed over considerable distances and time. Because these perfect, uninterrupted conditions seldom occur naturally, the PM spectrum serves more as a foundational

theoretical limit. Despite this the PM spectrum is extensively utilized in ocean engineering and naval architecture as it represents the absolute worst-case equilibrium for a specific wind speed, providing engineers a conservative, standardized benchmark for designing the structural integrity of ships, oil rigs, and floating platforms.

A full assessment of the effects of wave motions on the power output of turbines mounted on moving platforms necessitates consideration of transient dynamics. As a first step, we argue, it is critical to consider how multi-spectral wind waves affect power output of FOWT. Some of the transient ~~eases~~ conditions to consider next are obvious: the effect of swells, changing wind conditions and storms, developing ~~eeansor~~ decaying ocean waves. Some are less obvious. For example, finite-time averages of power output could still be affected by a fully developed ocean: when the hub wind dips up and down around the minimum or maximum wind operating conditions, for example, or when wind directions are not well accounted for by an alignment of the wind and the turbine. Nevertheless, for moored platforms like the TLP design studied here under the most generic of ocean conditions, namely, sustained steady winds and a fully developed ocean, the power of floating ocean turbines does not appear, in simulations, to be affected significantly, when compared to fixed turbines. Consideration of transient wave effects on power output necessitate consideration of the types of waves and conditions found in actual geographical locations of interest to be meaningful. Our simulation framework takes as a prescribed forcing the sea wave models, hence in principle, the formulation is easily extensible to consider transient wave cases.

Code availability. The code is available as a fixed DOI located at <https://zenodo.org/records/16780228>

Appendix A: Fully Developed Sea Conditions

The fully developed sea surface ~~obeys wind waves are captured by~~ the Pierson-Moskowitz (PM) spectrum (~~Stewart, 2008; Pierson and Moskowitz, 1964~~). ~~For the PM spectrum, model~~ (Stewart, 2008; Pierson and Moskowitz, 1964). The PM spectrum takes as input the steady wind speed at a height of 19.5m above the mean sea surface, and is given by

$$S_{PM}(\nu) = \frac{0.0081g^2}{(2\pi)^4\nu^5} e^{-\frac{5}{4}(\frac{\nu}{\nu_{peak}})^{-4}}. \quad (A1)$$

where $2\pi\nu_{peak} = 0.877g/u_{19.5}$, and $u_{19.5}$ is the wind speed at a 19.5m height above the sea surface, g is acceleration, ν is frequency. To obtain a random realization, we choose a frequency range of width $\Delta\nu$, the amplitude a_i of the monochromatic wave with angular frequency $\Omega_i = 2\pi\nu_i$ is $a_i = \sqrt{2S_{PM}(\nu_i)\Delta\nu_i}$, where ν_i is the central frequency of the interval $\Delta\nu$. The sea elevation $z = \eta(x_p, t)$ is given by:

$$\eta(x_p, t) = \sum_{i=1}^N a_i \sin(\Omega_i t - k_i x_p + \epsilon_i), \quad \ddot{\eta} = - \sum_{i=1}^N \Omega_i^2 a_i \sin(\Omega_i t - k_i x_p + \epsilon_i), \quad (A2)$$

where x_p is the x location of the floating platform, ϵ_i is a random phase, $\Omega_i = \sqrt{gk_i}$ for deep water waves, N , the number of spectral components, is chosen at 400. For the wave forcing we require $u_{19.5}$ to calculate the PM spectrum. This wind speed is

taken as the cell average estimate from the large eddy simulation calculation of the wind field, at a height of 19.5 m above the
605 sea surface. The significant wave height, which is used to set A in Eq. (35), is given by:

$$A := H_{1/3} = 0.21 \frac{u_{19.5}^2}{g}. \quad (\text{A3})$$

Appendix B: The Large Eddy Simulation Model Equations [and Its Numerical Implementation](#)

The equations are cast in Cartesian geometry as follows:

$$\partial_t \mathbf{q} + \partial_x \mathbf{f} + \partial_y \mathbf{g} + \partial_z \mathbf{h} = \mathbf{s} \quad (\text{B1})$$

610

$$\mathbf{q} = \begin{bmatrix} \rho \\ \rho u \\ \rho v \\ \rho w \\ \rho \theta \\ \rho q_v \\ \rho K \\ \rho q_\ell \end{bmatrix}, \quad \mathbf{f} = \begin{bmatrix} \rho u \\ \rho u u + p + \tau_{11} \\ \rho u v + \tau_{21} \\ \rho u w + \tau_{31} \\ \rho u \theta + \tau_{\theta 1} \\ \rho u q_v + \tau_{v1} \\ \rho u K + \tau_{K1} \\ \rho u q_\ell + \tau_{\ell 1} \end{bmatrix}, \quad \mathbf{g} = \begin{bmatrix} \rho v \\ \rho v u + \tau_{12} \\ \rho v v + p + \tau_{22} \\ \rho v w + \tau_{32} \\ \rho v \theta + \tau_{\theta 2} \\ \rho v q_v + \tau_{v2} \\ \rho v K + \tau_{K2} \\ \rho v q_\ell + \tau_{\ell 2} \end{bmatrix} \quad (\text{B2})$$

$$\mathbf{h} = \begin{bmatrix} \rho w \\ \rho w u + \tau_{13} \\ \rho w v + \tau_{23} \\ \rho w w + p' + \tau_{33} \\ \rho w \theta + \tau_{\theta 3} \\ \rho w q_v + \tau_{v3} \\ \rho w K + \tau_{K3} \\ \rho w q_\ell + \tau_{\ell 3} \end{bmatrix}, \quad \mathbf{s} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ -\rho' g \\ 0 \\ 0 \\ K_S + K_D + K_B \\ 0 \end{bmatrix} \quad (\text{B3})$$

$$615 \quad p = (\rho_d R_d + \rho_v R_v) T = C_0 (\rho \theta)^\gamma \quad (\text{B4})$$

where ρ is density; u , v , and w are wind velocities in the x , y , and z directions, respectively; θ is the potential temperature; q_v is the wet water vapor mixing ratio such that $\rho_v = \rho q_v$ is the density of water vapor; K is unresolved, sub-grid-scale Turbulent Kinetic Energy (TKE); q_ℓ is a tracer quantity that contributes to mass but not to pressure, p is total pressure; $C_0 = \left(R_d (p_0)^{-R_d/c_p} \right)^\gamma$ is a constant of proportionality; $\gamma = c_p/c_v$ is the ratio of specific heats of dry air; c_p is specific heat of dry air

620 at constant pressure; c_v is specific heat of dry air at constant volume; p_0 is reference pressure, R_d is the dry air ideal gas constant, R_v is the water vapor ideal gas constant; K_S is turbulent kinetic energy (TKE) shear production; K_D is TKE dissipation; K_B is the TKE buoyancy source/sink; $\tau_{ij} \forall i, j \in \{1, 2, 3\}$ is the unresolved eddy flux of wind velocity; $\tau_{\theta j} \forall j \in \{1, 2, 3\}$ is eddy flux of potential temperature; τ_{vj} is eddy flux of water vapor, τ_{Kj} is eddy flux of TKE (i.e., the turbulent transport terms for TKE); $\tau_{\ell j}$ is the eddy flux of tracers that do not contribute to pressure (e.g., hydrometeors); and g is acceleration due to gravity.
 625 Finally, the total density, ρ , is given by the sum of all mass-contributing densities: $\rho = \rho_d + \rho_v + \sum_{\ell} \rho_{\ell}$, where ρ_d is the density of dry air.

The perturbation pressure, $p' = p - p_H$, and density, $\rho' = \rho - \rho_H$, are perturbations from a dominant hydrostatic balance denoted by:

$$\frac{dp_H}{dz} = -\rho_H g \quad (\text{B5})$$

630

A semi-discretized, cell-centered, upwind Finite-Volume discretization is used in space with 9th-order-accurate Weighted Essentially Non-Oscillatory (WENO) reconstruction (Liu et al., 1994) with weight mapping (Henrick et al., 2005) for tracers and standard 9th-order Vandermonde-constrained polynomials for density and velocity. A third-order accurate, three-stage Strong Stability Preserving (SSP) Runge-Kutta (RK) is used to discretize in time (see (Gottlieb, 2005)). In all simulations, a Courant Friedrichs Lewy stability value of CFL= 0.6 is used, and a grid spacing of 10m in each direction is used. Identical turbulent precursor inflow conditions are used for all simulations of a given hub height mean wind speed to ensure the only wake and power differences between simulations with and without floating platform motions are due solely to floating platform motions.
 640

The model, including all turbine and floating platform motion parameterizations, are coded in portable C++ using the Yet Another Kernel Launcher (YAKL) library (Norman et al., 2023a), a library based on the Kokkos (Trott et al., 2022) portability library, to run on CPUs or Nvidia, AMD, and Intel GPUs.

The Eddy Fluxes:

645 The eddy viscosity is considered to be a function of the unresolved TKE and a stability-corrected corrected length scale, giving an eddy flux of:

$$\tau_{ij} = -\rho(K_m + \nu) \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} - \frac{2}{3} \frac{\partial u_k}{\partial x_k} \delta_{ij} \right) ; \quad \forall i, j, k \in \{1, 2, 3\} \quad (\text{B6})$$

$$\tau_{\theta j} = -\rho \left(\frac{K_m}{Pr_T} + \frac{\nu}{Pr} \right) \frac{\partial \theta}{\partial x_j} ; \quad \forall j \in \{1, 2, 3\} \quad (\text{B7})$$

650

$$\tau_{Kj} = -2\rho(K_m + \nu) \left(\frac{\partial K}{\partial x_j} \right) ; \quad \forall j \in \{1, 2, 3\} \quad (\text{B8})$$

$$\tau_{\ell j} = -2\rho \left(\frac{K_m}{Pr_T} + \frac{\nu}{Pr} \right) \left(\frac{\partial \rho_\ell}{\partial x_j} \right) ; \quad \forall j \in \{1, 2, 3\} \quad (\text{B9})$$

$$K_m = 0.1L\sqrt{K} \quad (\text{B10})$$

$$Pr_T = \frac{\Delta}{1 + 2L} \quad (\text{B11})$$

$$L = \min \left(\frac{0.76\sqrt{K}}{N + \epsilon}, \Delta \right) \quad (\text{B12})$$

660

$$\Delta = (\Delta x \Delta y \Delta z)^{1/3} \quad (\text{B13})$$

$$N = \begin{cases} \sqrt{(g/\theta)(\partial\theta/\partial z)} & \text{if } \partial\theta/\partial z > 0 \\ 0 & \text{otherwise} \end{cases} \quad (\text{B14})$$

where $\epsilon = 10^{-20}$ is a small number to avoid division by zero; N is the Brunt-Vaisala frequency, a measure of atmospheric stability; and Pr_T is the turbulent Prandtl number; Pr is the Prandtl number; ν is kinematic viscosity; δ_{ij} is the Kronecker delta; u_1 , u_2 , and u_3 are the velocity components in the x , y , and z directions (i.e., u , v , and w); x_1 , x_2 , and x_3 are the x , y , and z directions; and subset indices that appear only on one side of an equation are an implied sum over available indices (Einstein summation convention).

670 TKE Sources and Sinks:

The TKE evolution equation contains advection and turbulent transport (diffusion) on the left-hand-side of equation Eq. (B1). The remaining processes resolved here are the sources and sinks that are, in general, not cast in conservation form. The are defined as:

$$K_S = \rho K_m \sum_{i,j \in \{1,2,3\}} \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right) \frac{\partial u_j}{\partial x_i} \quad (\text{B15})$$

675

$$K_D = -\rho (0.19 + 0.51L\Delta^{-1}) \Delta^{-1} K^{3/2} \quad (\text{B16})$$

$$K_B = -\frac{\rho g K_m}{\theta (Pr)} \frac{\partial \theta}{\partial z} \quad (\text{B17})$$

680

Surface Friction:

For all surface cells, and for all cells adjacent to an immersed cell, surface friction in each direction is applied via the following flux term added to the eddy fluxes:

$$\tau_{13}^* = -\frac{\kappa^2 u \sqrt{u^2 + v^2}}{\zeta^2 \Delta z} \quad ; \quad \tau_{23}^* = -\frac{\kappa^2 v \sqrt{u^2 + v^2}}{\zeta^2 \Delta z} \quad (\text{B18})$$

685

$$\zeta = \ln \left(\frac{\frac{\Delta z}{2} + z_0}{z_0} \right) \quad (\text{B19})$$

where z_0 is the roughness length.

B1 Determining the Upstream Velocity

The “upstream” portion of the inflow velocity (“inflow” velocity is defined here as the sum of the upstream velocity normal to the disk and the platform motions normal to the disk) is integrated over a projected disk 2.5 turbine diameters upstream from the turbine base location. In order to do this, first the upstream direction is determined by computing the average horizontal wind velocity $\mathbf{u}_{avg} = (u_{avg}, v_{avg})$ over a cube with sides of length D_T centered on the turbine hub location. The upstream direction is then computed with $\theta_{upstream} = \tan^{-1}(v_{avg}/u_{avg})$. Then, a disk is projected to be centered about the location:

$$\begin{bmatrix} x_{upstream} \\ y_{upstream} \\ z_{upstream} \end{bmatrix} = \begin{bmatrix} x_p - 2D_T \cos(\theta_{upstream}) \\ y_p - 2D_T \sin(\theta_{upstream}) \\ z_p \end{bmatrix} \quad (\text{B20})$$

using the same procedure in section B2. The integration provides $u_{upstream}$ and $v_{upstream}$, the x and y components of wind velocity integrated over the upstream projected disk. The upstream wind speed normal to the turbine’s yaw angle is then determined as $|\mathbf{u}_{upstream}| = u_{upstream} \cos(\theta_{yaw}) + v_{upstream} \sin(\theta_{yaw})$.

B2 Projecting the Turbine Swept Disk

The turbine swept plane disk is initially projected onto the model grid at the origin facing westward in the $y-z$ plane. It will later be rotated and translated to the hub location and the correct yaw angle. It uses a radially varying thrust shape function, $S_T(r_{yz,initial})$, and a streamwise projection function, $S_S(x_{initial})$. Here r is the radial coordinate in the $y-z$ plane: $r_{yz,initial} = \sqrt{(y_{initial})^2 + (z_{initial})^2}$, in reference space. The thrust shape function provides degrees of freedom to represent

the way thrust increases toward the radial edges of the swept disk (e.g., Figure 13 of Aranake et al. (2015), Figure 6 of Xu et al. (2022), or Figure 11 of Jeong and Ha (2020)). The projection function reduces the discontinuity resulting from thrust application and helps the numerics better resolve the resulting wake. This kind of projection is common for actuator line approaches to turbine parameterizations with Gaussian projections (Martínez-Tossas et al., 2017; Sørensen et al., 2015). This study uses a more compact function for projection but with similar characteristics and for similar reasons.

The disk is initially projected onto the model with a center location of $(x_0, y_0, z_0) = 0$ and a yaw angle of zero (meaning the turbine swept plane is oriented facing west. The disk is then rotated about the z -axis according to the yaw angle and translated to the appropriate base location and hub height with the following linear operator:

$$\begin{bmatrix} x_p \\ y_p \\ z_p \end{bmatrix} = \begin{bmatrix} \cos(\theta_{yaw}) & -\sin(\theta_{yaw}) & 0 \\ \sin(\theta_{yaw}) & \cos(\theta_{yaw}) & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x_{initial} \\ y_{initial} \\ z_{initial} \end{bmatrix} + \begin{bmatrix} x_{base} \\ y_{base} \\ z_{hub} \end{bmatrix} \quad (\text{B21})$$

The disk projection weights are created by sampling a product of the thrust shaping function and projection function at regular intervals on a Cartesian hexahedron of size $D_P \times D_T \times D_T$ in the x , y , and z directions where D_P is the domain of projection (10 cells total) in the x direction for initial points, and D_T is the turbine swept disk diameter. For each point, the product $S_T(r_{yz})S_P(x)$ is added to the cell to the cell that contains the point (x_p, y_p, z_p) . Once all points are sampled, the sum of weights in each cell is computed, and each cell's weight is normalized by the summed total.

The thrust shaping function used here is computed as the piecewise function:

$$S_T = \begin{cases} (p_1(r))^a & \text{if } 0 \leq r < r_1 \\ p_2(r) & \text{if } r_1 \leq r \leq r_2 \end{cases} \quad (\text{B22})$$

with free parameters: a , r_1 , and r_2 . Thrust reaches its peak at r_1 and decays to zero over $r \in [r_1, r_2]$. Smaller a leads to more uniform distribution of thrust over the disk, and larger a concentrates thrust more at the edges of the disk. p_1 is a quadratic polynomial constrained by: $p_1(0) = 0$, $p_1(r_1) = 1$, and $p_1'(r_1) = 0$. p_2 is a cubic function constrained by $p_2(r_1) = 1$, $p_2'(r_1) = 0$, $p_2(r_2) = 0$, and $p_2'(r_2) = 0$. To match the wakes of AMR-wind calculations, the free parameters used here are: $r_1 = 1 - \Delta x/r_{turb}$, $r_2 = 1 + \Delta x/r_{turb}$, and $a = 1/2$, where r_{turb} is the radius of the swept plan in meters.

The streamwise projection function is:

$$S_S(x) = \begin{cases} \left(1 - \left(\frac{x}{x_R}\right)^2\right)^2 & \text{if } |x| \leq x_R \\ 0 & \text{otherwise} \end{cases} \quad (\text{B23})$$

which enforces a decay from the projected disk centerline in the streamwise direction to reduce the discontinuity of thrust projection. In this case $x_R = 5\Delta x$ to enforce a streamwise decay over 5 cells in each streamwise direction from the disk center.

Once these weights are computed, a weighted sum using these weights provides the integration of a quantity such as wind velocity over the entire disk.

To summarize:

- Over the domain $[-x_R, x_R] \times [-\frac{D_T}{2}, \frac{D_T}{2}] \times [-\frac{D_T}{2}, \frac{D_T}{2}]$ in the x , y , and z directions, evenly create sample points: $(x_{initial}, y_{initial}, z_{initial})$
- Initialize all cell weights to zero: $w_{ijk}^* = 0$
- For each sample point:

- Compute the rotated and translated location (x_p, y_p, z_p) for the sample point using ((B21))
- Locate the cell, C_{ijk} , in which the point (x_p, y_p, z_p) is located
- Atomically add the product of the thrust shape and streamwise projection functions to the weights in cell C_{ijk} :
 $w_{ijk}^* = w_{ijk}^* + S_P(x_{initial}) S_T(r_{yz, initial})$
 - “Atomically” is an algorithmic term to denote that when parallelizing over sample points (operating on each simultaneously), the sum and update should be performed in its entirety without any other operation accessing (read or write) cell C_{ijk} ’s memory. This is to avoid data races.

- Compute the sum of w_{ijk}^* over all cells
- Divide each weight by the total sum: $w_{ijk} = w_{ijk}^* / \sum_{ijk} w_{ijk}^*$
- For any set of cell averages of a quantity, $\bar{q}_{ijk}$, compute the disk-integration of that quantity with the sum

$$q_{disk} = \sum_{ijk} \bar{q}_{ijk} w_{ijk} \quad (B24)$$

B3 Verification of Stationarity for LES-Turbine Power Generation

The time trace of power is plotted in Figure B1 over the eight hours of simulation for the furthest right turbine in the center row to demonstrate that the simulation has reached an equilibrium state in terms of power production before the $t \in [4, 8]$ hr time averaging.

750 B4 Verification with Neutral AWAKEN Experiment

The Large Eddy Simulation code has been validated against standard neutral and convective boundary layer results, and here, it is validated against the AMR-Wind (Kuhn et al., 2025; Brazell et al., 2021) results for a modestly convective boundary layer test case for both turbulent boundary layer results and turbine wake results for the NREL 5MW turbine used in this study. To initialize, potential temperatures are linearly interpolated between values of 300 K, 300 K, 308 K, and 311.45 K at heights of 0m, 750m, 850m, and 2000m, respectively. The u and v winds are initialized with a log law setting $u = 9.873\text{m/s}$ and $v = 5.7\text{m/s}$ at hub height (90m), and vertical velocity is initialized to zero. AMR-Wind uses incompressible equations with a Boussinesq buoyancy term with a density of one kg per cubic meter throughout; and portUrb uses non-hydrostatic, compressible equations with the surface pressure set to enforce a surface density of one kg per cubic meter at a surface

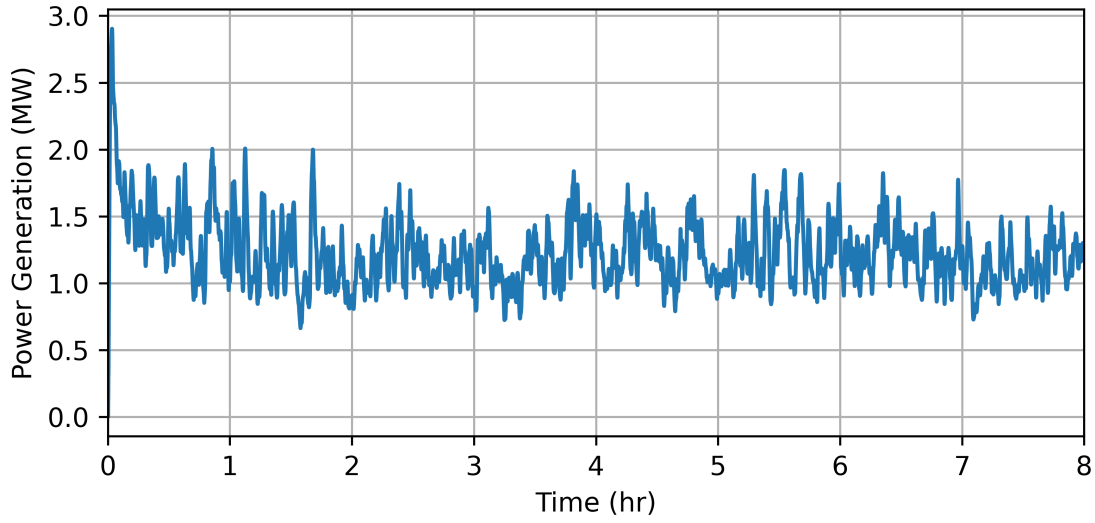


Figure B1. Plot of time trace of power generation for the furthest right turbine in the center row. $TI_{1.0}$ atmospheric conditions. Moving/Ocean simulations.

temperature of 300K. Both models perturb the lowest 50m of the domain with random potential temperature perturbations and use transverse four-period sine waves for u and v velocity in the lowest 100m.

Coriolis is active with a latitude of 40°N . Surface roughness is set to $z_0 = 0.01\text{m}$. The domain is $5.12 \times 5.12 \times 1.92\text{ km}$ in the x , y , and z directions, respectively. A uniform grid spacing of 10m is used for portUrb, while AMR-Wind has multiple grids that reach 2.5m grid spacing around the turbine with 10m grid spacing at the coarsest level. Both models use pressure gradient forcing to force a hub-height horizontal average wind speed of $(9.873, 5.7)\text{m/s}$ for the horizontal velocity vector. That pressure gradient forcing is calculated in the turbulent precursor and then used in both the precursor and primary turbine simulation. The precursor and turbine simulations are run for 20,000 model seconds, the first 15,000s used as spin-up and the last 5,000s as the performance period. The average pressure gradient forcing over $t \in [14000, 15000]\text{s}$ is used throughout the performance period in the main turbine simulation. The turbine is placed at 1,800m into the domain in the x and y directions. A small surface heat flux of 0.005 K m / s is added to the surface to create a modestly convective boundary layer.

Figure B2 plots the domain-averaged column of horizontal velocity, potential temperature, and turbulence intensity averaged in time over $t \in [15000, 20000]\text{s}$ for AMR-Wind and portUrb. The profiles are quite similar with portUrb carrying bit more wind speed and turbulence intensity throughout the boundary layer. Figure B3 plots resolved turbulent velocity correlations averaged over $t \in [15000, 20000]\text{s}$ for AMR-Wind and portUrb. The magnitudes and shapes of the profiles are very similar with portUrb exhibiting some oscillations at the surface peak and at times larger features at the top of the boundary layer. Figure B4 plots resolved turbulent temperature-velocity correlations averaged over the same time range. The $u'\theta'$ and $v'\theta'$ profiles are similar with portUrb exhibiting stronger features at the top of the boundary layer. The $w'\theta'$ profile shows more differences, which is

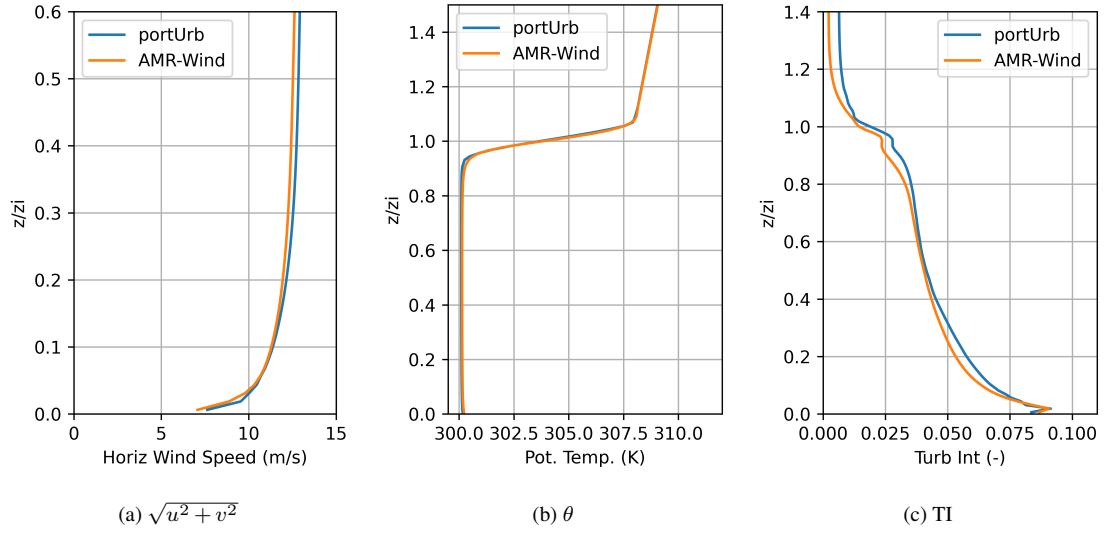


Figure B2. Domain-averaged profiles over $t \in [15000, 20000]$ s. TI stands for turbulence intensity. $z_i = 800$ m is the boundary layer height.

780 somewhat unsurprising, given the large differences in the buoyancy term. portUrb uses a non-hydrostatic and compressible discretization, where temperature perturbations propagate into density perturbations through acoustics, and the buoyancy term uses density perturbations to determine buoyant forcing. AMR-Wind is incompressible and uses a fixed Boussinesq buoyancy term based to deviations from background temperature (fixed at $T_0 = 300$ K throughout the simulation).

Figure B5 plots the turbine wakes at hub height ($z = 90$ m) as a function of y location averaged over $t \in [15000, 20000]$ for portUrb and AMR-Wind at 2, 4, 6, and 8 turbine diameters downstream of the turbine – along the direction of the wake, which is 30° . Both exhibit very similar features and magnitudes, though portUrb is running at $4\times$ larger grid spacing. Both show the asymmetrical profile due to swirl, and both show very similar wake recovery downstream. There are a bit larger differences in Figure B6, which plots wakes at the same distances downstream as a function of z location at the hub center, following the wake direction of 30° . The wakes are quite similar higher up, but nearer to the surface, portUrb has a stronger wake deficit –

785 likely due to the coarser grid spacing leading to surface friction to be less separated from the turbine wake.

In summary, despite being formulated quite differently as a model, portUrb replicates the salient features of both the boundary layer turbulence and the turbine wake deficit shape and magnitude compared to AMR-Wind.

790

Author contributions. Authors contributed equally to the research and its reporting.

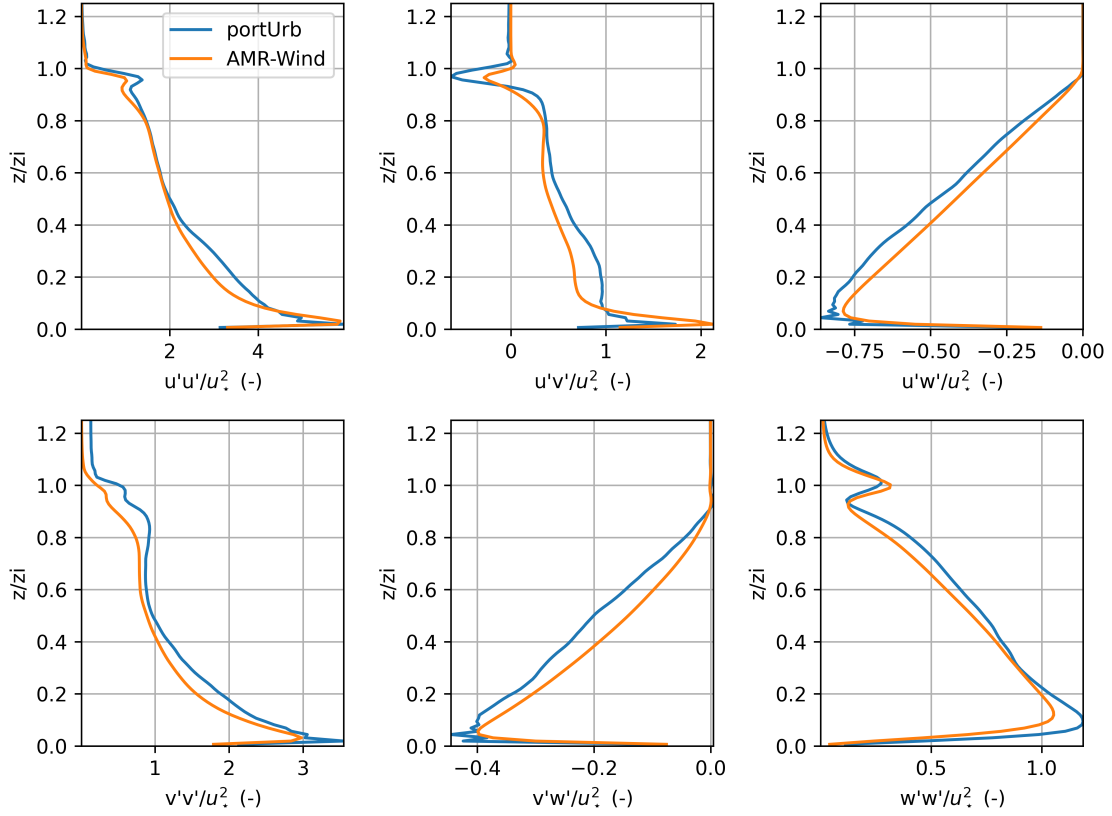


Figure B3. Resolved turbulent velocity correlations. Perturbations are computed as the deviation from the mean column, and correlations are averaged over multiple snapshots within $t \in [15000, 20000]$ s. $z_i = 800$ m is the boundary layer height.

Competing interests. The Authors report no competing interests.

Acknowledgements. JMR wishes to thank the NSF Institute of Mathematics and Statistical Innovation at the University of Chicago, where
795 some of this work was done. This research used resources of the Oak Ridge Leadership Computing Facility at the Oak Ridge National Laboratory, which is supported by the Office of Science of the U.S. Department of Energy under Contract No. DE-AC05-00OR22725. This research uses an ASCR Advanced Computing Challenge (ALCC) award titled “High-fidelity modeling and next-generation surrogate models for floating offshore wind energy.”

This material is based upon work supported by the U.S. Department of Energy, Office of Science, Offices of Advanced Scientific Com-
800 puting Research and Biological and Environmental Research through the FLOWMAS Energy Earthshot Research Center.

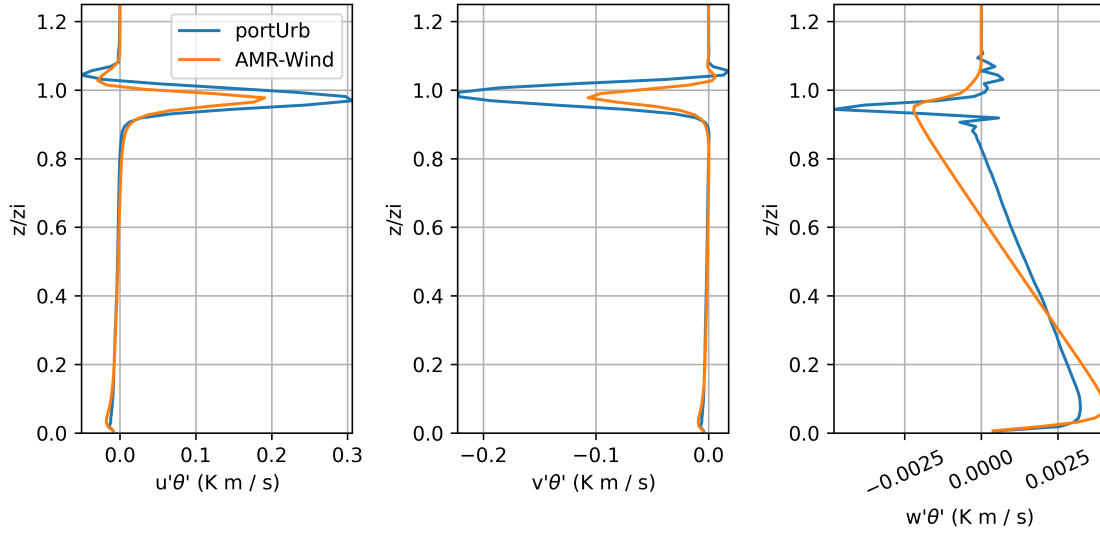


Figure B4. Resolved turbulent temperature correlations. Perturbations are computed as the deviation from the mean column, and correlations are averaged over multiple snapshots within $t \in [15000, 20000]$ s. $z_i = 800$ m is the boundary layer height.

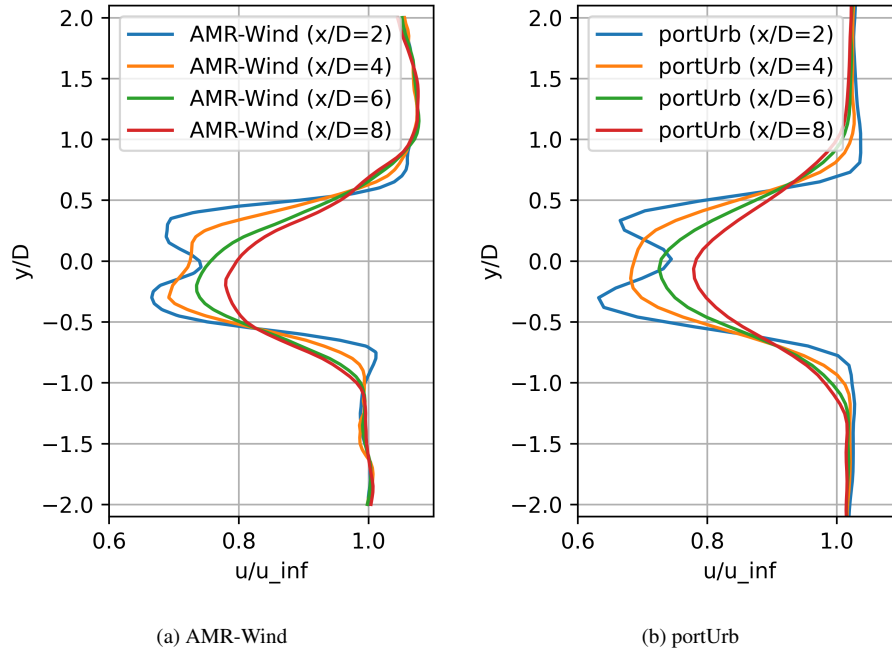


Figure B5. Hub height ($z = 90$ m) horizontal velocity divided by inflow wind speed (11.4 m/s) in the y -direction at 2, 4, 6, and 8 turbine diameters downstream of the turbine for $t \in [15000, 20000]$ s along the wake direction (30°).

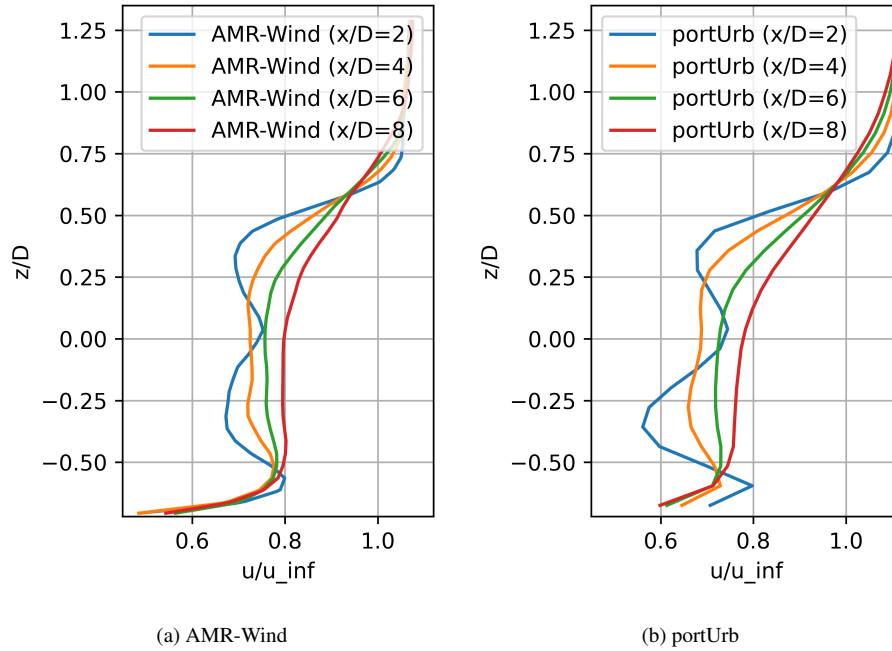


Figure B6. Horizontal velocity divided by inflow wind speed (11.4 m/s) in the z -direction at the turbine center $x = 1800\text{m}$ at 2, 4, 6, and 8 turbine diameters downstream of the turbine for $t \in [15000, 20000]\text{s}$ along the wake direction (30°).

References

- Abraham, A. and Leweke, T.: Experimental investigation of blade tip vortex behavior in the wake of asymmetric rotors, *Experiments in Fluids*, 64, 109, 2023.
- Aranake, A. C., Lakshminarayan, V. K., and Duraisamy, K.: Computational analysis of shrouded wind turbine configurations using a 3-
805 dimensional RANS solver, *Renewable Energy*, 75, 818–832, 2015.
- Archer, C. L., Wu, S., Ma, Y., and Jiménez, P. A.: Two corrections for turbulent kinetic energy generated by wind farms in the WRF model, *Monthly weather review*, 148, 4823–4835, 2020.
- Bergua, R., Robertson, A., Jonkman, J., Branlard, E., Fontanella, A., Belloli, M., Schito, P., Zasso, A., Persico, G., Sanvito, A., et al.: OC6
810 project Phase III: validation of the aerodynamic loading on a wind turbine rotor undergoing large motion caused by a floating support structure, *Wind Energy Science*, 8, 465–485, 2023.
- Bergua, R., Wiley, W., Robertson, A., Jonkman, J., Brun, C., Pineau, J.-P., Qian, Q., Maoshi, W., Beardsell, A., Cutler, J., Pierella, F., Hansen, C. A., Shi, W., Fu, J., Hu, L., Vlachogiannis, P., Peyrard, C., Wright, C. S., Friel, D., Hanssen-Bauer, Ø. W., dos Santos, C. R., Frickel, E., Islam, H., Koop, A., Hu, Z., Yang, J., Quideau, T., Harnois, V., Shaler, K., Netzband, S., Alarcón, D., Trubat, P., Connolly, A., Leen, S. B., and Conway, O.: OC6 project Phase IV: validation of numerical models for novel floating offshore wind support structures, *Wind
815 Energy Science*, 9, 1025–1051, <https://doi.org/10.5194/wes-9-1025-2024>, 2024.
- Betti, G., Farina, M., Guagliardi, G. A., Marzorati, A., and Scattolini, R.: Development of a Control-Oriented Model of Floating Wind Turbines, *IEEE Transactions on Control Systems Technology*, 22, 69–82, 2014.

- Blaylock, M. L., Martinez-Tossas, L., Sakievich, P., Houchens, B. C., Cheung, L., Brown, K., Hsieh, A., Maniaci, D. C., and Churchfield, M. J.: Validation of Actuator Line and Actuator Disk Models with Filtered Lifting Line Corrections Implemented in Nalu-Wind Large Eddy Simulations of the Atmospheric Boundary Layer, in: AIAA SCITECH 2022 Forum, p. 1921, 2022.
- 820 Brazell, M., Ananthan, S., Vijayakumar, G., Cheung, L., Sprague, M., Team, E. E. C. P., Team, H. F. M. P., et al.: Amr-wind: adaptive mesh-refinement for atmospheric-boundary-layer wind energy simulations, in: APS Division of Fluid Dynamics Meeting Abstracts, pp. T29–007, 2021.
- Brown, K., Yalla, G., Cheung, L., Frederik, J., Houck, D., deVelder, N., Simley, E., and Fleming, P.: Comparison of wind-farm control strategies under realistic offshore wind conditions: wake quantities of interest, *Wind Energy Science*, 10, 1737–1762, <https://doi.org/10.5194/wes-10-1737-2025>, 2025.
- 825 Bui, H., Bakhoday-Paskyabi, M., and Mohammadpour-Penchah, M.: Implementation of a Simple Actuator Disc for Large Eddy Simulation (SADLES-V1.0) in the Weather Research and Forecasting Model (V4.3.1) for Wind Turbine Wake Simulation, *EGUsphere*, 2023, 1–24, 2023.
- 830 Cheung, L., Blaylock, M. L., Brown, K., deVelder, N., Herges, T. G., Hsieh, A., Maniaci, D. C., and Cutler, J.: Comparison of simulated and measured wake behavior in stable and neutral atmospheric conditions, in: AIAA SCITECH 2022 Forum, p. 1923, 2022.
- Cheung, L. C., Brown, K. A., Houck, D. R., and deVelder, N. B.: Fluid-Dynamic Mechanisms Underlying Wind Turbine Wake Control with Strouhal-Timed Actuation, *Energies*, 17, <https://doi.org/10.3390/en17040865>, 2024.
- Cioni, S., Papi, F., Pagamonci, L., Bianchini, A., Ramos-García, N., Pirrung, G., Corniglion, R., Lovera, A., Galván, J., Boisard, R., et al.: Branlard, 710 E., Jonkman, J., and Robertson, A.: On the characteristics of the wake of a wind turbine undergoing large motions caused by a floating structure: an insight based on experiments and multi-fidelity simulations from the OC6 project Phase III, *Wind Energ. Sci.*, 8, 1659–1691.
- 835 Darling, H., Schmidt, D. P., Xie, S., Sadique, J., Koop, A., Wang, L., Wiley, W., Bergua Archeli, R., Robertson, A., and Tran, T. T.: OC6 Phase IV: Validation of CFD Models for Stiesdal TetraSpar Floating Offshore Wind Platform, *Wind Energy*, 28, e2966, <https://doi.org/https://doi.org/10.1002/we.2966>, e2966 we.2966, 2025.
- 840 Dong, G., Li, Z., Qin, J., and Yang, X.: Predictive capability of actuator disk models for wakes of different wind turbine designs, *Renewable Energy*, 188, 269–281, 2022.
- Fitch, A. C., Olson, J. B., Lundquist, J. K., Dudhia, J., Gupta, A. K., Michalakes, J., and Barstad, I.: Local and mesoscale impacts of wind farms as parameterized in a mesoscale NWP model, *Monthly Weather Review*, 140, 3017–3038, 2012.
- 845 Fontanella, A., Fusetti, A., Cioni, S., Papi, F., Muggiasca, S., Persico, G., Dossena, V., Bianchini, A., and Belloli, M.: Wake development in floating wind turbines: new insights and an open dataset from wind tunnel experiments, *Wind Energy Science*, 10, 1369–1387, <https://doi.org/10.5194/wes-10-1369-2025>, 2025.
- Frederik, J. A., Simley, E., Brown, K. A., Yalla, G. R., Cheung, L. C., and Fleming, P. A.: Comparison of wind farm control strategies under realistic offshore wind conditions: turbine quantities of interest, *Wind Energy Science*, 10, 755–777, [https://doi.org/10.5194/wes-10-755-](https://doi.org/10.5194/wes-10-755-2025)
- 850 2025, 2025.
- Gottlieb, S.: On high order strong stability preserving Runge-Kutta and multi step time discretizations, *Journal of scientific computing*, 25, 105–128, 2005.
- Hasselmann, K., Barnett, T., Bouws, E., Carlson, H., Cartwright, D., Enke, K., Ewing, J., Gienapp, H., Hasselmann, D., Kruseman, P., et al.: Measurements of wind-wave growth and swell decay during the Joint North Sea Wave Project (JONSWAP), Tech. rep., Deutsches
- 855 Hydrographisches Institut, 1973.

- Henrick, A. K., Aslam, T. D., and Powers, J. M.: Mapped weighted essentially non-oscillatory schemes: achieving optimal order near critical points, *Journal of Computational Physics*, 207, 542–567, 2005.
- Hsieh, A. S., Brown, K. A., deVelder, N. B., Herges, T. G., Knaus, R. C., Sakievich, P. J., Cheung, L. C., Houchens, B. C., Blaylock, M. L., and Maniaci, D. C.: High-fidelity wind farm simulation methodology with experimental validation, *Journal of Wind Engineering and Industrial Aerodynamics*, 218, 104 754, <https://doi.org/https://doi.org/10.1016/j.jweia.2021.104754>, 2021.
- Hsieh, A. S., Cheung, L. C., Blaylock, M. L., Brown, K. A., Houck, D. R., Herges, T. G., deVelder, N. B., Maniaci, D. C., Yalla, G. R., Sakievich, P. J., Radunz, W. C., and Carmo, B. S.: Model intercomparison of the ABL, turbines, and wakes within the AWAKEN wind farms under neutral stability conditions, *Journal of Renewable and Sustainable Energy*, 17, 023 301, 2025.
- Jeong, J.-H. and Ha, K.: Numerical investigation of three-dimensional and vortical flow phenomena to enhance the power performance of a wind turbine blade, *Applied Sciences*, 11, 72, 2020.
- Johlas, H. M., Martinez-Tossas, L., Schmidt, D. P., Lackner, M., and Churchfield, M.: Large eddy simulations of floating offshore wind turbine wakes with coupled platform motion, *IOP Conference Series, Journal of Physics*, 1256, 012 018, 2019.
- Johlas, H. M., Martinez-Tossas, L., Schmidt, D. P., Lackner, M., and Churchfield, M.: Large eddy simulations of oshore wind turbine wakes for two floating platform types, *IOP Conference Series, Journal of Physics*, 1452, 012 034, 2020.
- Jonkman, J., Butterfield, S., Musial, W., and Scott, G.: Definition of a 5-MW reference wind turbine for offshore system development, Tech. rep., National Renewable Energy Lab.(NREL), Golden, CO (United States), 2009.
- Karimi, M., Hall, M., Buckham, B., and Crawford, C.: A multi-objective design optimization approach for floating offshore wind turbine support structures, *Journal of Ocean Engineering and Marine Energy*, 3, 69–87, 2017.
- Kuhn, M. B., Henry de Frahan, M. T., Mohan, P., Deskos, G., Churchfield, M., Cheung, L., Sharma, A., Almgren, A., Ananthan, S., Brazell, M. J., et al.: AMR-Wind: A Performance-Portable, High-Fidelity Flow Solver for Wind Farm Simulations, *Wind Energy*, 28, e70 010, 2025.
- Kumer, V.-M., Reuder, J., Dorninger, M., Zauner, R., and Grubišić, V.: Turbulent kinetic energy estimates from profiling wind LiDAR measurements and their potential for wind energy applications, *Renewable Energy*, 99, 898–910, 2016.
- Kyle, R., Lee, Y. C., and Fröhlich, W.-G.: Propeller and vortex ring state for floating offshore wind turbines during surge, *Renewable Energy*, 155, 645–657, <https://doi.org/https://doi.org/10.1016/j.renene.2020.03.105>, 2020.
- Lemmer, F., Yu, W., and Cheng, P. W.: Iterative Frequency-Domain Response of Floating Offshore Wind Turbines with Parametric Drag, *Journal of Marine Science and Engineering*, 6, <https://doi.org/10.3390/jmse6040118>, 2018.
- Li, Y., Yu, W., and Sarlak, H.: Wake structures and performance of wind turbine rotor with harmonic surging motions under laminar and turbulent inflows, *Wind Energy*, p. e2949, 2024.
- Li, Z., Dong, G., and Yang, X.: Onset of wake meandering for a floating offshore wind turbine under side-to-side motion, *Journal of Fluid Mechanics*, 934, A29, 2022.
- Lilly, D. K.: On the application of the eddy viscosity concept in the inertial sub-range of turbulence, NCAR manuscript, 123, 1966.
- Lilly, D. K.: The representation of small-scale turbulence in numerical simulation experiments, in: *Proc. IBM Sci. Comput. Symp. on Environmental Science*, pp. 195–210, 1967.
- Liu, X.-D., Osher, S., and Chan, T.: Weighted essentially non-oscillatory schemes, *Journal of computational physics*, 115, 200–212, 1994.
- Liu, Y. and Chertkov, M.: Deciphering the Dance of the Winds and Waves: Unraveling Anomalous Dynamics in Floating Offshore Wind Turbines, *arXiv preprint arXiv:2402.00018*, 2023.

- Madsen, H. A.: A CFD analysis of the actuator disc flow compared with momentum theory results, in: Proceedings of the 10th Symposium on Aerodynamics of Wind Turbines, pp. 109–124, IEA Joint Action, 1996.
- 895 Mahrt, L., Vickers, D., Frederickson, P., Davidson, K., and Smedman, A.-S.: Sea-surface aerodynamic roughness, *Journal of Geophysical Research: Oceans*, 108, 2003.
- Malecha, Z. and Dsouza, G.: Modeling of wind turbine interactions and wind farm losses using the velocity-dependent actuator disc model, *Computation*, 11, 213, 2023.
- Martinez, L., Leonardi, S., Churchfield, M., and Moriarty, P.: A comparison of actuator disk and actuator line wind turbine models and best
900 practices for their use, in: 50th AIAA Aerospace Sciences Meeting including the New Horizons Forum and Aerospace Exposition, p. 900, 2012.
- Martínez-Tossas, L. A., Churchfield, M. J., and Meneveau, C.: Optimal smoothing length scale for actuator line models of wind turbine blades based on Gaussian body force distribution, *Wind Energy*, 20, 1083–1096, 2017.
- McWilliams, J. C. and Restrepo, J. M.: The wave-driven ocean circulation, *Journal of Physical Oceanography*, 29, 2523–2540, 1999.
- 905 McWilliams, J. C., Restrepo, J. M., and Lane, E. M.: An asymptotic theory for the interaction of waves and currents in coastal waters, *Journal of Fluid Mechanics*, 511, 135–178, 2004.
- Messmer, T., Peinke, J., Croce, A., and Hölling, M.: The role of motion-excited coherent structures in improved wake recovery of a floating wind turbine, *Journal of Fluid Mechanics*, 1018, A23, 2025.
- Miller, A., Chang, B., Issa, R., and Chen, G.: Review of computer-aided numerical simulation in wind energy, *Renewable and sustainable
910 energy Reviews*, 25, 122–134, 2013.
- Mirocha, J., Kosovic, B., Aitken, M., and Lundquist, J.: Implementation of a generalized actuator disk wind turbine model into the weather research and forecasting model for large-eddy simulation applications, *Journal of Renewable and Sustainable Energy*, 6, 2014.
- Monin, A.: Basic laws of turbulent mixing in the surface layer of the atmosphere.
- Norman, M., Lyngaas, I., Bagusetty, A., and Berrill, M.: Portable C++ code that can look and feel like Fortran code with Yet Another Kernel
915 Launcher (YAKL), *International Journal of Parallel Programming*, 51, 209–230, 2023a.
- Norman, M., Gopalakrishnan Meena, M., Gottiparthi, K., Koukpaizan, N., and Nichols, S.: PortUrb: a performance portable, high-order, moist atmospheric large eddy simulation model with variable-friction immersed boundaries, *Geoscientific Model Development*, 18, 9605–9631, <https://doi.org/10.5194/gmd-18-9605-2025>, 2025.
- Norman, M. R.: A high-order WENO-limited finite-volume algorithm for atmospheric flow using the ADER-differential transform time
920 discretization, *Quarterly Journal of the Royal Meteorological Society*, 147, 1661–1690, 2021.
- Norman, M. R., Eldred, C., and Gopalakrishnan Meena, M.: Investigating Inherent Numerical Stabilization for the Moist, Compressible, Non-Hydrostatic Euler Equations on Collocated Grids, *Journal of Advances in Modeling Earth Systems*, 15, e2023MS003 732, 2023b.
- Pan, Y. and Archer, C. L.: A hybrid wind-farm parametrization for mesoscale and climate models, *Boundary-Layer Meteorology*, 168, 469–495, 2018.
- 925 Papi, F. and Bianchini, A.: Technical challenges in floating offshore wind turbine upscaling: A critical analysis based on the NREL 5 MW and IEA 15 MW Reference Turbines, *Renewable and Sustainable Energy Reviews*, 162, 112 489, 2022.
- Pierson, W. and Moskowitz, L.: A proposed spectral form for fully developed wind seas based on the similarity theory of S. A. Kitaigorodskii, *Journal of Geophysical Research*, 69, 5181–5190, 1964.
- Pimont, F., Dupuy, J.-L., Linn, R. R., Sauer, J. A., and Muñoz-Esparza, D.: Pressure-Gradient Forcing Methods for Large-Eddy Simulations
930 of Flows in the Lower Atmospheric Boundary Layer, *Atmosphere*, 11, <https://doi.org/10.3390/atmos11121343>, 2020.

- Restrepo, J. M.: Wave Breaking Dissipation in the wave-driven ocean circulation, *Journal of Physical Oceanography*, 37, 1749–1763, 2007.
- Ribeiro, A. F. P., Casalino, D., and Ferreira, C. S.: Nonlinear inviscid aerodynamics of a wind turbine rotor in surge, sway, and yaw motions using a free-wake panel method, *Wind Energy Science*, 8, 661–675, <https://doi.org/10.5194/wes-8-661-2023>, 2023.
- Sebastian, T. and Lackner, M.: Offshore floating wind turbines-an aerodynamic perspective, in: 49th AIAA aerospace sciences meeting including the new horizons forum and aerospace exposition, p. 720, 2011.
- Smagorinsky, J.: General circulation experiments with the primitive equations: I. The basic experiment, *Monthly weather review*, 91, 99–164, 1963.
- Sørensen, J. N., Mikkelsen, R. F., Henningson, D. S., Ivanell, S., Sarmast, S., and Andersen, S. J.: Simulation of wind turbine wakes using the actuator line technique, *Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 373, 20140071, 2015.
- Stewart, R. H.: *Introduction to Physical Oceanography*, Texas A&M University, 2008.
- Trott, C. R., Lebrun-Grandié, D., Arndt, D., Ciesko, J., Dang, V., Ellingwood, N., Gayatri, R., Harvey, E., Hollman, D. S., Ibanez, D., Liber, N., Madsen, J., Miles, J., Poliakoff, D., Powell, A., Rajamanickam, S., Simberg, M., Sunderland, D., Turcksin, B., and Wilke, J.: Kokkos 3: Programming Model Extensions for the Exascale Era, *IEEE Transactions on Parallel and Distributed Systems*, 33, 805–817, <https://doi.org/10.1109/TPDS.2021.3097283>, 2022.
- Wang, H., Barthelmie, R., Pryor, S., and Kim, H.: A new turbulence model for offshore wind turbine standards, *Wind Energy*, 17, 1587–1604, 2014.
- Wang, L., Robertson, A., Jonkman, J., and Yu, Y.: OC6 phase I: Improvements to the OpenFAST predictions of nonlinear, low-frequency responses of a oating offshore wind turbine platform, *Renewable Energy*, 187, 282–301, 2022.
- Wei, N. J. and Dabiri, J. O.: Phase-averaged dynamics of a periodically surging wind turbine, *Journal of Renewable and Sustainable Energy*, 14, 013305, <https://doi.org/10.1063/5.0076029>, 2022.
- Wena, B., Donga, X., Tian, X., Penga, Z., Zhanga, W., and Wei, K.: The power performance of an offshore floating wind turbine in platform pitching motion, *Energy*, 154, 508–521, 2018.
- Wu, Y.-T. and Porté-Agel, F.: Modeling turbine wakes and power losses within a wind farm using LES: An application to the Horns Rev offshore wind farm, *Renewable Energy*, 75, 945–955, 2015.
- Xu, Z., Chang, M., Bai, J., and Wang, B.: Computational Investigation of Blade–Vortex Interaction of Coaxial Rotors for eVTOL Vehicles, *Energies*, 15, 7761, 2022.
- Yang, H., Gea, M., Abkar, M., and Yang, X.: Large-eddy simulation study of wind turbine array above swell sea, *Energy*, 256, 124674, 2022.