

Response to Reviewers and Community Comments

Experimental wind tunnel dataset of wake and turbine measurements for wind farm control

F. Campagnolo, D. Aktan, D. Bortolin, S. Tamaro, F. V. Mühle, and C. L. Bottasso — wes-2026-86

We thank the two anonymous referees for their careful reading, and for the thoughtful, constructive feedback. Their remarks have helped us sharpen the paper. Below, we reproduce the original comments in blue italics, then provide our point-by-point replies in black. Wherever relevant, we also indicate what has been changed in the manuscript.

A revised version of the manuscript is attached to the present reply, with additions highlighted in blue and deletions marked in red.

Response to Anonymous Referee #1 (RC1)

We appreciate the referee's very positive evaluation and the helpful suggestions. We respond to each point in the following.

General comments

Comment 1: *The data set is unique and has the potential to be a reference case for wind farm control in the future.*

Response: Thank you for this assessment. We are grateful that you recognize the potential value of the dataset as a reference for the wind-farm control community.

Comment 2: *The experimental data are also accompanied by a series of numerical models, from CAD to ALM-LES model of the turbines. This is also nice to have, as potential users of the dataset can also make use of one of the available numerical models, should they see this fit. At the same time, I expect this will create a bias, with most future users employing the same inflow/ALM etc model. Since no model is perfect, this is not ideal, but this is no reason not to include the numerical models.*

Response: This is a valuable point, and Referee #2 also raised a closely related concern (major comment 5). We agree that giving users ready-made models can nudge them toward adopting the same inflow/ALM choices, even when independent implementations would be preferable.

Still, we think the upside is substantial: the models reduce the barrier to entry, provide a fully documented and reproducible reference setup, and let users cross-check their own configurations against a known baseline. To make the intended use unmistakable, we added text in Sect. 5 and in the conclusions stating that the models are optional companions and reference implementations, not default prescriptions, and that users are encouraged to develop and validate independent models against the measurements.

Comment 3: *One aspect the authors could consider is the continuous update/modification of the data description. A data description article review can obviously not check whether the description is entirely complete, or if something can be improved, in the same way an actual user of the data set could. The authors could consider making this explicit and ask for feedback in the paper.*

Response: We agree, and thank you for the suggestion. Since the dataset is hosted on Zenodo, we can rely on its native versioning support. That enables us to revise documentation (for instance README files and metadata) in response to user input while preserving citability through versioned DOIs.

Following your recommendation, we added a statement in Sect. 4.3 and in the conclusions explicitly inviting users to report issues, unclear points, or suggestions, and we commit to maintaining the repository documentation accordingly.

Minor comments (annotated PDF supplement)

Minor comment 1: *(Abstract, "individual pitch control") Is this the same as helix or is it for load reduction? If the latter, please clarify.*

Response: Here, individual pitch control (IPC) is used for load mitigation, following the classical Bossanyi-type approach described in Sect. 2.2.6. This is different from the Helix strategy, which also uses individual pitching but aims at wake mixing. We clarified this in the abstract and introduction by explicitly writing "individual pitch control for load mitigation."

Minor comment 2: *(Fig. 1) For clarity, please specify that Φ is negative in Fig. 1b.*

Response: Done. The Fig. 1 caption now states that the shown angle Φ is negative.

Minor comment 3: *("at the apex of the G1 rotor") Apex or hub-height? Would it not be better to quote hub-height values, as usually done in the community?*

Response: In line with prior usage in the literature (Jonkman et al., 2009; Fontanella et al., 2021; Panda et al., 2025), we use "rotor apex" to refer to the rotor's central point where the blades pitch axis intersects at the turbine front. For an untilted and not coned rotor (as the G1's), the distance from the ground of the rotor apex coincides with the hub height. We added this clarification to the manuscript.

Minor comment 4: *(Inflow description) Here only the inflow TI is described, however mean profiles are also important. For completeness please include this information (profile exponent for example) and direct the reader to Sect. 4.1.1 for more info.*

Response: Agreed. In Sect. 2.1.1 we expanded the inflow descriptions to include the mean velocity profile characteristics (power-law shear exponents), and we added a clear forward reference to Sect. 4.1.1, where the full inflow mapping is documented.

Minor comment 5: *(Figure 2) In Figure 1, the indices (a) and (b) appear before the relevant descriptive text, here they appear after. Please select one type and be consistent throughout the document.*

Response: Thanks for catching this. We corrected the inconsistency by updating the caption of Fig. 1.

Minor comment 6: *(Temperature transducer, " $\pm 0.1\%$ of Full Scale") Please provide the full scale for the sensor or directly a quantitative measure.*

Response: The Mescon TH 12-U full-scale range is 100°C, which corresponds to $\pm 0.1^\circ\text{C}$ uncertainty. We updated the text accordingly.

Minor comment 7: *(Pitot tube "in front of the cluster") At what distance?*

Response: The Pitot tube sits about 3–4 diameters upstream of the first turbine, far enough that rotor induction (blockage influence on the probe) is negligible. The exact probe position is included for each test in the corresponding metadata. We added this to Sect. 2.1.2, along with a short justification. This also answers Referee #2 minor comment 2.

Minor comment 8: *(Figure 3) Minor comment, can be ignored. The paper would look much better if the font in the figures was the same as in the main text.*

Response: Understood. Where feasible, we regenerated figures using a font consistent with the main text.

Minor comment 9: *(Torque controller integral gain changed in January 2019) Please state if and how that affects the user of the dataset.*

Response: We clarified this in Sect. 2.2.6. The update of the integral gain $K_{Q,I}$ affects only the closed-loop transient response during fast wind-speed changes; steady operating points (tip-speed ratio and power coefficient) do not change.

Minor comment 10: *(Probe attitude "precisely measured") Within $\pm 0.1^\circ$? How precisely?*

Response: The dual-axis inclinometer SPECTRON L-212T has $\pm 0.3^\circ$ accuracy. We replaced the qualitative wording with this quantitative specification.

Minor comment 11: *("with the turbines not installed") $\rightarrow$ "without the turbines".*

Response: Corrected.

Minor comment 12: *(Torque-drift correction) Are runs where this correction is applied labeled in the dataset? If not please add this, or somehow list them, so that the users are aware if they are using a corrected dataset or not.*

Response: Only a limited fraction of tests showed torque-signal drift requiring the correction described in Sect. 3.4.2. Those tests are explicitly flagged in the metadata (test matrices). We added a statement about this in Sect. 3.4.2.

Minor comment 13: *(Torque-drift correction) Also, does this only apply to the most upstream turbine? Is the correction applicable to the downstream turbine(s) operating in the controlled or uncontrolled wake of the upstream one?*

Response: The correction depends only on the torque drift estimate (from the calibration phase before and after each test) and the rotational speed. If the machine operates in Region II, the correction applies whether or not G1 is in a wake. We added this clarification to Sect. 3.4.2.

Minor comment 14: *(Symbol δ) This is missing from the nomenclature. Please double check for all symbols.*

Response: Thank you. We added δ (encoder quantization interval) to the nomenclature and cross-checked the symbol list against the full text. This also addresses Referee #2 minor comment 3.

Minor comment 15: *(Gearbox ratio deviation of 0.2%) Is this deviation from the nominal reduction ratio? How does this translate to rotor angular velocity?*

Response: Yes, it is the deviation of the real gearbox reduction ratio from the nominal value due to manufacturing tolerances. Because rotor speed is inferred from the torque-actuator encoder via the nominal ratio, this yields up to 0.2% relative uncertainty in rotor speed (for example about ± 1.7 rpm at 850 rpm). Sect. 3.6 has been updated to make this explicit.

Minor comment 16: *(Overall uncertainty as the sum of the individual contributions) Is this to be more conservative than selecting the square root of the sum of the squares of each contribution?*

Response: Yes. Since independence between contributions cannot always be guaranteed, we chose the arithmetic sum as a conservative upper bound. We now state this rationale directly in Sect. 3.6.

Minor comment 17: *(Sect. 4) Please avoid one-sentence paragraphs.*

Response: Agreed. We revised the text throughout the manuscript to merge one-sentence paragraphs into surrounding material.

Response to Anonymous Referee #2 (RC2)

We appreciate the positive evaluation and the detailed, constructive feedback. Below we answer each point.

Major comments

Major comment 1: *Some details of the measurement equipment are probably too much for the article. For instance, from my perspective, adding the model number for each component in section 2.2 is not necessary. Similarly, sections 2.2.3, 2.2.4 and some details in the beginning of section 2.2.6 can be omitted from the main manuscript. These details could be provided as supplementary material. The intended users of the dataset are numerical modelers – burdening them with too much technical details of the experimental setup is probably not necessary.*

Response: We see the point, and agree that not all users will need the same level of hardware detail. At the same time, we expect the dataset to be valuable to experimentalists as well, and in a data description article we consider long-term traceability and reproducibility a central goal, which is why we prefer to keep a fully detailed description of the apparatus, including component identifiers. For that reason, we would like to maintain the original version of the text.

Major comment 2: *On a similar note, why is there a need for section 3.1 in the article? Could this be better suited in supplementary notes?*

Response: Sect. 3.1 describes the assembly procedure, which directly feeds into the positioning uncertainty reported in Sect. 3.6 and therefore matters for interpreting wake measurements. Improper assembly, for example failing to rigidly fix the turbine at the base, can also affect the aero-elastic response. On that basis, we believe this material should remain in the manuscript.

Major comment 3: *Given the length that the authors go to in order to explain the experimental setup, it seems rather superficial that they simply assume that the yaw and tilt biases are stationary in section 3.4.1. There should be some verification/validation for this assumption.*

Response: We agree that the assumption needs explicit backing. We expanded Sect. 3.4.1 to report the verification: we quantify how yaw and tilt biases vary across wind speeds in the tested range and show that the variability is small compared with the quoted 0.2° uncertainty on the hot-wire angles.

Major comment 4: *In comparison to the details provided on the experimental setup and execution, the description of the datasets seems rather brief. For a potential user of the data, this section might be of the most interest. I would have expected the authors to provide details of the experimental conditions for each dataset. For instance, lines 595-597 mention that turbines are operated under a range of control conditions. However, no further details on control strategies are presented. Same can be said of other subsections in this section. I understand that the user can consult the metadata on it, however, given the detail given to the earlier sections, I would have expected a nice and clean overview of experimental conditions for each campaign.*

Response: We agree, and thank you for the suggestion. Section 4 has been expanded. For each dataset, we now provide a compact overview of the tested conditions, covering inflow, wind-farm layout, and control strategies. These summaries complement the machine-readable metadata in the repository, so readers can understand the experimental scope without downloading the data first.

Major comment 5: *Section 5 does not have a proper motivation. If the intention of the article is to provide an open access wind tunnel dataset for independent development/validation of numerical codes, providing numerical implementation in some existing codes adds a bias factor, and may unintentionally redirect the potential user towards using these codes rather than independent development/testing/validation.*

Response: We appreciate the comment, and Referee #1 flagged the same risk. We added a clear motivation at the start of Sect. 5. The numerical models are shared to (i) encode the turbine geometry, structure, aerodynamics, and control in machine-readable form, (ii) lower the entry barrier, (iii) provide a verified reference implementation that users can use as a baseline when checking independent setups, and (iv) sharing the models is also a fundamental and indispensable step towards ensuring the reproducibility of research, which is one of the central goals of data description papers.

We also inserted an explicit caveat that these models are optional and not prescriptive, and that independent development and validation against the experimental data are encouraged.

Major comment 6: *Finally, it needs to be pointed out that as detailed in section 4, the dataset presented in this work is not 'new' but is a collection of many experiments (which are very much appreciated) going back as far as 2016. Still, the conclusion starts with 'This paper presents a new open-access experimental dataset ...', which seems a bit contradictory and incorrect to me. I think the article should be explicit about which experiments are new or unique to it, and which are old. This also brings in the question that does making a collection of existing datasets open access constitute the basis for a data description article, or should it be a new dataset that has not been published/accessible before? Perhaps the handling editor can be a better judge on that than we, but it is a question that needs to be addressed.*

Response: We agree the wording needed tightening. While some of the campaigns have been analyzed in earlier papers, the underlying data had not been released publicly. What is new here is the open-access release of the complete, harmonized collection, along with uniform post-processing, uncertainty quantification, metadata, and companion numerical models.

We revised the abstract, introduction, and conclusions accordingly, for instance by writing “a newly released open-access dataset” instead of “a new dataset.” On whether an open release of previously non-public data is appropriate for a data description article, we believe this fits WES's scope for this manuscript type, which aims to document and make valuable datasets citable.

Minor comments

Minor comment 1: *G1 rotor is first mentioned in section 2.1.1 without any prior/proper introduction. For a reader unfamiliar with this rotor, it is difficult to relate/contextualize the boundary layer characteristics with the rotor. For instance, on first read, I do not know what the hub/top/bottom height of G1 is, so the turbulence intensity number with respect to it is not very intuitive.*

Response: Agreed. At the start of Sect. 2 (before the boundary-layer inflows), we added a short introduction to the G1 turbine, including rotor diameter $D = 1.1$ m and hub height $z_H = 0.825$ m, with a forward reference to Sect. 2.2 for the full turbine description.

Minor comment 2: *Section 2.1.2, line 124: what is the distance between the pitot tube and the wind farm cluster? Is the tube sufficiently upstream such that it is not influenced by the blockage of the rotor?*

Response: As stated in our reply to Referee #1 minor comment 7, the Pitot tube is placed about 3–4 diameters upstream of the first turbine, where induction effects are negligible. We added the distance and a brief justification to Sect. 2.1.2.

Minor comment 3: *I think some of the variables are missing from the nomenclature section. For example, I could not find P_R in the nomenclature.*

Response: Thank you. P_R has been added, and we cross-checked the nomenclature against the manuscript (also covering Referee #1 minor comment 14).

Minor comment 4: *In fig 7 it may be beneficial to add a 1:1 line as well.*

Response: Agreed. We added a 1:1 reference line to every panel in Fig. 7 and updated the caption.

Minor comment 5: *I would have appreciated a few figures visualizing some key data from the dataset as well.*

Response: We understand the request. We believe the appendix figures comparing simulations and measurements already provide that kind of overview: they report mean values and the temporal variability ranges for key quantities (power, rotor speed, pitch angles, structural loads, wake velocities). For that reason, we did not add further figures beyond those already included.

Response to Community Comment by J. Gordon Leishman (CC1)

Comment 1: *The manuscript presents an open-access wind-tunnel dataset for wind-farm-control studies using scaled G1 turbine models. While the dataset itself may have some practical value, the manuscript is not sufficiently strong as a journal article. It reads mainly like a laboratory data manual, with lengthy descriptions of hardware, sensors, actuator specifications, calibration procedures, data channels, acquisition rates, post-processing steps, and numerical model files. Much of this information may be useful for repository documentation, but it does not constitute a scientific contribution.*

Response: The submission is a data description article, a format explicitly supported by Wind Energy Science. For this article type, the aim is to document the dataset, including apparatus, calibration, post-processing, uncertainties, and data organization, at a level that allows correct use and makes the dataset citable. In that context, the detailed material cited in the comment is not peripheral at all; quite the opposite, it is the core of what the manuscript type asks for. Very clear explanations and abundant guidelines are provided on this type of manuscript at various places on the journal web pages, including https://www.wind-energy-science.net/about/manuscript_types.html, https://www.wind-energy-science.net/peer_review/review_criteria.html, <https://www.wind-energy-science.net/submission.html>.

Both anonymous referees reviewed the paper with these criteria in mind and identified the dataset as valuable, with Referee #1 calling it “unique” and potentially a reference case.

Comment 2: *The central weakness is that the manuscript does not critically establish the value, fidelity, or limits of the dataset. Scaled wind-tunnel wake-control experiments are subject to Reynolds-number mismatch, artificial inflow generation, limited atmospheric realism, actuator-bandwidth scaling, structural-scaling compromises, blockage effects, and simplified farm geometry. These limitations directly affect whether the data can meaningfully validate wind-farm-control models for full-scale turbines. The manuscript describes the apparatus in detail but gives too little critical assessment of what the dataset can and cannot validate.*

Response: We have previously extensively published on these topics (Campagnolo et al., 2020; Canet et al., 2021; Wang et al., 2021; Bottasso and Campagnolo, 2022). However, for completeness, we have now added a new dedicated section, Sect. 6 (“Scope and limitations of the dataset”), covering: (i) Reynolds-number mismatch, mitigation via low-Re airfoil design, and remaining effects; (ii) what the passively generated boundary-layer inflows capture and what they do not (for example no Coriolis-induced veer and no stability effects); (iii) blockage; (iv) actuator-bandwidth and structural-scaling implications; and (v) a plain summary of what the dataset can validate and what it cannot. We believe this makes the manuscript more self-contained: readers can understand the limits of the dataset due to scaling, and look for additional details in the references provided.

Comment 3: *The manuscript also blurs the boundaries among measurement, correction, and modeling. Several quantities depend on post-processing, sensor corrections, load transformations, imbalance removal, derived quantities, and numerical models. A credible benchmark dataset should make these distinctions central, namely, what is directly measured, what is inferred, what is corrected, and what is model-generated. Instead, the paper presents procedural details without a sufficiently rigorous assessment of uncertainty and sensitivity.*

Response: We disagree, as in fact these distinctions are very explicitly discussed one by one with the necessary level of detail throughout the manuscript: Sect. 3.4 lists the corrections that were applied, Sect. 3.5 identifies derived quantities, and Sect. 3.6 provides a quantitative uncertainty budget for all measured channels (Table 1) at 95% confidence.

Also, both raw and corrected signals are stored in the released NetCDF files, so users can -if they wish- use the unprocessed raw measurements. In addition, the metadata flags all runs where specific corrections were applied (as noted in our response to Referee #1 minor comment 12).

Comment 4: *Overall, I do not recommend the publication of this article. The dataset may be appropriate for an institutional repository, a technical report, or a supplementary data release, but the manuscript does not provide sufficient scientific analysis, critical interpretation, or validation to justify publication as a journal article. I recommend that the paper be declined in its present form.*

Response: We strongly disagree. This manuscript is submitted under the data description category, where the primary evaluation criteria are dataset significance, quality, and documentation, not novel scientific analysis. The scientific exploitation of the data is addressed in companion studies in which these measurements have already been used and will continue to be used. This is very clearly explained on the Wind Energy Science web site, which also provides ample and clear guidance to authors: detailed information on data description papers is provided at https://www.wind-energy-science.net/about/manuscript_types.html, and dedicated review criteria are clearly spelled out at https://www.wind-energy-science.net/peer_review/review_criteria.html. We have very carefully designed this paper to match the goals and criteria of this article type. This community comment ignores these facts and the fundamental differences existing between a normal research article and a data-description paper.

Comment 5: *Because the Editor-in-Chief is listed as a co-author and corresponding author, the public record would benefit from explicit clarification that he was fully recused from editorial handling, reviewer selection, discussion moderation, and decision-making. The identification of a handling editor is helpful, but it does not by itself clarify whether the Editor-in-Chief had no role in the editorial process for a manuscript on which he is a co-author.*

Response: All Editors, not only the Editor-in-Chief, are bound to the ethical standards described at https://www.wind-energy-science.net/policies/publication_ethics.html and follow all journal policies, which are described at https://www.wind-energy-science.net/policies/obligations_for_editors.html and linked pages.

References

- Canet, H., Bortolotti, P., Bottasso, C.L. On the scaling of wind turbine rotors. Wind Energ. Sci., 6, 601–626, doi:10.5194/wes-6-601-2021, 2021.
- Bottasso, C. L., & Campagnolo, F. (2022). Wind tunnel testing of wind turbines and farms. In B. Stoevesandt, G. Schepers, P. Fuglsang, & Y. Sun, Handbook of Wind Energy Aerodynamics (pp. 1077–1126). Springer Nature.
- Campagnolo, F., Weber, R., Schreiber, J., & Bottasso, C. L. (2020). Wind tunnel testing of wake steering with dynamic wind direction changes. Wind Energy Science, 1273–1295.

Fontanella, A., Bayati, I., Mikkelsen, R., Belloli, M., & Zasso, A. (2021). UNAFLOW: a holistic wind tunnel experiment about the aerodynamic response of floating wind turbines under imposed surge motion. *Wind Energy Science*, 1169–1190.

Jonkman, J., Butterfield, S., Musial, W., & Scott, G. (2009). Definition of a 5-MW reference wind turbine for offshore system development. Golden, CO, USA: National Renewable Energy Laboratory (NREL).

Panda, D., Chakraborty, A., Sarkar, S., & Johansson, H. (2025). Rotor effective wind field estimation and multi-body dynamic characterization of a 45 kW horizontal axis wind turbine. *Renewable Energy*, 124343.

Wang, C., Campagnolo, F., Canet, H., Barreiro, D. J., & Bottasso, C. L. (2021). How realistic are the wakes of scaled wind turbine models? *Wind Energy Science*, 961–981.

Experimental wind tunnel dataset of wake and turbine measurements for wind farm control

Filippo Campagnolo, Doruk Aktan, Davide Bortolin, Simone Tamaro, Franz V. Mühle, and Carlo L. Bottasso

Wind Energy Institute, Technische Universität München, Garching bei München, D-85748 Germany

Correspondence: Carlo L. Bottasso (carlo.bottasso@tum.de)

Abstract. Open-access experimental datasets play a central role in validating and benchmarking numerical models used in wind energy and wind-farm control research. However, publicly available datasets providing time-resolved turbine loads, actuator commands, and inflow characterisation under controlled operation remain scarce.

This paper presents a ~~new~~-newly released open-access experimental dataset from wind-tunnel experiments featuring actuated, instrumented, scaled wind turbine models. While several of the underlying experimental campaigns have supported previous publications, the data themselves are made publicly available here for the first time, in a harmonized and fully documented form. The database includes time-resolved measurements of tower-base and rotating-shaft moments, rotor speed, generated torque and power, blade pitch angles, nacelle yaw angle, and controller commands. The inflow conditions are described in terms of wind speed, wind direction, air density, and wake-flow measurements, enabling detailed analyses of turbine response and controller behaviour under consistent, repeatable conditions.

The experiments cover a wide range of ~~wake-control~~-wake-affecting strategies, including yaw-based wake steering, curtailment and derating, Helix control, dynamic yaw actuation, Pulse wake mixing, individual pitch control for load mitigation, and several combinations of these strategies. The simultaneous availability of actuator commands, measured turbine response, and time-resolved structural loads enables detailed investigation of the controller performance, load variability, and dynamic turbine behaviour induced by active wake-control strategies.

In addition to the experimental measurements, the dataset is complemented by numerical models of the experiments, providing a reproducible experimental-numerical benchmarking framework that enables dataset extension, sensitivity analyses, and systematic validation of control-oriented aeroelastic and wake-interaction models.

The dataset is intended to support the validation and benchmarking of numerical tools for wind-farm control, the assessment of fatigue-relevant loading under wake-control operations, and to strengthen community efforts to improve transparency, reproducibility, and model fidelity in wind-farm design and control research.

1 Introduction

Open-access experimental datasets have become a cornerstone for validation, benchmarking, and reproducibility across multiple engineering disciplines, including aeronautics, rotorcraft dynamics, and wind engineering.

25 In aeronautics, reference geometries and wind tunnel data – such as those of the NASA Common Research Model (Rivers and Dittberner, 2014) – have supported large-scale community benchmarking initiatives to assess the predictive capabilities of Computational Fluid Dynamics (CFD) solvers and uncertainty quantification strategies. Coordinated efforts such as the AIAA Drag Prediction Workshops (Levy et al., 2002; Laflin et al., 2004; Levy et al., 2013; Tinoco et al., 2018; Tinoco, 2023) have demonstrated that shared experimental baselines can accelerate advances in turbulence modelling, mesh generation
30 practices, and aerodynamic prediction accuracy. Comparable progress has been achieved within the rotorcraft community, where comprehensive experimental campaigns such as HART II (van der Wall et al., 2004) have made subsets of time-resolved aerodynamic and structural measurements publicly available. These datasets, often complemented by structured validation workshops (van der Wall, 2011; Smith et al., 2013), have contributed significantly to improvements in the modelling of unsteady aerodynamics, aeroelastic coupling, and prediction of dynamic loads.

35 In wind engineering, open-access datasets derived from both laboratory and full-scale measurements have long served to bridge the gap between controlled wind-tunnel conditions and the complexity of real atmospheric inflows. Publicly available measurements of wind-induced pressures, structural loads, and flow statistics, like the ones reported in Tominaga and Shirzadi (2021); Styk Andersen et al. (2022); Shaukat and Giljarhus (2024); Ishihara and Zhou (2025), have enabled detailed validation of numerical models, extending from mean quantities to spectral characteristics, intermittency, and extreme response
40 events. These efforts have underscored the critical importance of time-resolved datasets for characterising flow-structure interaction under turbulent inflow and for enhancing the reliability of predictive tools used in structural design and performance assessment (Kareem, 2010; Holmes, 2015).

The wind energy sector has particularly benefited from coordinated experimental and numerical benchmarking efforts. Laboratory-scale campaigns such as the Unsteady Aerodynamics Experiment (UAE Phase VI) (Hand et al., 2001), the MEX-ICO (Snel et al., 2007; Schepers et al., 2012, 2014), and New MEXICO (Boorsma and Schepers, 2014, 2016) projects have
45 provided high-quality aerodynamic and load measurements for the validation of blade-resolved CFD and aeroelastic models. At full scale, coordinated measurement programs such as DanAero (Madsen et al., 2010) have offered valuable insight into turbine response under realistic inflow and wake conditions. In parallel, open numerical datasets and reference models released within the IEA Wind Task 37 (Bortolotti et al., 2019) have established common baselines for reproducible simulations and
50 tool-to-tool comparison.

Despite these advances, open-access datasets specifically tailored to wind-farm control and wake-interaction studies remain scarce (Veers et al., 2023). Existing experimental investigations of wake steering and active wake control often focus on aggregated power performance metrics (Doekemeijer et al., 2021; Fleming et al., 2019, 2020), and time-resolved measurements – particularly for field-scale experiments – are seldom publicly released. A case in point is the recent ambitious AWAKEN
55 experiment (Moriarty et al., 2020), an effort of unprecedented scope and breadth that has collected extensive measurements, of which only a small fraction has ever been released to the scientific community. Moreover, available datasets – e.g., Sengers et al. (2023); Fontanella et al. (2025) – typically emphasize wake or flow-field characterization, while detailed on-board turbine measurements under active wake-control operation are much less common, if at all available outside of small closed consortia.

This lack of high-resolution actuator and load data limits the validation of control-oriented load models. It also hinders the assessment of load variability arising from wake-mixing strategies.

The dataset presented in this work addresses this gap by providing a ~~new~~newly released open-access experimental database specifically designed for wind-farm control and wake-interaction studies. The database collects measurements from several wind-tunnel campaigns conducted between 2016 and 2025; while subsets of these measurements have supported previous publications, the underlying data had never been publicly released prior to this work, and are here made available in their entirety, with harmonized post-processing, uncertainty quantification, and metadata. The dataset was obtained from wind-tunnel experiments featuring small clusters of scaled, sensorized, and actuated wind turbines of the G1 type (Bottasso and Campagnolo, 2022). The measurements include time-resolved tower-base moments, rotating-shaft moments, rotor speed, generated torque and power, commanded and measured blade pitch for each blade, and nacelle yaw angle. Inflow conditions are characterized by wind speed, wind direction, air density, and wake-flow measurements, enabling comprehensive analyses of both turbine response and controller behaviour under known, repeatable conditions.

The experiments cover a broad range of ~~wake-control~~wake-affecting strategies, including yaw-based wake steering, curtailment and derating strategies, Helix control (Frederik et al., 2020a), dynamic yaw actuation, Pulse-based wake mixing (Frederik et al., 2020b, 2025), individual pitch control (IPC) for load reduction, and several combined strategies. By combining actuator commands, measured responses, and time-resolved structural loads, the dataset supports a detailed evaluation of controller performance, load variability, and the dynamic turbine behaviour induced by active wake control.

This dataset is expected to support several research efforts: validation of control-oriented aeroelastic and wake-interaction models, assessment of load variability and fatigue-relevant statistics under wake-control operation, and benchmarking of numerical tools used for wind-farm control synthesis. More broadly, it contributes to ongoing community efforts to enhance transparency, reproducibility, and model fidelity in wind-farm control research.

Alongside the experimental measurements, the database provides numerical models designed to replicate the experimental setups. This combined experimental-numerical framework transforms the dataset into a reproducible benchmarking platform, enabling the extension of the database beyond the measured conditions and facilitating systematic investigations of modelling assumptions and parameter sensitivity.

This paper is organised as follows. Section 2 presents the experimental setup. Section 3 discusses the execution of the experiments, the data post-processing, and the expected measurement uncertainty. The experimental dataset is described in Sect. 4, while the numerical models are presented in Sect. 5, ~~followed by the conclusions~~. Section 6 critically discusses the scope and limitations of the dataset, i.e. what it can and cannot be used to validate. Conclusions are given in Sect. 7.

2 Experimental setup

The experiments were conducted using clusters of G1 scaled wind turbines, three-bladed machines with a rotor diameter D of 1.1 m and a hub height z_H of 0.825 m, so that the rotor spans elevations between 0.275 m and 1.375 m above the floor. A

complete description of the G1 model is given in Sect. 2.2; the main rotor dimensions are anticipated here to help contextualize the inflow characteristics presented in the following.

2.1 Wind tunnel

All tests were conducted in the boundary layer test section of the wind tunnel at the Politecnico di Milano (POLIMI), which consists of a closed-loop vertical conduit (Diana et al., 1998). The section, shown in Fig. 1a, is located in the return line of the facility and extends longitudinally for 35.6 m, with a width of 13.84 m and a height of 3.84 m. The test chamber is equipped with a 13 m diameter rotating table, whose center is located along the centerline, at a distance of 29.1 m from the inlet. The rotation of the table Φ , defined as positive if clockwise when viewed from above, allows simulating the effect of wind direction on the performance of the experimental setup. Φ is zero when the centerline of the turntable is aligned with the centerline of the test section, as shown in Fig. 1b. Rotation is achieved by a driving tyred wheel that engages with the outer perimeter of the turntable, using the position measured by an absolute rotary encoder with 8192 Pulses Per Revolution (PPR) as feedback. A limitation on the maximum acceleration is enforced to prevent the tyre from slipping (Campagnolo et al., 2020b). The turntable rotation is measured and converted into an analog signal for acquisition by an external system.

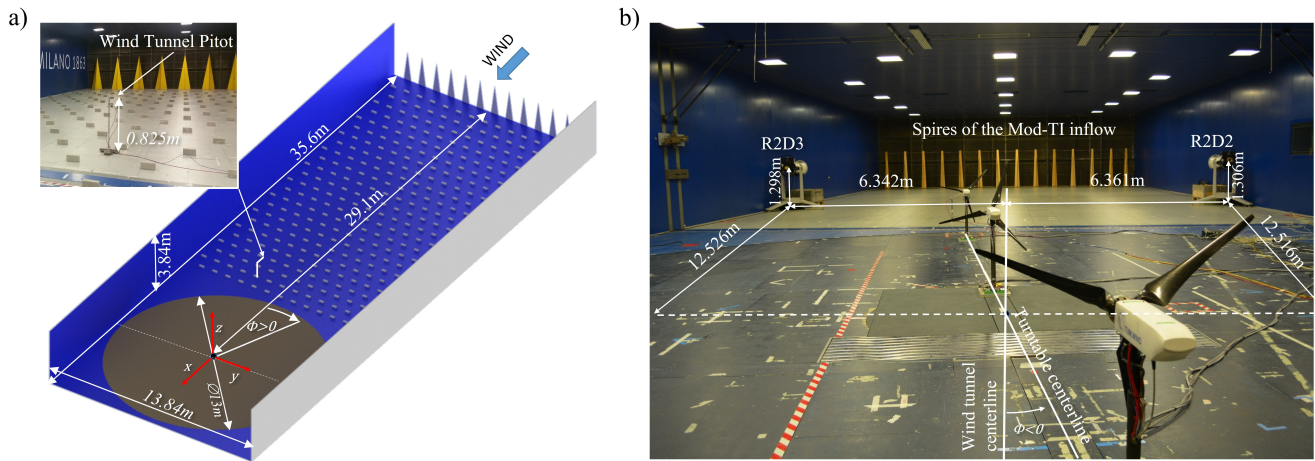


Figure 1. Main dimensions of the test section of the POLIMI wind tunnel, including the distance of the turntable center from the inlet **(a)**; **Boundary layer test section equipped with the spires used to simulate the Mod-TI inflow (b)**. Wind turbine and flow-measurement device positions are measured relative to the depicted reference frame, whose origin lies at the turntable center **(a)**. **Boundary layer test section equipped with the spires used to simulate the Mod-TI inflow; note that the turntable angle Φ shown in this figure panel is negative (b).**]

2.1.1 Boundary layer simulation

Given the relatively modest length of the test chamber compared to the dimensions of its cross-section, a proper simulation of the atmospheric boundary layer requires the installation of obstacles both at the inlet (spires, triangular or trapezoidal

in shape) and on the floor (rectangular bricks) (Cermak, 2003). The size and precise position of these obstacles depend on the desired characteristics of the boundary layer, and particularly on the velocity and turbulence profiles. The dataset described in this article was obtained by reproducing four different inflows in the test section: Here and in the following, the rotor apex denotes the point of intersection at the hub of the blade pitch axes, consistent with its definition provided in Jonkman et al. (2009); Fontanella et al. (2021); Panda et al. (2025). For an untilted and not coned rotor (which is the case of the G1), the distance from the ground of the rotor apex coincides with the hub height.

- Low-TI: obtained with an empty test section; it is characterized by a low turbulence inflow of approximately 1-2% (Diana et al., 1998), and by a nearly uniform mean velocity profile across the rotor disk.
- Mod-TI: obtained by installing 14 trapezoidal spires of type A (lower base width 0.26 m, top width 0.1 m, height 2 m) at the inlet, spaced 1 m apart, as shown in Fig. 1b; it has a turbulence of about 6% at the apex of the G1 rotor, and a power-law shear exponent $\alpha \approx 0.14$.
- High-TI: obtained by installing 9 type B triangular spires (base 0.8 m, height 2.5 m) at the inlet, spaced 1.55 m apart, as shown in Fig. 2a. Rectangular bricks (height 0.1 m, width 0.2 m, depth 0.06 m) are aligned diagonally on the floor, with a longitudinal and lateral spacing of 1.1 m. It has a turbulence of about 13.5% at the apex of the G1 rotor, and a power-law shear exponent $\alpha \approx 0.21$.
- Extreme-TI: obtained by installing 9 type B triangular spires at the inlet, spaced 1.55 m apart and interspersed with 8 type A trapezoidal spires. In addition, five different types of bricks are disposed on the floor, as shown in Fig. 2b: one row of bricks of type A (height 0.74 m, width 0.39 m, depth 0.15 m) placed immediately downstream of the spires and aligned with the spires of type A; one row of bricks of type B (height 0.5 m, width 0.4 m, depth 0.15 m) placed next, aligned with the spires of type B; one row of bricks of type C (height 0.3 m, width 0.24 m, depth 0.24 m) placed next, followed by a row of bricks of type D (height 0.24 m, width 0.22 m, depth 0.11 m), and several rows of bricks of type E (height 0.2 m, width 0.2 m, depth 0.06 m) up to the turntable. The bricks of types C, D, and E are placed diagonally on the floor at a longitudinal and lateral distance of 0.9 m. The generated inflow has a turbulence of approximately 22% at the apex of the G1 rotor, and a power-law shear exponent $\alpha \approx 0.36$.

A detailed characterization of the four inflows, including the measured vertical profiles of mean velocity and turbulence intensity, is provided in Sect. 4.1.1.

2.1.2 Wind tunnel sensors

The wind tunnel is equipped with sensors that measure the thermohygrometric parameters of the air in the boundary-layer test section. Specifically, atmospheric pressure is measured by an *Effa AK-S 900-1060* transducer (uncertainty ± 0.5 hPa), temperature by a *Mescon TH 12-U* thermocouple transducer (uncertainty $\pm 0.1\%$ of **Full Scale** 100°C full scale, i.e. $\pm 0.1^\circ\text{C}$), and relative humidity (RH) with a *Rense 741* transducer (uncertainty $\pm 2\%$ RH). These measurements are used to estimate the air density ρ as explained in Davis (1992).



Figure 2. Spires and bricks used to simulate the High-TI boundary layer (a). Spires and bricks used to simulate the Extreme-TI boundary layer (b).

The test section is equipped with Pitot tubes at the inlet and on the ceiling. The measurements from these sensors can be useful for controlling the wind tunnel fans, but they do not provide an accurate velocity measurement upstream of the turbine cluster being tested. For this reason, an additional Pitot tube is placed in front of the cluster, at hub height, between 3 and 4 rotor diameters upstream of the most upstream turbine. At this distance, the induction of the rotors has a negligible effect on the probe reading. The exact probe position adopted in each experiment is documented in the test matrices (see Sect. 4.3). The dynamic pressure p_{dyn} of the Pitot tube is measured by an *MKS Baratron-Type 226A* pressure transducer, characterized by an accuracy $\Delta p_{\text{dyn}} = \pm 0.4$ Pa, and can also be acquired by external data acquisition systems. The freestream velocity representative of the undisturbed flow is then obtained as $u_{\infty} = \sqrt{2p_{\text{dyn}}/\rho}$.

2.2 Scaled wind turbine model

The wind turbine model used in the experiments, shown in Fig. 3, ~~features a rotor diameter D of 1.1 m and a hub height z_H of 0.825 m. Its has a~~ rated power P_R , torque Q_R , and rotor speed Ω_R ~~are equal to~~ 46 W, 0.517 Nm, and 850 rpm, respectively. The cut-in and cut-out velocities are 2 ms^{-1} and 9 ms^{-1} , respectively, while the rated wind speed is around 5.8 ms^{-1} . The time compression ratio is equal to 80, i.e. time flows in the experiments 80 times faster than at full scale (Bottasso and Campagnolo, 2022). The rotor axis is parallel to the ground. The rotor is upwind, not coned, and rotates clockwise if viewed from upstream. The rotor has an overhang of 0.123 m from the tower axis. A 12-channel slip ring is used to transmit power, measurement, and control signals between the rotor and the fixed frame. The machine design process is extensively discussed in Bottasso and Campagnolo (2022). The following sections, instead, report a detailed description of the G1 hardware and software.

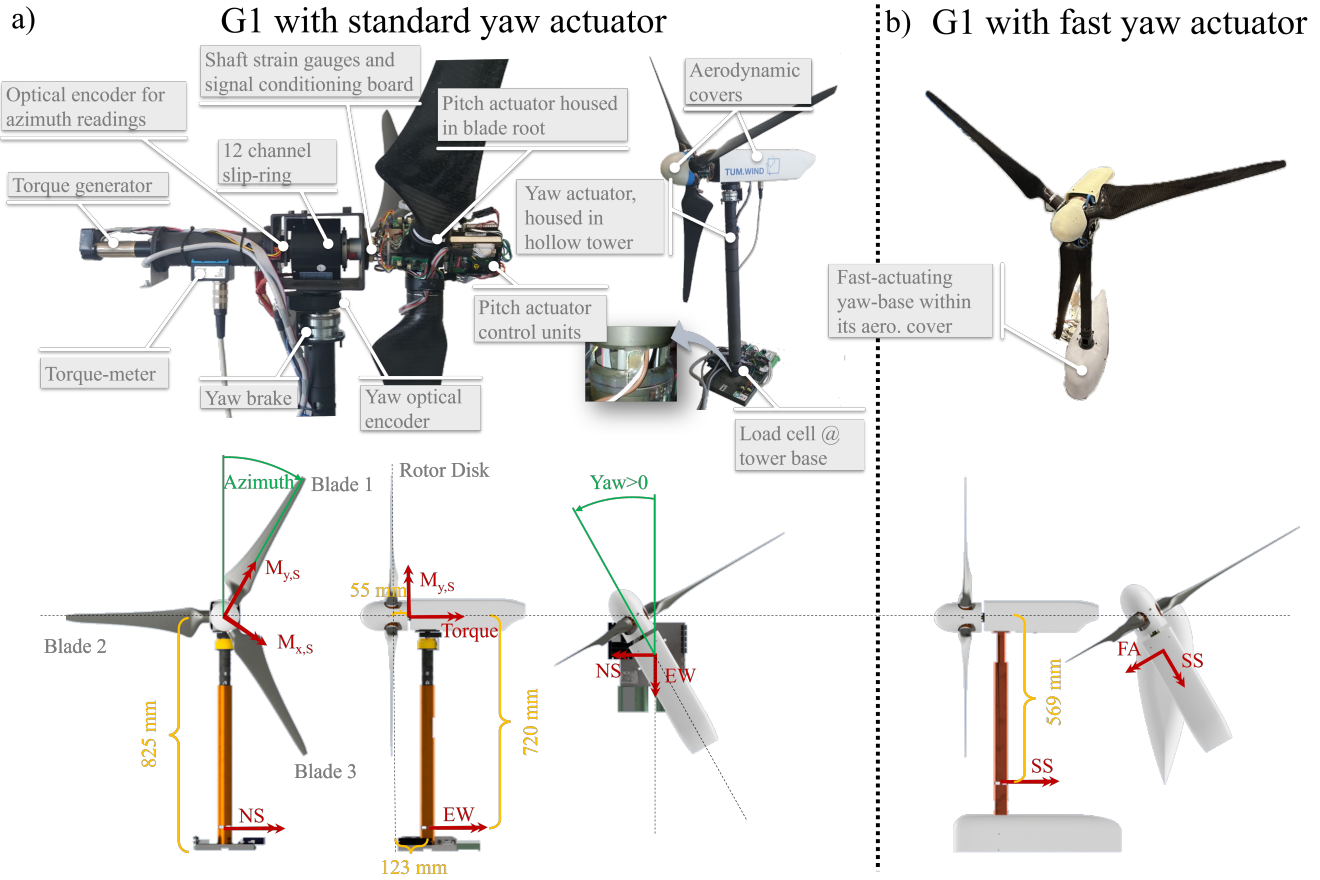


Figure 3. Top: overview of the G1 model and its main features (Bottasso and Campagnolo, 2022). Bottom: G1 sensed quantities and corresponding reference frames. G1 with standard yaw actuator (a); G1 with fast yaw actuator (b).

2.2.1 Actuators

The G1 is equipped with Maxon motors (Maxon Motor AG, 2026) that serve as pitch, yaw, and torque actuators. Each blade is individually controlled through a brushed motor *DCX16L GB SL 24V*, housed within the hollow root of the blade, equipped with a planetary gear-head *GPX19 A* (nominal gear ratio 62:1) and a co-located relative encoder *ENX10 EASY* (128 PPR).
 160 An *EPOS2 24/2 DCX* positioning controller is used to actuate the motor position. The actuation system is preloaded using a torsion spring, as described in Campagnolo (2013). This solution removes gearbox backlash, enabling the encoder to accurately measure the blade pitch; additionally, it passively sets a high blade pitch in the event of controller malfunction or power loss. The maximum pitch rate is 400°s^{-1} , equivalent to 5°s^{-1} at full scale because of time compression. For each blade, the actuator is homed using the output of a *Honeywell SS496A1* Hall-effect sensor mounted on the hub. The sensor measures the
 165 magnetic flux induced by a magnetic dipole made of two *NdFeB Supermagnete Q-05-1.5-01-N* magnets placed side by side.

The magnets are positioned at the base of the blade and thus rotate with it. During the homing procedure, the blades are slowly rotated until the Hall sensor detects zero magnetic flux, which occurs when the sensor centerline is aligned with the magnetic dipole centerline; this triggers the encoder reset.

The torque generator consists of a brushless motor *EC-4pole22 BL Y 90W KL*, equipped with a planetary gear-head *GP22HP* 2.4Nm 2ST KL (nominal gear ratio 14:1) and a co-located tachometer *HEDL 5540* (500 PPR). An *ESCON 50/5* servo-controller is used to manage the current flowing through the motor windings.

The G1 can be equipped with two different yaw actuation systems: a standard and a fast one, shown in Fig. 3a and 3b, respectively.

The standard yaw actuator, located inside the hollow tower, consists of a brushed motor *DCX32L GB KL 24V* equipped with a planetary gear-head *GPX37 LZ* (nominal gear ratio 231:1). The nacelle position is measured by a non-co-located optical encoder *US-DIGITAL E6-10000-750-IE-D-H-D-3* (10000 PPR). An *EPOS2 24/2* positioning controller, used to actuate the motor position, allows to rotate the entire rotor-nacelle assembly at a maximum yaw rate of 20°s^{-1} , equivalent to 0.25°s^{-1} at full scale.

The fast yaw actuation is provided by a mechanism located at the base of the tower and concealed within an airfoil-shaped cover. The mechanism, described in detail in Mühle et al. (2022), consists of a *RE40 Ø 40 mm* brushed motor, a *Wittenstein TK+* right-angle gearbox (nominal gear ratio 100:1) characterized by a very small backlash ($\gamma_{BL} = 4$ arc minutes), and a co-located optical encoder *HEDS 5540* (500 PPR). An *EPOS2 24/5* positioning controller enables the entire rotor-nacelle assembly to rotate with a maximum yaw rate equivalent to 0.9°s^{-1} at full scale.

2.2.2 Sensors

Several physical quantities are measured in the reference systems shown in Fig. 3. The blades and their corresponding actuators are numbered according to the order in which they pass through the vertical axis during a rotation. The azimuth position ψ of the first blade is measured by an optical encoder *US-DIGITAL HUBDISK-2-2500-1000-IE* (2500 PPR). It is defined as the angle between the vertical axis and the pitch axis, measured clockwise when looking downstream, and it is null when the first blade points upward. The pitch β_i of the i -th blade is measured by the built-in encoder, and it is positive when the blade is pitched to feather. The rotation of the nacelle γ_{nac} is measured by the optical encoder of the yaw actuator. It is the angle between the rotor axis and the turntable centerline, positive for counter-clockwise rotation when viewed from above. The rotor speed Ω is sensed by the tachometer of the generator.

The G1 is equipped with several strain gauges arranged in full Wheatstone bridges. Two full bridges are placed close to the tower base, at a distance z_{SG} of 0.72 m or 0.569 m from the rotor axis for the standard and fast yaw actuator, respectively. For the standard yaw actuator, the strain gauges are located below the yaw system and are therefore fixed with respect to the turntable; their sensed bending moments are noted East-West (EW, aligned with the turntable centerline) and North-South (NS, forming a right-handed triad with EW and the yaw axis). For the fast yaw actuator, the strain gauges are placed above the yaw system and therefore rotate with respect to the turntable; their sensed moments are noted Side-Side (SS, aligned with the rotor axis) and Fore-Aft (FA, forming a right-handed triad with SS and the yaw axis).

200 Three full bridges are placed on the rotating shaft between the rotor and the front bearing, 0.055 m from the rotor apex. They measure the main shaft torque Q_S and two out-of-plane bending moments: the moment $M_{y,S}$, aligned with the pitch axis of the first blade, and the moment $M_{x,S}$, which forms a right-handed triad with the torque and $M_{y,S}$ vector.

A *Lorenz Messtechnik DR2112-R* torque meter (measurement uncertainty ± 0.002 Nm) is used to measure the torque Q_{TM} supplied by the generator. Due to friction in the bearings and slip ring, the torque measured by the torque meter is smaller
205 than the one measured by the strain gauges on the shaft, but it shows a better signal-to-noise ratio. To obtain an accurate, friction-free, low-noise measurement of mechanical torque, the following method is employed. The friction, which depends on various factors and can vary over time due to temperature and wear, is estimated by calculating the difference $Q_S - Q_{TM}$. This estimate is filtered by a high-order, low-cut-off frequency filter to eliminate noise even at low frequencies. The resulting signal is added to the torque meter measurement to compute Q_{Meas} , which is the torque measurement used by the control system (see
210 Sect. 2.2.6) and logged in the machine data.

2.2.3 Sensors calibration

Before each experimental campaign, all G1 sensors are calibrated in the laboratory or in the wind tunnel, as explained below.

The load cells on the shaft and tower base are calibrated in the lab using weights whose mass is known with an accuracy of ± 0.1 g. During the calibration of the shaft sensors, the drive train is locked in four different azimuth positions; through
215 a bar fixed to the hub, the weights are hung at varying distances from the axis of rotation to simultaneously stress the strain gauges with torsion and bending (Campagnolo, 2013). Similarly, the base of the tower is fixed to a wall, with the EW axis (or the SS axis when using the fast actuator) aligned in 4 directions relative to the vertical. The azimuth of the rotor and the angular position of the tower are measured with a *Wyler Clinotronic PLUS* inclinometer (accuracy ≤ 3 arcmin), while the load application arm with respect to the load cell is estimated from the CAD model of the G1 (accuracy ± 0.2 mm). The calibration
220 matrix – ~~3x3 and 2x2~~ 3 by 3 and 2 by 2 for the load cells on the shaft and tower base, respectively – is identified by least-squares using the voltage measured downstream of the entire measurement chain.

The measurement of the blade pitch is calibrated in the lab by placing the inclinometer on a CNC-machined saddle that fits onto the blade at a specific and unique span-wise location. With the blade connected to the hub and kept parallel to the ground, the blade pitch is varied using its actuator, and the inclinometer and encoder readings are recorded. The slope of
225 their interpolating line provides a measure of the relationship between the blade pitch and the encoder pulses, yielding a more accurate estimate than one derived from the nominal gearhead ratio and the encoder PPR. The pitch at which the Hall sensor detects zero magnetic flux is also measured using the same setup.

The azimuth angle and the yaw angle in the standard yaw actuator are derived using the nominal PPR values of the corresponding encoders. When using the fast actuator, the yaw angle calculation also accounts for the gearhead nominal reduction
230 ratio. Finally, the rotor speed is obtained using the torque actuator nominal gear ratio and encoder PPR.

As most calibration factors and matrices vary from machine to machine, they are stored on turbine-specific USB sticks. During the wind tunnel experiments, each USB stick is connected to the acquisition and control hardware of the corresponding

G1. When the system boots up, the calibration parameters are acquired and stored in internal memory for real-time conversion of voltages and pulses into the corresponding physical quantities.

235 2.2.4 Acquisition and control hardware

Each G1 is controlled in real time by a Programmable Logic Controller (PLC) *Bachmann M1* (Bachmann electronic GmbH, 2025).

240 A 16-bit analog acquisition module *AIO216* acquires the strain-gauge signals, appropriately conditioned by dedicated electronic boards located on the rotor and at the tower base, together with the torque-meter signal, the dynamic pressure measured by the Pitot tube transducer, and the turntable position.

245 An additional *AIO216* module is used to provide the analog set point of the generator current to the *ESCON 50/5* servo controller and to acquire the rotor speed. In particular, the generator current is managed by a control algorithm implemented on the *M1*, as described in Campagnolo (2013). This algorithm uses Q_{Meas} as feedback and regulates the generator current so that the generator supplies the torque requested by the control algorithm responsible for tracking the regulation trajectory (see Sect. 2.2.6).

The azimuth is acquired by a *CNT204/R* module. The blade pitch and nacelle yaw angles are transmitted by the *EPOS2* in digital format via the CANopen protocol. A *CM202* module is used to connect the *EPOS2* to the *M1* controller: it reads the pitch and yaw angles and transmits the set points $\beta_{i,\text{Dem}}$ (the desired pitch of the i -th blade) and $\gamma_{\text{nac,Dem}}$ (the desired nacelle yaw).

250 The system operates at different acquisition frequencies. The *M1* controller internal time, the bending moments on the shaft, the torque meter measurement, and the azimuth are acquired every 0.4 ms, i.e. with a sampling frequency f_S equal to 2.5 KHz. Conversely, the rotor speed, tower base loads, measured and demanded pitch and yaw angles, Pitot dynamic pressure, and turntable position are acquired every 4 ms ($f_S = 250$ Hz). The demanded curtailment or derating (see Sect. 2.2.5) is acquired every 8 ms (f_S equal to 125 Hz). The density, obtained from the wind tunnel acquisition system, is considered constant during a single test, which usually lasts a few minutes. It is therefore logged manually by the user as a scalar. The data are written to binary files on the USB stick connected to the *M1*.

A computer in the control room is connected via Ethernet to the *M1*s and used to manage the machines and display the real-time measurements from the main sensors.

2.2.5 Regulation trajectories

260 The regulation trajectories are calculated offline using estimates of the power coefficient (C_P) provided by a simulation model of the G1 implemented in ~~OpenFast~~ [OpenFAST](#) (see Sect. 5.4).

The nominal regulation trajectory, shown in Fig. 4 using black lines and circles, maximizes the power produced by the machine for wind speeds below the rated one (region II), whereas it limits the power to the rated value $P_R = 46$ W for higher wind speeds (region III). The calculation of this trajectory takes into account that the power coefficient, which depends on the chord-based Reynolds number, decreases at lower wind speeds (Campagnolo et al., 2020b). Moreover, the optimal tip speed

265

ratio (TSR, noted λ) is set in the range 8.15-8.5, which are typical values for full-scale turbines. In region II, this results in a constant optimal pitch β_{opt} equal to 0.42° , a rotor speed that varies linearly with wind speed, and a torque that is scheduled as a function of the rotor speed, i.e. $Q_{\text{Dem}} = f_Q(\Omega)$.

The G1 can be down-regulated (or curtailed) in order to limit the power output to a given value $P_D \leq P_R$. Among the various approaches proposed in the literature, the G1 implements the *Const- Ω* strategy (Lio et al., 2018). From the nominal regulation trajectory, the rotation speed corresponding to the desired power level P_D is identified and set equal to Ω_R . The resulting rated torque is P_D/Ω_R . Curtailed trajectories differ from the nominal one only for wind speeds higher than the value required to produce P_D , as shown in Fig. 4a-c.

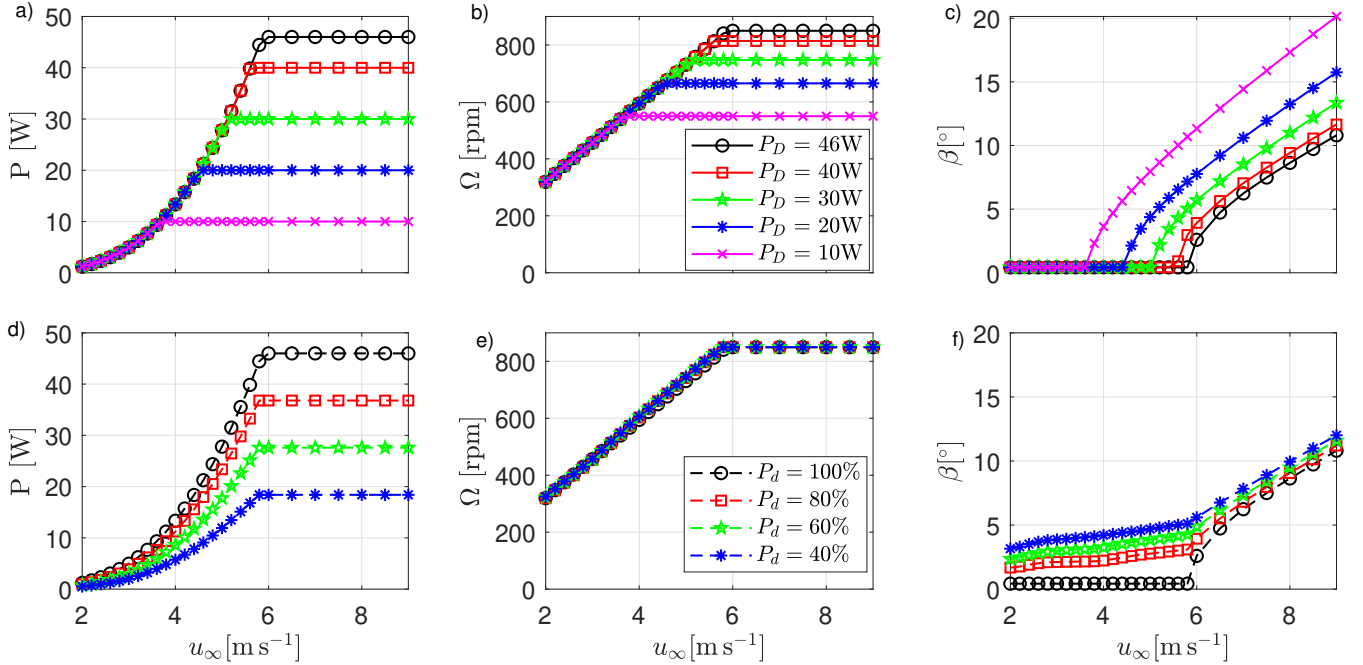


Figure 4. Regulation trajectories tracked by the G1 control algorithm with a density $\rho = 1.19 \text{ Kg m}^{-3}$. The nominal regulation trajectory is depicted by black lines and circles ($P_D = 46 \text{ W}$ and $P_d = 100\%$). Curtailed and derated regulation trajectories are shown in panels **a-c** and **d-f**, respectively.

The G1 can also be derated, i.e. it can deliver a power that is a fraction $P_d \leq 100\%$ of what is produced by following the nominal regulation trajectory, regardless of wind speed. Among the various approaches proposed in the literature (Juangarcia et al., 2018; Croce et al., 2024), the G1 strategy maintains the TSR constant. It follows that the rotor speed does not depend on derating, and that the generator torque is reduced according to the derating factor, i.e. $Q_{\text{Dem}} = f_Q(\Omega) P_d$. The optimal blade pitch in region II is determined by balancing electrical and aerodynamic power. Due to the dependence of aerodynamic performance on chord-based Reynolds, the desired derating in region II can only be achieved if the fine pitch varies slightly

280 with wind speed. The plots in Fig. 4d-f show the regulation trajectories for different values of P_d , computed using the [OpenFast](#) [OpenFAST](#) model of the G1.

2.2.6 Control software

The control system, developed in Simulink (The MathWorks Inc., 2023), implements closed-loop algorithms designed to track the regulation trajectories, as well as the wake-mixing strategies Helix, Dynamic Yaw, and Pulse. The control is executed on
285 the MI every 4 ms.

The torque and pitch controls that track the desired regulation trajectory were developed in collaboration with the National Kangwon University, and are based on the work of Nam (2013). The torque control consists of a lookup table (LUT) of optimal torque for region II, scheduled based on rotor speed and derating. The torque is saturated at the rated value Q_R , which depends on the curtailment or derating. A correction term, based on a proportional-integral (PI) loop that feeds back on the error
290 $\epsilon_\Omega = \Omega - \Omega_R$, is added to the optimal torque to improve control behavior during the transition between below and above rated conditions. The pitch control consists of a PI loop that feeds back on ϵ_Ω , with Ω_R depending on the curtailment. The pitch is saturated at the fine value β_{opt} , scheduled according to the rotor speed – to account for Reynolds dependency of aerodynamic characteristics – and the derating level. A mode-switch block determines the machine operating status (above or below rated) based on filtered measurements of power, rotation speed, and blade pitch. The gains of the controllers were tuned using a
295 numerical model of the G1 drive train and tower north-south dynamics implemented in Simulink (see Sect. 5.3). The resulting gains are $K_{\beta,P} = 0.0336$ s and $K_{\beta,I} = 0.0168$ for the pitch controller, $K_{Q,P} = 0.00113$ Nms and $K_{Q,I} = 0.000564$ Nm for the torque controller. In January 2019, the integral gain of the torque controller ($K_{Q,I}$) was set to 0.00282 Nm to improve the performance of the machine under conditions characterized by rapid, significant changes in wind speed. [This change affects only the closed-loop dynamic response of the torque controller during wind-speed transients, whereas the steady-state operating points \(tip-speed ratio, power coefficient\) are unaffected.](#)
300

Flags are used to enable the curtailment or derating of the G1, as well as for activating the following wake mixing strategies:

- **Helix**: the i -th blade set-point is equal to

$$\beta_{i, Dem}(t) = \beta_{opt} + \hat{\beta}_{Helix} \sin(f_{Helix} 2\pi f_r t - 2\pi/3(i-1)), \quad (1)$$

where $\hat{\beta}_{Helix}$ and f_{Helix} are the Helix amplitude and excitation frequency, expressed in fractions of the rotational frequency f_r . A clockwise (CW) Helix is obtained if $f_{Helix} < 1$, a counter-clockwise (CCW) Helix if $f_{Helix} > 1$ (Mühle
305 et al., 2024).

- **Dynamic Yaw**, or **DY**: the nacelle yaw set-point is equal to

$$\gamma_{nac, Dem}(t) = \hat{\gamma}_{DY} \sin(2\pi f_{DY} t), \quad (2)$$

where $\hat{\gamma}_{DY}$ and f_{DY} are the DY amplitude and excitation frequency, respectively.

310 – **Pulse**, or **DIC**: the collective blade pitch set-point is equal to

$$\beta_{c, \text{Dem}}(t) = \beta_{\text{DIC}} + \hat{\beta}_{\text{DIC}} \sin(2\pi f_{\text{DIC}} t), \quad (3)$$

where $\hat{\beta}_{\text{DIC}}$ and f_{DIC} are the Pulse amplitude and excitation frequency, respectively, and β_{DIC} is the mean pitch angle.

The controller allows changing the steady yaw set point $\bar{\gamma}_{\text{nac}, \text{Dem}}$ while limiting the yaw rate to $\dot{\gamma}_{\text{max}}$. The yaw set point can be implemented even when a wake-mixing strategy is active or when the machine is curtailed/derated, thus combining wake
315 steering with wake mixing or induction control.

Finally, load reduction is achieved through an individual-pitch-control (IPC) algorithm (Bossanyi, 2003). The IPC scheme is based on two PI controllers that feed back on the projections of the shaft loads $M_{y, S}$ and $M_{x, S}$ onto a fixed reference frame. The resulting load signals are properly filtered using a low-pass filter prior to control action. Finally, the control request accounts for the delay introduced by the pitch actuator dynamics, as described in Petrović and Campagnolo (2013).

320 2.3 Hot-wire CTA probes

Flow measurements were carried out using tri-axial hot-wire CTA *Dantec 55R91* probes, consisting of three fiber-film sensors, each perpendicular to the others. The sensors form an orthogonal system with an acceptance cone of 70.4° , and are connected to a 6-channel *Dantec StreamLine Pro* anemometric system. The latter is connected to a National Instruments PXI System (National Instruments, 2024), which samples the data at 0.5 ms ($f_S = 2$ kHz) and stores them in internal memory.

325 The hot-wire probes are calibrated in an open-circuit wind tunnel of the Aerodynamics Laboratory at POLIMI (Politecnico di Milano, 2025), whose test section is 150 mm wide and 200 mm high. The inlet contraction ratio is 25, while the maximum speed is 100 ms^{-1} . The wind tunnel flow velocity is calculated by measuring the dynamic pressure with a pressure transducer *DRUCK LPM9481* (accuracy ± 0.5 Pa), while the density is derived from the measurement of the atmospheric pressure, relative humidity, and temperature. The probe is mounted on its support, whose attitude with respect to the wind tunnel flow is
330 ~~precisely~~ measured by a dual-axis inclinometer *SPECTRON L-212T* (accuracy $\pm 0.3^\circ$). The probes are calibrated with respect to Reynolds number and velocity direction. The calibration procedure accounts for the effects of flow temperature, relative humidity, and absolute pressure, as described by Raffel et al. (2011).

Measurements in the boundary-layer test section are performed using two probes supported by a double-pronged sting. The latter, in turn, is attached to a two-axis traversing system, as shown in Fig. 5, and is precisely aligned to the inflow direction
335 using an inclinometer. This setup enables automated movement of the probes along the vertical and lateral axes. The traversing system can be positioned anywhere within the test section, allowing the mapping of the undisturbed inflow or of the wake shed by the scaled wind turbines. The position of each probe within the traversing system is measured using the encoders present in the electrical motors of the two linear actuators. Given the position of the traversing system, it is possible to reconstruct the position of the probes with respect to the reference system shown in Fig. 1a. The three speed components u_x , u_y , and u_z of the
340 velocity vector $\mathbf{u}$ are measured in the reference system shown in Fig. 5.



Figure 5. Traversing system equipped with two CTA probes, each one measuring the three components of the velocity vector $\mathbf{u}$ along the longitudinal (u_x), lateral (u_y), and vertical (u_z) directions.

2.4 Lidars

Measurements of the undisturbed inflow and of the wakes shed by 3 G1s were also taken using two short-range WindScanner lidars (Mikkelsen et al., 2012), named R2D2 and R2D3. The lidar head scans were positioned as shown in Fig. 1b: R2D2 at $x = -12.516$ m, $y = 6.361$ m, $z = 1.306$ m; R2D3 at $x = -12.526$ m, $y = -6.342$ m, $z = 1.298$ m. Each lidar measures
 345 v_{LOS} , i.e. the projection of $\mathbf{u}$ on the lidar line of sight, with a sampling frequency $f_S = 390$ Hz. The two time- and space-synchronized measurements of v_{LOS} provided by the lidars are used to estimate the u_x and u_y components of the wind speed. The experimental setup, its calibration, the data acquisition, and its post-processing are described in detail in van Dooren et al. (2017). For the dataset described in this article, the measurements were resampled at $f_S = 250$ Hz.

3 Execution of the wind tunnel experiments, data post-processing, and measurement uncertainties

350 This section describes the procedures followed during the execution of the experiments, including the assembly of the experimental setup, the zeroing of the sensors, the synchronization of the data, their post-processing, and, finally, the estimation of measurement uncertainties.

3.1 Assembly of the experimental setup

The experimental setup, including the G1 wind turbines, the Pitot tube placed upstream of the cluster, and, when necessary,
 355 the CTA probes with their traversing system or the lidars, is assembled in the test section at the beginning of an experimental campaign, and possibly later modified as necessary depending on the test matrix. The assembly is carried out with the rotating table set to zero degrees. The entire setup is positioned at the desired locations, defined by their coordinates $[x, y, z]$ in the reference system shown in Fig. 1a. To this aim, a longitudinal line parallel to the inflow direction is traced onto the floor of

the test section using a multi-line laser level *Huepar LS41G* positioned at the center of the turntable. Using a measuring tape, points are marked at the x coordinates. Centering the laser level at these points, transverse lines are drawn, on which points are marked at the y coordinates. When positioning the wind speed sensing probes, the laser level is centered at the coordinates $[x, y]$, and the head of the Pitot tube or the CTA probe is placed at the desired z coordinate using a measuring stick. The laser level is also used to align the G1 base with the incoming inflow. For information on lidar positioning, please refer to van Dooren et al. (2017).

The G1 turbines are mounted on heavy steel interface plates (thickness: 25 mm, mass > 100 kg) that are, in turn, fixed to the wooden floor of the turntable. Experimental verification confirmed that this mounting configuration does not affect the model natural frequencies. The PLCs that control the G1s, the traversing control system, and the acquisition system of the CTA probes are positioned inside the test chamber, close to the side walls and therefore sufficiently distant (at least 4-5 D) from the experimental setup. Their impact on the flow impinging on the G1s and on the wakes they shed is negligible.

3.2 Zeroing the sensors

Most of the G1 sensors and other sensors (CTA probes, turntable position, etc.) are reset when there is no wind in the test section, and the rotating table is set to 0° . Specifically, the G1 pitch actuator encoder is reset when the PLC is started or rebooted, using the homing procedure described in Sect. 2.2.1. The encoder that measures the nacelle yaw is reset as follows. Once the G1 installation is complete, the yaw actuator is moved until the index channel is detected by its encoder. At this point, the encoder is reset, and the actuator is moved in the opposite direction until the rotor axis is precisely aligned with the inflow direction, using the multi-line laser for the purpose. The yaw angle read by the encoder in this condition is then saved on the G1 USB stick. Each time the PLC is started, an automated homing procedure is performed: (i) the yaw is varied until the index is detected; (ii) the nacelle is then rotated in the opposite direction by an angle equal to the value stored on the USB stick; (iii) the encoder is reset.

Some sensors are subject to measurement drift and must be frequently reset, usually before and after each test run. The torque meter, the Pitot transducer, the analog signal that carries the turntable position, and the CTA probes are reset with the G1 actuators disabled. The sensors at the tower base are reset by keeping the nacelle yaw at zero ($\gamma_{\text{nac}} = 0^\circ$) and the rotor standing still. The tower loads are therefore corrected for the gravitational loads induced by the masses of the tower and rotor-nacelle assembly in the configuration $\gamma_{\text{nac}} = 0^\circ$. The load induced by the rotor-nacelle assembly is particularly significant, given that its center of gravity is quite offset from the tower axis. The load sensors on the shaft are reset as follows: several rotor rotations are performed at very low speed ($\Omega < 30$ rpm), with the load cell measuring solely zero-mean gravitational loads. The average values read by the sensors are stored in internal memory and subtracted from subsequent measurements in real time.

The encoder that reads the azimuth is reset via software every time its index channel is detected. Once the G1 has been assembled in the wind tunnel, the rotor is manually rotated a few times to ensure that the index channel is detected. The rotor is then set to zero azimuth using a laser level. The value of ψ in this position is stored on the USB stick and subtracted in real time from subsequent measurements.

The zeroing of hot-wire probes is performed with the wind tunnel off. For the reset of the lidars, please refer to van Dooren et al. (2017).

395 3.3 Test execution and data synchronization

The tests are conducted according to a specific test matrix. Once the desired environmental conditions (wind speed and turntable angle) and the operating conditions of the G1s (control type and related settings) have been set, a few seconds are allowed for the wakes to develop and for the response of the machines to stabilize. Data acquisition then proceeds for the required duration.

The data acquired from the G1s is synchronized as follows. A MATLAB script, executed on the computer that manages
400 the G1s, simultaneously sends a request to start acquisition on all *MI*s via the Modbus protocol; the maximum expected desynchronization is less than 10 ms. Synchronization between G1 and CTA probe data is achieved by orally synchronizing the start of the respective acquisitions; the expected desynchronization is in the order of 1 s. Synchronization between G1 and lidar data is achieved through postprocessing: during the experiments, the acquisition systems of the upstream G1 and the lidars both acquire the same trigger signal, generated by a third source; the maximum expected desynchronization is less than
405 the sample time, i.e. 4 ms.

3.4 Data post-processing

The binary data of the G1s and of the flow probes are converted into the format presented in Sect. 4.2 and saved to *NetCDF* files using Matlab scripts. Most measurements are saved as they are recorded. The measurements of rotor speed and shaft torque are instead first filtered using a forward-backward eighth-order low-pass Butterworth filter (pass-band equal to three times the
410 average rotational frequency), and then saved in the *NetCDF* files. Power is calculated as the product of these two physical quantities, with the torque downsampled to 250 Hz.

3.4.1 Post-processing of flow measurements

Post-processing of the hot-wire probe data consists of transforming, via the calibration matrix, the voltages measured by the acquisition system into the three velocity components. The resulting data are then corrected as follows. At the beginning of a
415 measurement campaign, the flow is sampled along a horizontal line at hub height ~~with the turbines not~~ without the turbines installed in the wind tunnel, i.e. under conditions such that the mean flow can be considered aligned with the longitudinal direction. For each acquisition point, the yaw angle $\gamma_{\mathbf{u}} = \text{atan2}(u_y, u_x)$ and the tilt angle $\varphi_{\mathbf{u}} = \text{atan2}(u_z, \sqrt{u_x^2 + u_y^2})$ of the mean velocity vector are computed. Any deviation from zero is attributed to imperfect levelling of the measurement system – including the traversing unit, the probes, and their support – rather than to small elastic deformations during motion. During
420 post-processing, the average yaw and tilt estimated in this preliminary scan are subtracted from the corresponding angles measured during the campaign. The time history of the velocity vector is then reconstructed. This correction assumes that the yaw and tilt biases are stationary throughout the measurement campaign and independent of the flow conditions, which is reasonable given the relatively low wind speeds of the test.

425 This assumption was verified by quantifying the variability of the yaw and tilt biases for different wind speeds within the range of the tested ones, which was found to be within $\pm 0.1^\circ$, i.e. within the $\pm 0.2^\circ$ uncertainty quoted for the hot-wire flow angles in Sect. 3.6. For the post-processing of the lidar data, please refer to van Dooren et al. (2017).

3.4.2 Post-processing to compensate for strain-gauge torque drifts

In a few experiments at sub-rated wind speeds, discrepancies of up to 15% of Q_R were observed between measurements of Q_S at two consecutive zeroings due to malfunctioning of the strain gauges conditioning boards. This indicates a drift in the measurement chain during data acquisition, compromising the accuracy of the mechanical torque signal. Because this signal is used as feedback by the generator current controller (see Sect. 2.2.2), the actual generator torque deviates from the target value Q_{Dem} by an amount comparable to the drift. Consequently, G1 settles at a rotational speed – and thus a TSR – different from the intended operating point. This leads to operation at a C_P different from the expected value and to an inaccurate computation of the reference torque. A simple algebraic correction of the measured torque by adding or subtracting the estimated drift is therefore not sufficient. The thrust coefficient C_T , on the other hand, is only marginally affected, owing to its low sensitivity to TSR in region II.

In such cases, torque and speed measurements were corrected during post-processing as follows. A Simulink model of the drive-train and tower NS dynamics (see Sect. 5.3) was used to perform simulations with turbulent wind fields with mean speeds between the cut-in and rated values. The generator torque was artificially biased within $\pm 15\%Q_R$ to reproduce the effect of the drift on the closed-loop dynamics. For each simulation, differences in the mean mechanical torque and rotational speed with respect to the unbiased case, denoted ΔQ and $\Delta\Omega$, were stored in a LUT parameterized by the imposed bias and the mean rotational speed. The drift during each experiment was estimated assuming it varies linearly with time and then used, together with the measured rotational speed, to interpolate the LUT. The interpolated values were finally used to correct the measured torque and speed. The resulting time series are filtered as explained above, and then saved in the *NetCDF* files.

445 A comparison between experiments conducted under the same environmental and operating conditions, some with torque signal drift and others without, highlighted the validity of the developed correction method, even in the presence of significant drift. In particular, the measured power is consistent with variations within the expected measurement uncertainty. For experiments affected by torque signal drift, however, there is a discrepancy between the rotation speed recorded in the data and the rotation speed that can be calculated by differentiating the azimuth or inferred from the shaft load spectrum.

450 Only a small portion of the experimental dataset was affected by torque-signal drift. The affected experiments, to which the above correction is applied, are explicitly flagged in the test matrices accompanying the datasets (see Sect. 4.3), so that users are always aware of whether they are working with corrected data. It is also noted that the correction depends solely on the estimated torque drift – derived from the data recorded during the sensor zeroing performed before and after each test – and on the rotational speed. As long as the machine operates in region II, the correction therefore applies regardless of whether the G1 operates in free stream or in the wake of an upstream turbine.

3.4.3 Post-processing to compensate for rotor imbalances

The G1 rotor exhibits small but non-negligible inertial and aerodynamic imbalances. The inertial imbalance originates from minor mass asymmetries among the blades and from the non-uniform azimuthal and radial distribution of wiring in the hub region (see Fig. 3, top). The aerodynamic imbalance reflects both deviations of the blade geometry from the nominal profile
 460 due to manufacturing tolerances (Campagnolo, 2013) and the uncertainty in blade pitch measurement (see Sect. 3.6) used as feedback by the pitch actuator, resulting in slightly different pitch settings among the blades. These imbalances affect the bending moments measured on the rotor and tower: the mean rotor-side moments deviate from zero, whereas the tower-base moments exhibit a pronounced component at the rotational frequency (f_r , or 1P). The measurements are corrected as follows. The shaft-side moments are first projected onto a fixed reference frame using the rotor azimuth; the 1P component is
 465 then removed by demodulating the time series over a moving window spanning one rotor revolution; the corrected moments are finally projected back onto the rotating frame. Tower-base moments are similarly corrected for the 1P component by demodulating the raw signals. Both the original and corrected loads are stored in the *NetCDF* files.

3.5 Derivable physical quantities

The signals measured during the experiments can be used to derive other physical quantities.

470 At a fixed wind-tunnel fan rotational speed, the mean wind speed measured by the Pitot probe may vary slightly between tests due to the turbulent nature of the flow. For this reason, the turbine performance is usually analysed in terms of normalised power, defined as $P_n = 2\bar{P}/(\rho A \bar{u}_\infty^3)$, where $\bar{P}$ is the mean mechanical power measured at the shaft, A is the rotor disk area, and $\bar{u}_\infty$ the mean Pitot wind speed. The normalised power of the upstream turbine (WT1) corresponds to its power coefficient, C_P . For the downstream turbines operating in the wake, the normalised power differs from C_P , as discussed in Campagnolo
 475 et al. (2020b).

The moments measured on the rotating shaft can be projected onto the fixed reference frame, thus obtaining the nodding (tilt) moment Nod_F and the yawing moment Yaw_F acting on the nacelle. These moments are stored in the *NetCDF* files after being corrected for the effects of the inertial and aerodynamic imbalance of the rotor, and for the contribution of the rotor weight.

480 The moments measured at the tower base can be used to estimate the thrust coefficient, defined as $C_T = 2\bar{T}/(\rho A \bar{u}_\infty^2)$, with $\bar{T}$ the mean thrust along the rotor axis. Estimating $\bar{T}$ is also possible if the rotor is yawed, and requires correcting the loads for (i) the yaw-dependent drag of the nacelle and tower, and (ii) the variations of gravitational loads for $\gamma_{\text{nac}} \neq 0^\circ$.

With reference to Fig. 6a, the moments induced by the nacelle and tower drag along directions respectively parallel and perpendicular to u_∞ are expressed as

$$485 \quad D_{NT, \parallel u_\infty} = \frac{1}{2} \rho u_\infty^2 D_{S \parallel u_\infty}(\gamma), \quad (4a)$$

$$D_{NT, \perp u_\infty} = \frac{1}{2} \rho u_\infty^2 D_{S \perp u_\infty}(\gamma), \quad (4b)$$

where the drag static moments $D_{S_{\parallel u_{\infty}}}$ and $D_{S_{\perp u_{\infty}}}$ are reported in Fig. 6b. Both quantities depend on the misalignment angle, which is defined as $\gamma = \gamma_{\text{nac}} - \Phi$, with positive γ corresponding to a counter-clockwise misalignment when viewed from above. The drag static moments were obtained experimentally by measuring the moments at the tower base with the blades removed, and for several misalignment angles.

Yawing the nacelle also modifies the gravitational loads sensed at the tower base relative to the aligned condition $\gamma_{\text{nac}} = 0^\circ$. Their variation is

$$\Delta NS_g = W r_{\text{cog}} (\cos \gamma_{\text{nac}} - 1) \approx a_{\text{NS}} \gamma_{\text{nac}}^2, \quad (5a)$$

$$\Delta EW_g = W r_{\text{cog}} \sin \gamma_{\text{nac}} \approx a_{\text{EW}} \gamma_{\text{nac}}, \quad (5b)$$

where W is the total rotor-nacelle weight, r_{cog} the distance of its center of gravity from the tower axis, and γ_{nac} the nacelle yaw angle expressed in degrees. The coefficients a_{NS} and b_{NS} were obtained experimentally, yielding $a_{\text{NS}} = -1.7 \times 10^{-4} \text{ Nm}$ and $a_{\text{EW}} = 1.832 \times 10^{-2} \text{ Nm}$.

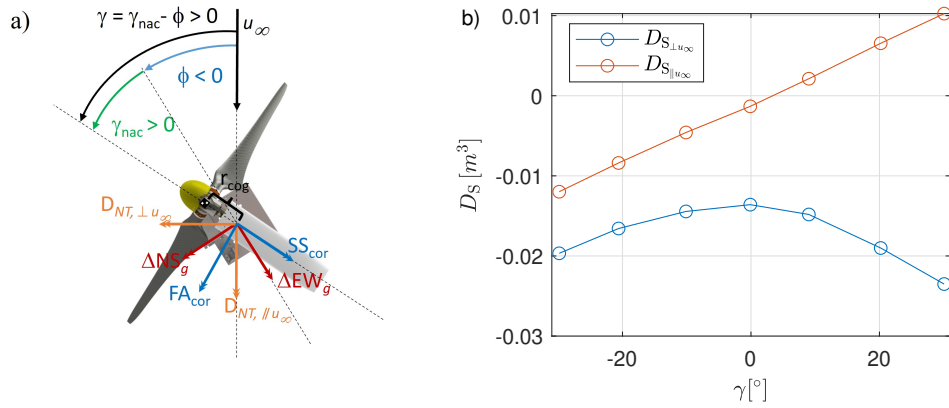


Figure 6. Schematic of the thrust calculation (a). Drag static moments of the G1 nacelle and tower as a function of the yaw misalignment (b).

Given the measured tower-base bending moment vector $\mathbf{m} = [NS; EW]$, the gravitational correction vector term $\Delta \mathbf{m}_g = [\Delta NS_g; \Delta EW_g]$, and the nacelle-tower drag contribution $\mathbf{d}_{NT} = [D_{NT, \perp u_{\infty}}; D_{NT, \parallel u_{\infty}}]$, the corrected tower-base bending moment vector is readily computed as

$$\mathbf{m}_{\text{cor}} = \mathbf{m} - \Delta \mathbf{m}_g - \mathbf{R}(\phi) \mathbf{d}_{NT}, \quad (6)$$

$\mathbf{R}(\cdot)$ denoting the 2D rotation matrix.

The projection of the corrected loads onto a reference frame aligned with the rotor axis yields

$$\mathbf{m}_{\text{RA,cor}} = \mathbf{R}(-\gamma) \mathbf{m}_{\text{cor}}, \quad (7)$$

with $\mathbf{m}_{\text{RA,cor}} = [FA_{\text{cor}}; SS_{\text{cor}}]$. The thrust is finally obtained as $T = -FA_{\text{cor}}/z_{\text{SG}}$, with z_{SG} the elevation of the rotor axis above the strain-gauge section (see Fig. 3, bottom).

If the fast yaw actuator is used, the reconstruction simplifies considerably. In this case, the sensors at tower base rotate with the nacelle and are already corrected for gravitational loads during their zeroing (see Sect. 3.2); no additional gravitational correction is therefore required. The corrected fore-aft and side-side moments are obtained as

$$510 \quad \mathbf{m}_{\text{RA,cor}} = \mathbf{m}_{\text{RA}} - \mathbf{R}(-\gamma) \mathbf{d}_{NT}, \quad (8)$$

with $\mathbf{m}_{\text{RA}} = [\text{FA}; \text{SS}]$ the raw tower-base bending moment vector.

Previous publications (Campagnolo et al., 2020b; Campagnolo and Bottasso, 2021; Campagnolo et al., 2022a; Mühle et al., 2024) have investigated Damage Equivalent Loads (DELs) collected on the G1 turbine. Therein, the DELs are calculated using the rainflow counting algorithm implemented in Matlab (The MathWorks Inc., 2023) and the Palmgren-Miners rule (Miner, 515 1945). The equivalent number of cycles is defined as the product of the load signal duration and the rated rotor speed of the nominal regulation trajectory ($\Omega_R = 850$ rpm). In this way, it is possible to directly compare DELs calculated from time histories of different durations. The slope of the S-N curve is set to $m = 10$ for tower-based loads and hub loads projected onto the fixed frame, and $m = 4$ for rotating loads, as the latter are assumed to be representative of the fatigue loads experienced by composite blades. For computing the DELs, load signals are filtered above six times the rotor frequency (6P), to remove 520 high-frequency load components. Combined DELs may also be obtained by projecting the two orthogonal load components on the direction associated with the maximum DEL. Finally, normalized DELs are computed as $\text{DEL}_n = 2\text{DEL}/(\rho A R \bar{u}_\infty^2)$.

The torque, Nod_F and Yaw_F moments can be used to estimate the Rotor Effective Wind Speed (REWS) and the effective wind speed on four equally sized, 90° -wide sectors, as described in Schreiber et al. (2020b). For this purpose, it is necessary to use a mapping of the power and cone (C_m , defined in Bottasso et al., 2018) coefficients, which can be derived using the 525 [OpenFast](#) [OpenFAST](#) model of the G1 (see Sect. 5.4). A validation of this method against lidar data is discussed in Campagnolo et al. (2017).

3.6 Assessment of the measurement uncertainties

The sensors of the experimental setup measure physical quantities affected by uncertainty, classifiable according to their respective sources, namely:

- 530 – **Linearity:** associated with the linearity of the calibration model. In this work, the standard deviation of the residuals with respect to the calibration line is used to estimate the uncertainty, consistent with the guidelines of ISO and OIML (1993).
- **Resolution:** due to the discrete nature of the measurement output. Assuming a uniform quantization error over the interval $[-\delta/2, +\delta/2]$, the resulting uncertainty for a 95% confidence level is $\Delta = 1.645 \delta / (2\sqrt{3})$, as prescribed in ISO 535 and OIML (1993).
- **Thermal drift:** mainly associated with temperature-induced variations of the sensor output at zero-load (Temperature Effect on Zero, or TEZ).

- **Zeroing**: type B standard uncertainty associated with the definition of the zero position.
- **Backlash**: the yaw encoder of the fast actuation system measures angular position upstream of a gearbox that exhibits mechanical backlash equal to γ_{BL} . Consequently, the encoder reading does not uniquely define the yaw angle in the presence of directional reversals, giving rise to a deadband-type uncertainty for a 95% confidence level equal to $\Delta = 1.645\gamma_{BL}/\sqrt{3}$.
- **Other**: contributions not included in the categories above.

G1 load transducers are predominantly affected by linearity uncertainty. Figure 7 compares the applied loads (x axis) with those reconstructed through the calibration matrix (y axis) of a G1 unit. The root-mean-square error (RMSE) shown in the plots is used as an estimate of the linearity uncertainty at the intended confidence level. Similar results have been observed across multiple G1 units.

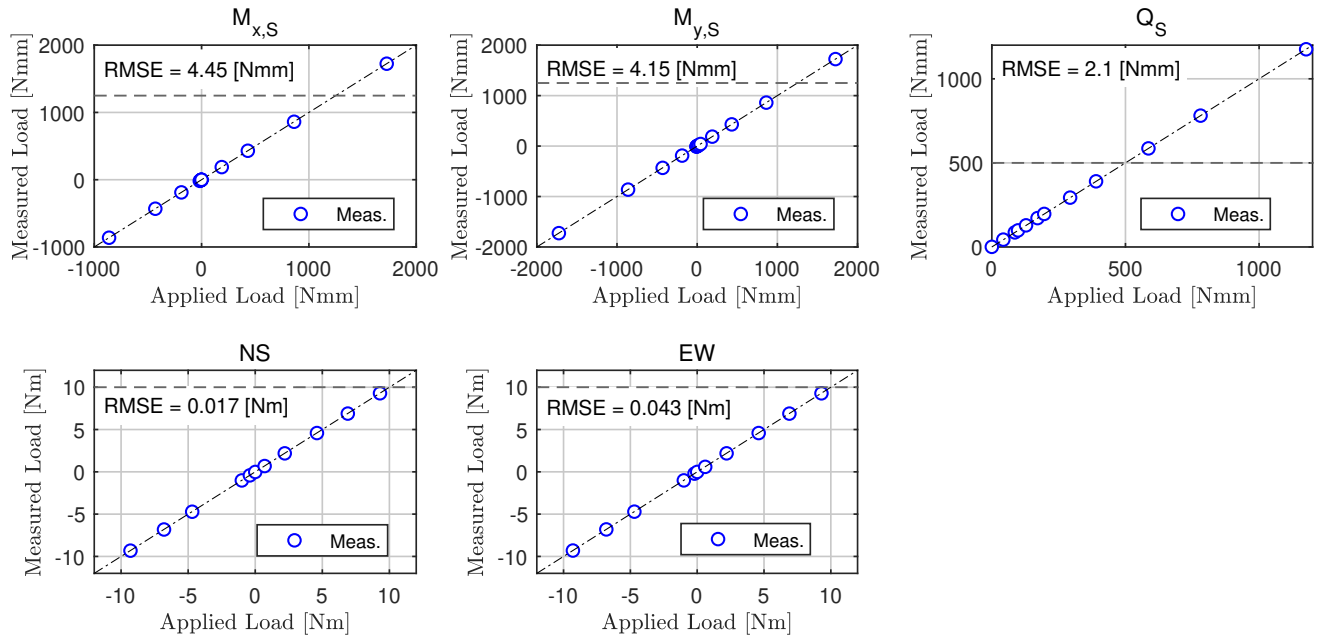


Figure 7. Comparison between applied loads (x axis) and loads reconstructed using the calibration matrix (y axis). The horizontal dotted lines mark the absolute value of the expected loads at the rated wind speed. The plots include the best-fitting 1:1 reference (dash-dotted line) and the RMSE of the residuals.

An analysis performed over multiple successive zeroings of the load cells indicated a small thermally-induced drift in the transducer zero, which may lead to inaccurate measurements, as explained in Sect. 3.4. Figure 8 reports the distribution of the variation of the zero offsets between two consecutive zeroing procedures of a G1 unit. The standard deviation obtained from the Gaussian fits is used to quantify the uncertainty at the chosen confidence level. Also in this case, similar results have been observed across multiple G1 units.

Encoder-based measurements are primarily affected by resolution uncertainty. Let N_p denote the PPR of the encoder and i the reduction ratio of any gearbox interposed between the encoder and the body whose rotation angle is to be determined; the corresponding angular resolution is then given by $\delta = 360^\circ / 4 N_p i$, as the *CNT204/R* and *EPOS2 24/2* modules implement X4 encoding.

For the encoder measuring the pitch angle, the linearity uncertainty is evaluated from the residuals with respect to the best-fit calibration line obtained from encoder-inclinometer measurements (see Sect. 2.2.3). The resulting RMSE is typically on the order of 0.05° .

The G1 encoders require a zeroing procedure (see Sect. 3.2). The yaw-control and azimuth encoders are zeroed in the wind tunnel using a laser level, with an estimated accuracy on the order of $0.2^\circ - 0.5^\circ$. The pitch encoders are instead zeroed using a Hall sensor calibrated in the laboratory (see Sect. 2.2.3). Several repetitions of the calibration procedure indicate a repeatability of 0.1° .

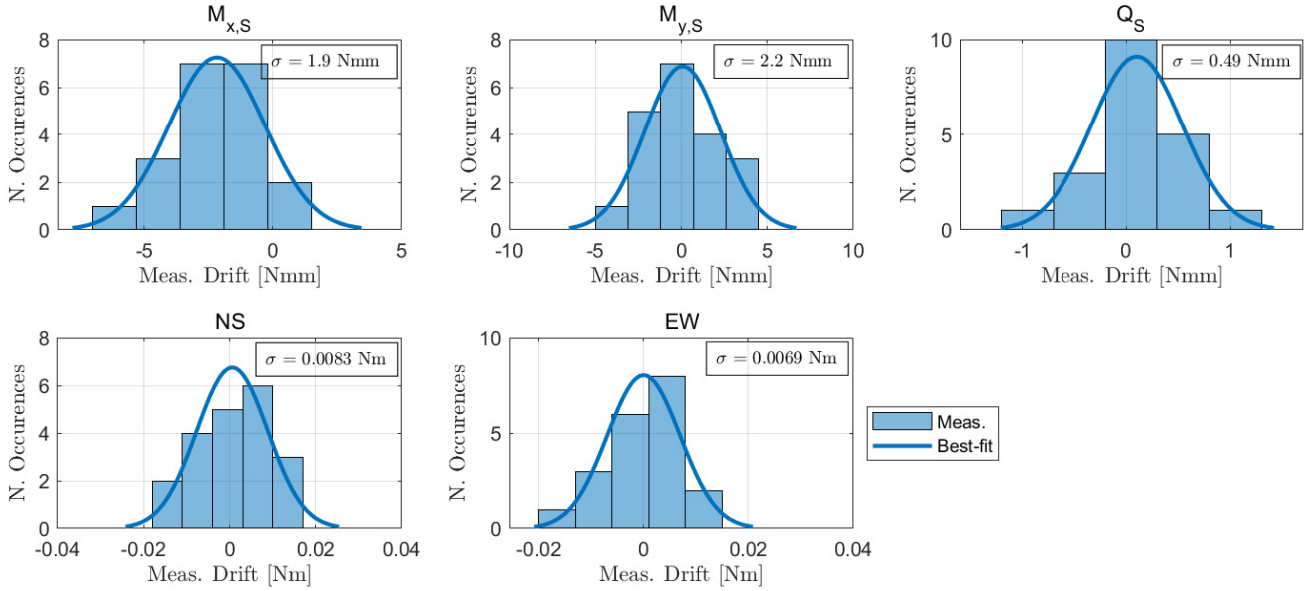


Figure 8. Distribution of the zero drift of the five G1 load sensors between successive zeroing. The plots also include the best-fitting Gaussian, with its standard deviation reported within the text box.

The positioning of the devices installed in the wind tunnel is performed using a meter (1-mm resolution) and a laser level (see Sect. 3.1). Repeated positioning tests reveal small variations in the device actual location, which is therefore considered known with an uncertainty of 5 mm.

The uncertainty associated with measuring the rotor angular velocity warrants special consideration. For some G1s, the angular velocity obtained by differentiating the azimuth encoder signal slightly differs from that measured by the torque-actuator encoder. This discrepancy is attributable to a small deviation (up to 0.2%) of the gearbox reduction ratio from its nominal value, due to manufacturing tolerances, and constitutes the dominant source of uncertainty. [Since the rotor speed](#)

is obtained from the torque-actuator encoder through the nominal reduction ratio (see Sect. 2.2.3), this deviation translates directly into a relative uncertainty of up to 0.2% on the rotor angular velocity, i.e. about 1.7 rpm at the rated speed of 850 rpm.

Derived physical quantities inherit uncertainties by propagation of the uncertainties of the underlying measured variables. For the density, this results in an expected uncertainty of $\Delta\rho = 0.01 \text{ kg m}^{-3}$.

575 The uncertainty associated with hot-wire probe measurements under laminar conditions is discussed in Raffel et al. (2011). In turbulent flows, the same authors estimate an uncertainty of 0.1 ms^{-1} on the velocity magnitude $|\mathbf{u}|$, and 0.2° on the tilt and yaw angles. Finally, the uncertainty associated with the lidar measurements is described in detail in van Dooren et al. (2017).

Table 1 provides a summary of the measurement uncertainties at a 95% confidence level. For selected physical quantities, the table reports the uncertainty contributions arising from the sources discussed above. The overall uncertainty (last column) is conservatively estimated as the sum of the individual contributions when these are of comparable magnitude, or as the maximum contribution when one source is dominant. The arithmetic sum is deliberately preferred over the root-sum-of-squares combination, which would be appropriate only under the assumption of statistically independent contributions. Since such independence cannot always be guaranteed, the arithmetic sum provides a conservative upper bound of the overall uncertainty.

Table 1. Uncertainty summary table at a 95% confidence level. For selected physical quantities, the table reports the uncertainty contributions from linearity, resolution, thermal drift, zeroing, backlash, and other sources.

	Physical quantity	Linearity, resolution	Thermal drift, zeroing	Backlash, other	Overall uncertainty
Wind tunnel, and its sensors	Equipment position	0.00047 m	-	0.005 m	$\Delta x = \Delta y = \Delta z = 0.005 \text{ m}$
	Density	-	-	-	$\Delta\rho = 0.01 \text{ kg m}^{-3}$
	Pitot wind speed	-	-	-	$\Delta u_\infty = \frac{1}{\rho u_\infty} \sqrt{(\Delta p_{\text{dyn}})^2 + \frac{u_\infty^4}{4} (\Delta\rho)^2}$
	Turntable angle	0.0052°	-	-	$\Delta\Phi = 0.0052^\circ$
G1 sensors	Blade pitch angle	0.1°	0.1°	-	$\Delta\beta = 0.2^\circ$
	Rotor azimuth	0.017°	0.5°	-	$\Delta\psi = 0.5^\circ$
	Rotor speed	-	-	$0.2\%\Omega$	$\Delta\Omega = 0.002\Omega$
	Nacelle yaw, standard actuator	0.0043°	0.2°	-	$\Delta\gamma_{\text{nac}} = 0.2^\circ$
	Nacelle yaw, fast actuator	0.00085°	0.2°	0.063°	$\Delta\gamma_{\text{nac}} = 0.2^\circ$
	Mechanical torque	0.005 Nmm	0.001 Nm	-	$\Delta Q_{\text{Meas}} = 0.005 \text{ Nm}$
	Mechanical power	-	-	-	$\Delta P = \sqrt{(\Omega \Delta Q_{\text{Meas}})^2 + (Q_{\text{Meas}} \Delta\Omega)^2}$
	Shaft bending moments	0.01 Nm	0.004 Nm	-	$\Delta M_{x,S}, \Delta M_{y,S} = 0.01 \text{ Nm}$
	Tower bending moments	0.1 Nm	0.016 Nm	-	$\Delta NS, \Delta EW, \Delta FA, \Delta SS = 0.1 \text{ Nm}$
CTA probes	Wind vector magnitude	-	-	-	$\Delta \mathbf{u} = 0.1 \text{ ms}^{-1}$
	Wind vector angles	-	-	-	$\Delta\gamma_{\mathbf{u}} = \Delta\varphi_{\mathbf{u}} = 0.2^\circ$
Lidars	Wind speed components	-	-	-	see van Dooren et al. (2017)

This section describes the content of the experimental dataset, the data format, and the provided metadata.

4.1 Dataset content

The content of the experimental dataset is summarized in Table 2. It includes experimental inflow mappings obtained in an empty test section, wake measurements downstream of one, two, or three turbines, and turbine operational data measured for a
590 three-turbine cluster under both stationary and dynamically varying mean wind-direction conditions.

The measurements were collected over several wind-tunnel campaigns conducted between 2016 and 2025. For each dataset, the following sections summarize the experimental conditions regarding inflow, wind-farm layout, and tested control strategies, complementing the machine-readable test matrices described in Sect. 4.3.

Table 2. Overview of the data content included in the experimental dataset, corresponding description, repository, and dataset size.

Dataset content	Dataset content description	Dataset repository	Dataset size
Inflow mapping	see Sect. 4.1.1	https://doi.org/10.5281/zenodo.18749773	2.86 Gb
Single wake measurement	see Sect. 4.1.2	https://doi.org/10.5281/zenodo.18732794	31.88 Gb
Double wakes measurement	see Sect. 4.1.2	https://doi.org/10.5281/zenodo.18743973	41.05 Gb
Multiple wakes measurement	see Sect. 4.1.3	https://doi.org/10.5281/zenodo.18731994	0.67 Gb
Wind turbine data, steady wind direction	see Sect. 4.1.4	https://doi.org/10.5281/zenodo.18723855	110.11 Gb
Wind turbine data, time-varying wind direction	see Sect. 4.1.5	https://doi.org/10.5281/zenodo.18743431	73.38 Gb

4.1.1 Inflow mapping with empty wind tunnel

595 Measurements of the inflow were performed with the four ABLs presented in Sect. 2.1.1. The Low-TI was sampled using the lidars along a vertical plane at the turntable center point. The Mod-TI, High-TI, and Extreme-TI ABLs were sampled with the CTA probes 9.94 m upstream of the turntable center point. The inflow mapping was performed along a vertical plane for the Mod-TI and High-TI ABLs, and along a vertical and a horizontal line at hub height for the Extreme-TI.

The dataset (Campagnolo et al., 2026f) consists of time histories of the three velocity components measured by the CTA
600 probes, along with lidar measurements of the mean longitudinal velocity. Figure 9a–c shows the mean longitudinal velocity $\bar{u}_x$ for the Low-TI, Mod-TI, and High-TI ABLs, normalized by the mean longitudinal velocity $\bar{u}_{x,P}$ measured at the reference Pitot position. Figure 9d shows the vertical profiles, measured at the pitot position, of the normalized longitudinal velocity (left) and longitudinal turbulence (right).

The non-homogeneity of the mean flow is evident not only in the vertical direction, but also across the transverse direction, as
605 previously discussed in Schreiber et al. (2020c); Campagnolo et al. (2020b, 2022b). Experimental measurements indicate that

this non-homogeneity is only marginally affected by the operating power of the wind tunnel fans, at least within the velocity range relevant to the G1 experiments. Therefore, the inflow mapping can be scaled by multiplying the ratio $\bar{u}_x/\bar{u}_{x,P}$ by the mean velocity measured at the Pitot location during the G1 experiments.

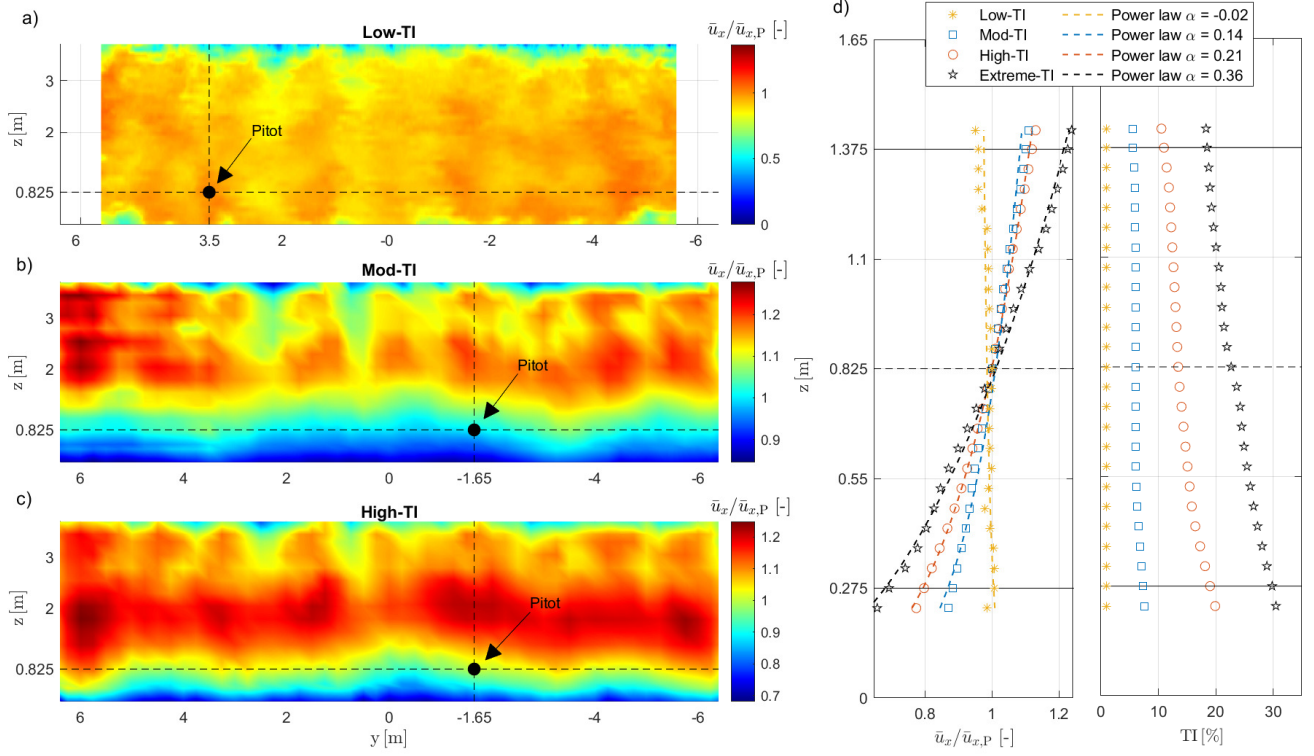


Figure 9. Characteristics of the inflows that were passively generated in the wind tunnel and measured by the lidars or CTA probes: normalized longitudinal wind velocity with Low-TI (a), Mod-TI (b), and High-TI (c) inflows, looking downstream; vertical profiles of the normalized longitudinal wind speed and their best-fitting power laws (d, left), and vertical profiles of the longitudinal turbulence intensity (d, right); within (d), the black dashed line indicates the hub height, while the two solid black lines limit the rotor disk.

The inflow mapping was used to normalize G1 power production in Campagnolo et al. (2020b), whereas it was applied to wake normalization in Wang et al. (2017a).

4.1.2 Measurement of single and double wakes with CTA probes

The wake generated by a single G1 or by a tandem of two G1 turbines was measured using CTA probes. Wake measurements were performed along ~~vertical and horizontal lines~~ horizontal lines and, for the single-wake experiments, also along vertical lines, at various downstream distances from the rotor(s). ~~The~~

In summary, the single-wake dataset comprises 201 experiments, performed under all four ABLs described in Sect. 2.1.1, with the G1 turbines were operated under different conditions, including operating in region II at freestream hub-height

wind speeds between approximately 5 and 6 ms⁻¹. The tested control conditions comprise baseline greedy operation, ~~power curtailment, yaw misalignment~~ static yaw misalignments between -40° and +40°, power curtailment with set-points down to about 37% of the greedy reference, Pulse operation – realized through sinusoidal collective pitch oscillations with frequencies between 0.5 and 2.3 Hz, corresponding to Strouhal numbers $St = fD/u_\infty$ between approximately 0.1 and 0.45, and amplitudes up to 6.5° – and IPC for load mitigation. The wake was surveyed at longitudinal distances from 2D to 10D downstream of the rotor, along horizontal lines at hub height, and along vertical lines passing through the wake center.

The double-wake dataset comprises 68 experiments, also performed under all four ABLs, with two G1s in tandem at longitudinal spacings of 3.2D, 4.1D, and 5D, in the latter case also with a lateral offset of the downstream machine of 0.5D. The tested control conditions comprise baseline greedy operation, wake steering with a yaw misalignment of 30° applied to the upstream machine, to the downstream machine, or to both, and power curtailment of the upstream machine, in some cases combined with a deep curtailment of the waked downstream machine. In this case, the wake was surveyed at longitudinal distances between 5D and IPC. ~~Tests were conducted by reproducing the four ABLs described in Sect. 2.1.1~~ 11D downstream of the most upstream rotor, along a single horizontal line at hub height or, in a subset of experiments, along three horizontal lines located at hub height and at 0.36D above and below it.

The datasets (Campagnolo et al., 2026c, e) consist of time histories of the three velocity components measured by the CTA probes, along with time series of the corresponding operational data for the G1 turbine(s). These data have been used for the development (Kim et al., 2018; Schreiber et al., 2020a; Zengler et al., 2024) and validation (Schreiber et al., 2017; Ruissi and Bossanyi, 2019; Campagnolo et al., 2019; Schreiber et al., 2020c) of wake engineering models, for the tuning and validation of large-eddy simulation (LES) codes (Wang et al., 2017a, b, 2019), and for assessing the impact of IPC and wake mixing techniques on wake recovery (Wang et al., 2020a, c).

4.1.3 Measurement of multiple wakes with lidars

The wake generated by a cluster of three G1 turbines, arranged in a column with longitudinal and lateral spacings of 4D and 0.5D, respectively, was measured using lidars along a horizontal plane located approximately 0.1 m above the hub height. ~~The G1 turbines were operated in both greedy and misaligned modes, and the tests were conducted under Mod-TI inflow conditions~~

This dataset comprises four 10-minute experiments at a freestream hub-height wind speed of approximately 5.7 ms⁻¹: one baseline run with all machines in greedy operation, and three wake-steering runs with yaw misalignments $(\gamma_1, \gamma_2) = (7^\circ, 5^\circ)$, $(14^\circ, 11^\circ)$, and $(20^\circ, 16^\circ)$ applied to the upstream and central turbines, while the most downstream machine was always aligned with the mean flow.

The dataset (Campagnolo et al., 2026b) consists of time series of the line-of-sight, longitudinal, and lateral velocity components measured by the lidars, together with the corresponding operational data of the G1 turbines. These data have been used to assess the reliability of lidar measurements in boundary-layer wind tunnels (van Dooren et al., 2016, 2017) and to validate LES codes (Draper et al., 2018a, b; Wang et al., 2018a, 2020d).

4.1.4 Wind turbine data under steady wind direction

650 Measurements of G1 operational data were performed using a cluster of three turbines arranged in a column, with inter-turbine spacings ~~between 3.2D and ranging from 4D to 5D. The turbines were operated under a range of conditions, including greedy operation, power curtailment and derating, wake steering, individual pitch control for load reduction, Pulse operation, Helix control, dynamic yaw, as well as combinations of derating, curtailment, Helix, and dynamic yaw with wake steering.~~

Data were collected under the three atmospheric boundary-layer conditions Low-TI, Mod-TI, and High-TI. During each
655 experimental run, the mean wind speed and direction were held constant, and multiple tests were performed to assess the cluster sensitivity to variations in these parameters.

In summary, this dataset comprises 1650 experiments, with typical durations between 60 s and 300 s, collected in several campaigns between 2016 and 2025. The turntable angle was varied between -11.5° and $+11.5^\circ$ to emulate different mean wind directions, and the freestream hub-height wind speed ranged between approximately 2.8 and 7.5 ms^{-1} , covering operation
660 from region II up to above-rated conditions. The tested control settings comprise: static yaw misalignments of the upstream and central turbines between $\pm 40^\circ$; power derating of one or more machines with levels between 50% and 90% of the available power, also in combination with wake steering; active power control of the cluster, with the same open- and closed-loop APC variants described in Sect. 4.1.5, here operated under steady wind direction; Pulse operation, with collective pitch oscillation frequencies between 0.5 and 2.3 Hz and amplitudes up to 7° ; Helix operation, in both the clockwise and counter-clockwise
665 variants, with excitation frequencies between 0.025 and 0.3 times the rotor frequency and amplitudes between 1° and 4° , also in combination with wake steering; dynamic yaw actuation with amplitudes between 2° and 20° and frequencies between 0.5 and 2.25 Hz; and IPC for load mitigation.

The dataset (Campagnolo et al., 2026a) has been used to investigate the effectiveness of several wake control techniques (~~Campagnolo et al.~~
(Campagnolo et al., 2016; Wang et al., 2020c; Frederik et al., 2020b; Campagnolo et al., 2023; Bortolin et al., 2026; Mühle et al., 2026)
670 , to develop and validate engineering models of wind farms (Schreiber et al., 2017; Draper et al., 2018b; Schreiber et al., 2020c; Campagnolo et al., 2020b, 2022b), and to develop models that capture the effect on power of the way a turbine is controlled as it is misaligned (Tamaro et al., 2024).

4.1.5 Wind turbine data under dynamically varying wind direction

Measurements were performed using a cluster of three G1 turbines arranged in a column with a spacing of 5D, with the
675 turntable dynamically rotated to reproduce time-varying wind-direction conditions. Figure 10 shows the 90-minute time history of the rotation imposed on the turntable, synthesized to reproduce wind-direction variations observed in real atmospheric conditions (Campagnolo et al., 2020b).

The G1 operational data were collected by testing two classes of control strategies. The first class consists of LUT-based wind-farm control algorithms aimed at boosting cluster power through wake steering. The second class comprises Active Power
680 Control (APC) algorithms (Tamaro et al., 2026) that track a prescribed time-varying reference power level by a combination of curtailment and yaw misalignment. In the former case, the tests were conducted by dividing the wind-direction time history

into nine blocks of 10 minutes, as shown in Fig. 10, and by using LUTs computed as described in Campagnolo et al. (2020b). In the latter case, the tests lasted 180 s and were conducted using a portion of the 90-minute time history, highlighted in red and labeled Φ_{APC} in Fig. 10. In both cases, filtered measurements of wind direction were fed to the controllers to determine, in real time, the optimal control settings.

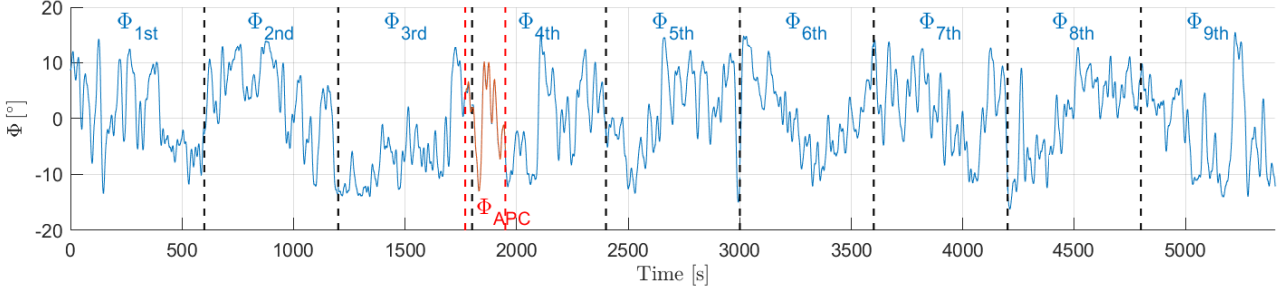


Figure 10. The 90-minute time history of the rotation imposed on the turntable during experiments with dynamically varying wind direction. The 10-minute blocks used for the power-boosting experiments are shown in blue and are separated by vertical black dashed lines. The 180 s block used for the APC experiments, labeled Φ_{APC} , is shown in red.

In summary, this dataset comprises 264 experiments. In the power-boosting experiments, the tested wake-steering configurations cover several LUT synthesis approaches – based on the FLORIS engineering model, on an augmented version thereof, on a purely data-driven approach, as well as variants restricted to positive yaw offsets or including an actuation threshold – together with LUTs robustified against wind-direction uncertainties of standard deviation $\sigma_\phi = 2, 4$, and 6° ; the wind-direction signal fed to the controllers was filtered with moving averages of 1.5, 7.5, or 15 s. In the APC experiments, open-loop and closed-loop APC variants (the latter also with load-balancing and maximum-margin options) tracked normalized power references of 0.8, 0.85, and 0.9, realized by curtailment alone or combined with yaw misalignment; in this case, the wind direction was filtered with a first-order low-pass filter with a 0.25 Hz cut-off frequency.

The dataset (Campagnolo et al., 2026d) consists of time series of operational data from the G1s, as well as the LUTs of the power-boosting wind farm controller. The APC controllers are provided in Tamaro et al. (2025). The data have been used in several research works (Campagnolo et al., 2020a, b; Campagnolo and Bottasso, 2021; Tamaro et al., 2026) to study the effects of control settings on the power production and fatigue loads of the turbine cluster.

4.2 Data format

The data are saved in NetCDF files using the structure described in Table 3. In addition to the measurements from the sensors described in the previous sections, the time elapsed since the start of data acquisition, sampled at 2.5 kHz, is also saved.

Table 3. Structure of the *NetCDF* files storing the G1s, hot-wire CTA probe, and lidars data.

Field	Field description [unit of measurements]	f_s [Hz]
Time	Time vector [s]	2500
WindTunnelData/	Structure array containing wind tunnel recorded data	
PitotVelocity	Pitot wind speed, u_∞ [ms^{-1}]	250
TurntableAngle	Turntable angle, Φ [$^\circ$]	250
AirDensity	Air density, ρ [kg m^{-3}]	scalar
WTsData/	Structure array containing WTs recorded data	
WT1/	Structure array containing WT1 recorded data	
Pitch/		
Blade1	Blade 1 pitch, β_1 [$^\circ$]	250
Blade1Dem	Control-demanded pitch of Blade 1, $\beta_{1,\text{Dem}}$ [$^\circ$]	250
Blade2	Blade 2 pitch, β_2 [$^\circ$]	250
Blade2Dem	Control-demanded pitch of Blade 2, $\beta_{2,\text{Dem}}$ [$^\circ$]	250
Blade3	Blade 3 pitch, β_3 [$^\circ$]	250
Blade3Dem	Control-demanded pitch of Blade 3, $\beta_{3,\text{Dem}}$ [$^\circ$]	250
RotorSpeed	Rotor speed, Ω [rpm]	250
Azimuth	Rotor azimuth, ψ [$^\circ$]	2500
Hub/	Shaft rotating loads	
Torque	Torque, Q_{Meas} [Nm]	2500
Nodding	Moment, $M_{x,S}$ [Nm]	2500
Yawing	Moment, $M_{y,S}$ [Nm]	2500
Tower/	Tower base loads	
NS or FA	North-South (NS) or Fore-Aft (FA) moment [Nm]	250
EW or SS	East-West (EW) or Side-Side (SS) moment [Nm]	250
Power/		
Meas	Mechanical power, P [W]	250
RefAbs	Control-demanded power curtailment, P_D [W]	125
RefRel	Control-demanded power derating, P_d [%]	125
Yaw	Nacelle orientation, γ_{nac} [$^\circ$]	250
YawDem	Control-demanded nacelle orientation, $\gamma_{\text{nac,Dem}}$ [$^\circ$]	250
FilteredLoads/	Loads corrected for the effect of rotor imbalance (see Sect. 3.4)	
Hub/		
Nodding	Shaft rotating moment, $M_{x,S}$ [Nm]	2500
Yawing	Shaft rotating moment, $M_{y,S}$ [Nm]	2500

Continued on next page

Field	Field description [unit of measurements]	f_s [Hz]
NoddingFixed	Fixed frame Nodding (Tilt) moment, Nod_F [Nm]	2500
YawingFixed	Fixed frame Yawing moment, Yaw_F [Nm]	2500
Tower/		
NS or FA	North-South (NS) or Fore-Aft (FA) moment [Nm]	250
EW or SS	East-West (EW) or Side-Side (SS) moment [Nm]	250
WT2/	Structure array containing WT2 recorded data (if WT2 was ON during the test)	
WT3/	Structure array containing WT3 recorded data (if WT3 was ON during the test)	
FlowData/	Structure array containing flow data sampled at N different positions with the CTA probes. It only exists if flow measurements with CTA probes were conducted during the test	
Probe1/	Structure array of flow data sampled at the 1 st probe position	
InitTime	Flow sampling at different points is done sequentially. This field reports the elapsed time since the beginning of the WT(s) data acquisition [s]	scalar
Position/	Probe position	
x	coordinate x [mm]	scalar
y	coordinate y [mm]	scalar
z	coordinate z [mm]	scalar
ux	u_x component of the wind speed [ms^{-1}]	2000
uy	u_y component of the wind speed [ms^{-1}]	2000
uz	u_z component of the wind speed [ms^{-1}]	2000
Probe2/	Structure array of flow data sampled at the 2 nd probe position	
⋮		
ProbeN/	Structure array of flow data sampled at the N^{th} probe position	
LiDARData/	Structure array containing flow data sampled with two short-range WindScanner lidars. It only exists if flow measurements with lidars were conducted during the test	
R2D2/	Structure array of flow data measured by the R2D2 lidar	
Position/	Position of the focused laser beam	
x	coordinate x [mm]	250
y	coordinate y [mm]	250
z	coordinate z [mm]	250
vLOS	line-of-sight velocity, v_{LOS} [ms^{-1}]	250
R2D3/	Structure array of flow data measured by the R2D3 lidar	
Position/	Position of the focused laser beam	
x	coordinate x [mm]	250
y	coordinate y [mm]	250

Continued on next page

Field	Field description [unit of measurements]	f_s [Hz]
z	coordinate z [mm]	250
vLOS	line-of-sight velocity, v_{LOS} [ms^{-1}]	250
AvgPosition/	Average position of the R2D2 and R2D3 focused laser beams	
x	coordinate x [mm]	250
y	coordinate y [mm]	250
z	coordinate z [mm]	250
ux	u_x component of the wind speed [ms^{-1}]	250
uy	u_y component of the wind speed [ms^{-1}]	250

705 For signals sampled at frequencies other than 2.5 kHz, the corresponding time histories can be reconstructed by downsampling the time vector to match the signal sampling frequency. Data acquired from the most upstream machine in the cluster are stored in the substructure WT1. For tests involving two or more G1 turbines, data from the central and most downstream machines are stored in the substructures WT2 and WT3, respectively.

4.3 Metadata

710 Each dataset is accompanied by its own test matrix (Fig. 11) that provides a compact, systematic overview of all wind-tunnel experiments included in the corresponding data release. The test matrix is intended as a reference tool to support the interpretation, selection, and comparison of the measurements across different experimental conditions.

Each entry of the test matrix corresponds to a single experimental run and uniquely identifies the associated data file, ensuring a one-to-one correspondence between the experimental metadata and the stored measurement time series. For each test, the
715 matrix documents the execution date and time, the wind-farm layout adopted in the wind tunnel, including the number of G1s and their relative positions within the test section, expressed in the reference frame of Fig. 1. The main characteristics of the inflow conditions reproduced during the experiment are also reported, including the simulated ABL, the turntable angle, the Pitot tube position, and its mean wind speed.

The test matrix further specifies the wind-farm control strategy applied in each experiment. This includes the class of control
720 algorithm under investigation and the corresponding control settings assigned to each turbine, such as static or dynamic yaw offsets, power curtailment or derating, amplitude and frequency of the Helix or Pulse control. This information allows controlled cases to be clearly distinguished from baseline (greedy) operation and enables consistent comparisons across different control strategies.

For experiments that include dedicated flow measurements, the test matrix indicates the availability of these data and summarizes the associated measurement configurations, including the measurement technique and the location of the flow surveys.
725 This facilitates the identification of test cases suitable for wake-related analyses and the correct interpretation of flow-field data in relation to turbine operating conditions.

For experiments with dynamically changing wind direction, the test matrix reports the applied control algorithm and settings, as well as the filter used to process the measured turntable angle.

A	B	C	D	E
TEST_ID	Tested_CTRL	Data_nc_file	Test_Start_Data_Time	Duration_sec
1	Greedy	DATA_test_1.nc	Nov. 2015, exact date/time not avail.	860
2	Curtailment	DATA_test_2.nc	Nov. 2015, exact date/time not avail.	860
3	Curtailment	DATA_test_3.nc	Nov. 2015, exact date/time not avail.	860
4	Curtailment	DATA_test_4.nc	Nov. 2015, exact date/time not avail.	860
5	Greedy	DATA_test_5.nc	Nov. 2015, exact date/time not avail.	860

Test info:

- Test ID
- Tested WFC strategy
- Corresponding file name
- Test date & time
- Test duration

F	G	H	I	J
ABL_type	Turntable_angle_deg	Pitot_Pos_x_mm	Pitot_Pos_y_mm	Pitot_wind_speed_ms-1
Low-TI	0	-9800	3500	6.01
Low-TI	0	-9800	3500	6.02
Low-TI	0	-9800	3500	6.02
Low-TI	0	-9800	3500	6.02
Low-TI	0	-9800	3500	5.99

Inflow feature:

- ABL Type
- Turntable angle Φ
- Pitot position (x,y)
- Pitot mean wind speed $\bar{u}_{\infty}$

Number of tested WTs. For each tested WT:

- Rotor apex position (x,y) with null yaw mis.
- Yaw misalignment γ
- Curtailment P_D
- Derating P_d
- IPC on/off; control settings
- Pulse on/off; control settings

K	L	M	N	O	P	Q	R
N_WTs	WT1_Pos_x_mm	WT1_Pos_y_mm	WT1_yaw_mis_deg	WT1_power_PD_W	WT1_power_Pd_pc	WT1_IPC_OnOff_Type	WT1_Pulse_OnOff_Type
1	-6500	3500	0	46	100	OFF	OFF
1	-6500	3500	0	44.4	100	OFF	OFF
1	-6500	3500	0	43.2	100	OFF	OFF
1	-6500	3500	0	42.1	100	OFF	OFF
1	-6500	3500	0	46	100	OFF	OFF

Z	AA
Flow_Meas_Type	Wake_Meas_Loc_D_mm
CTA, horizontal line	@x=8D (8800 mm) from WT1
CTA, horizontal line	@x=8D (8800 mm) from WT1
CTA, horizontal line	@x=8D (8800 mm) from WT1
CTA, horizontal line	@x=8D (8800 mm) from WT1
CTA, horizontal line	@x=10D (11000 mm) from WT1

If flow data is available:

- Measurement type and configuration
- Location of flow survey

AG	AH
WFC_Type_LUT	WFC_WindDir_Filt
LUTs\LUT-ModTI-FLORIS- α_ϕ -0deg	MovAvg, T_([MAvg])=7.5sec
LUTs\LUT-ModTI-FLORIS- α_ϕ -0deg	MovAvg, T_([MAvg])=7.5sec
LUTs\LUT-ModTI-FLORIS- α_ϕ -0deg	MovAvg, T_([MAvg])=7.5sec
LUTs\LUT-ModTI-FLORIS- α_ϕ -0deg	MovAvg, T_([MAvg])=7.5sec
LUTs\LUT-ModTI-FLORIS- α_ϕ -0deg	MovAvg, T_([MAvg])=7.5sec

For unsteady wind direction tests:

- Type of tested control algorithm, and related settings
- Type of filter applied to the measurement of the turntable angle, and related settings

U	V
Important_Info	Publication
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	
Azimuth not recorded. Yaw mis. achieved by rotating the entire model (tower included) around the tower axis	

<https://doi.org/10.5194/wes-4-71-2019>

Other info;

- Issues (if any) occurred in the measurement of some quantity(ies)
- DOI of the publication(s) that discuss findings based on the data

Figure 11. Test matrix summarizing all wind-tunnel experiments included in the corresponding dataset. For each experimental run, the matrix reports: the test identifier, the tested wind-farm control strategy, the execution date and time, the main inflow conditions reproduced in the wind tunnel, the wind-farm layout and turbine positions in the test section, the turbine-level control settings, and the availability and configuration of any dedicated wake measurements. Each entry in the test matrix uniquely identifies the associated data file and provides the reference metadata required to interpret and compare the measurements across different experimental conditions.

730 ~~Finally, the test matrix~~ Additionally, it reports any issues that occurred with one or more sensors during data acquisition, as well as previous publications that present findings derived from the data analysis.

Since the completeness and clarity of a data description can ultimately only be assessed by its users, the repository documentation (README files and test matrices) will be maintained and updated in response to community feedback, exploiting the versioning capabilities of Zenodo, which preserve the citability of each release through versioned DOIs. Users are warmly encouraged to

735 report issues, ambiguities, or suggestions for improvement to the corresponding author.

5 Numerical models

The experimental dataset is ~~accompanied~~ complemented by a set of numerical models for four main reasons. First, the models document in a machine-readable form the geometric, structural, aerodynamic, and control characteristics of the scaled turbines and of the wind-tunnel environment, which is essential information for any independent modelling effort. Second,

740 they lower the entry barrier for new users of the dataset, who can start from a working reference implementation. Third, they provide a verified baseline against which independently developed models can be checked, before being validated against the experimental data. Fourth, they enable the reproduction of the results, which is one of the pillars supporting integrity, error verification, and trust building in scientific research. It should be emphasized that these models are optional companions to the data, and not prescriptive choices: since no model is perfect, users are explicitly encouraged to develop, test, and validate their

745 own independent implementations against the experimental measurements, thereby avoiding the bias that would result from the community converging on a single modelling chain.

The numerical models, listed in Table 4, ~~which~~ simulate different aspects of the G1 wind-tunnel experiments. Two of the provided models focus on the aeroservoelastic behavior of the G1 turbines and do not explicitly resolve the wakes generated in the wind tunnel or their interaction with downstream machines. One of the numerical models, instead, explicitly accounts for

750 wake development and wake-turbine interactions within the wind-tunnel environment. A synthetic representation of the inflow conditions imposed in the wind tunnel, used as input to the numerical simulations, is also provided. Finally, three-dimensional CAD models of the G1 turbine are provided for two configurations: with the standard and with the fast yaw actuator.

Table 4. Overview of the provided numerical models, corresponding software, description, and repository.

Numerical model	Software	Model description	Model repository
3D CAD	-	see Sect. 5.1	https://doi.org/10.5281/zenodo.19047499
Synthetic inflow	SOWFA	see Sect. 5.2	Mod-TI: https://doi.org/10.5281/zenodo.18860646 High-TI: https://doi.org/10.5281/zenodo.19004026
G1 drive-train and tower dynamics	Simulink, v13.38	see Sect. 5.3	https://doi.org/10.5281/zenodo.18755240
G1 aeroservoelasticity	OpenFast <u>OpenFAST</u> , v4.1.2	see Sect. 5.4	https://doi.org/10.5281/zenodo.18772302
Wakes and wake-turbine interaction within the wind tunnel	AMR-Wind, v3.8.0	see Sect. 5.5	https://doi.org/10.5281/zenodo.18874300

The numerical models can complement the experimental dataset by predicting physical quantities that were not directly measured during the experiments (e.g., loads, deflections, and accelerations of G1 components, and flow-related quantities), thereby supporting a more comprehensive interpretation of the investigated phenomena. Furthermore, the models provide a framework for assessing innovative control techniques and for validating supporting technologies prior to wind-tunnel testing.

A validation of the models using a subset of the experimental data described in Sect. 4.1 is presented in Appendix A.

5.1 Three-dimensional CAD model

The three-dimensional CAD models are simplified representations of the G1 geometry that retain the machine external shape. The provided data (Campagnolo et al., 2026i) consists of two STEP (.stp) files representing the nominal geometry of a G1 turbine characterized by: a collective blade pitch equal to $\beta_{\text{opt}} = 0.42^\circ$, i.e. the fine-pitch of the nominal control trajectory in region II; zero rotor azimuth ($\psi = 0$); zero nacelle yaw angle ($\gamma_{\text{nac}} = 0$).

These CAD geometries are suitable for generating conformal meshes for blade-resolved CFD simulations. It should be noted that, owing to manufacturing tolerances in the blade production process, minor discrepancies may exist between the nominal G1 blade geometry and the actual geometry of the tested blades, which is not known.

5.2 Synthetic inflow

Time histories of the synthetic inflows generated by two LES analyses, aimed at reproducing the Mod-TI and High-TI atmospheric boundary layers (ABLs), are provided. The simulations were performed using the Simulator fOr Wind Farm Applications (SOWFA, Churchfield et al. (2012)), including an explicit representation of the spires and roughness elements used to generate the boundary layer in the wind tunnel. Further details of the numerical setup are reported in Wang et al. (2019).

The provided datasets (Campagnolo et al., 2026k, l) consist of time histories of the three velocity components sampled along a vertical plane located 19.1 m downstream of the inlet, i.e. 10 m upstream of the turntable center, and therefore very close to the location of the corresponding experimental inflow mapping. For the Mod-TI case, the time history spans approximately 70 s, with data sampled at 0.9 ms intervals. For the High-TI case, the time history spans approximately 40 s, with data sampled at 1 ms intervals. For each time instant, a text file is provided in the corresponding folder containing the three instantaneous components of the velocity vector sampled at the mesh nodes. The coordinates of the mesh nodes are specified in a separate file.

The synthetic inflow can be scaled following the same procedure suggested for the experimental inflow mapping, described in Sect. 4.1.1. The resulting inflows have been used in several studies (Wang et al., 2017a, 2018b, a, 2019, 2020d, a, c, 2021; Bortolin et al., 2020; Wang et al., 2017a, 2018b, a, 2019, 2020d, a, c, 2021; Bortolin et al., 2026; Mühle et al., 2026) to numerically assess the impact of a wide range of wind-farm control strategies on the performance of a cluster of G1 turbines and their shed wakes.

5.3 Simulink model

A two-degree-of-freedom (2-DOF) numerical model of the G1 turbine is implemented in Simulink. The model neglects blade and drivetrain flexibility and resolves the drivetrain and north-south tower dynamics, the latter represented by a mass-spring-damper system.

For aligned operation ($\gamma = 0^\circ$), the rotor aerodynamic power and thrust are computed using Blade Element Momentum (BEM) theory, as implemented in the OpenFAST model described in Sect. 5.4. Specifically, simulations were performed for multiple combinations of wind speed, tip-speed ratio, and collective blade pitch. The resulting aerodynamic power and thrust coefficients are stored in three-dimensional LUTs, which are interpolated in Simulink during model execution.

The model can also predict power and thrust losses induced by yaw misalignment. To this end, the approach proposed in Tamaro et al. (2024) is adopted, which accounts for the effect of yaw misalignment on rotor aerodynamic performance as collective pitch, tip-speed ratio, rotor speed, and vertical shear vary. The corresponding thrust and power loss factors, η_T and η_P , are stored in five-dimensional LUTs and interpolated during model execution. These loss factors are applied to the thrust and power predicted under aligned conditions.

The 2-DOF numerical model includes the controller responsible for tracking the prescribed control trajectory, also during curtailed or derated operation (see Sect. 2.2.6). The temporal evolution of wind speed is defined by the REWS estimated from the appropriately scaled synthetic inflow.

The provided model (Campagnolo et al., 2026g) consists of a Simulink file and its parameters, available in a MATLAB (.mat) file. The model has been used, in its original or slightly modified form, to support research on wind-turbine and wind-farm control strategies (Campagnolo et al., 2022a; Tamaro et al., 2026).

5.4 ~~OpenFast~~ OpenFAST model

The aeroservoelastic behavior of the G1 turbine is modeled in OpenFAST (Jonkman et al., 2019) using the following modules:

- **ElastoDyn (v1.03):** resolves the structural dynamics of the G1 blades, tower, and drivetrain. The mass and stiffness distributions of the structural components are based on their nominal properties. The first fore-aft and side-side natural frequencies of the tower, which are approximately 15% higher than the 1P at rated condition, were tuned using the tower load spectra. Similarly, the drivetrain stiffness was tuned to match the first drivetrain natural frequency inferred from the ~~torquemeter spectra~~ torque meter spectra, which is slightly higher than 6 times the 1P at the rated condition. Higher tower modes and blade natural frequencies may differ from the experimental ones, which are unknown. However, note that the structural design of the blades is driven by strength requirements; as a result, the natural frequencies are much higher and not representative of ~~the frequencies~~ those of an aeroelastically-scaled model. Virtual load sensors, placed at the same locations as the G1 load sensors, are also implemented. Finally, two versions of the ElastoDyn input files are provided: one for the standard yaw actuator and the other for the fast yaw actuator.

- **AeroDyn (v15.03)**: computes aerodynamic loads using a BEM-based formulation with improved performance at large skew angles (Branlard et al., 2024). Airfoil polars were specifically tailored to achieve good agreement between experimental and numerical performance under aligned operating conditions (Wang et al., 2020b).
- **ServoDyn (v1.05)**: implements all control functionalities described in Sect. 2.2.6, with the exception of the IPC block for load reduction. Specifically, the controller implemented in Simulink is compiled into a Bladed-style Dynamic Link Library (DISCON.dll) following the approach of Mulders et al. (2020), with control parameters (e.g., curtailment, derating, and the amplitude and frequency of wake-mixing techniques) specified in an external file (DISCON.in).
- **InflowWind (v3.01)**: defines the inflow wind conditions using the appropriately scaled synthetic inflow.

The provided data (Campagnolo et al., 2026h) includes the OpenFAST input files, the 64-bit DISCON.dll, the DISCON.in file containing the control settings, and an example inflow file modelling the Mod-TI ABL. The Simulink model of the controller is also provided, enabling the controller compilation for other operating environments.

5.5 AMR-Wind model

A digital twin of the experimental facility is implemented within the open-source, GPU-accelerated flow solver *AMR-Wind* (Sharma et al., 2024; Kuhn et al., 2025), which solves the incompressible Navier-Stokes equations with Boussinesq buoyancy, Coriolis forcing, and actuator forcing. The flow is advanced in time using a fixed time step of $\Delta t = 2.5 \times 10^{-4}$ s, for a total simulated time of 30 s. The computational domain spans $x \in [-10.0, 14.2]$ m, $y \in [-6.92, 6.92]$ m, and $z \in [0.0, 3.84]$ m, and is discretized on a base mesh of $304 \times 176 \times 48$ cells with three adaptive mesh refinement (AMR) levels, resulting in a mesh size of 0.0098 m (equal to $\approx D/112$) at the turbine rotor disk. No-slip wall boundary conditions are imposed on the lateral boundaries (y_{lo} , y_{hi}) and at upper boundary (z_{hi}), while the streamwise boundaries x_{lo} and x_{hi} are modeled as mass inflow at x_{lo} and pressure outflow at x_{hi} . A surface roughness length $z_0 = 10^{-3}$ m is used at the lower boundary (z_{lo}).

Realistic inflow conditions are imposed through ingestion of time-resolved velocity fields from a precursor LES (Mod-TI synthetic inflow, see Sect. 5.2), using the boundary-plane inflow capability of AMR-Wind at x_{lo} . AMR-Wind version v3.8.0 (and AMReX v24.10) was used and minimally modified such that the ingested velocity fields can be scaled by a constant factor to match the experimental wind conditions. The small turbulence scales in the LES are modeled with the AMD subgrid-scale model.

Within the provided datasets (Campagnolo et al., 2026j), each scaled wind turbine is modeled with the Actuator Line Model (ALM) corrected through the vortex-based tip/smearing correction of Meyer Forsting et al. (2019), which couples AMR-Wind with OpenFAST to capture the aeroservoelastic response of each G1 turbine. Each rotor blade is discretized using 60 actuator points and 12 points along the tower, with a Gaussian smearing width $\epsilon = 0.013$ m.

The CFD solver is coupled with OpenFAST v3.5.0. The G1 turbine modelling files and the closed-loop control system are identical to those used in the model described in Sect. 5.4. The controller is interfaced with OpenFAST via a dynamic library compiled on a Linux system.

Wind-tunnel experiments at reduced scale inevitably come with trade-offs when compared with true field, full-scale conditions. Here, the key shortcomings of the present dataset are examined, with a clear line drawn between what it can credibly validate and what sits outside its reach. Full details of the scaling approach are available in Campagnolo et al. (2020b); Wang et al. (2021); Canet et al. (2021); what follows is a brief review of that material.

850 *Reynolds-number mismatch.* Based on blade chord, the Reynolds number of the G1 rotors falls roughly between 50000 and 80000, meaning it is lower than full scale by orders of magnitude. To reduce the impact of this gap, low-Reynolds-number airfoils are used to reproduce realistic rotor aerodynamic behavior at model scale. At the same time, the most influential non-dimensional quantities for wake development are matched, namely tip-speed ratio, thrust coefficient, non-dimensional circulation, and the rotor-based Strouhal number (Wang et al., 2021). Under those similarity constraints, the G1 wakes can be
855 considered representative of full-scale wakes in a non-dimensional sense (Wang et al., 2021). Even so, effects tied directly to the blade boundary layer – for example airfoil transition, stall characteristics, or aeroacoustic emissions – do not translate to full scale. For that reason, the dataset is not a suitable basis for validating models intended to predict those boundary-layer-driven phenomena at full scale.

Inflow realism. The inflow boundary layers are produced passively, using spires and roughness elements, and they reproduce
860 realistic shear and turbulence-intensity vertical profiles. Still, several atmospheric ingredients are missing: Coriolis-driven wind veer, stratification and buoyancy, in addition to the largest turbulent length scales, which simply cannot develop within the limited size of the test section. In addition, the mean flow shows a small lateral non-homogeneity (see Sect. 4.1.1); it is measured and shared so users can include it explicitly in their analyses. When wind direction is varied in time, this change is emulated by rotating the turntable. This means that the turbine cluster is rotated – and the turbines are therefore moved – within
865 an otherwise steady mean flow, while the opposite happens in reality – where the turbines do not move and it is the flow that rotates with respect to the ground. While using the turntable enables matching the changing relative alignment between inflow and farm, it does not reproduce the atmospheric dynamics that cause real direction shifts.

Blockage. The rotor swept area of one G1 is about 1.8% of the test-section cross-sectional area; as a result, blockage-related impacts on measured performance are expected to be very small (Wang et al., 2021).

870 *Actuator and structural scaling.* With the time compression ratio of 80 resulting from the size scaling and the tunnel flow speed (Bottasso and Campagnolo, 2022), the pitch and yaw actuation is as fast as – and in some cases faster than – what is typical at full scale, which is essential for the wake-mixing strategies exercised here. The manufacturing of the scaled blades prioritizes safety and therefore strength, not aeroelastic similarity, so blade natural frequencies end up far higher than in an aeroelastically-scaled design. This makes blade elastic behavior non-representative of full-scale response. By contrast,
875 the placement of the first tower fore-aft and side-side modes, as well as the drivetrain mode relative to rotor harmonics, is comparable to full-scale machines (see Sect. 5.4). In practice, the measured loads should be considered as those of a stiff aeroservoelastic system. They serve well for validating control-focused load models and for assessing load changes driven by wake-control actions, but they should not be used to infer or extrapolate absolute fatigue levels directly to full scale.

Farm geometry. The experiments cover compact clusters, composed of at most three turbines, and with relatively tight spacing. Effects associated with deep arrays, farm-scale blockage, or gravity-wave interactions are clearly not captured by this dataset.

Taken together, the dataset is meant to support validation of control-oriented aeroelastic models, engineering and LES wake models, wind-farm flow models, and wind-farm control strategies, interpreted in a non-dimensional or model-scale sense and under the specified inflow conditions. It is not meant for validating blade-resolved boundary-layer aerodynamics, aeroelastic blade deformation and response, absolute full-scale fatigue loading, or any process dominated by atmospheric physics that the wind tunnel cannot reproduce.

7 Conclusions

This paper presents a ~~new~~-newly released open-access experimental dataset specifically designed for wind-farm control and wake-interaction research. Although several of the underlying experimental campaigns, conducted between 2016 and 2025, have supported previous publications, the data are made publicly available here for the first time, in a complete, harmonized, and fully documented form. The dataset comprises time-resolved structural loads, actuator commands, turbine operating states, and wake measurements obtained from wind-tunnel experiments featuring actuated and instrumented scaled wind turbine models. The measurements cover a broad range of ~~wake-control~~-wake-affecting strategies, including yaw-based wake steering, dynamic yaw actuation, Pulse-based wake mixing, Helix control, curtailment and derating strategies, individual pitch control for load mitigation, and combinations thereof.

A key distinguishing feature of the dataset is the simultaneous availability of actuator commands, measured turbine responses, and high-frequency structural load measurements under controlled and repeatable inflow conditions. This enables detailed investigations of controller tracking performance, load variability, and dynamic turbine behaviour induced by active wake-control strategies. In addition to the experimental measurements, the database provides numerical models reproducing the experimental configurations, thereby establishing a reproducible benchmarking framework that supports systematic validation, sensitivity analyses, and model-to-model comparison.

By addressing the current scarcity of publicly available time-resolved datasets tailored to wind-farm control studies, this work contributes to ongoing community efforts aimed at enhancing transparency, reproducibility, and model fidelity in wind-farm control research. The dataset is expected to support validation of control-oriented aeroelastic and wake-interaction models, fatigue-relevant load assessments under active wake-control operation, and benchmarking of numerical tools used for wind-farm design and control.

The intended scope of the dataset, together with the inherent limitations of scaled wind-tunnel testing – and hence what the data can and cannot be used to validate – is critically discussed in Sect. 6. The companion numerical models are provided as optional, documented reference implementations, and users are encouraged to develop and validate their own independent models against the experimental data.

Future extensions may include additional inflow conditions, further control strategies, and expanded numerical reference cases, with the aim of progressively consolidating this dataset as a community benchmark for controlled wake-interaction studies. To this end, the repository documentation will be maintained and updated in response to community feedback, and users are encouraged to report issues or suggestions for improving the data description.

915 **Appendix A: Validation of the numerical models**

This section presents a validation of the models described in Sect. 5 against a subset of the experimental data presented in Sect. 4.1. Table A1 lists, for each validated numerical model, the data obtained from the validation simulations, together with the corresponding repository links.

Table A1. Overview of the provided simulation data and corresponding repository

Numerical model	Provided simulation data	Data repository
G1 drive-train and tower dynamics	In. and out. variables, stored in MATLAB (.mat) files	https://doi.org/10.5281/zenodo.18755240
G1 aeroservoelasticity	OpenFast OpenFAST output files (.outb)	https://doi.org/10.5281/zenodo.18772302
Wakes and wake-turbine interaction within the wind tunnel	AMR-Wind (.nc) and OpenFast OpenFAST (.outb) output files	https://doi.org/10.5281/zenodo.18874300

A1 Validation of the synthetic inflow

920 Figure A1 shows a numerical-experimental comparison of the longitudinal turbulence intensity (TI, lower panels) and the mean longitudinal velocity $\bar{u}_x$ (upper panels), with the latter normalized by the corresponding mean velocity at the Pitot tube position $\bar{u}_{x,P}$. Panels a-d and e-h present the comparison for Mod-TI and High-TI inflow conditions, respectively.

The synthetic inflow reproduces reasonably well the variability of both the mean velocity and the longitudinal turbulence intensity, along both the lateral direction (panels a, c, e, g) and the vertical direction (panels b, d, f, h), with errors on the order
 925 of a few percentage points. Further comparisons between the turbulent kinetic energy spectra and the autocorrelation of the synthetic inflow and the experimental measurements are reported in Wang et al. (2019).

A2 Validation of the Simulink model

Figure A2 shows a comparison between numerical predictions and experimental data for the most upstream machine in the cluster (WT1), operating under greedy conditions (panels a-d) and under combined yaw misalignment and derating conditions
 930 (panels e-h).

The simulations were performed by reducing the simulated mean wind speed by 0.1 ms^{-1} relative to the mean of the Pitot measurement. These modest adjustments to the simulated ambient conditions, justified by the uncertainty in wind-speed measurements, improve the agreement with the experimental data. The first 5 seconds were also discarded to avoid transient effects in subsequent analyses.

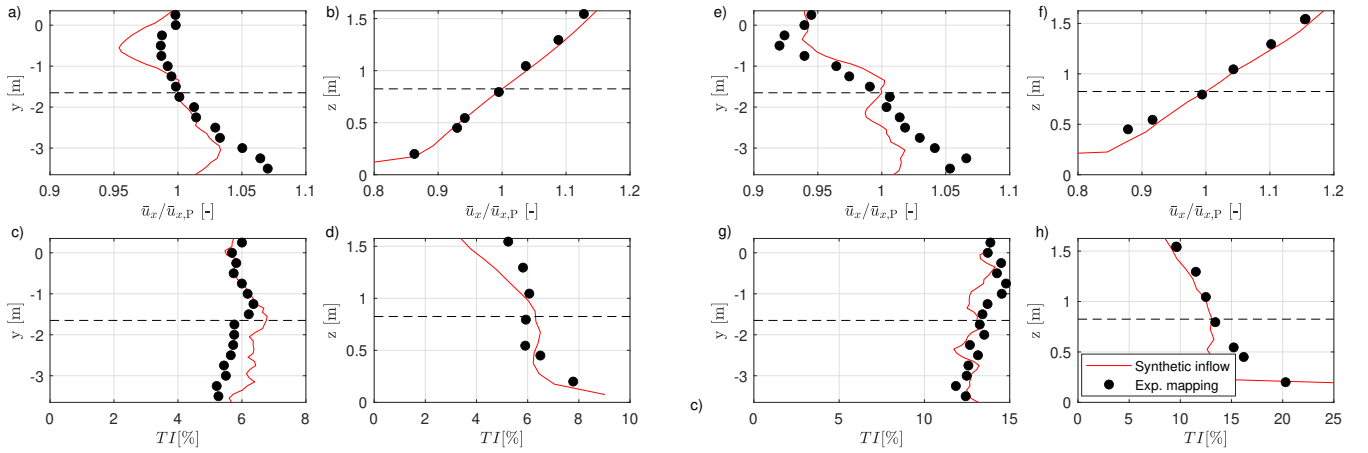


Figure A1. Numerical (red lines) and experimental (black dots) comparison of the longitudinal turbulence intensity (lower panels) and the normalized mean longitudinal velocity (upper panels). Panels **a-d** and **e-h** refer to Mod-TI and High-TI inflow conditions, respectively. The black dashed lines mark the Pitot position.

935 Statistical distributions of the considered quantities are represented using boxplots. For each case, the central line of the box indicates the median value, while the box edges correspond to the first and third quartiles. The whiskers extend to 1.96 times the interquartile range, indicating the variability associated with approximately 95% of the data under the assumption of a normally distributed sample. Outliers are not explicitly shown. The boxplots are positioned and colored to allow direct comparison between experimental and numerical data, as well as between different operating conditions.

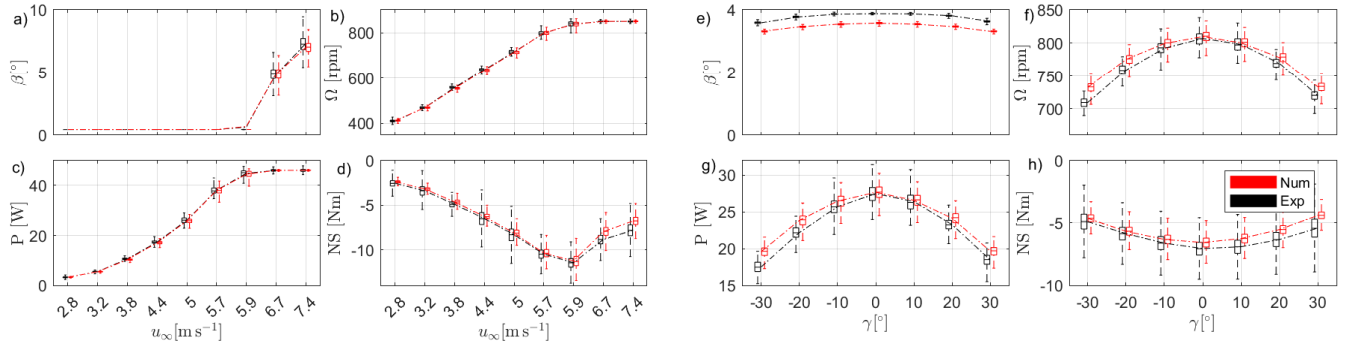


Figure A2. Dataset “Wind turbine data under steady wind direction”. Boxplots **a-d**: comparison between experimental (black) data and numerical (red) predictions for greedy operation of WT1 under Mod-TI inflow conditions and varying wind speed (test IDs: [592:6:640]). Boxplots **e-h**: comparison between experimental (black) data and numerical (red) predictions for derated ($P_d = 0.7$) and yaw-misaligned operation of WT1 under Mod-TI below-rated inflow conditions (test IDs: [667:673]).

940 The agreement in terms of mean values is very good, except for the blade pitch under combined derating and yaw misalignment. This discrepancy is attributed to the fine-tuning of the optimal pitch implemented in the controller deployed on the G1 turbine (Campagnolo et al., 2023), which differs from the nominal pitch setting implemented in the controller coupled to the simulation environment.

The variability of the considered signals, primarily driven by turbulence in the simulated inflow, is also well captured, except for the tower-base load. This indicates accurate modelling of the drivetrain dynamics in the Simulink environment, whereas the tower motion dynamics is only partially captured by the adopted mass-spring-damper system.

A3 Validation of the ~~OpenFast~~ OpenFAST model

Figures A3 and A4 compare numerical predictions with experimental data for WT1 under Helix and DY operation, using boxplots. The plots illustrate the sensitivity of the main signals measured on the G1 turbine to variations in the amplitude of the investigated mixing strategy, while the mixing frequency is kept constant.

For the simulations performed with Helix, the simulated mean wind speed was reduced by 0.1 ms^{-1} with respect to the mean value measured by the Pitot. The simulations were carried out using the ElastoDyn input files for the fast yaw actuator, with the degree of freedom associated with the first blade edgewise mode disabled, as its activation prevented the solver from converging. The first 30 seconds were also discarded to avoid transient effects in subsequent analyses. Finally, the numerical loads were corrected for the contributions due to the weight of the tower and the rotor-nacelle assembly at zero yaw, as obtained from a no-wind simulation with the rotor at standstill.

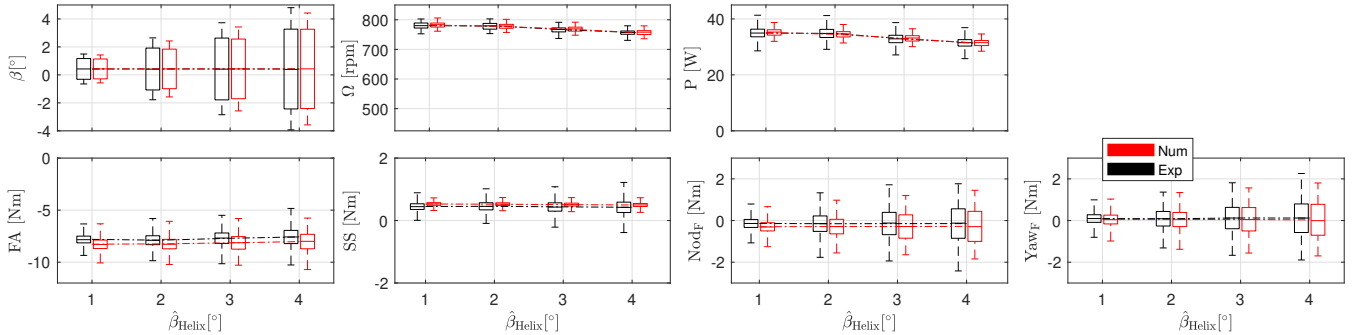


Figure A3. Dataset “Wind turbine data under steady wind direction”. Comparison between experimental (black) data and numerical (red) predictions for CCW Helix operation ($f_{\text{Helix}} = 1.075$) of WT1 under Mod-TI below-rated inflow conditions and varying amplitude $\hat{\beta}_{\text{Helix}}$ (test IDs: [988:991]).

The aeroelastic model accurately captures both the mean values and their variability. In particular, the increase in load variability associated with increasing wake-mixing amplitude is reasonably well reproduced. Only the variability of the side-side bending moment at the tower base is underestimated by the model.

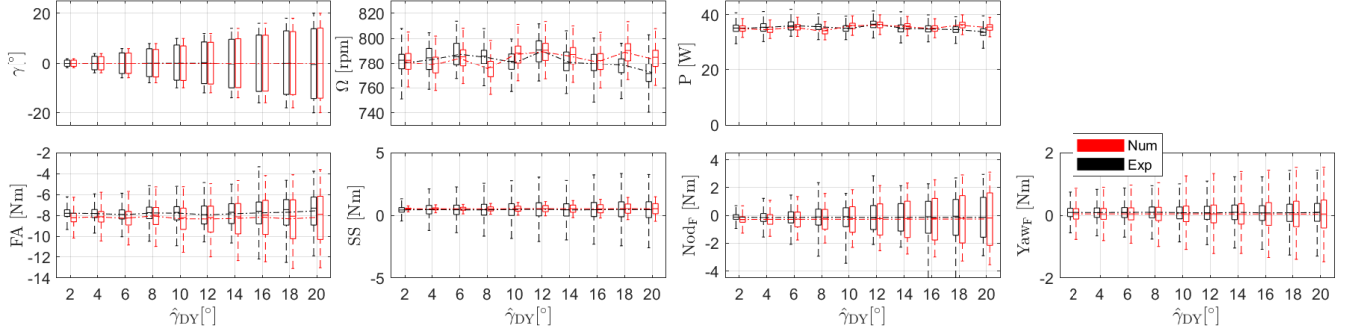


Figure A4. Dataset “Wind turbine data under steady wind direction”. Comparison between experimental (black) data and numerical (red) predictions for DY operation ($f_{DY} = 0.75$ Hz) of WT1 under Mod-TI below-rated inflow conditions and varying amplitude $\hat{\gamma}_{DY}$ (test IDs: [1069 1081 1094 1106 1120 1126 1131 1134 1139 1141]).

960 The spectrum of the numerical side-side bending moment signal shows a marked underestimation of vibrations at frequencies above the first tower mode. This indicates the need to improve the accuracy of the parameters governing high-frequency tower vibrations, which could be achieved through appropriate tuning based on results from a comprehensive experimental modal analysis of the G1 turbine.

A4 Validation of the AMR-Wind model

965 Figure A5 shows the average longitudinal velocity field $\bar{u}_x$ predicted by AMR-Wind for two cases of the multiple wake measurement with lidars dataset (see Sect. 4.1.3): greedy control (panel a) and yaw misalignment of the two upstream machines (panel b). The shown data are sampled along a horizontal plane at $z = 0.925$ m, with the wind speed normalized by $\bar{u}_{x,P}$, i.e. the average of the numerical wind speed at the Pitot position.

The simulations were performed by suppressing all elastic dofs in [OpenFast-OpenFAST](#) to simplify the numerical setup.
970 Furthermore, the first ten seconds of simulation data were discarded to remove transient effects.

Figure A6 shows the comparison between the normalized horizontal wake profiles at $z = 0.925$ m measured experimentally with the lidar (black dots) and predicted by AMR-Wind (red lines). The lidar measurements were first filtered using a simple min-max criterion, removing all velocity samples outside the range $0-8 \text{ ms}^{-1}$. Average velocity-deficit profiles were then obtained by binning the data in the x and y directions with bin sizes of 0.05 m and 0.1 m, respectively. The CFD sampling data
975 from AMR-Wind were processed in a similar way. Due to the regular structure of the CFD sampling grid, the data were only binned in the x direction (bin size 0.05 m).

The agreement between numerical and experimental data is very good, with the largest discrepancies observed at 11D for the case when the two upstream turbines are yaw-misaligned.

Figure A7 shows the comparison between the power gains $P_{\text{Gain}} = P^{\text{WS}}/P^{\text{Greedy}} - 1$ obtained by yaw-misaligning the
980 two upstream turbines relative to the greedy case, as measured experimentally and predicted numerically. The power losses of

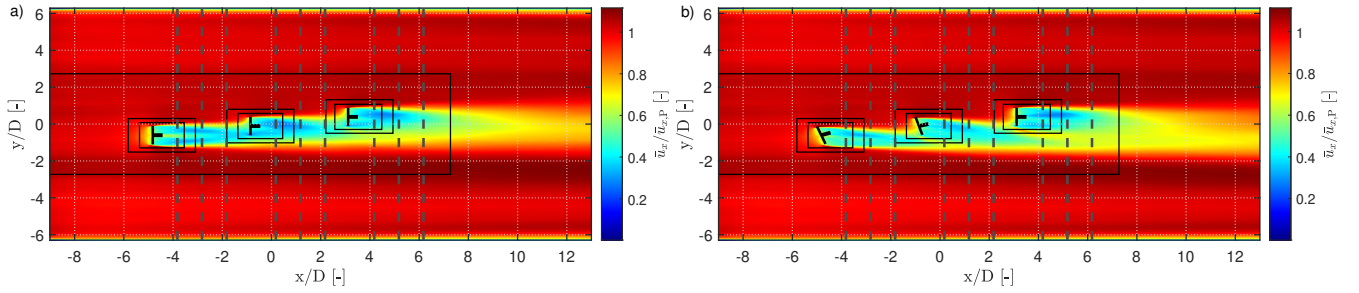


Figure A5. Dataset “Multiple wakes measurement with lidars”. Normalized longitudinal velocity field at $z = 0.925$ m predicted by AMR-Wind for two cases: greedy control (panel **a**, ID 1) and yaw misalignment of the two upstream turbines (panel **b**, ID 4) under Mod-TI below-rated inflow conditions. The black rectangles indicate the three AMR levels. The vertical dashed lines mark the streamwise locations where the comparison between lidar measurements and numerical results is performed (see Fig. A6).

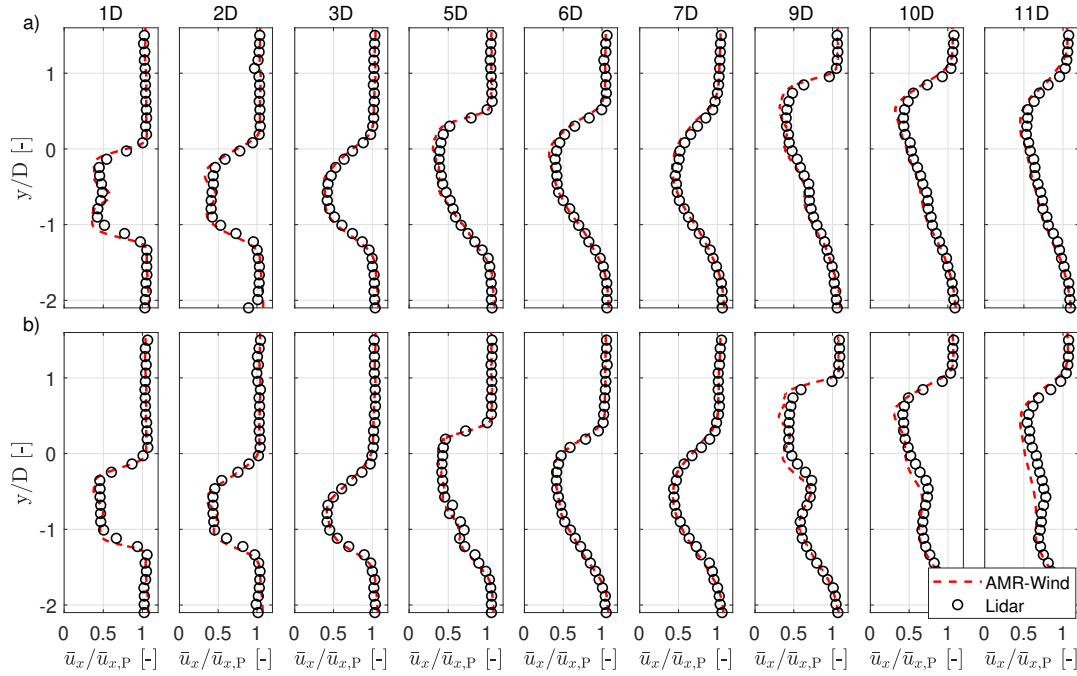


Figure A6. Dataset “Multiple wakes measurement with lidars”. Comparison of experimental lidar data (black dots) and AMR-Wind numerical predictions (red lines) of normalized horizontal wake profiles for greedy control (panel **a**, ID 1) and yaw misalignment of the two upstream turbines (panel **b**, ID 4) under Mod-TI below-rated inflow conditions. The comparison is performed at several streamwise locations, expressed in rotor diameters downstream of WT1.

WT1 induced by the yaw misalignment are well reproduced by the numerical simulations, whereas the power gains of WT2 and WT3 due to wake steering are slightly overestimated. Overall, the wind-farm power gain almost falls within the expected uncertainty range of the experimental measurements, estimated by propagating the individual sources of error.

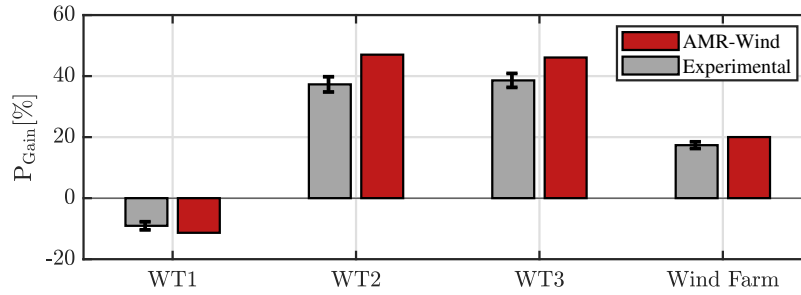


Figure A7. Dataset “Multiple wakes measurement with lidars”. Comparison of experimental measurements and AMR-Wind predictions of the power gain P_{Gain} relative to greedy control (ID 1), obtained by yaw-misaligning the two upstream turbines (ID 4) under Mod-TI below-rated inflow conditions. The error bars represent the uncertainty of the experimental measurements.

Appendix: Nomenclature

A	Rotor swept area [m ²]
C_m	Cone coefficient [-]
C_P	Power coefficient [-]
C_T	Thrust coefficient [-]
D	Rotor diameter [m]
EW	East-West tower base bending moment [Nm]
FA	Fore-Aft tower base bending moment [Nm]
f	Frequency [Hz]
f_r	Rotor rotational frequency [Hz]
$K_{Q,I}$	Integral gain of the PI torque controller [Nms]
$K_{Q,P}$	Proportional gain of the PI torque controller [Nm]
$K_{\beta,I}$	Integral gain of the PI pitch controller [-]
$K_{\beta,P}$	Proportional gains of the PI pitch controller [s]
$M_{x,S}, M_{y,S}$	Shaft rotating bending moments [Nm]
Nod_F	Fixed-frame nacelle nodding moment [Nm]
NS	North-South tower base bending moment [Nm]
P	Mechanical power [W]
P_D	Demanded curtailed power [W]
P_d	Power derating factor [-]
P_n	Normalized mechanical power [-]
<u>P_R, Q_R, Ω_R</u>	<u>Rated power [W], torque [Nm], and rotor speed [rpm]</u>
<u>r_{cog}</u>	<u>Distance of the rotor-nacelle center of gravity from the tower axis [m]</u>
p_{dyn}	Pitot dynamic pressure [Pa]
Q	Mechanical torque [Nm]
R	Rotor radius [m]
SS	Side-Side tower base bending moment [Nm]
t	Time [s]
T	Rotor thrust force [N]
u_∞	Freestream wind speed [ms ⁻¹]
u_x, u_y, u_z	Velocity components [ms ⁻¹]
v_{LOS}	Line-of-sight velocity measured by lidar [ms ⁻¹]
<u>W</u>	<u>Total rotor-nacelle weight [N]</u>
x, y, z	Longitudinal, lateral, and vertical coordinates [m]
Y_{awF}	Fixed-frame nacelle yawing moment [Nm]
z_H	Hub height [m]
z_{SG}	Distance between the rotor apex and the tower strain-gauge section [m]

985

α	<u>Power-law shear exponent [-]</u>
β_i	Pitch angle of blade i [°]
δ	<u>Angular resolution (quantization interval) of encoder-based measurements [°]</u>
Δ	<u>Measurement uncertainty at a 95% confidence level (of the following quantity)</u>
ϵ_Ω	Rotor speed error [rpm]
γ_{BL}	<u>Gearbox mechanical backlash [°]</u>
γ	Yaw misalignment angle [°]
γ_{nac}	Nacelle yaw angle [°]
γ_u	Yaw angle of velocity vector [°]
Φ	Turntable angle [°]
φ_u	Tilt angle of velocity vector [°]
λ	Tip-speed ratio [-]
ρ	Air density [kg m ⁻³]
σ_ϕ	<u>Standard deviation of wind-direction uncertainty [°]</u>
Ω	Rotor angular velocity [rpm]
ψ	Rotor azimuth angle [°]

$(\cdot)_{Dem}$	Demanded value
$(\cdot)_{Meas}$	Measured value
$(\cdot)_{opt}$	Optimal value
$(\cdot)_P$	Pitot probe reference position
$(-)_R$ Red value $(\cdot)_S$	Rotating shaft reference frame

ABL	Atmospheric boundary layer
APC	Active power control
CAD	Computer-aided design
CTA	Constant temperature anemometer
DEL	Damage equivalent load
DIC	Dynamic induction control
DY	Dynamic yaw
IPC	Individual pitch control
LES	Large eddy simulation
PLC	Programmable logic controller
REWS	Rotor effective wind speed
TSR	Tip-speed ratio

Code and data availability. The "Experimental inflow mapping" dataset (Campagnolo et al., 2026f) is available on Zenodo at <https://doi.org/10.5281/zenodo.18749773> and on WindLab at <https://windlab.hlr.de/dataset/18749773>.

The "Single wake measurement" dataset (Campagnolo et al., 2026c) is available on Zenodo at <https://doi.org/10.5281/zenodo.18732794> and on WindLab at <https://windlab.hlr.de/dataset/18732794>.

The "Double wakes measurement" dataset (Campagnolo et al., 2026e) is available on Zenodo at <https://doi.org/10.5281/zenodo.18743973> and on WindLab at <https://windlab.hlr.de/dataset/18743973>.

The "Multiple wakes measurement" dataset (Campagnolo et al., 2026b) is available on Zenodo at <https://doi.org/10.5281/zenodo.18731994> and on WindLab at <https://windlab.hlr.de/dataset/18731994>.

The "Wind turbine data under steady wind direction" dataset (Campagnolo et al., 2026a) is available on Zenodo at <https://doi.org/10.5281/zenodo.18723855> and on WindLab at <https://windlab.hlr.de/dataset/18723855>.

The "Wind turbine data under dynamically varying wind direction" dataset (Campagnolo et al., 2026d) is available on Zenodo at <https://doi.org/10.5281/zenodo.18743431> and on WindLab at <https://windlab.hlr.de/dataset/18743431>.

The 3D CAD models (Campagnolo et al., 2026i) are available on Zenodo at <https://doi.org/10.5281/zenodo.19047499> and on WindLab at <https://windlab.hlr.de/dataset/19047499>.

The synthetic inflows (Campagnolo et al., 2026k, l) are available on Zenodo at <https://doi.org/10.5281/zenodo.18860646> and <https://doi.org/10.5281/zenodo.19004026>, as well as WindLab at <https://windlab.hlr.de/dataset/18860646> and <https://windlab.hlr.de/dataset/19004026>.

The 2-DOF Simulink model and its input/output files for selected cases (Campagnolo et al., 2026g) are available on Zenodo at <https://doi.org/10.5281/zenodo.18755240> and on WindLab at <https://windlab.hlr.de/dataset/18755240>.

The OpenFAST model and its output files for selected cases (Campagnolo et al., 2026h) are available on Zenodo at <https://doi.org/10.5281/zenodo.18772302> and on WindLab at <https://windlab.hlr.de/dataset/18772302>.

The AMR-Wind model and its input/output files for selected cases (Campagnolo et al., 2026j) are available on Zenodo at <https://doi.org/10.5281/zenodo.18874300> and on WindLab at <https://windlab.hlr.de/dataset/18874300>.

Author contributions. CLB conceived the G1 research concept as a platform for wake behaviour and wind farm control studies, initiated and led the research projects enabling its development and testing, designed and supervised the experimental activities. He contributed to the analysis and interpretation of the results and helped define the overall research direction. FC designed and developed the G1 wind turbines and their acquisition and control systems, covering both system-level definition and detailed engineering, including hardware selection, mechanical design, and control software implementation. He co-designed the experimental campaigns, played a key role in their execution, contributed to data analysis and interpretation, and created and structured the dataset. He led the development of the digital twins of the experimental facility described in the paper. CLB conceived this data description paper, with the initial draft written by FC. FVM, ST, and DB contributed to the design and execution of the experimental activities, data analysis, and technical discussions. AD contributed to the development of the numerical models and the controllers integrated within them. All authors contributed ideas, suggestions, and improvements to the writing and editing of the paper.

Financial support. This work has been supported in part by the German Federal Ministry for Economic Affairs and Energy through projects CompactWind (FKZ: 0325492), e-TWINS (FKZ: 03EI6020A), PowerTracker (FKZ: 03EE2036A), and LifeOdometer (FKZ: 03EE3037B).

This work has also been partially supported by the European Union’s Horizon Europe Programme through projects CL-WINDCON (grant agreement No. 727477), TWEET-IE (grant agreement No. 101079125), and MERIDIONAL (grant agreement No. 101084216).

1025 *Competing interests.* At least one of the (co-)authors is a member of the editorial board of *Wind Energy Science*.

Acknowledgements. The authors gratefully acknowledge Insu Paek of Kangwon National University for developing the very first version of the Simulink controller that tracks the regulation trajectory. Emmanouil Nanos, Vlaho Petrović, Manu Prosser, Johannes Schreiber, Chengyu Wang, and Robin Weber from the Technical University of Munich are gratefully acknowledged for their valuable contribution to the development of the G1 model, the execution of the wind-tunnel experiments, the development of the synthetic inflow, and the implementation of the numerical setup in AMR-Wind.

The authors thank Stefano Cacciola, Gabriele Campanardi, Alessandro Croce, Stefano Giappino, Donato Grassi, Luca Ronchi, Paolo Schito, and Alberto Zasso from Politecnico di Milano for conducting the hot-wire flow measurements and for their support during the wind-tunnel experimental campaigns.

1035 The authors also express their gratitude to the Leibniz Supercomputing Centre (LRZ) for providing access and computing time on the SuperMUC Petascale System under Projekt-ID pn67qi “Large-eddy Simulation of wind farm Control beyond Power maximization” (LESCoP).

References

- Bachmann electronic GmbH: System overview, <https://www.bachmann.info/en/system-overview>, last accessed: 2025-12-12, 2025.
- Boorsma, K. and Schepers, J.: New MEXICO experiment. Preliminary Overview with Initial Validation, Tech. Rep. ECN-E-14-048, Energy Research Centre of the Netherlands (ECN), 2014.
- 1040 Boorsma, K. and Schepers, J. G.: Rotor experiments in controlled conditions continued: New Mexico, *Journal of Physics: Conference Series*, 753, 022004, <https://doi.org/10.1088/1742-6596/753/2/022004>, 2016.
- Bortolin, D., Tamaro, S., Campagnolo, F., Mühle, F., Manolesos, M., Croce, A., Bottasso, C., et al.: An experimental investigation on wake mixing and steering techniques, in: *Journal of Physics: Conference Series*, vol. 3224, pp. 1–11, IOP Publishing, <https://doi.org/10.1088/1742-6596/3224/3/032050>, 2026.
- 1045 Bortolotti, P., Tarres, H. C., Dykes, K., Merz, K., Sethuraman, L., Verelst, D., and Zahle, F.: IEA Wind TCP Task 37: Systems engineering in wind energy-WP2. 1 Reference wind turbines, <https://doi.org/10.2172/1529216>, 2019.
- Bossanyi, E. A.: Wind turbine control for load reduction, *Wind Energy*, 6, 229–244, <https://doi.org/10.1002/we.95>, 2003.
- Bottasso, C. L. and Campagnolo, F.: Wind tunnel testing of wind turbines and farms, *Handbook of Wind Energy Aerodynamics*, pp. 1077–1126, https://doi.org/10.1007/978-3-030-31307-4_54, 2022.
- 1050 Bottasso, C. L., Cacciola, S., and Schreiber, J.: Local wind speed estimation, with application to wake impingement detection, *Renewable Energy*, 116, 155–168, <https://doi.org/10.1016/j.renene.2017.09.044>, 2018.
- Branlard, E., Jonkman, J., Lee, B., Jonkman, B., Singh, M., Mayda, E., and Dixon, K.: Improvements to the blade element momentum formulation of openfast for skewed inflows, in: *Journal of Physics: Conference Series*, vol. 2767, p. 022003, IOP Publishing, <https://doi.org/10.1088/1742-6596/2767/2/022003>, 2024.
- 1055 Campagnolo, F.: Wind tunnel testing of scaled wind turbine models: aerodynamics and beyond, 2013.
- Campagnolo, F. and Bottasso, C. L.: On the effectiveness of one-sided wake steering-A wind tunnel study with dynamic direction changes, in: *2021 American Control Conference (ACC)*, pp. 3070–3075, IEEE, <https://doi.org/10.23919/ACC50511.2021.9483266>, 2021.
- Campagnolo, F., Petrović, V., Schreiber, J., Nanos, E. M., Croce, A., and Bottasso, C. L.: Wind tunnel testing of a closed-loop wake deflection controller for wind farm power maximization, in: *Journal of Physics: Conference Series*, vol. 753, p. 032006, IOP Publishing, <https://doi.org/10.1088/1742-6596/753/3/032006>, 2016.
- 1060 Campagnolo, F., Schreiber, J., Garcia, A. M., and Bottasso, C. L.: Wind tunnel validation of a wind observer for wind farm control, in: *ISOPE International Ocean and Polar Engineering Conference*, pp. ISOPE-I, ISOPE, 2017.
- Campagnolo, F., Molder, A., Schreiber, J., and Bottasso, C. L.: Comparison of analytical wake models with wind tunnel data, in: *Journal of physics: conference series*, vol. 1256, p. 012006, IOP Publishing, <https://doi.org/10.1088/1742-6596/1256/1/012006>, 2019.
- 1065 Campagnolo, F., Schreiber, J., and Bottasso, C. L.: Wake deflection control with wind direction changes: Wind tunnel comparison of different wind farm flow models, in: *2020 American Control Conference (ACC)*, pp. 4817–4823, IEEE, <https://doi.org/10.23919/ACC45564.2020.9147449>, 2020a.
- Campagnolo, F., Weber, R., Schreiber, J., and Bottasso, C. L.: Wind tunnel testing of wake steering with dynamic wind direction changes, *Wind Energy Science*, 5, 1273–1295, <https://doi.org/10.5194/wes-5-1273-2020>, 2020b.
- 1070 Campagnolo, F., Castellani, F., Natili, F., Astolfi, D., and Mühle, F.: Wind Tunnel Testing of Yaw by Individual Pitch Control Applied to Wake Steering, *Frontiers in Energy Research*, 10, <https://doi.org/10.3389/fenrg.2022.883889>, 2022a.

- Campagnolo, F., Imširović, L., Braunbehrens, R., and Bottasso, C. L.: Further calibration and validation of FLORIS with wind tunnel data, in: *Journal of Physics: Conference Series*, vol. 2265, p. 022019, IOP Publishing, <https://doi.org/10.1088/1742-6596/2265/2/022019>, 2022b.
- 1075 Campagnolo, F., Tamaro, S., Mühle, F., and Bottasso, C. L.: Wind Tunnel Testing of Combined Derating and Wake Steering, *IFAC-PapersOnLine*, 56, 8400–8405, <https://doi.org/10.1016/j.ifacol.2023.10.1034>, 2023.
- Campagnolo, F., Aktan, H. D., Bortolin, D., Tamaro, S., Mühle, F. V., and Bottasso, C. L.: Wind Tunnel Benchmark Dataset for Wind Farm Control Strategies on a Three-Turbine Farm, *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18723855>, 2026a.
- Campagnolo, F., Aktan, H. D., Bortolin, D., Tamaro, S., Mühle, F. V., and Bottasso, C. L.: Wind Tunnel Experimental Dataset for Wind Farm Control with Scanning Lidar Wake Measurements, *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18731994>, 2026b.
- 1080 Campagnolo, F., Aktan, H. D., Bortolin, D., Tamaro, S., Mühle, F. V., and Bottasso, C. L.: Wind Tunnel Single-Wake Dataset with Multi-Probe Flow Measurements and Turbine Loads, *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18732794>, 2026c.
- Campagnolo, F., Aktan, H. D., Bortolin, D., Tamaro, S., Mühle, F. V., and Bottasso, C. L.: Wind Tunnel Dataset of Wind Farm Power Boosting and Active Power Control under Unsteady Wind Direction (Three-Turbine Farm), *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18743431>, 2026d.
- 1085 Campagnolo, F., Aktan, H. D., Bortolin, D., Tamaro, S., Mühle, F. V., and Bottasso, C. L.: Wind Tunnel Double-Wake Dataset with Multi-Probe Three-Component Velocity Measurements (NetCDF Collection), *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18743973>, 2026e.
- Campagnolo, F., Aktan, H. D., Bortolin, D., Tamaro, S., Mühle, F. V., and Bottasso, C. L.: Wind Tunnel Atmospheric Boundary Layer Inflow Dataset (Lidar & Hot-Wire Measurements), *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18749773>, 2026f.
- 1090 Campagnolo, F., Aktan, H. D., and Bottasso, C. L.: Simulink 2-DOF Model of the G1 Wind Turbine with Simulation Inputs and Outputs for Wind Farm Control Benchmarking, *Zenodo* [numerical model and data set], <https://doi.org/10.5281/zenodo.18755240>, 2026g.
- Campagnolo, F., Aktan, H. D., and Bottasso, C. L.: OpenFAST G1 Model and Validation Simulations for the Wind Tunnel Benchmark Dataset for Wind Farm Control Strategies, *Zenodo* [numerical model and data set], <https://doi.org/10.5281/zenodo.18772302>, 2026h.
- Campagnolo, F., Bortolin, D., and Bottasso, C. L.: Simplified CAD geometry of the G1 wind turbine for blade-resolved CFD simulations, *Zenodo* [numerical model], <https://doi.org/10.5281/zenodo.19047499>, 2026i.
- 1095 Campagnolo, F., Bortolin, D., Prosser, M., Tamaro, S., and Bottasso, C. L.: Dataset for the AMR-Wind digital-twin simulations of the three-turbine experimental facility, *Zenodo* [numerical model and data set], <https://doi.org/10.5281/zenodo.18874300>, 2026j.
- Campagnolo, F., Tamaro, S., and Bottasso, C. L.: Mod-TI Synthetic Inflow Dataset for the G1 Wind Farm Control Benchmark, *Zenodo* [data set], <https://doi.org/10.5281/zenodo.18860646>, 2026k.
- 1100 Campagnolo, F., Tamaro, S., and Bottasso, C. L.: High-TI Synthetic Inflow Dataset for the G1 Wind Farm Control Benchmark, *Zenodo* [data set], <https://doi.org/10.5281/zenodo.19004026>, 2026l.
- Canet, H., Bortolotti, P., and Bottasso, C. L.: On the scaling of wind turbine rotors, *Wind Energy Science*, 6, 601–626, <https://doi.org/10.5194/wes-6-601-2021>, 2021.
- Cermak, J. E.: Wind-tunnel development and trends in applications to civil engineering, *Journal of Wind Engineering and Industrial Aerodynamics*, 91, 355–370, [https://doi.org/10.1016/S0167-6105\(02\)00396-3](https://doi.org/10.1016/S0167-6105(02)00396-3), 2003.
- 1105 Churchfield, M., Lee, S., Moriarty, P., Martinez, L., Leonardi, S., Vijayakumar, G., and Brasseur, J.: A large-eddy simulation of wind-plant aerodynamics, in: 50th AIAA aerospace sciences meeting including the new horizons forum and aerospace exposition, p. 537, 2012.
- Croce, A., Cacciola, S., and Isella, F.: Combining wake redirection and derating strategies in a load-constrained wind farm power maximization, *Wind Energy Science*, 9, 1211–1227, <https://doi.org/10.5194/wes-9-1211-2024>, 2024.

- 1110 Davis, R. S.: Equation for the Determination of the Density of Moist Air (1981/91), *Metrologia*, 29, 67–70, <https://doi.org/10.1088/0026-1394/29/1/008>, 1992.
Diana, G., De Ponte, S., Falco, M., and Zasso, A.: A new large wind tunnel for civil-environmental and aeronautical applications, *Journal of Wind Engineering and Industrial Aerodynamics*, 74, 553–565, [https://doi.org/10.1016/S0167-6105\(98\)00050-6](https://doi.org/10.1016/S0167-6105(98)00050-6), 1998.
Doekemeijer, B. M., Kern, S., Maturu, S., Kanev, S., Salbert, B., Schreiber, J., Campagnolo, F., Bottasso, C. L., Schuler, S., Wilts, F., et al.:
1115 Field experiment for open-loop yaw-based wake steering at a commercial onshore wind farm in Italy, *Wind Energy Science*, 6, 159–176, <https://doi.org/10.5194/wes-6-159-2021>, 2021.
Draper, M., Guggeri, A., López, B., Díaz, A., Campagnolo, F., and Usera, G.: A Large Eddy Simulation framework to assess wind farm power maximization strategies: Validation of maximization by yawing, in: *Journal of Physics: Conference Series*, vol. 1037, p. 072051, IOP Publishing, <https://doi.org/10.1088/1742-6596/1037/7/072051>, 2018a.
1120 Draper, M., Guggeri, A., Mendina, M., Usera, G., and Campagnolo, F.: A large eddy simulation-actuator line model framework to simulate a scaled wind energy facility and its application, *Journal of Wind Engineering and Industrial Aerodynamics*, 182, 146–159, <https://doi.org/10.1016/j.jweia.2018.09.010>, 2018b.
Fleming, P., King, J., Dykes, K., Simley, E., Roadman, J., Scholbrock, A., Murphy, P., Lundquist, J. K., Moriarty, P., Fleming, K., et al.: Initial results from a field campaign of wake steering applied at a commercial wind farm–Part 1, *Wind Energy Science*, 4, 273–285,
1125 <https://doi.org/10.5194/wes-4-273-2019>, 2019.
Fleming, P., King, J., Simley, E., Roadman, J., Scholbrock, A., Murphy, P., Lundquist, J. K., Moriarty, P., Fleming, K., van Dam, J., et al.: Continued results from a field campaign of wake steering applied at a commercial wind farm: Part 2, *Wind Energy Science*, 5, 945–958, <https://doi.org/10.5194/wes-5-945-2020>, 2020.
Fontanella, A., Bayati, I., Mikkelsen, R., Belloli, M., and Zasso, A.: UNAFLOW: a holistic wind tunnel experiment about the aerodynamic
1130 response of floating wind turbines under imposed surge motion, *Wind Energy Science*, 6, 1169–1190, <https://doi.org/10.5194/wes-6-1169-2021>, 2021.
Fontanella, A., Fusetti, A., Cioni, S., Papi, F., Muggiasca, S., Persico, G., Dossena, V., Bianchini, A., and Belloli, M.: Wake development in floating wind turbines: new insights and an open dataset from wind tunnel experiments, *Wind Energy Science*, 10, 1369–1387, <https://doi.org/10.5194/wes-10-1369-2025>, 2025.
1135 Frederik, J. A., Doekemeijer, B. M., Mulders, S. P., and van Wingerden, J.-W.: The helix approach: Using dynamic individual pitch control to enhance wake mixing in wind farms, *Wind Energy*, 23, 1739–1751, <https://doi.org/10.1002/we.2513>, 2020a.
Frederik, J. A., Weber, R., Cacciola, S., Campagnolo, F., Croce, A., Bottasso, C., and van Wingerden, J.-W.: Periodic dynamic induction control of wind farms: proving the potential in simulations and wind tunnel experiments, *Wind Energy Science*, 5, 245–257, <https://doi.org/10.5194/wes-5-245-2020>, 2020b.
1140 Frederik, J. A., Simley, E., Brown, K. A., Yalla, G. R., Cheung, L. C., and Fleming, P. A.: Comparison of wind farm control strategies under realistic offshore wind conditions: turbine quantities of interest, *Wind Energy Science*, 10, 755–777, <https://doi.org/10.5194/wes-10-755-2025>, 2025.
Hand, M. M., Simms, D. A., Fingersh, L. J., Jager, D. W., Cotrell, J. R., Schreck, S., and Larwood, S. M.: Unsteady Aerodynamics Experiment Phase VI: Wind Tunnel Test Configurations and Available Data Campaigns, Tech. Rep. NREL/TP-500-29955, National Renewable Energy
1145 Laboratory (NREL), Golden, CO, USA, 2001.
Holmes, J. D.: *Wind Loading of Structures*, CRC Press, 3rd edn., <https://doi.org/10.1201/b18029>, 2015.

- Ishihara, T. and Zhou, T.: Wind tunnel measurement dataset of turbulent flow over two-dimensional ridges and three-dimensional hills with smooth and rough surfaces, Data in Brief, p. 112260, <https://doi.org/10.1016/j.dib.2025.112260>, 2025.
- ISO, I. and OIML, B.: Guide to the Expression of Uncertainty in Measurement, Aenor Madrid, Spain, 1993.
- 1150 Jonkman, J., Butterfield, S., Musial, W., and Scott, G.: Definition of a 5-MW reference wind turbine for offshore system development, Tech. rep., National Renewable Energy Laboratory (NREL), Golden, CO., 2009.
- Jonkman, J. M., Sprague, M. A., and Jonkman, B. J.: OpenFAST: An Open-Source Tool for Wind Turbine Simulation, Tech. Rep. NREL/TP-5000-74917, National Renewable Energy Laboratory (NREL), Golden, CO, USA, <https://openfast.readthedocs.io>, 2019.
- Juangarcia, D. A., Eguinoa, I., and Knudsen, T.: Derating a single wind farm turbine for reducing its wake and fatigue, in: Journal of Physics: Conference Series, vol. 1037, p. 032039, IOP Publishing, <https://doi.org/10.1088/1742-6596/1037/3/032039>, 2018.
- 1155 Kareem, A.: Bluff body aerodynamics and aeroelasticity: a wind effects perspective, Journal of wind and Engineering, 7, 30–74, 2010.
- Kim, H., Kim, K., Bottasso, C. L., Campagnolo, F., and Paek, I.: Wind turbine wake characterization for improvement of the Ainslie eddy viscosity wake model, Energies, 11, 2823, <https://doi.org/10.3390/en1102823>, 2018.
- Kuhn, M. B., Henry de Frahan, M. T., Mohan, P., Deskos, G., Churchfield, M., Cheung, L., Sharma, A., Almgren, A., Ananthan, S., Brazell, M. J., A., M. L., Thedin, R., Rood, J., Sakievich, P., Vijayakumar, G., Zhang, W., and Sprague, M. A.: AMR-Wind: A performance-portable, high-fidelity flow solver for wind farm simulations, Wind Energy, 28, –, <https://doi.org/10.1002/we.70010>, 2025.
- 1160 Laffin, K., Brodersen, O., Rakowitz, M., Vassberg, J., Wahls, R., Morrison, J., Tinoco, E., and Godard, J.-L.: Summary of data from the second AIAA CFD drag prediction workshop, in: 42nd AIAA Aerospace Sciences Meeting and Exhibit, p. 555, <https://doi.org/10.2514/6.2004-555>, 2004.
- 1165 Levy, D., Wahls, R., Zickuhr, T., Vassberg, J., Agrawal, S., Pirzadeh, S., and Hensch, M.: Summary of data from the first AIAA CFD drag prediction workshop, in: 40th AIAA Aerospace Sciences Meeting & Exhibit, p. 841, <https://doi.org/10.2514/6.2002-841>, 2002.
- Levy, D., Laffin, K., Vassberg, J., Tinoco, E., Mani, M., Rider, B., Brodersen, O., Crippa, S., Rumsey, C., Wahls, R., et al.: Summary of data from the fifth AIAA CFD drag prediction workshop, in: 51st AIAA Aerospace Sciences Meeting including the New Horizons Forum and Aerospace Exposition, p. 46, <https://doi.org/10.2514/6.2013-46>, 2013.
- 1170 Lio, W. H., Mirzaei, M., and Larsen, G. C.: On wind turbine down-regulation control strategies and rotor speed set-point, in: Journal of Physics: Conference Series, vol. 1037, p. 032040, IOP Publishing, <https://doi.org/10.1088/1742-6596/1037/3/032040>, 2018.
- Madsen, H., Fuglsang, P., Romblad, J., Enevoldsen, P., Laursen, J., Jensen, L., Bak, C., Paulsen, U. S., Gaunna, M., Sorensen, N. N., et al.: The dan-aero mw experiments, in: 48th Aiaa Aerospace Sciences Meeting Including the New Horizons Forum and Aerospace Exposition, p. 645, <https://doi.org/10.2514/6.2010-645>, 2010.
- 1175 Maxon Motor AG: Maxon motor datasheet, <https://www.maxongroup.com>, last accessed: 2026-01-05, 2026.
- Meyer Forsting, A. R., Pirrung, G. R., and Ramos-García, N.: A vortex-based tip/smearing correction for the actuator line, Wind Energy Science, 4, 369–383, <https://doi.org/10.5194/wes-4-369-2019>, 2019.
- Mikkelsen, T., {Siggaard Knudsen}, S., Sjöholm, M., Angelou, N., and Pedersen, A.: WindScanner.eu - a new Remote Sensing Research Infrastructure for On- and Offshore Wind Energy, in: Proceedings of the International Conference on Wind Energy: Materials, Engineering, and Policies (WEMEP-2012), 2012.
- 1180 Miner, M. A.: Cumulative damage in fatigue, <https://doi.org/10.1115/1.4009458>, 1945.
- Moriarty, P., Hamilton, N., Debnath, M., Herges, T., Isom, B., Lundquist, J. K., Maniaci, D., Naughton, B., Pauly, R., Roadman, J., Shaw, W., van Dam, J., and Wharton, S.: American WAKE experimeNt (AWAKEN), Tech. Rep. NREL/TP-5000-75789, National Renewable Energy Laboratory (NREL), Golden, CO, USA, 2020.

- 1185 Mühle, F., Tamaro, S., Bortolin, D., Campagnolo, F., and Bottasso, C.: Wake mixing wind farm control with synchronized dynamic yaw for power optimization, in: *Journal of Physics: Conference Series*, vol. 3224, p. 032113, IOP Publishing, <https://doi.org/10.1088/1742-6596/3224/3/032113>, 2026.
- Mühle, F. V., Campagnolo, F., Llobell Buigues, J., and Bottasso, C. L.: Design and testing of a model-scale yaw mechanism for an experimental wind turbine model, *Journal of Physics: Conference Series*, 2265, 022094, <https://doi.org/10.1088/1742-6596/2265/2/022094>,
 1190 2022.
- Mühle, F. V., Heckmeier, F. M., Campagnolo, F., and Breitsamter, C.: Wind tunnel investigations of an individual pitch control strategy for wind farm power optimization, *Wind Energy Science*, 9, 1251–1271, <https://doi.org/10.5194/wes-9-1251-2024>, 2024.
- Mulders, S. P., Zaaier, M. B., Bos, R., and van Wingerden, J.-W.: Wind turbine control: Open-source software for control education, standardization and compilation, *Journal of Physics: Conference Series*, 1452, 012010, <https://doi.org/10.1088/1742-6596/1452/1/012010>,
 1195 2020.
- Nam, Y.: *Wind Turbine System Control*, GS intevision, pp. 430–441, 2013.
- National Instruments: PXI Platform, <https://www.ni.com/en/shop/pxi.html>, last accessed: 2025-12-12, 2024.
- Panda, D., Chakraborty, A., Sarkar, S., and Johansson, H.: Rotor effective wind field estimation and multi-body dynamic characterization of a 45 kW horizontal axis wind turbine, *Renewable Energy*, p. 124343, <https://doi.org/10.1016/j.renene.2025.124343>, 2025.
- 1200 Petrović, V. and Campagnolo, F.: Experimental validation of wind turbine higher harmonic control using shaft loads measurements, in: 2013 European Control Conference (ECC), pp. 472–477, IEEE, <https://doi.org/10.23919/ECC.2013.6669709>, 2013.
- Politecnico di Milano: Aerodynamic Laboratory, <https://www.aero.polimi.it/en/experimental-labs/aerodynamic-laboratory>, last accessed: 2025-12-12, 2025.
- Raffel, M., De Gregorio, F., de Groot, K., Schneider, O., Sheng, W., Gibertini, G., and Seraudie, A.: On the generation of a helicopter aerodynamic database, *The Aeronautical Journal*, 115, 103–112, <https://doi.org/10.1017/S0001924000005492>, 2011.
- 1205 Rivers, M. B. and Dittberner, A.: Experimental investigations of the NASA common research model, *Journal of Aircraft*, 51, 1183–1193, <https://doi.org/10.2514/1.C032626>, 2014.
- Ruisi, R. and Bossanyi, E.: Engineering models for turbine wake velocity deficit and wake deflection. A new proposed approach for onshore and offshore applications, *Journal of Physics: Conference Series*, 1222, 012004, <https://doi.org/10.1088/1742-6596/1222/1/012004>, 2019.
- 1210 Schepers, J. G., Boorsma, K., Cho, T., Gomez-Iradi, S., Schaffarczyk, P., Jeromin, A., Lutz, T., Meister, K., Stoevesandt, B., Schreck, S., et al.: Final report of IEA task 29, Mexnet (phase 1): analysis of Mexico wind tunnel measurements, Tech. Rep. ECN-E–12-004, Energy Research Centre of the Netherlands (ECN), 2012.
- Schepers, J. G., Boorsma, K., and Munduate, X.: Final Results from Mexnext-I: Analysis of detailed aerodynamic measurements on a 4.5 m diameter rotor placed in the large German Dutch Wind Tunnel DNW, *Journal of Physics: Conference Series*, 555, 012089, <https://doi.org/10.1088/1742-6596/555/1/012089>, 2014.
 1215
- Schreiber, J., Nanos, E. M., Campagnolo, F., and Bottasso, C. L.: Verification and calibration of a reduced order wind farm model by wind tunnel experiments, in: *Journal of Physics: Conference Series*, vol. 854, p. 012041, IOP Publishing, <https://doi.org/10.1088/1742-6596/854/1/012041>, 2017.
- Schreiber, J., Balbaa, A., and Bottasso, C. L.: Brief communication: A double-Gaussian wake model, *Wind Energy Science*, 5, 237–244, <https://doi.org/10.5194/wes-5-237-2020>, 2020a.
 1220
- Schreiber, J., Bottasso, C. L., and Bertelè, M.: Field testing of a local wind inflow estimator and wake detector, *Wind Energy Science*, 5, 867–884, <https://doi.org/10.5194/wes-5-867-2020>, 2020b.

- Schreiber, J., Bottasso, C. L., Salbert, B., and Campagnolo, F.: Improving wind farm flow models by learning from operational data, *Wind Energy Science*, 5, 647–673, <https://doi.org/10.5194/wes-5-647-2020>, 2020c.
- 1225 Sengers, B. A. M., Steinfeld, G., Hulsman, P., and Kühn, M.: Validation of an interpretable data-driven wake model using lidar measurements from a free-field wake steering experiment, *Wind Energy Science*, 8, 747–770, <https://doi.org/10.5194/wes-8-747-2023>, 2023.
- Sharma, A., Brazell, M. J., Vijayakumar, G., Ananthan, S., Cheung, L., deVelder, N., Henry de Frahan, M. T., Matula, N., Mullowney, P., Rood, J., Sakievich, P., Almgren, A., Crozier, P. S., and Sprague, M.: ExaWind: Open-source CFD for hybrid-RANS/LES geometry-resolved wind turbine simulations in atmospheric flows, *Wind Energy*, 27, 225–257, <https://doi.org/10.1002/we.2886>, 2024.
- 1230 Shaukat, U. and Giljarhus, K. E. T.: Precursor turbulent inflow dataset for large eddy simulation of a semi-idealized European generic city, *Data in Brief*, 54, 110467, <https://doi.org/10.1016/j.dib.2024.110467>, 2024.
- Smith, M. J., Lim, J. W., van der Wall, B. G., Baeder, J. D., Biedron, R. T., Boyd Jr, D. D., Jayaraman, B., Jung, S. N., and Min, B.-Y.: The HART II international workshop: an assessment of the state of the art in CFD/CSD prediction, *CEAS Aeronautical Journal*, 4, 345–372, <https://doi.org/10.1007/s13272-013-0078-8>, 2013.
- 1235 Snel, H., Schepers, J. G., and Montgomerie, B.: The MEXICO project (Model Experiments in Controlled Conditions): The database and first results, *Journal of Physics: Conference Series*, 75, 012014, <https://doi.org/10.1088/1742-6596/75/1/012014>, 2007.
- Styrk Andersen, M., Isaksen, B., and Hansen, S. O.: Full-scale monitoring of the wind field, surface pressures and structural response of Gjemnessund suspension bridge, *Structural Engineering International*, 32, 43–54, <https://doi.org/10.1080/10168664.2021.1953426>, 2022.
- Tamaro, S., Campagnolo, F., and Bottasso, C. L.: On the power and control of a misaligned rotor–beyond the cosine law, *Wind Energy Science*, 9, 1547–1575, <https://doi.org/10.5194/wes-9-1547-2024>, 2024.
- 1240 Tamaro, S., Bortolin, D., Campagnolo, F., Mühle, F. V., and Bottasso, C. L.: Scaled testing of maximum-reserve active power control, *Zenodo* [source code and data set], <https://doi.org/10.5281/zenodo.17551525>, 2025.
- Tamaro, S., Bortolin, D., Campagnolo, F., Mühle, F. V., and Bottasso, C. L.: Scaled testing of maximum-reserve active power control, *Wind Energy Science*, 11, 1607–1630, <https://doi.org/10.5194/wes-11-1607-2026>, 2026.
- 1245 The MathWorks Inc.: MATLAB version: 9.14.0 (R2023a), <https://www.mathworks.com>, last accessed: 2025-12-12, 2023.
- Tinoco, E.: Summary data from the seventh AIAA CFD drag prediction workshop, in: *AIAA Aviation 2023 Forum*, p. 3492, <https://doi.org/10.2514/6.2023-3492>, 2023.
- Tinoco, E. N., Brodersen, O. P., Keye, S., Laflin, K. R., Feltrop, E., Vassberg, J. C., Mani, M., Rider, B., Wahls, R. A., Morrison, J. H., et al.: Summary data from the sixth AIAA CFD drag prediction workshop: CRM cases, *Journal of Aircraft*, 55, 1352–1379, <https://doi.org/10.2514/1.C034409>, 2018.
- 1250 Tominaga, Y. and Shirzadi, M.: Wind tunnel measurement dataset of 3D turbulent flow around a group of generic buildings with and without a high-rise building, *Data in Brief*, 39, 107504, <https://doi.org/10.1016/j.dib.2021.107504>, 2021.
- van der Wall, B. G.: A comprehensive rotary-wing data base for code validation: the HART II international workshop, *Aeronautical Journal*, 115, 91, <https://doi.org/10.1017/S0001924000005480>, 2011.
- 1255 van der Wall, B. G., Burley, C. L., Yu, Y., Richard, H., Pengel, K., and Beaumier, P.: The HART II test–measurement of helicopter rotor wakes, *Aerospace Science and Technology*, 8, 273–284, <https://doi.org/10.1016/j.ast.2004.01.001>, 2004.
- van Dooren, M. F., Kühn, M., Petrović, V., Bottasso, C. L., Campagnolo, F., Sjöholm, M., Angelou, N., Mikkelsen, T., Croce, A., and Zasso, A.: Demonstration of synchronised scanning lidar measurements of 2d velocity fields in a boundary-layer wind tunnel, in: *Journal of Physics: Conference Series*, vol. 753, p. 072032, IOP Publishing, <https://doi.org/10.1088/1742-6596/753/7/072032>, 2016.

- 1260 van Dooren, M. F., Campagnolo, F., Sjöholm, M., Angelou, N., Mikkelsen, T., and Kühn, M.: Demonstration and uncertainty analysis of synchronised scanning lidar measurements of 2-D velocity fields in a boundary-layer wind tunnel, *Wind Energy Science*, 2, 329–341, <https://doi.org/10.5194/wes-2-329-2017>, 2017.
- Veers, P., Bottasso, C. L., Manuel, L., Naughton, J., Pao, L., Paquette, J., Robertson, A., Robinson, M., Ananthan, S., Barlas, T., et al.: Grand challenges in the design, manufacture, and operation of future wind turbine systems, *Wind Energy Science*, 8, 1071–1131, <https://doi.org/10.5194/wes-8-1071-2023>, 2023.
- 1265 Wang, C., Wang, J., Campagnolo, F., Carraón, D. B., and Bottasso, C. L.: Validation of large-eddy simulation of scaled waked wind turbines in different yaw misalignment conditions, in: *Journal of Physics: Conference Series*, vol. 1037, p. 062007, IOP Publishing, <https://doi.org/10.1088/1742-6596/1037/6/062007>, 2018a.
- Wang, C., Campagnolo, F., and Bottasso, C. L.: Does the use of load-reducing IPC on a wake-steering turbine affect wake behavior?, in: *Journal of Physics: Conference Series*, vol. 1618, p. 022035, IOP Publishing, <https://doi.org/10.1088/1742-6596/1618/2/022035>, 2020a.
- 1270 Wang, C., Campagnolo, F., and Bottasso, C. L.: Identification of airfoil polars from uncertain experimental measurements, *Wind Energy Science*, 5, 1537–1550, <https://doi.org/10.5194/wes-5-1537-2020>, 2020b.
- Wang, C., Campagnolo, F., Sharma, A., and Bottasso, C. L.: Effects of dynamic induction control on power and loads, by LES-ALM simulations and wind tunnel experiments, in: *Journal of Physics: Conference Series*, vol. 1618, p. 022036, IOP Publishing, <https://doi.org/10.1088/1742-6596/1618/2/022036>, 2020c.
- 1275 Wang, C., Muñoz-Simon, A., Deskos, G., Laizet, S., Palacios, R., Campagnolo, F., and Bottasso, C. L.: Code-to-code-to-experiment validation of LES-ALM wind farm simulators, in: *Journal of Physics: Conference Series*, vol. 1618, p. 062041, IOP Publishing, <https://doi.org/10.1088/1742-6596/1618/6/062041>, 2020d.
- Wang, C., Campagnolo, F., Canet, H., Barreiro, D. J., and Bottasso, C. L.: How realistic are the wakes of scaled wind turbine models?, *Wind Energy Science*, 6, 961–981, <https://doi.org/10.5194/wes-6-961-2021>, 2021.
- 1280 Wang, J., Foley, S., Nanos, E. M., Yu, T., Campagnolo, F., Bottasso, C. L., Zanotti, A., and Croce, A.: Numerical and experimental study of wake redirection techniques in a boundary layer wind tunnel, in: *Journal of Physics: Conference Series*, vol. 854, p. 012048, IOP Publishing, <https://doi.org/10.1088/1742-6596/854/1/012048>, 2017a.
- Wang, J., Mclean, D., Campagnolo, F., Yu, T., and Bottasso, C. L.: Large-eddy simulation of waked turbines in a scaled wind farm facility, in: *Journal of Physics: Conference Series*, vol. 854, p. 012047, IOP Publishing, <https://doi.org/10.1088/1742-6596/854/1/012047>, 2017b.
- 1285 Wang, J., Wang, C., Castañeda, O. D., Campagnolo, F., and Bottasso, C. L.: Large-eddy simulation of scaled floating wind turbines in a boundary layer wind tunnel, in: *Journal of Physics: Conference Series*, vol. 1037, p. 072032, IOP Publishing, <https://doi.org/10.1088/1742-6596/1037/7/072032>, 2018b.
- Wang, J., Wang, C., Campagnolo, F., and Bottasso, C. L.: Wake behavior and control: comparison of LES simulations and wind tunnel measurements, *Wind Energy Science*, 4, 71–88, <https://doi.org/10.5194/wes-4-71-2019>, 2019.
- 1290 Zengler, C. P., Braunbehrens, R., and Tamaro, S.: Further improvements to the double-Gaussian wake model, in: *Journal of Physics: Conference Series*, vol. 2767, p. 092066, IOP Publishing, <https://doi.org/10.1088/1742-6596/2767/9/092066>, 2024.